



# Test Report - FCC Part 15.247/ DTS

## Applicant: Escort Incorporated

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 10/31/2022

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



## Table of Contents

---

<b>1. CUSTOMER INFORMATION.....</b>	<b>4</b>
1.1 TEST RESULT SUMMARY .....	4
<b>2. LOCATION OF TESTING .....</b>	<b>6</b>
2.1 TEST LABORATORY .....	6
2.2 TESTING WAS PERFORMED, REVIEWED BY .....	6
<b>3. TEST SAMPLE(S) (EUT/DUT).....</b>	<b>7</b>
3.1 DESCRIPTION OF THE EUT.....	7
3.2 CONFIGURATION OF EUT .....	8
3.3 TEST SETUP OF EUT.....	8
<b>4. TEST METHODS &amp; APPLICABLE REGULATORY LIMITS.....</b>	<b>9</b>
4.1 TEST METHODS/STANDARDS/GUIDANCE: .....	9
4.2 APPLIED LIMITS AND REGULATORY LIMITS:.....	9
<b>5. MEASUREMENT UNCERTAINTY.....</b>	<b>9</b>
<b>6. ENVIRONMENTAL CONDITIONS .....</b>	<b>9</b>
6.1 TEMPERATURE & HUMIDITY.....	9
<b>7. LIST OF TEST EQUIPMENT AND TEST FACILITY.....</b>	<b>10</b>
7.1 LIST OF TEST EQUIPMENT .....	10
<b>8. TEST RESULTS .....</b>	<b>11</b>
8.1 DTS CONDUCTED OUTPUT POWER.....	12
8.1.1 <i>Conducted Output Power, 2402 MHz</i> .....	13
8.1.2 <i>Conducted Output Power, 2440 MHz</i> .....	14
8.1.3 <i>Conducted Output Power, 2480 MHz</i> .....	15
8.2 OCCUPIED BANDWIDTH.....	16
8.2.1 <i>99% Bandwidth Plot, 2402 MHz</i> .....	17
8.2.2 <i>99% Bandwidth Plot, 2440 MHz</i> .....	18
8.2.3 <i>99% Bandwidth Plot, 2480 MHz</i> .....	19
8.3 6DB BANDWIDTH (DTS BW).....	20
8.3.1 <i>6dB Bandwidth (DTS BW), 2402 MHz</i> .....	21
8.3.2 <i>6dB Bandwidth (DTS BW), 2440 MHz</i> .....	22
8.3.3 <i>6dB Bandwidth (DTS BW), 2480 MHz</i> .....	23
8.4 POWER SPECTRAL DENSITY (PSD).....	24
8.4.1 <i>Power Spectral Density (PSD), 2402 MHz</i> .....	25
8.4.2 <i>Power Spectral Density (PSD), 2440 MHz</i> .....	26
8.4.3 <i>Power Spectral Density (PSD), 2480 MHz</i> .....	27
8.5 EMISSIONS IN NONRESTRICTED FREQUENCY BANDS (OUT OF BAND) .....	28
8.5.1 <i>Conducted Emissions Plot, 2402 MHz</i> .....	29
8.5.2 <i>Conducted Emissions Plot, 2440 MHz</i> .....	30
8.5.3 <i>Conducted Emissions Plot, 2480 MHz</i> .....	31



- 8.6 BAND-EDGE MEASUREMENTS ..... 32
  - 8.6.1 Lower Band Edge Plot ..... 33
  - 8.6.2 Upper Band Edge Plot..... 34
- 8.7 RADIATED EMISSIONS..... 35
  - 8.7.1 Radiated Emissions, 2402 MHz ..... 36
  - 8.7.2 Radiated Emissions, 2440 MHz ..... 37
  - 8.7.3 Radiated Emissions, 2480 MHz ..... 38
- 9. ANNEX-A - PHOTOGRAPHS OF THE EUT..... 39
- 10. ANNEX-B – TEST SETUP PHOTOGRAPHS..... 39
- 11. HISTORY OF TEST REPORT CHANGES..... 39



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

## 1. Customer Information

**Applicant:** Escort Incorporated  
**Address:** 5440 West Chester Road  
West Chester, Ohio, 45069, United States

### 1.1 Test Result Summary

The following test procedure and guidance were used for measuring Digital Transmission System (DTS); FCC KDB 558074 D01 DTS Measurement Guidance and ANSI C63.10-2013. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.



Applicable Clauses from Part 2 or KDB		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
KDB 558074 D01	Duty Cycle	Reported
KDB 558074 D01	99 % Bandwidth	Reported
KDB 558074 D01	Band-edge measurements	Pass

Applicable Clauses from Part 15.247		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
15.247 (a) (1) – (1) (iii)	FHSS hopping requirements (1, i,ii,iii)	N/A
15.247 (a) (1)	FHSS 20dB Bandwidth	N/A
15.247 (a) (2)	DTS 6dB Bandwidth	Pass
15.247 (b) (1) – (4)	Conducted output power	Pass
15.247 (c) (1) – (2)	Operation with directional antenna gains > 6 dBi	N/A
15.247 (d), 15.215 (b)	Conducted Emissions in Non-restricted bands	Pass
15.247 (d), 15.215 (b)	Conducted Emissions at the Band-edge	Pass
15.247 (e)	Power Spectral Density (PSD)	Pass
15.247 (f)	Hybrid system hopping requirements	N/A
15.247 (f)	Hybrid system Power Spectral Density	N/A
15.247 (g)	FHSS System requirements	N/A
15.247 (h)	FHSS spectrum sensing	N/A

Applicable Clauses from Part 2 and Part 15 Subpart C		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
15.203	Antenna requirements	Pass
15.205	Restricted bands of operation	Pass
15.207	AC Power Conducted Emissions	N/A
15.209	Radiated Emissions in Restricted bands	Pass
15.211	Tunnel Radio Systems	N/A
15.212 (a)	Single Modular Transmitter	N/A
15.212 (b)	Limited Modular Transmitter	N/A
15.213	Cable Locating Equipment	N/A



Timco Engineering, Inc., an IIA Company  
 849 NW State Road 45, Newberry, Florida 32669  
 (352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

## 2. Location of Testing

### 2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").  
 Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780  
 FCC Designation # US1070  
 FCC site registration is under A2LA certificate # 0955.01  
 ISED Canada test site registration # 2056A  
 EU Notified Body # 1177  
 For all designations see A2LA scope # 0955.01

### 2.2 Testing was performed, reviewed by

Dates of Testing: 10/3/2022-10/5/2022

Signature:

Sr. EMC Engineer  
 EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

10/31/2022

Signature:

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

10/31/2022



### 3. Test Sample(s) (EUT/DUT)

The test sample was received: 9/27/2022

#### 3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	QKLMAX3V2
Brief Description	Radar Detector with BLE
Model(s) #	MAX 3
Firmware version	N/A
Software version	N/A
Serial Number	N/A

Technical Characteristics	
Technology	Radar Detector with BLE
Frequency Range	2402 – 2480 MHz
Duty Cycle	100%
Antenna Connector	N/A
Voltage Rating (AC or Batt.)	13.8 VAC



### 3.2 Configuration of EUT

Band (MHz)	Mode	Number of Ant.
2400 – 2483.5	Transmit	1

#### Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

#### Peripherals used during Testing:

A laptop was used to program the EUT.

### 3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.





#### 4. Test methods & Applicable Regulatory Limits

##### 4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Digital Transmission System (DTS) are provided in the FCC KDB 558074 D01 DTS Measurement Guidance and in Clause 11 of ANSI C63.10-2013.

- 1) ANSI C63.10-2013
- 2) FCC KDB 558074 D01

##### 4.2 Applied Limits and Regulatory Limits:

- 3) FCC CFR 47 Part 15.247

#### 5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
<b>Note:</b> The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

#### 6. Environmental Conditions

##### 6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barametric pressure	30.05 inHg
<b>Note:</b> Specific environmental conditions that are applicable to a specific test are available in the test result section.	



## 7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer’s model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

### 7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	12/21/2023
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	2/27/19	7/26/2025
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



## 8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dBµV. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dBµV/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dBµV if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.


### Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dBµV	+ 10.36 dB/m	+0.40 dB	=30.36 dBµV/m @ 3m

$$\text{EIRP} = \text{Pcond (dBm)} + \text{dBi}$$

### 8.1 DTS conducted output power

Limits from FCC Part 15.247 (b) (3) and test procedure from ANSI C63.10-2013 section 11.9

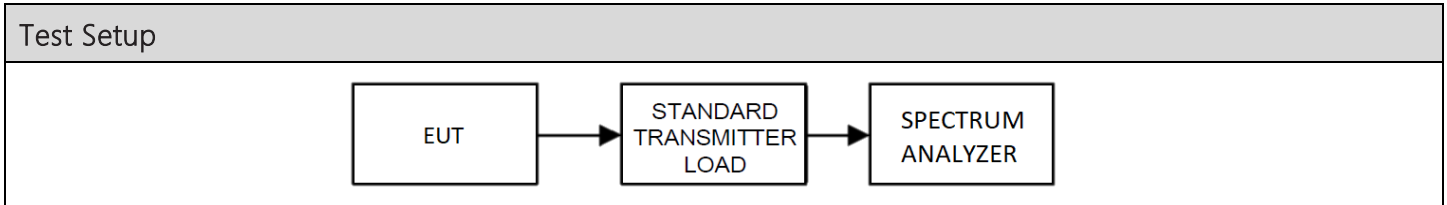


Test Results, Mode 1	
Tuned Frequency (MHz)	Power Output (dBm)
2402	1.25
2440	1.05
2480	0.79

- MAXIMUM Conducted Output Power = 1.25 dBm

### Conducted Output Power, Spectrum Plots


#### 8.1.1 Conducted Output Power, 2402 MHz

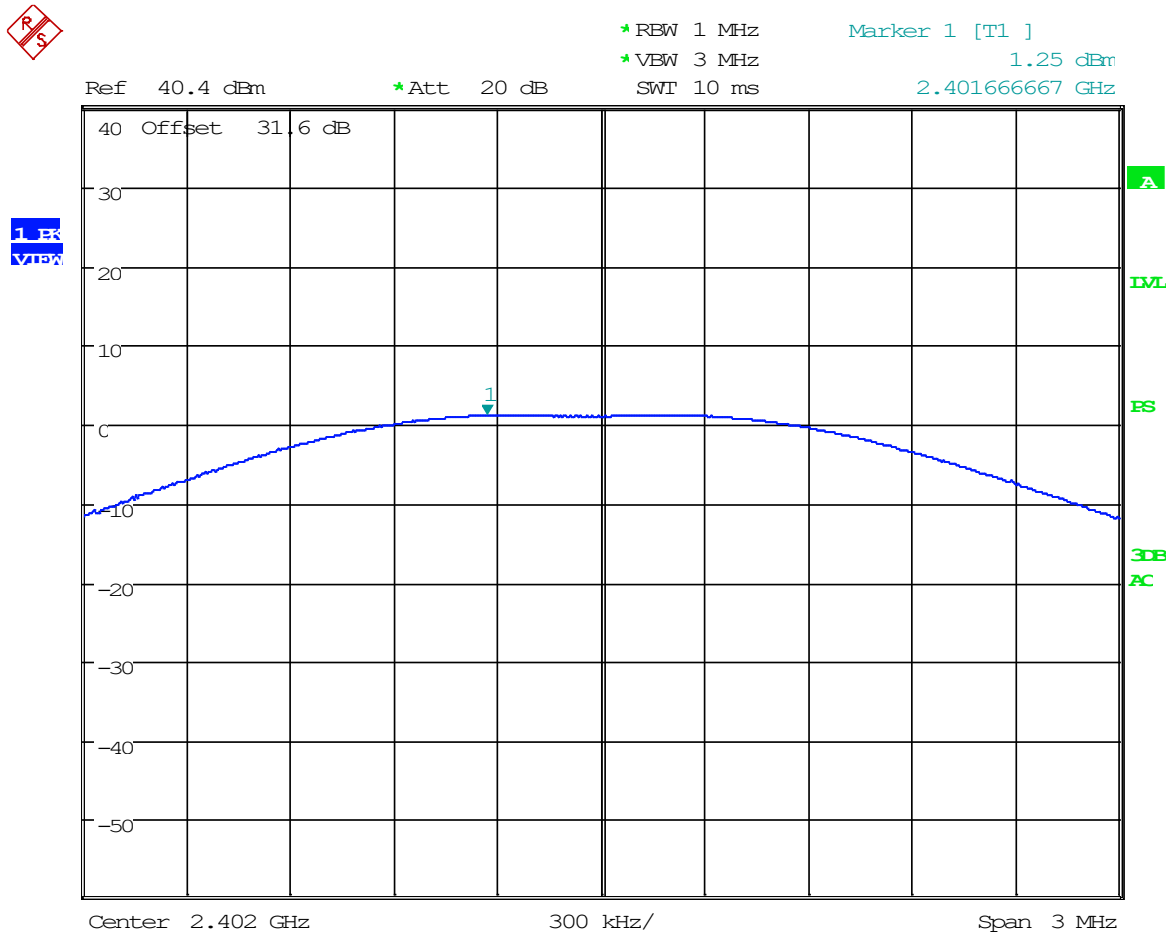

Date: 10.OCT.2022 15:48:04




### 8.1.2 Conducted Output Power, 2440 MHz

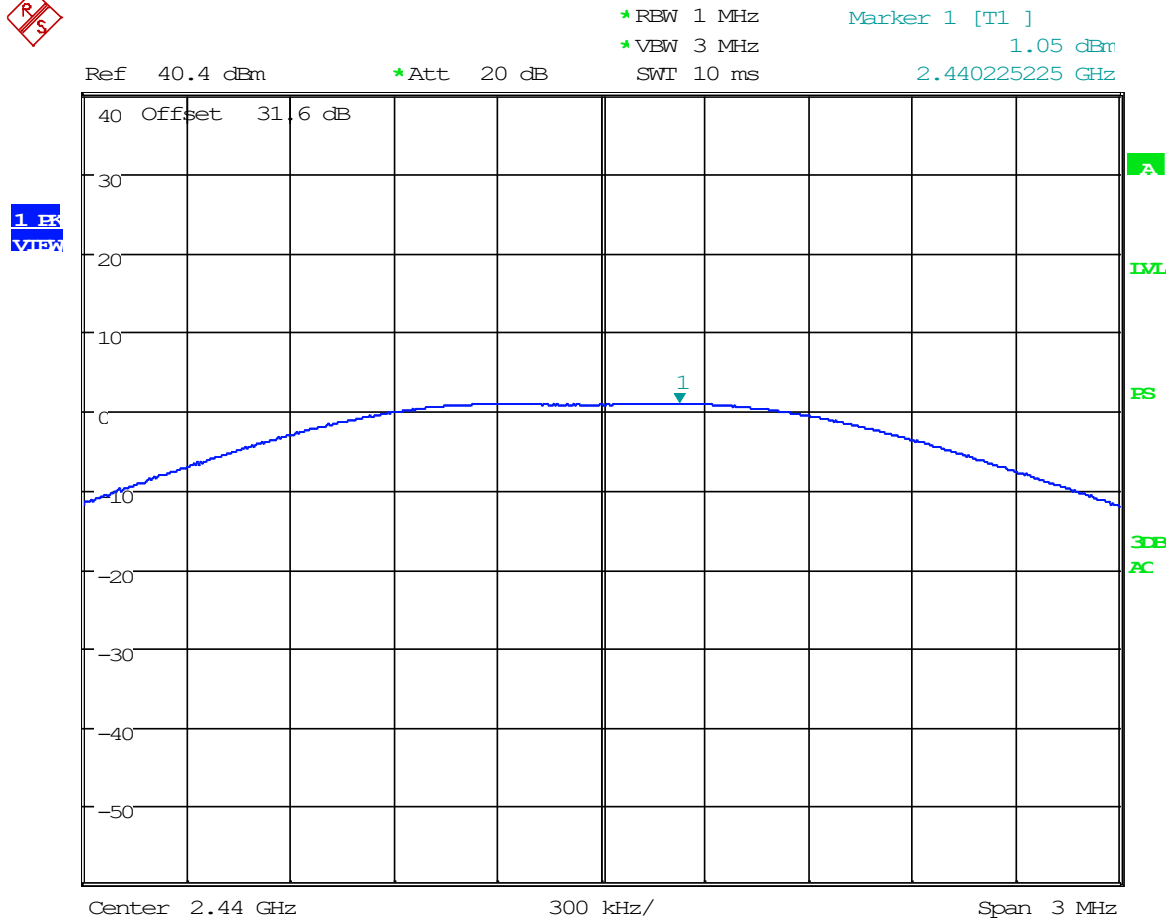

Date: 10.OCT.2022 15:49:35




### 8.1.3 Conducted Output Power, 2480 MHz

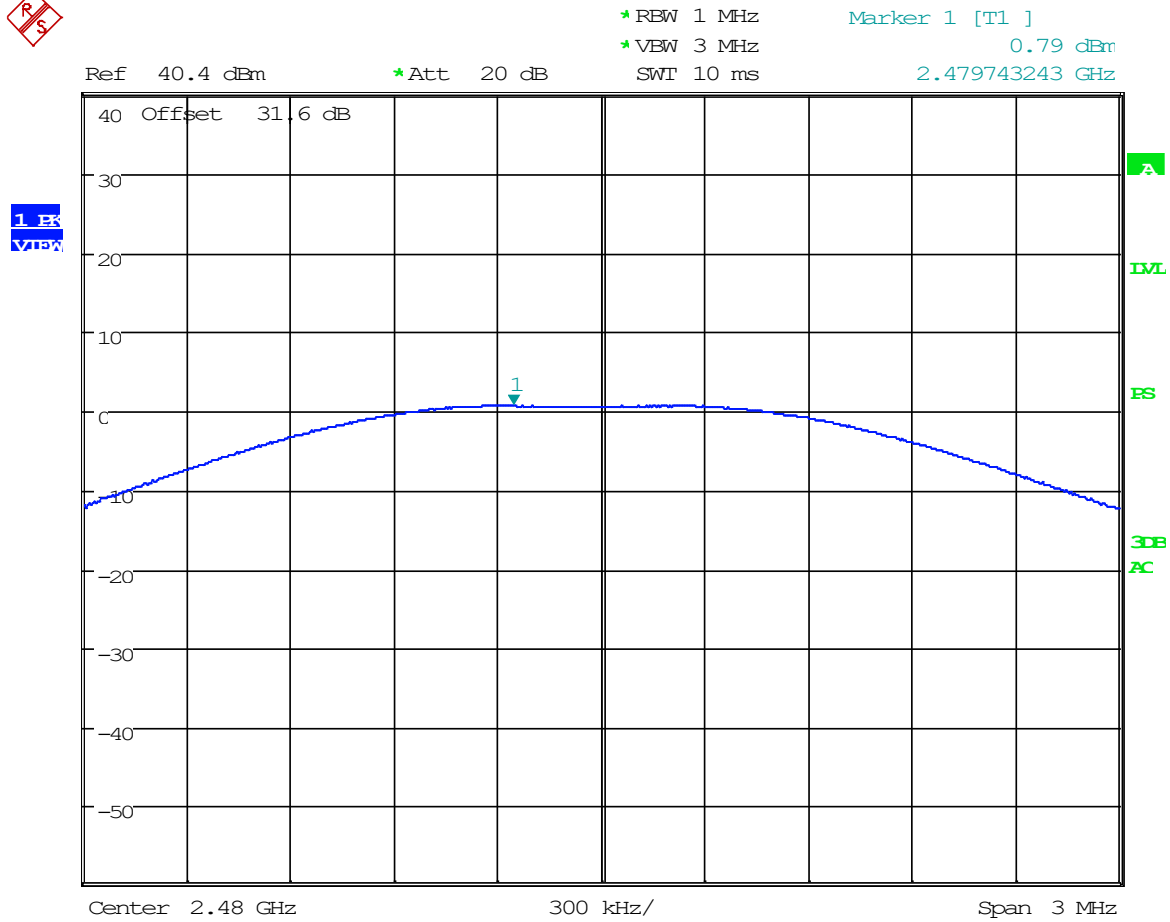

Date: 10.OCT.2022 15:53:38

## 8.2 Occupied Bandwidth

Requirement from FCC KDB 558074 D01 and test procedure from ANSI C63.10-2013 section 6.9.3

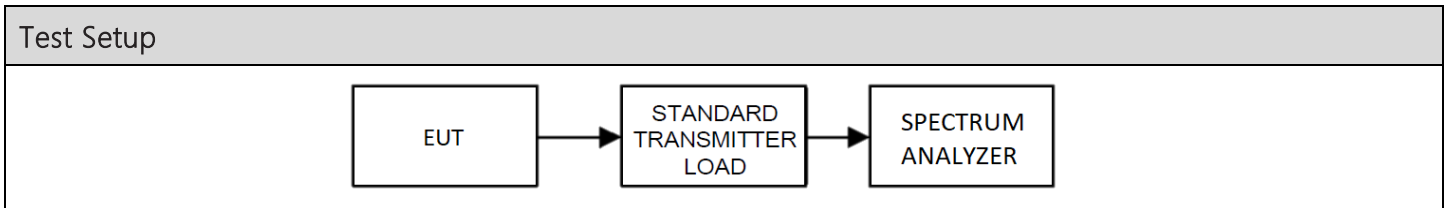


### 99% BW Test Results

Tuned Frequency (MHz)	99% BW (MHz)
2402	1.057
2440	1.056
2480	1.069



99% Occupied Bandwidth Test Data / Spectrum Plots

8.2.1 99% Bandwidth Plot, 2402 MHz

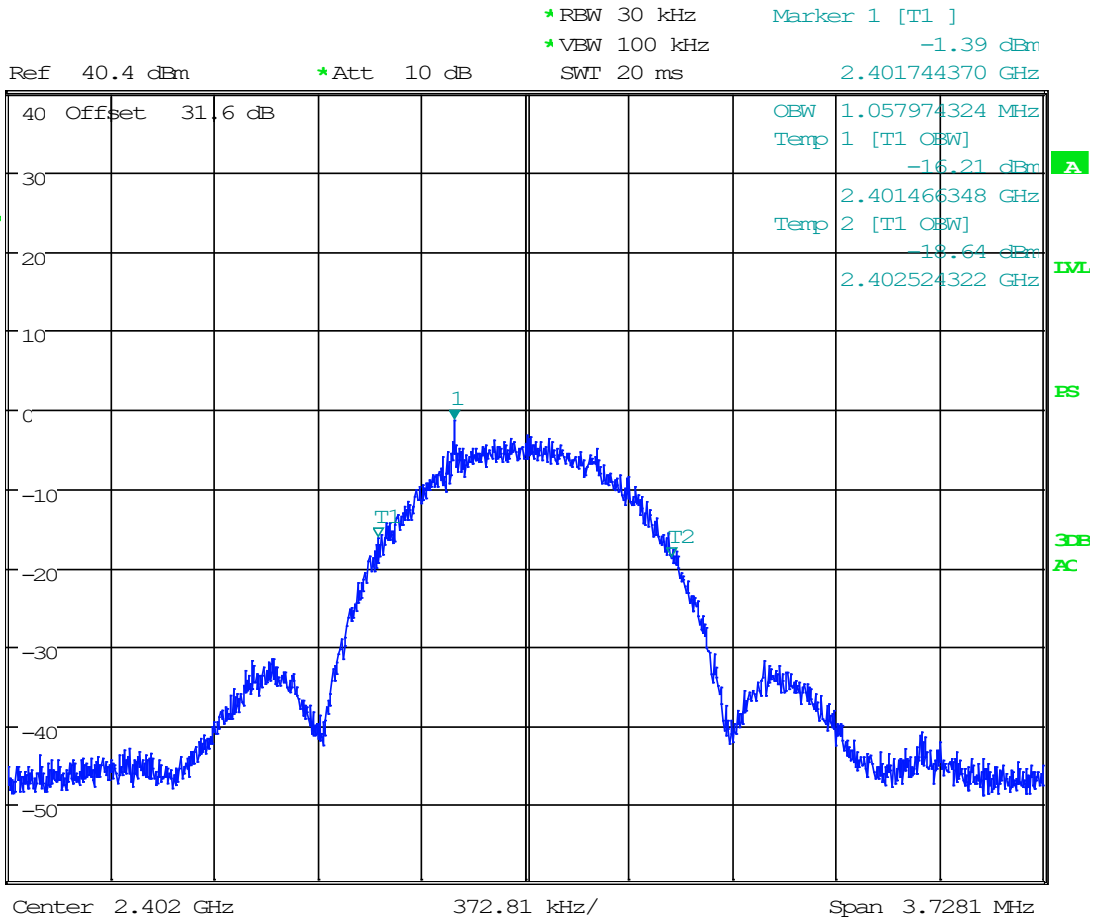


Date: 10.OCT.2022 16:46:43

### 8.2.2 99% Bandwidth Plot, 2440 MHz




\*RBW 30 kHz      Marker 1 [T1 ]  
 \*VBW 100 kHz      -1.39 dBm  
 Ref 40.4 dBm      \*Att 10 dB      SWT 20 ms      2.439749967 GHz

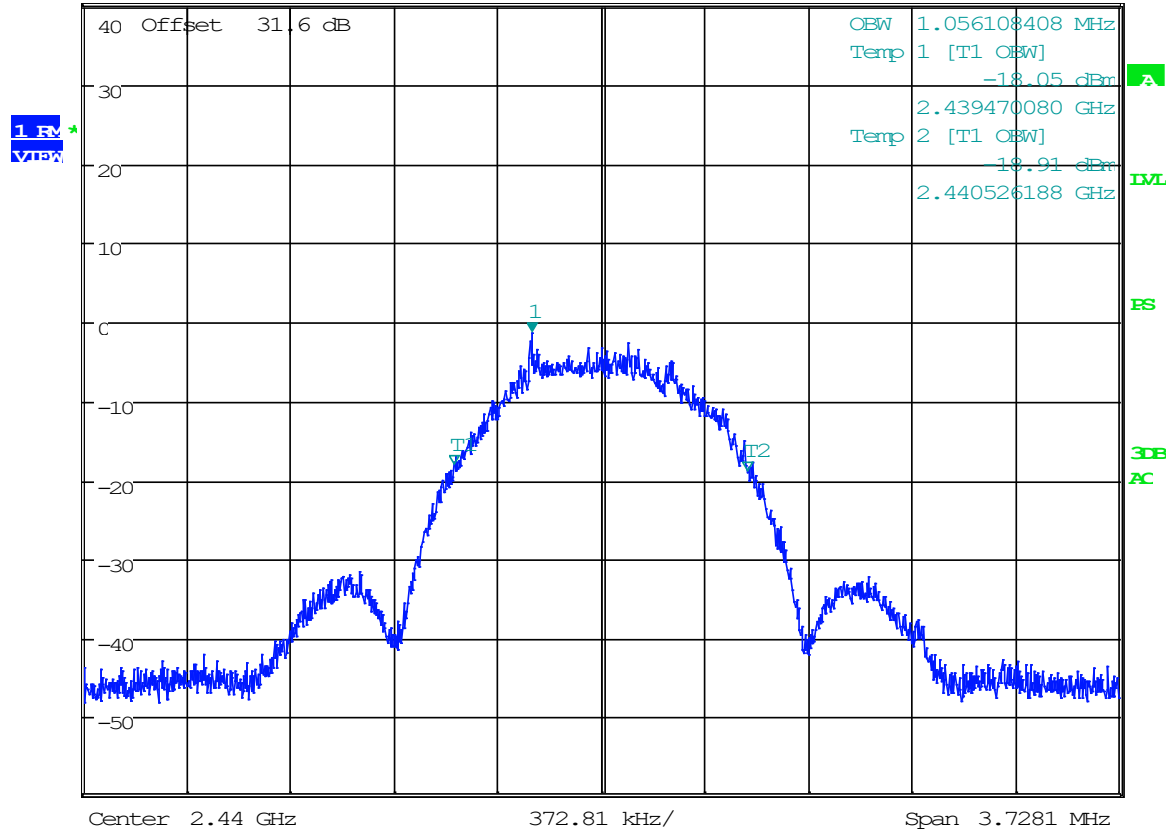

Date: 10.OCT.2022 16:45:51

### 8.2.3 99% Bandwidth Plot, 2480 MHz

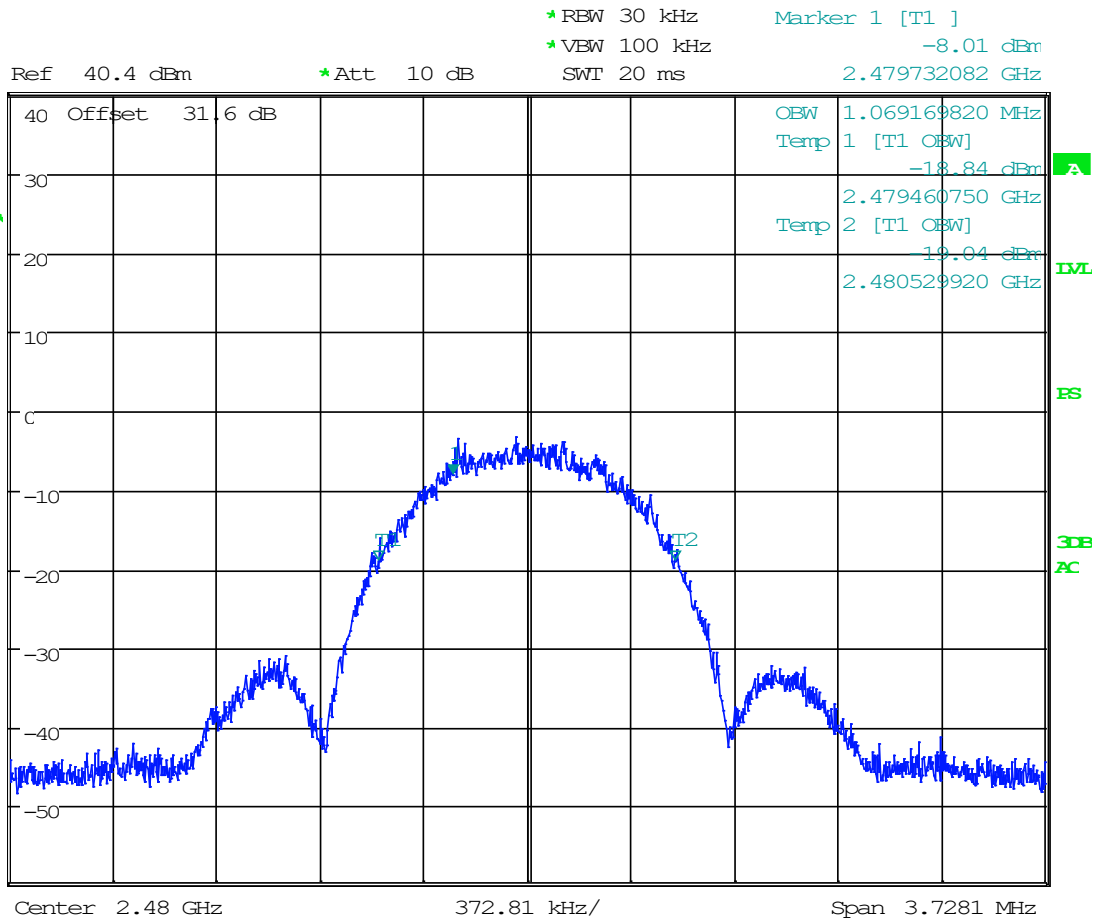


Date: 10.OCT.2022 16:44:34



### 8.3 6dB Bandwidth (DTS BW)


Limits from FCC Part 15.247 (a) (2) and test procedure from ANSI C63.10-2013 section 11.8

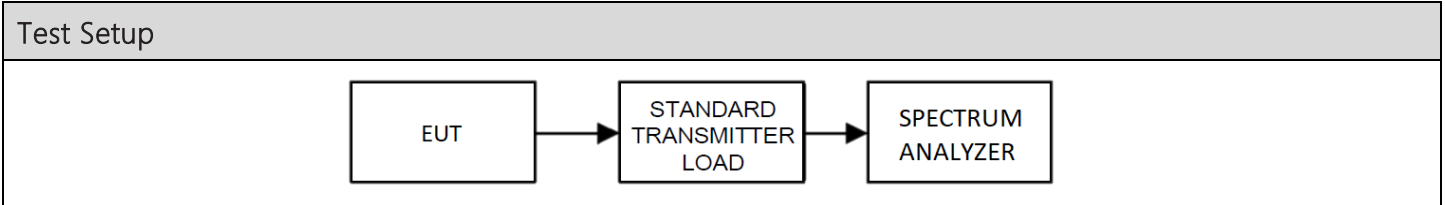

Tuned Frequency (MHz)	6dB Bandwidth (DTS BW) (kHz)
2402	681.731
2440	689.689
2480	683.058


6dB BW Test Data / Spectrum Plots

8.3.1 6dB Bandwidth (DTS BW), 2402 MHz

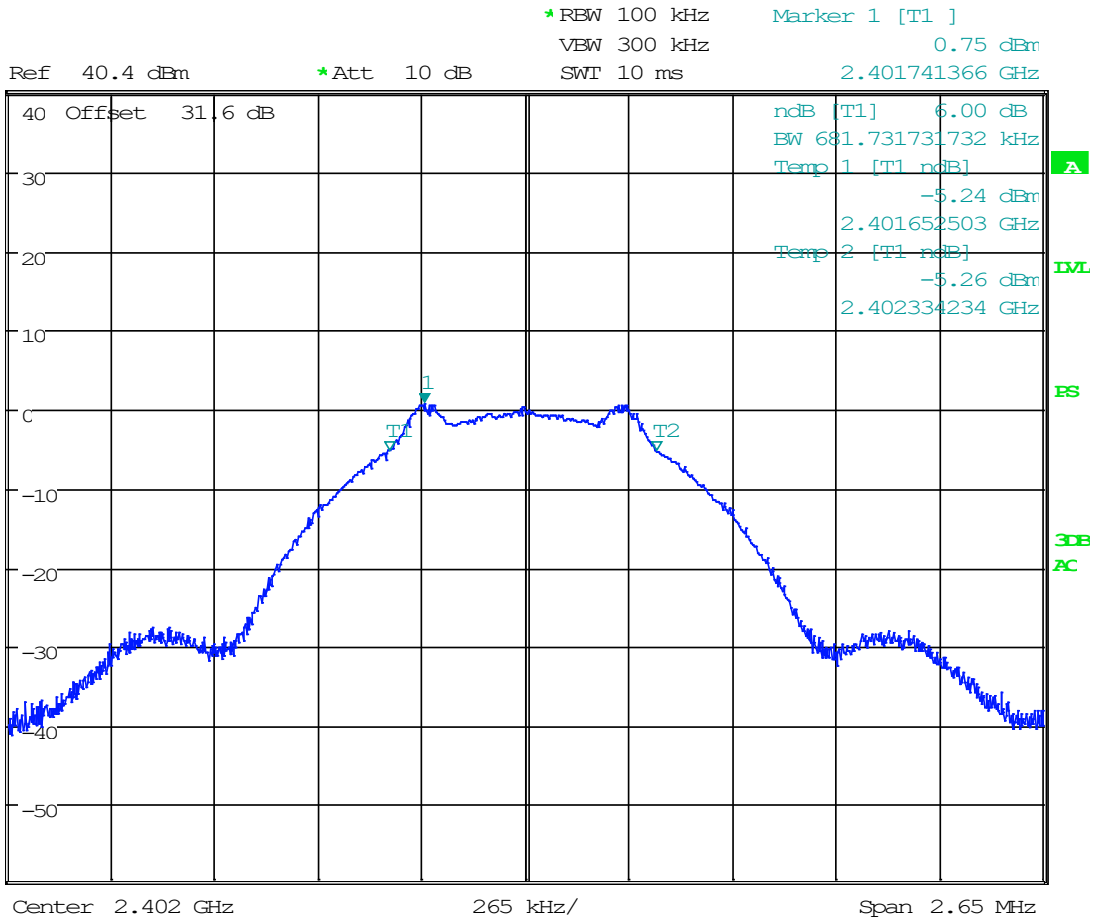


Date: 10.OCT.2022 15:56:56

### 8.3.2 6dB Bandwidth (DTS BW), 2440 MHz

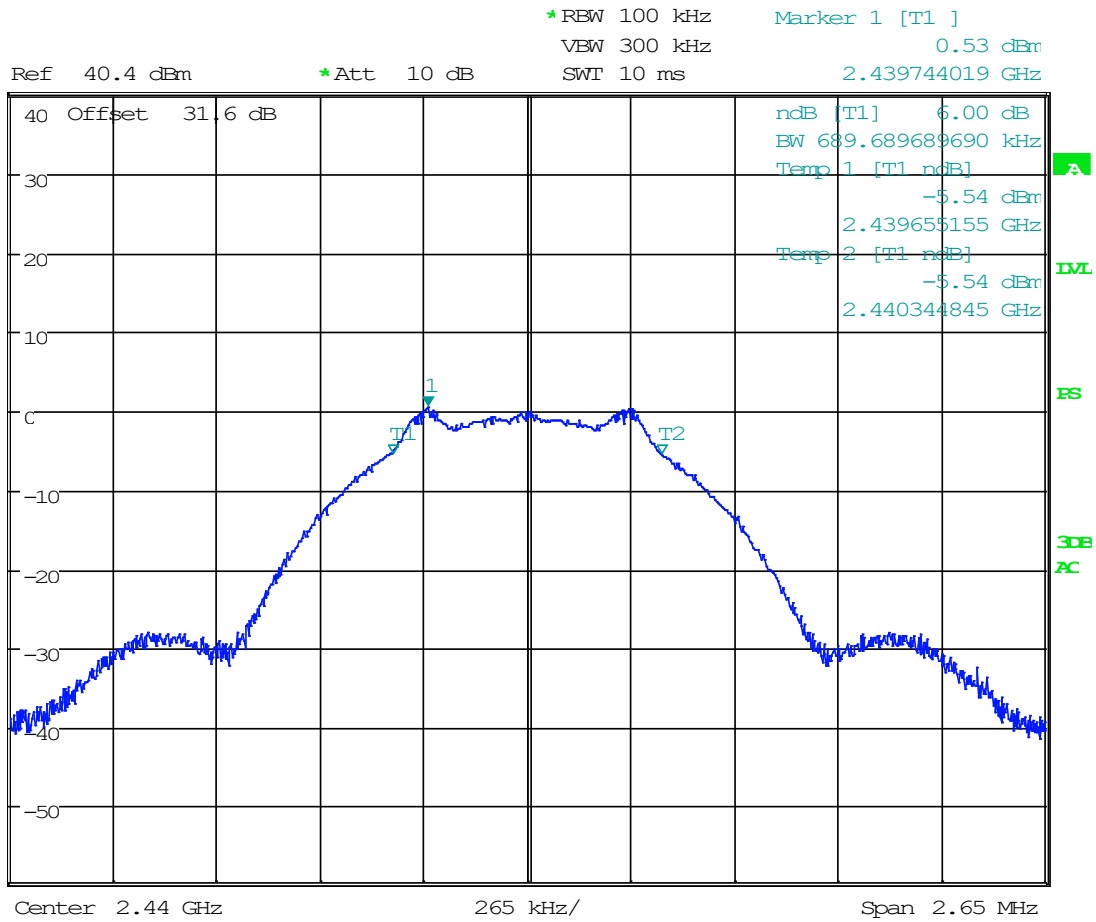

Date: 10.OCT.2022 15:58:33

### 8.3.3 6dB Bandwidth (DTS BW), 2480 MHz

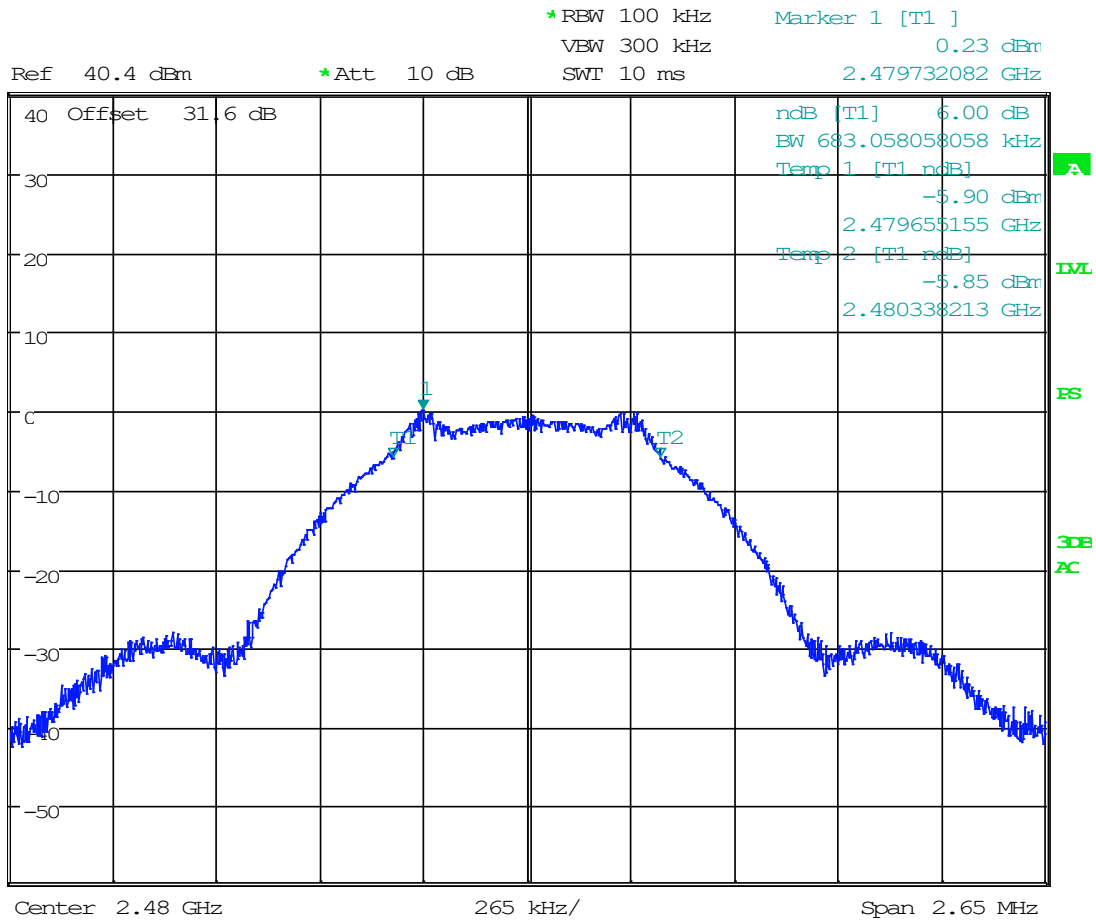


Date: 10.OCT.2022 16:00:05



### 8.4 Power Spectral Density (PSD)

Limits from FCC Part 15.247 (e) and test procedure from ANSI C63.10-2013 section 11.10.

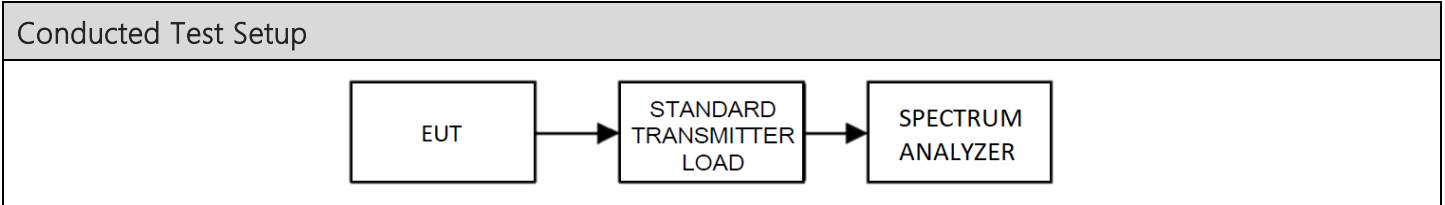


Tuned Frequency (MHz)	PSD Level (dBm)
2402	0.97
2440	0.65
2480	0.37





### 8.4.1 Power Spectral Density (PSD), 2402 MHz

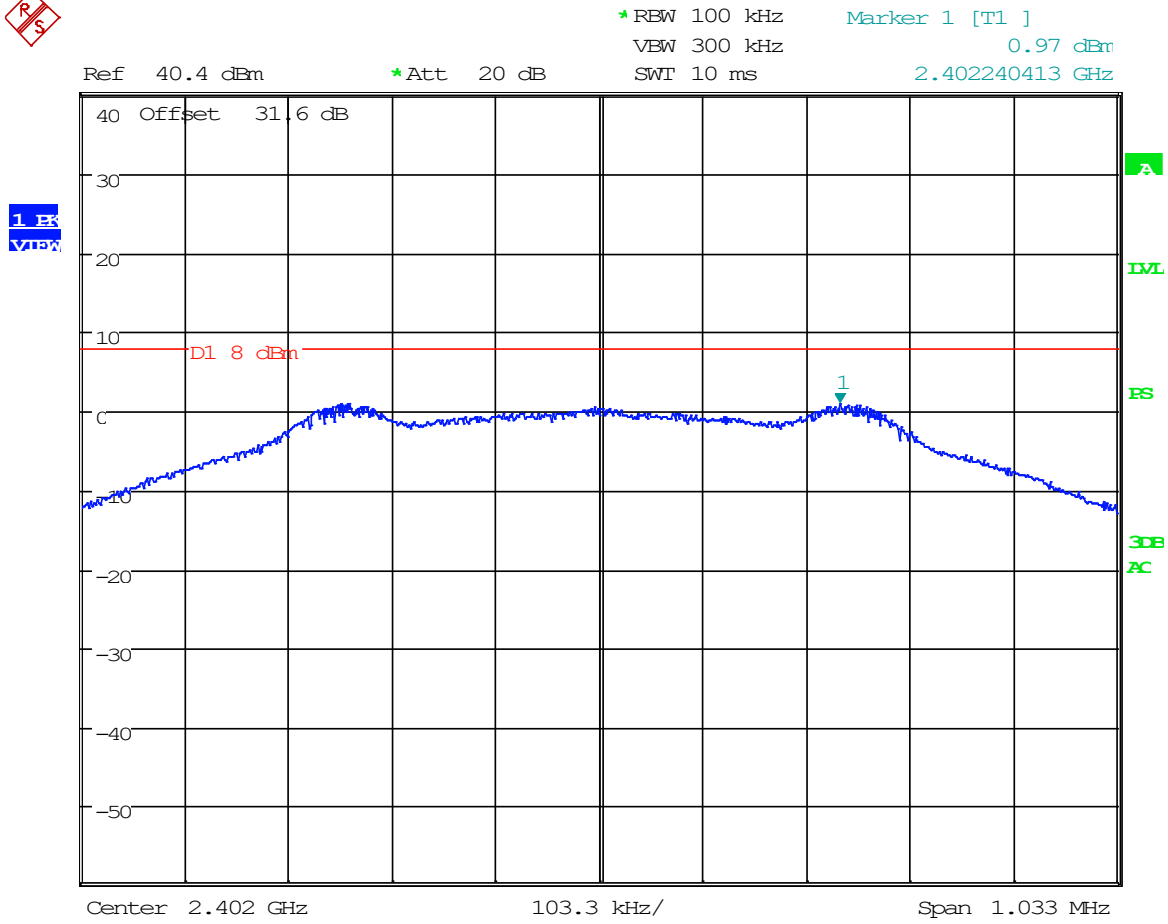


Date: 10.OCT.2022 17:16:38

### 8.4.2 Power Spectral Density (PSD), 2440 MHz




\*RBW 100 kHz      Marker 1 [T1 ]  
 VBW 300 kHz      0.65 dBm  
 SWT 10 ms      2.439749247 GHz

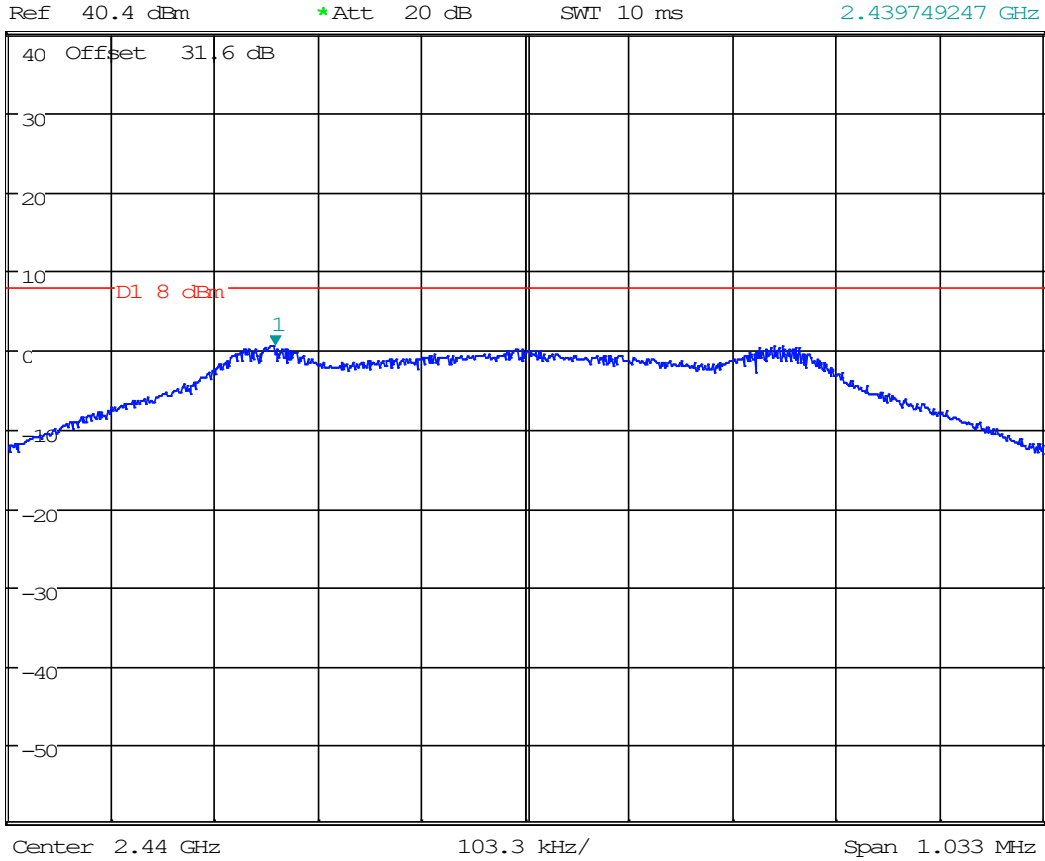

Date: 10.OCT.2022 17:17:32

### 8.4.3 Power Spectral Density (PSD), 2480 MHz

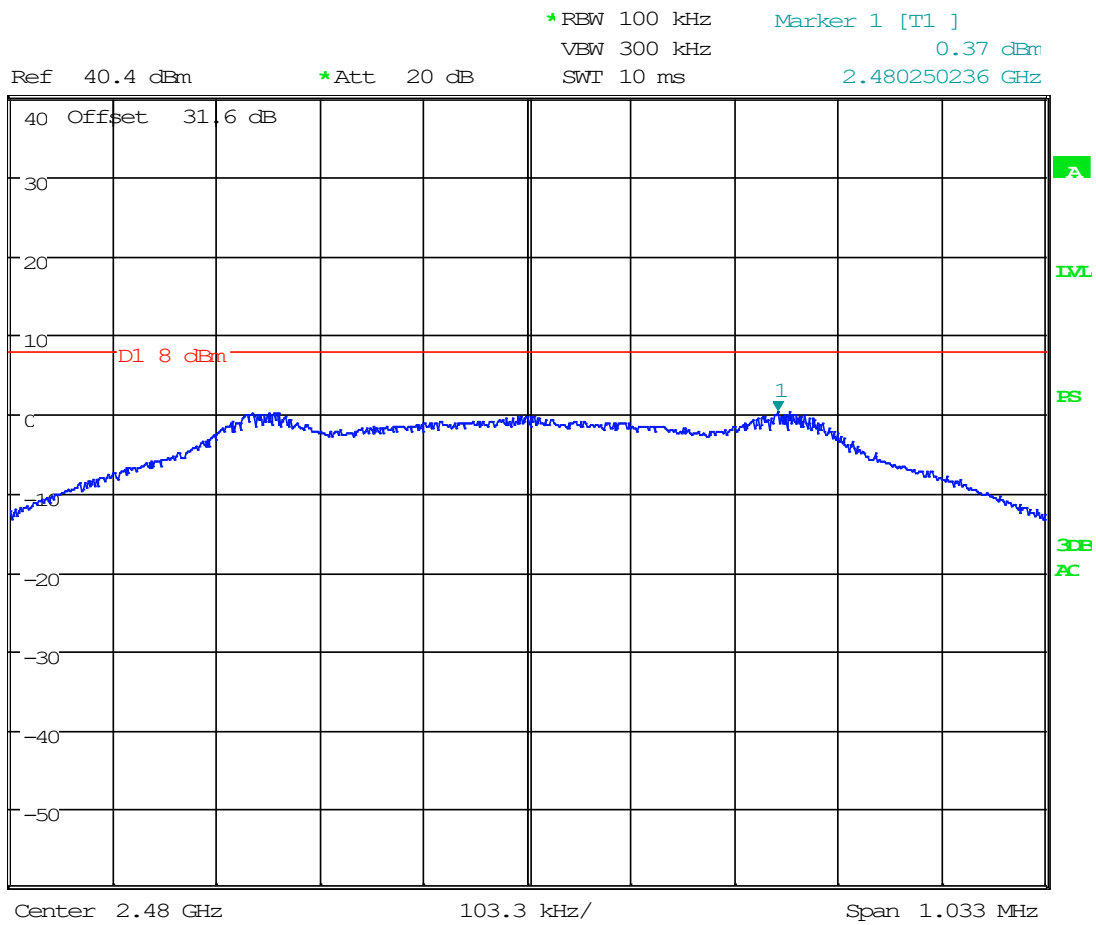


Date: 10.OCT.2022 17:18:22



### 8.5 Emissions in Nonrestricted Frequency Bands (Out of Band)

Limits from FCC Part 15.247 (d) and 15.215 (b) and test procedure from ANSI C63.10-2013 section 7.8 or 11.11 as applicable.

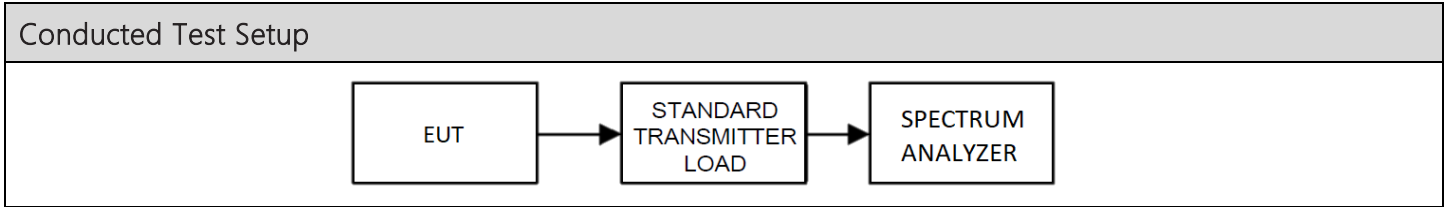




## Conducted Emissions in Non-Restricted Bands, Spectrum Plots

### 8.5.1 Conducted Emissions Plot, 2402 MHz




1 RB  
VTPW

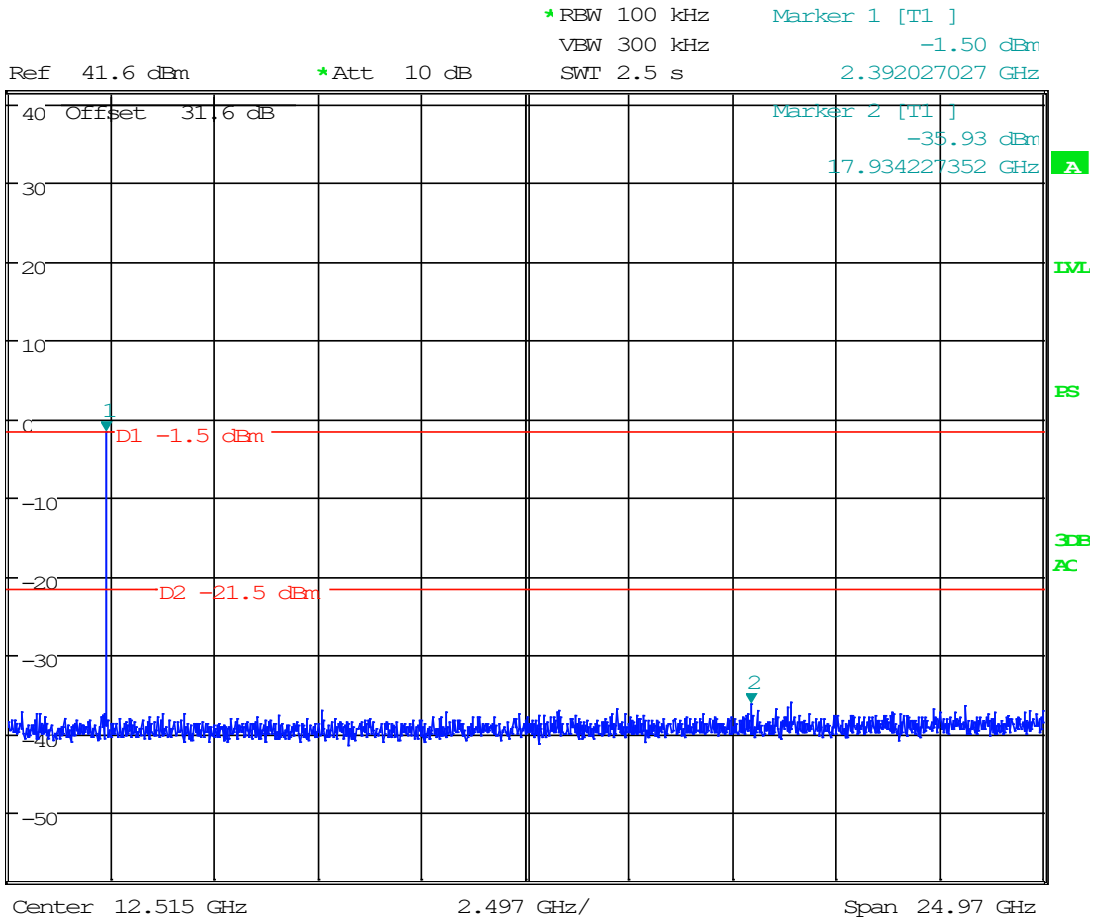

Date: 11.OCT.2022 09:29:19

### 8.5.2 Conducted Emissions Plot, 2440 MHz

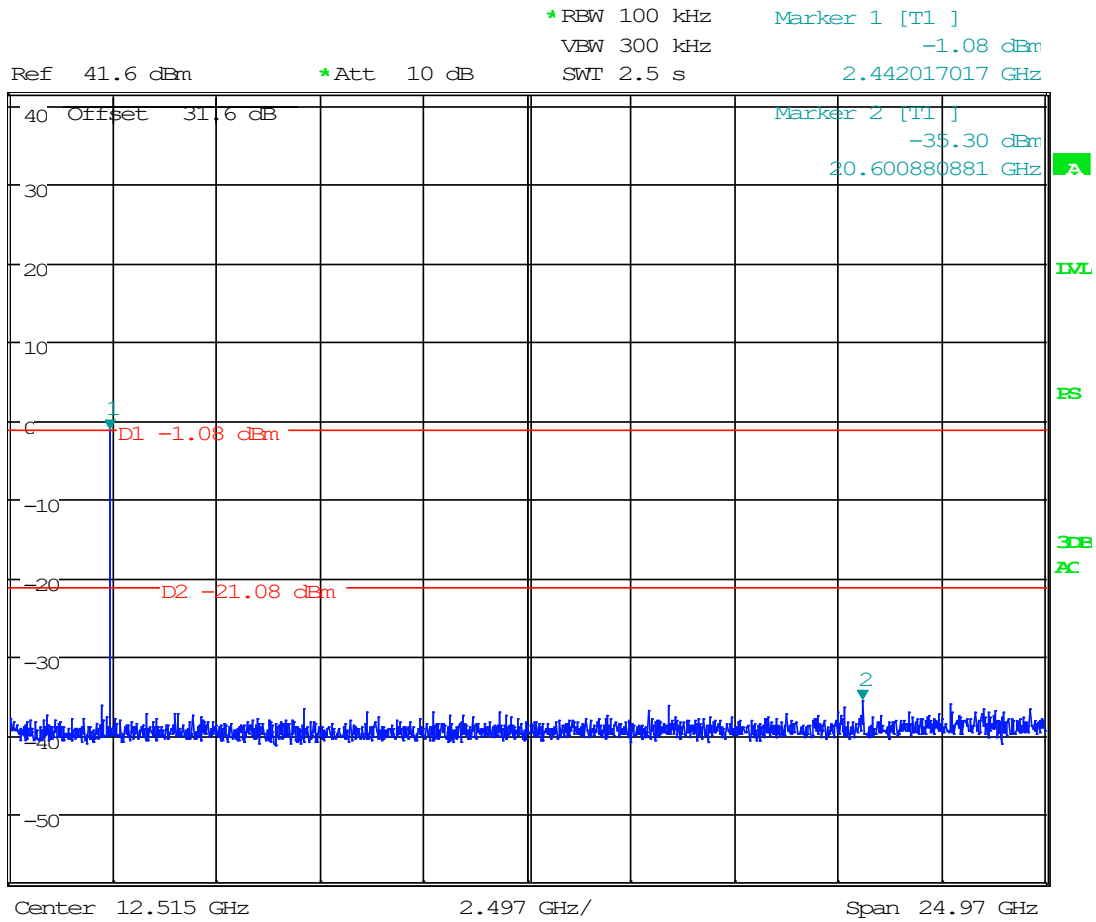


Date: 11.OCT.2022 09:31:01

### 8.5.3 Conducted Emissions Plot, 2480 MHz



1 BK  
VIEW

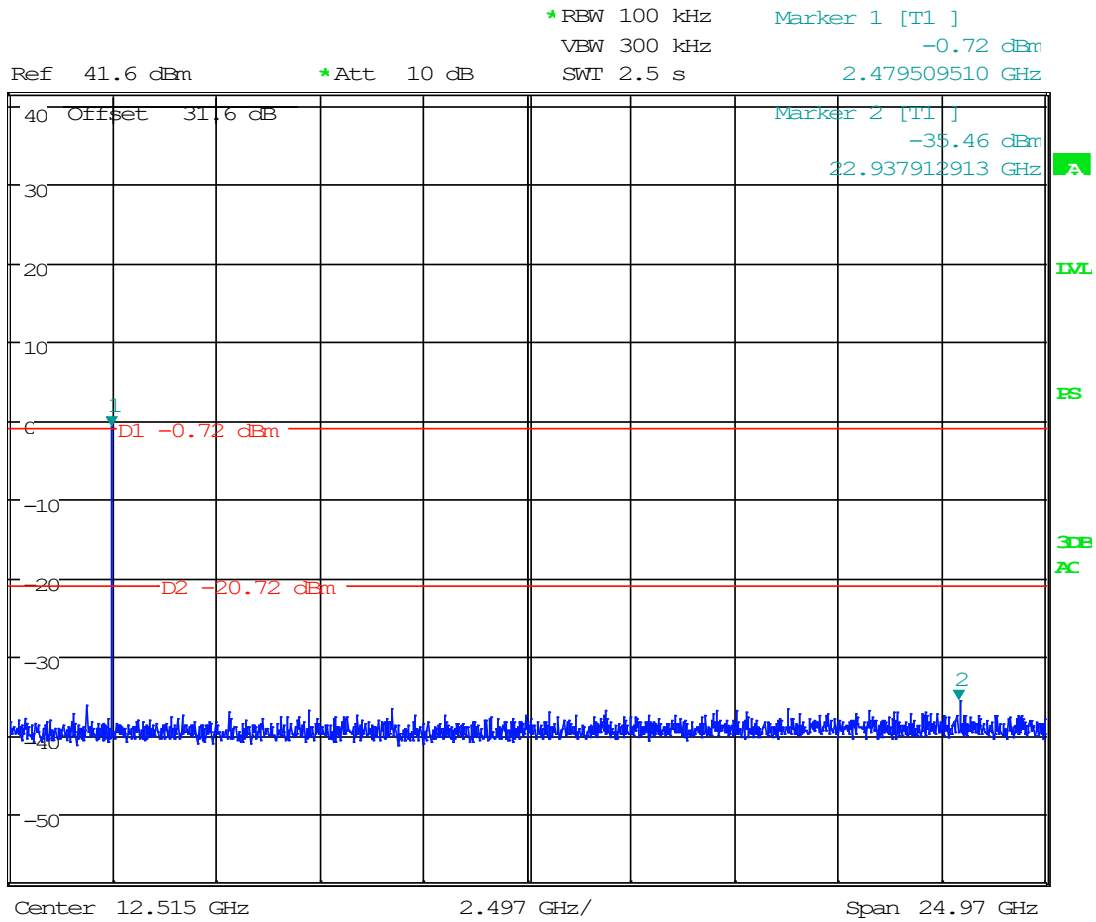


Date: 11.OCT.2022 09:32:25


## 8.6 Band-edge measurements

Requirement from FCC KDB 558074 D01 and test procedure from ANSI C63.10-2013 section 7.8 or 11.13 as applicable.


### Conducted Test Setup



### Radiated Test Setup, 30 – 1000 MHz

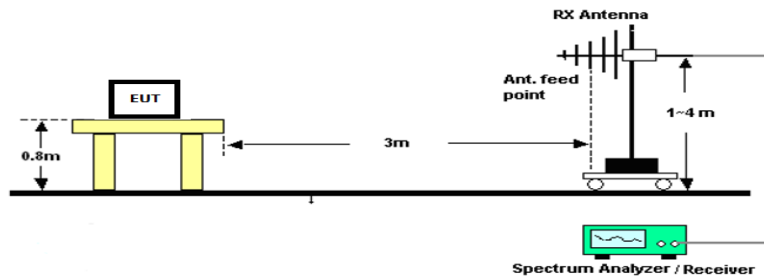

### Radiated Test Setup, Above 1000 MHz

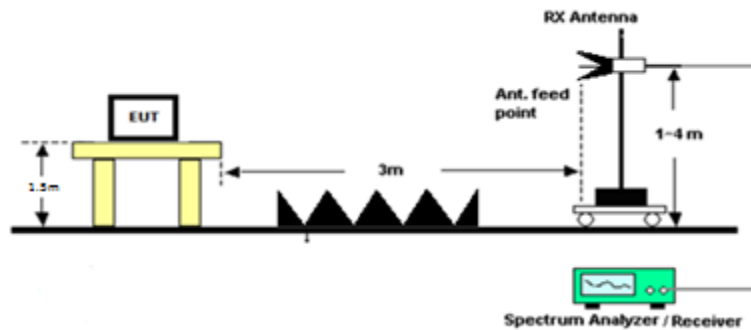







## Band-edge Spectrum Plots

### 8.6.1 Lower Band Edge Plot

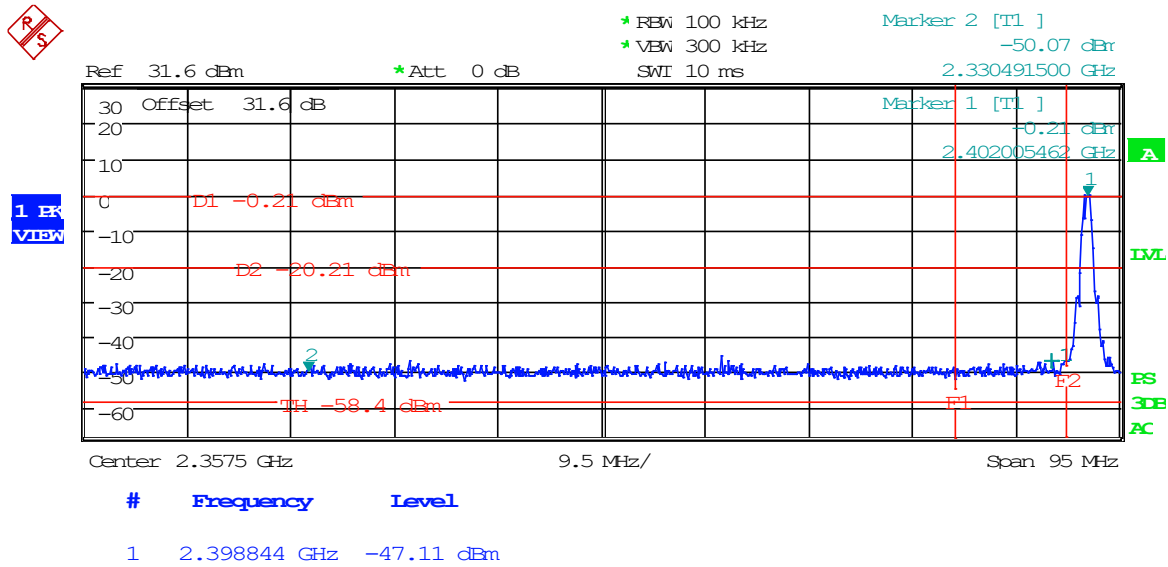

Date: 10.OCT.2022 17:23:05

### 8.6.2 Upper Band Edge Plot

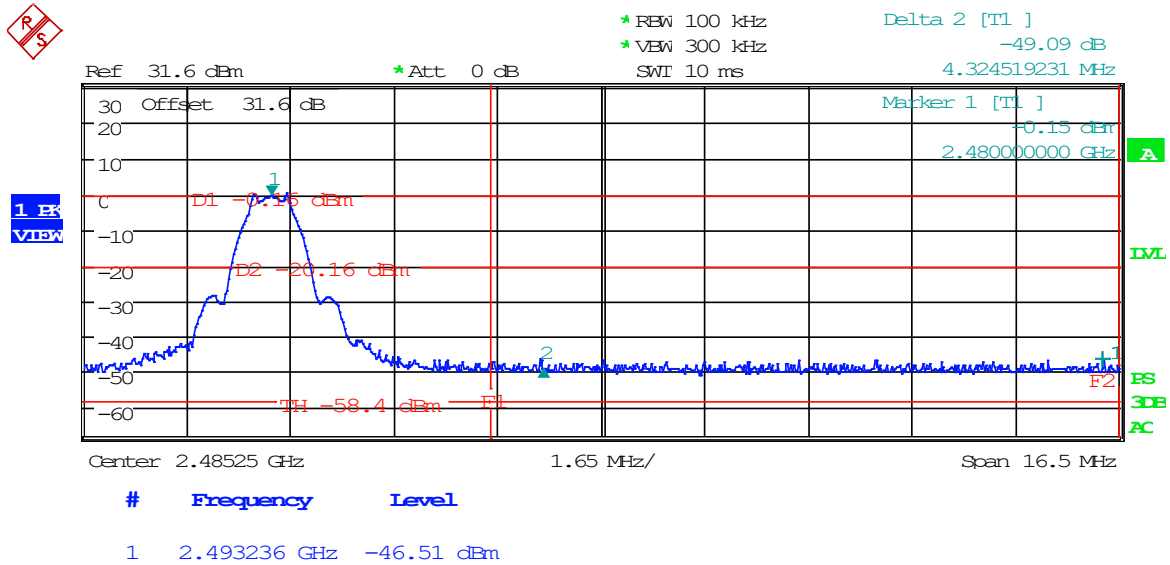


Date: 10.OCT.2022 17:32:01


## 8.7 Radiated Emissions

Restricted Bands from FCC Part 15.205; Limits from FCC Part 15.209


### Radiated Test Setup, Below 30 MHz

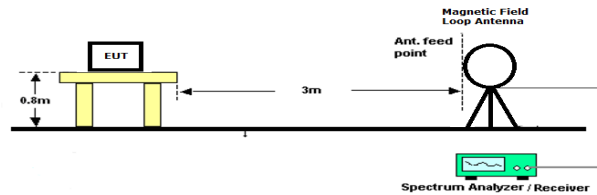

### Radiated Test Setup, 30 – 1000 MHz

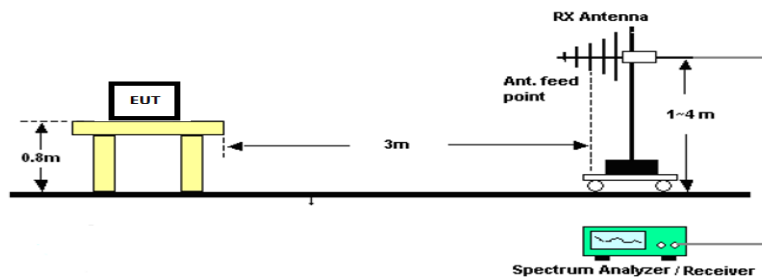

### Radiated Test Setup, Above 1000 MHz

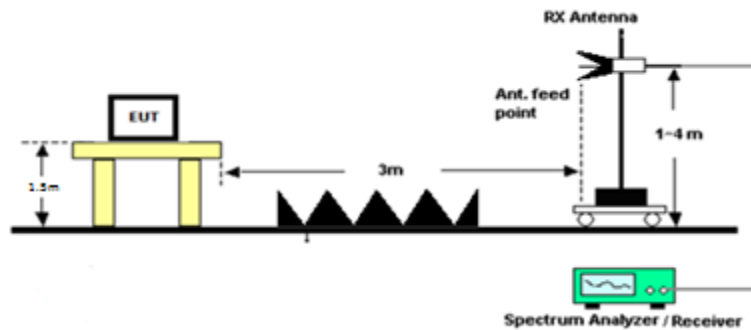



Radiated Emissions in Restricted Bands, Tabular Data

8.7.1 Radiated Emissions, 2402 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
2402.00	4804.00	X	PK	-16.00	H	7.10	0.00	33.93	3.00	25.03	-72.35	-30.00	42.35
2402.00	4804.00	X	PK	-15.60	V	7.10	0.00	33.93	3.00	25.43	-71.95	-30.00	41.95
2402.00	4804.00	X	AVG	-32.20	H	7.10	0.00	33.93	3.00	8.83	-88.55	-30.00	58.55
2402.00	4804.00	X	AVG	-32.20	V	7.10	0.00	33.93	3.00	8.83	-88.55	-30.00	58.55
2402.00	7206.00		PK	-12.20	H	9.54	0.00	36.39	3.00	33.73	-63.64	-30.00	33.64
2402.00	7206.00		PK	-12.70	V	9.54	0.00	36.39	3.00	33.23	-64.14	-30.00	34.14
2402.00	9608.00		PK	-7.20	H	10.70	0.00	36.62	3.00	40.12	-57.26	-30.00	27.26
2402.00	9608.00		PK	-7.80	V	10.70	0.00	36.62	3.00	39.52	-57.86	-30.00	27.86
2402.00	12010.00	X	PK	-6.10	H	12.40	0.00	39.08	3.00	45.38	-52.00	-30.00	22.00
2402.00	12010.00	X	PK	-5.10	V	12.40	0.00	39.08	3.00	46.38	-51.00	-30.00	21.00
2402.00	12010.00	X	AVG	-20.00	H	12.40	0.00	39.08	3.00	31.48	-65.90	-30.00	35.90
2402.00	12010.00	X	AVG	-20.10	V	12.40	0.00	39.08	3.00	31.38	-66.00	-30.00	36.00
2402.00	14412.00		PK	-6.00	H	13.35	0.00	39.75	3.00	47.10	-50.28	-30.00	20.28
2402.00	14412.00		PK	-5.80	V	13.35	0.00	39.75	3.00	47.30	-50.08	-30.00	20.08



### 8.7.2 Radiated Emissions, 2440 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
2440.00	4880.00	X	PK	-16.00	H	7.33	0.00	33.93	3.00	25.26	-72.12	-30.00	42.12
2440.00	4880.00	X	PK	-15.70	V	7.33	0.00	33.93	3.00	25.56	-71.82	-30.00	41.82
2440.00	4880.00	X	AVG	-31.60	H	7.33	0.00	33.93	3.00	9.66	-87.72	-30.00	57.72
2440.00	4880.00	X	AVG	-31.60	V	7.33	0.00	33.93	3.00	9.66	-87.72	-30.00	57.72
2440.00	7320.00	X	PK	-12.70	H	9.61	0.00	36.24	3.00	33.15	-64.23	-30.00	34.23
2440.00	7320.00	X	PK	-12.20	V	9.61	0.00	36.24	3.00	33.65	-63.73	-30.00	33.73
2440.00	7320.00	X	AVG	-26.80	H	9.61	0.00	36.24	3.00	19.05	-78.33	-30.00	48.33
2440.00	7320.00	X	AVG	-26.80	V	9.61	0.00	36.24	3.00	19.05	-78.33	-30.00	48.33
2440.00	9760.00		PK	-7.80	H	10.98	0.00	36.83	3.00	40.00	-57.37	-30.00	27.37
2440.00	9760.00		PK	-7.70	V	10.98	0.00	36.83	3.00	40.10	-57.27	-30.00	27.27
2440.00	12200.00	X	PK	-7.50	H	12.52	0.00	39.23	3.00	44.25	-53.13	-30.00	23.13
2440.00	12200.00	X	PK	-7.30	V	12.52	0.00	39.23	3.00	44.45	-52.93	-30.00	22.93
2440.00	12200.00	X	AVG	-21.20	H	12.52	0.00	39.23	3.00	30.55	-66.83	-30.00	36.83
2440.00	12200.00	X	AVG	-21.20	V	12.52	0.00	39.23	3.00	30.55	-66.83	-30.00	36.83
2440.00	14640.00		PK	-6.30	H	13.68	0.00	40.27	3.00	47.65	-49.73	-30.00	19.73
2440.00	14640.00		PK	-6.60	V	13.68	0.00	40.27	3.00	47.35	-50.03	-30.00	20.03



### 8.7.3 Radiated Emissions, 2480 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
2480.00	4960.00	X	PK	-15.30	H	7.72	0.00	33.96	3.00	26.38	-71.00	-30.00	41.00
2480.00	4960.00	X	PK	-15.10	V	7.72	0.00	33.96	3.00	26.58	-70.80	-30.00	40.80
2480.00	4960.00	X	AVG	-30.80	H	7.72	0.00	33.96	3.00	10.88	-86.50	-30.00	56.50
2480.00	4960.00	X	AVG	-30.80	V	7.72	0.00	33.96	3.00	10.88	-86.50	-30.00	56.50
2480.00	7440.00	X	PK	-12.10	H	9.56	0.00	36.01	3.00	33.48	-63.90	-30.00	33.90
2480.00	7440.00	X	PK	-11.80	V	9.56	0.00	36.01	3.00	33.78	-63.60	-30.00	33.60
2480.00	7440.00	X	AVG	-26.10	H	9.56	0.00	36.01	3.00	19.48	-77.90	-30.00	47.90
2480.00	7440.00	X	AVG	-26.00	V	9.56	0.00	36.01	3.00	19.58	-77.80	-30.00	47.80
2480.00	9920.00		PK	-7.80	H	11.15	0.00	37.08	3.00	40.43	-56.95	-30.00	26.95
2480.00	9920.00		PK	-8.10	V	11.15	0.00	37.08	3.00	40.13	-57.25	-30.00	27.25
2480.00	12400.00	X	PK	-6.50	H	12.54	0.00	39.23	3.00	45.27	-52.10	-30.00	22.10
2480.00	12400.00	X	PK	-6.10	V	12.54	0.00	39.23	3.00	45.67	-51.70	-30.00	21.70
2480.00	12400.00	X	AVG	-20.30	H	12.54	0.00	39.23	3.00	31.47	-65.90	-30.00	35.90
2480.00	12400.00	X	AVG	-20.30	V	12.54	0.00	39.23	3.00	31.47	-65.90	-30.00	35.90
2480.00	14880.00		PK	-6.10	H	13.44	0.00	40.29	3.00	47.64	-49.74	-30.00	19.74
2480.00	14880.00		PK	-6.50	V	13.44	0.00	40.29	3.00	47.24	-50.14	-30.00	20.14



### 9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

### 10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

### 11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_4407-22_FCC 15.247 DTS_	1	Initial release	10/12/2022
	2	Updated frequency range Page 7	10/31/2022



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

---

END OF TEST REPORT

---