



FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

ATEN Technology Inc. dba IOGEAR

KeySlate Bluetooth 4.0 Keyboard

Model No.: GKB641B

FCC ID: QLEGKB641B

Prepared for : ATEN Technology Inc. dba IOGEAR
19641 Da Vinci Foothill Ranch, CA 92610 USA

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F15209
Date of Test : Jul.10~21, 2015
Date of Report : Jul.27, 2015

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. SUMMARY OF STANDARDS AND RESULTS	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Block Diagram of connection between EUT and simulators	2-2
2.3. Test information	2-2
2.4. Test Facility	2-3
2.5. Measurement Uncertainty (95% confidence levels, k=2)	2-3
3. POWER LINE CONDUCTED EMISSION MEASUREMENT	3-1
4. RADIATED EMISSION MEASUREMENT	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup	4-2
4.3. Radiated Emission Limit Standard:	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-3
4.7. Radiated Emission Test Results	4-4
5. CONDUCTED SPURIOUS EMISSIONS	5-1
5.1. Test Equipment	5-1
5.2. Limit	5-1
5.3. Test Procedure	5-1
5.4. Test result	5-1
6. 6dB BANDWIDTH TEST	6-1
6.1. Test Equipment	6-1
6.2. Limit	6-1
6.3. Test Procedure	6-1
6.4. Test Results	6-1
7. MAXIMUM PEAK OUTPUT POWER TEST	7-1
7.1. Test Equipment	7-1
7.2. Limit	7-1
7.3. Test Procedure	7-1
7.4. Test Results	7-1
8. BAND EDGE COMPLIANCE TEST	8-1
8.1. Test Equipment	8-1
8.2. Limit	8-1
8.3. Test Produce	8-1
8.4. Test Results	8-1
9. POWER SPECTRAL DENSITY TEST	9-1
9.1. Test Equipment	9-1
9.2. Limit	9-1
9.3. Test Procedure	9-1
9.4. Test Results	9-1
10. ANTENNA REQUIREMENT	10-1
10.1. STANDARD APPLICABLE	10-1
10.2. ANTENNA CONNECTED CONSTRUCTION	10-1



11.	DEVIATION TO TEST SPECIFICATIONS.....	11-1
12.	HOTOGRAPH OF TEST	12-1
	12.1. Photos of Radiated Emission Test.....	12-1
13.	PHOTOGRAPH OF EUT	13-1

TEST REPORT CERTIFICATION

Applicant : ATEN Technology Inc. dba IOGEAR
 Manufacturer : G.tech Technology Ltd.
 EUT Description : KeySlate Bluetooth 4.0 Keyboard
 FCC ID : QLEGKB641B
 (A) Model No. : GKB641B
 (B) Power Supply : DC 3.7V
 (C) Test Voltage : DC 3.7V

Tested for comply with:

FCC Rules and Regulations Part 15 Subpart C: 2014
 Test procedure used : ANSI C63.10: 2009;
 KDB558074 D01 v03r03

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jul.10~21, 2015 Report of date: Jul.27, 2015

Prepared by : Kayli He Reviewed by : [Signature]
 Kayli He / Assistant Sunny Lu / Assistant Manager

信華科技 (深圳) 有限公司
 Audix Technology (Shenzhen) Co., Ltd.
 EMC 部門報告專用章
 Stamp only for EMC Dept. Report
 Signature: David Jin 7.27
 David Jin / Manager

Approved & Authorized Signer :

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 :2009	PASS
Radiated Emission Test	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2009	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2009	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2009	PASS
6dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10 :2009	PASS
Maximum Peak Output Power Test	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2009	PASS
Band Edge Compliance Test	FCC Part 15: 15.247(d) ANSI C63.10 :2009	PASS
Power Spectral Density Test	FCC Part 15: 15.247(d) ANSI C63.10 :2009	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name : KeySlate Bluetooth 4.0 Keyboard

Model Number : GKB641B

FCC ID : QLEGKB641B

Radio : Bluetooth V4.0

Operation Frequency : 2402-2480MHz

Modulation
Technology : GFSK

Antenna Assembly : PCB Antenna, 0dBi
Gain


Applicant : ATEN Technology Inc. dba IOGEAR
19641 Da Vinci Foothill Ranch, CA 92610 USA

Manufacturer : G.tech Technology Ltd.
No.21, Jinding Industrial Park, West Jinfeng Road, Tangjiawan Town,
Xiangzhou District Zhuhai Guangdong

Date of Test : Jul.10~21, 2015

Date of Receipt : Jul.08, 2015

2.2. Block Diagram of connection between EUT and simulators



(EUT: KeySlate Bluetooth 4.0 Keyboard)

2.3. Test information

A Special Test Software was used to control EUT work in Continuous TX mode, and select test channel.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	3	Low :CH 0	2402
	3	Middle: CH19	2440
	3	High: CH39	2480

2.4. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
 No. 6, Ke Feng Rd., 52 Block, Shenzhen
 Science & Industrial Park, Nantou, Shenzhen,
 Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA
 Registration Number: 90454
 Valid Date: Dec.30,2017

3m & 10m Anechoic Chamber : Certificated by FCC, USA
 Registration Number: 794232
 Valid Date: Oct.31, 2015

EMC Lab. : Certificated by Industry Canada
 Registration Number: IC 5183A-1
 Valid Date: May.14, 2017

: Certificated by DAkkS, Germany
 Registration No: D-PL-12151-01-00
 Valid Date: Dec.15, 2016

: Accredited by NVLAP, USA
 NVLAP Code: 200372-0
 Valid Date: Mar.31, 2016

2.5. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiation Emission test in 3m chamber	3.0 dB(30~200MHz, Polarize: H)
	3.0 dB(30~200MHz, Polarize: V)
	3.2 dB(200M~1GHz, Polarize: H)
	3.1 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	6.3 dB (1~6GHz, Distance: 3m)
	5.7 dB (6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6 dB
Uncertainty for Conduction Spurious emission test	2.0 dB
Uncertainty for Output power test	0.8 dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION MEASUREMENT

According to Paragraph (c) of FCC Part 15 section 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment


Frequency rang: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Nov.23,14	1 Year
2.	EMI Spectrum	Agilent	E4407B	MY41440292	Apr.28,15	1 Year
3.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	Apr.28,15	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.28,15	1 Year
5.	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-493	May.06,15	1 Year
6.	RF Cable	MIYAZAKI	CFD400-NW (3.5M)	No.3	Apr.28,15	1 Year
7.	RF Cable	MIYAZAKI	CFD400-LW (22M)	No.7	Apr.28,15	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.28,15	1 Year
9.	Test Software	AUDIX	E3	6.2009-5-21a(n)	N/A	N/A


Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	Apr.28,15	1 Year
2	Horn Antenna	ETS	3115	9510-4877	Sep.20,14	1 Year
3	Amplifier	Agilent	8449B	3008A02495	Apr.28,15	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	Apr.28,15	1 Year
5	Horn Antenna	ETS	3116	00060089	Sep.20,14	1 Year
6	Test Software	AUDIX	E3	6.2009-5-21a(n)	N/A	N/A

4.2. Block Diagram of Test Setup
For frequency range 30MHz-1000MHz

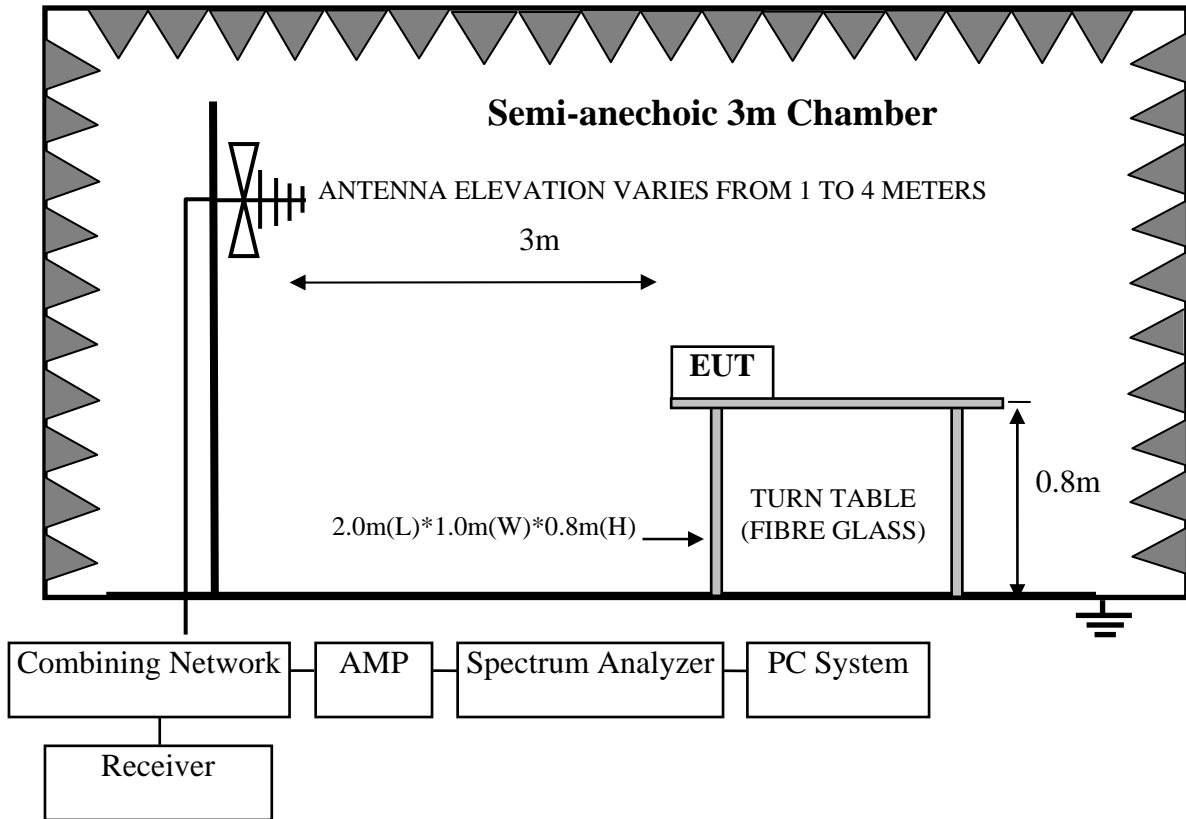

For frequency range 1GHz-25GHz

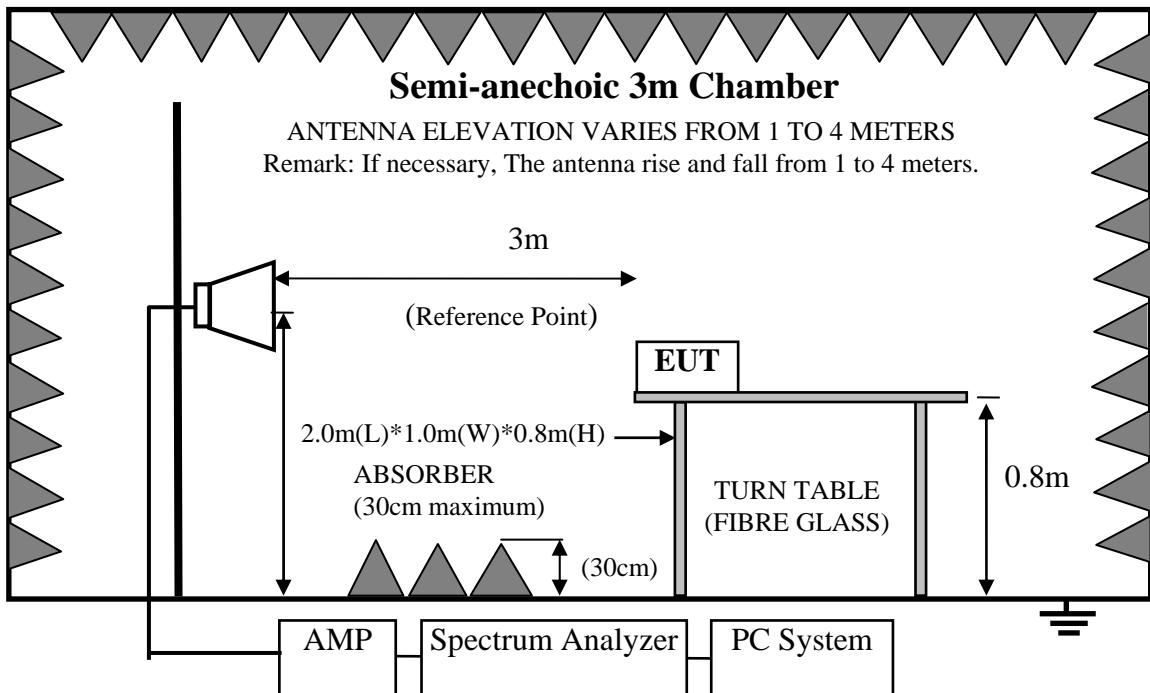

4.3. Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark :
- (1) Emission level dBμV = 20 log Emission level μV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. KeySlate Bluetooth 4.0 Keyboard (EUT)

Model Number : GKB641B
 Serial Number : N/A

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turned on the power of all equipment.
- 4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2009 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz.

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.


The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results
PASS.


All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note: The duty cycle factor for calculate average level is -37.86 dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit

Duty cycle factor = $20\log (1/\text{Duty cycle}) = -37.86$

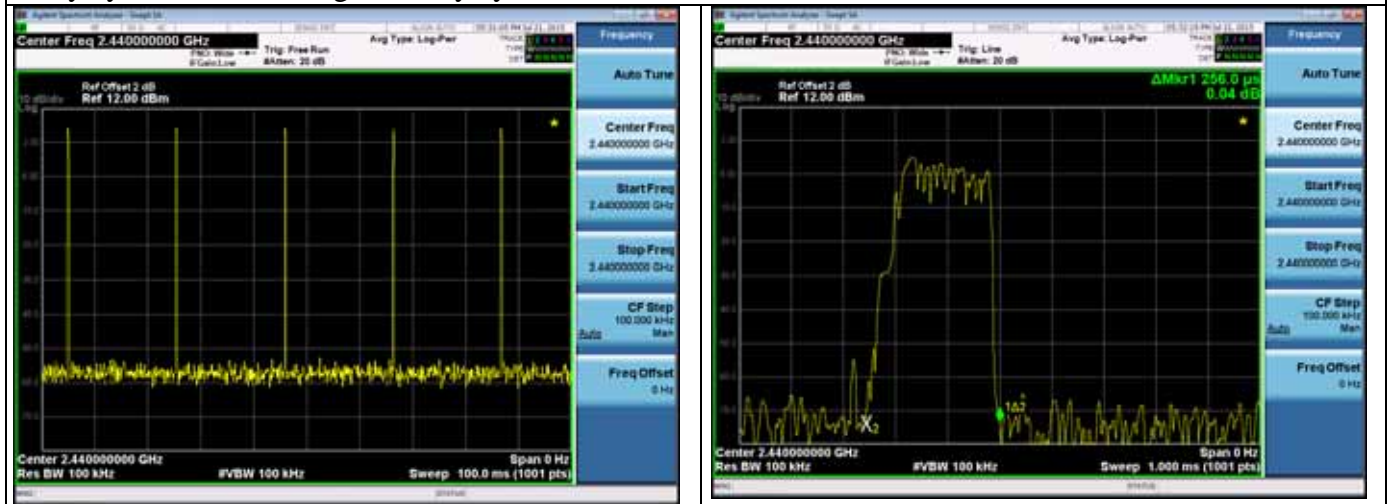

Frequency: 30MHz~1GHz

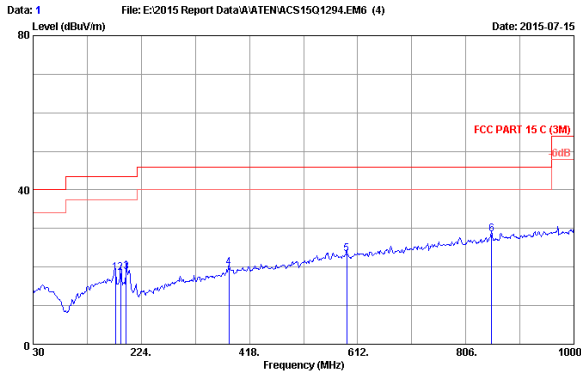


File: E:\2015 Report Data\A\ATENACS15Q1294.EM6 (4) Date: 2015-07-15

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2015 VULB 9168-493 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Brown
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : Tx Mode
 M/N:GKB641B

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	177.440	13.15	1.40	4.00	18.55	43.50	24.95	QP
2	187.140	12.03	1.46	4.97	18.46	43.50	25.04	QP
3	196.840	11.35	1.49	5.84	18.68	43.50	24.82	QP
4	381.140	15.98	2.14	1.64	19.76	46.00	26.24	QP
5	592.600	19.86	2.75	0.83	23.44	46.00	22.56	QP
6	852.560	23.04	3.39	2.09	28.52	46.00	17.48	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

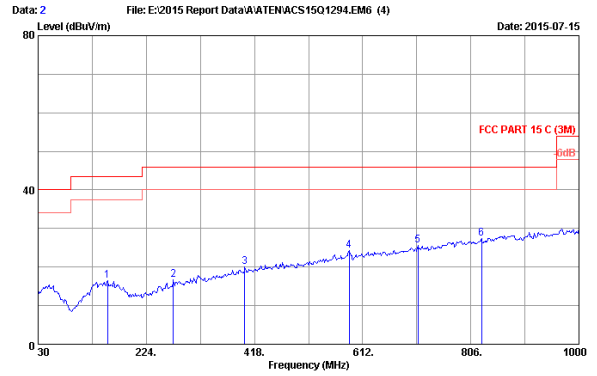


File: E:\2015 Report Data\A\ATENACS15Q1294.EM6 (4) Date: 2015-07-15

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2015 VULB 9168-493 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Brown
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : Tx Mode
 M/N:GKB641B


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	154.160	14.34	1.32	0.91	16.57	43.50	26.93	QP
2	272.500	13.18	1.79	1.66	16.63	46.00	29.37	QP
3	400.540	16.51	2.20	1.31	20.02	46.00	25.98	QP
4	587.750	19.77	2.74	1.84	24.35	46.00	21.65	QP
5	710.940	21.51	3.05	1.12	25.68	46.00	20.32	QP
6	825.400	22.80	3.32	1.32	27.44	46.00	18.56	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency:1GHz~18GHz

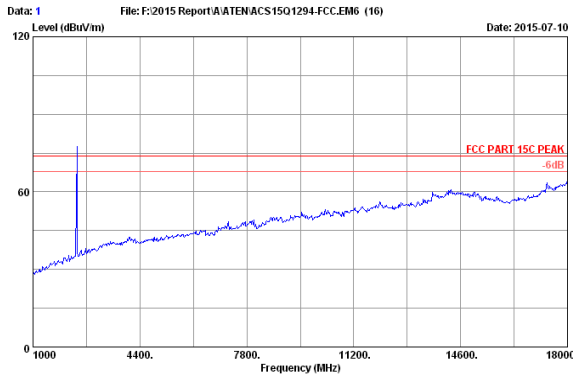

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2402MHz Tx Mode

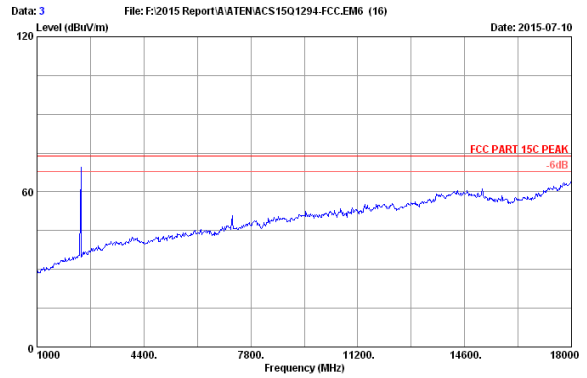


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2402MHz Tx Mode

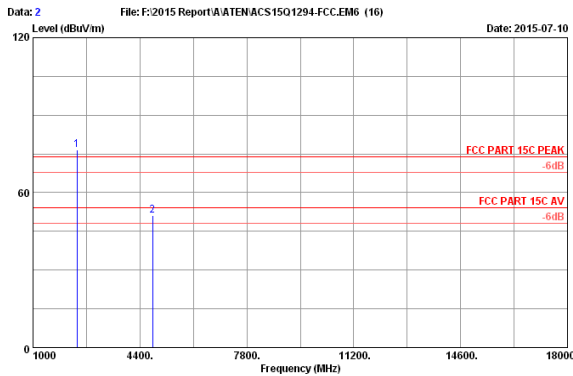

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	28.26	7.32	36.62	77.64	76.60	74.00	-2.60	Peak
2	4804.000	33.02	9.46	35.54	44.23	51.17	74.00	22.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

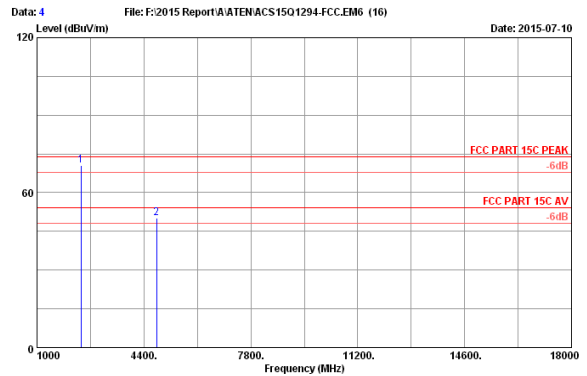


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	28.26	7.32	36.62	71.64	70.60	74.00	3.40	Peak
2	4804.000	33.02	9.46	35.54	43.35	50.29	74.00	23.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

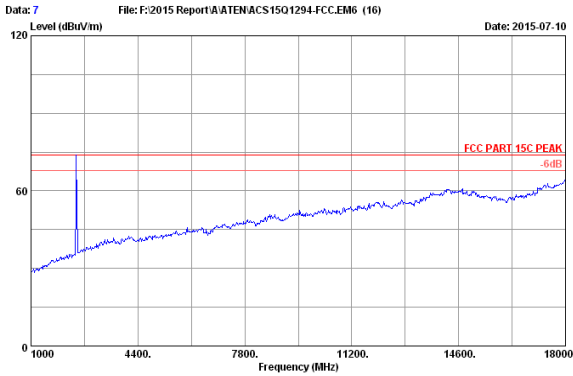

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2440MHz Tx Mode

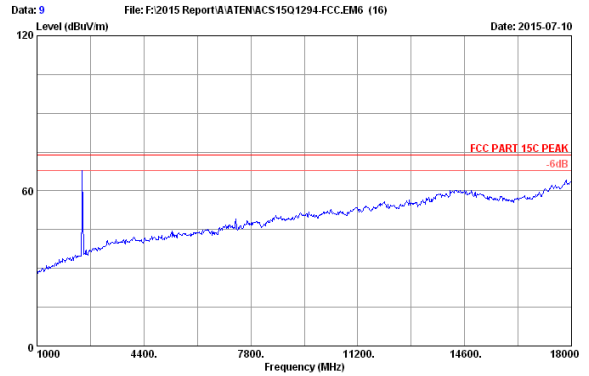


Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2440MHz Tx Mode

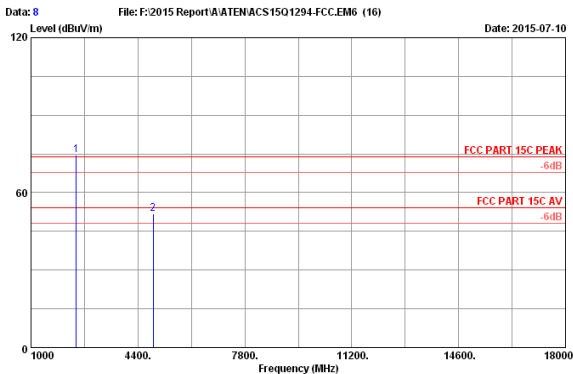

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.000	28.31	7.39	36.60	75.48	74.58	74.00	-0.58	Peak
2	4880.000	33.17	9.49	35.51	44.57	51.72	74.00	22.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

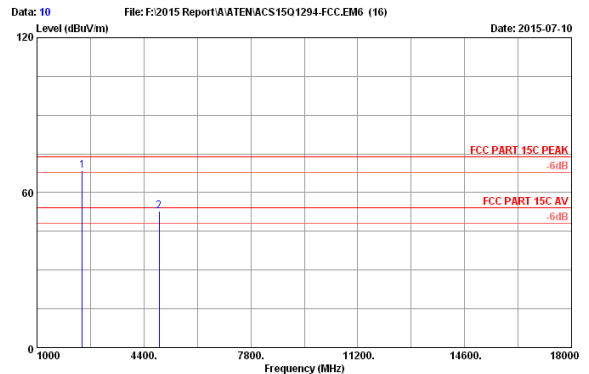


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.000	28.31	7.39	36.60	69.54	68.64	74.00	5.36	Peak
2	4880.000	33.17	9.49	35.51	45.76	52.91	74.00	21.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

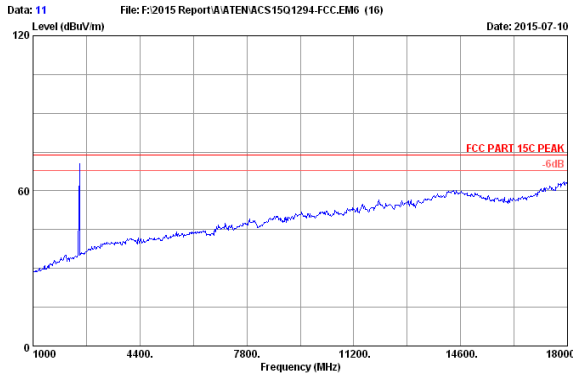

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2480MHz Tx Mode

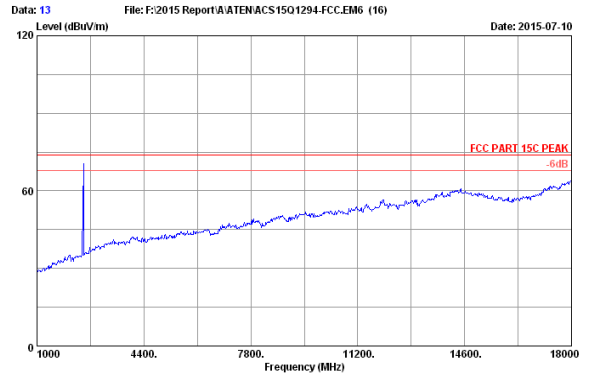


Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2480MHz Tx Mode

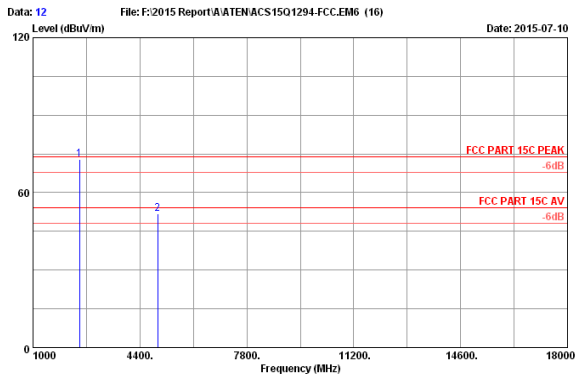

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.37	7.47	36.59	73.46	72.71	74.00	1.29	Peak
2	4960.000	33.32	9.52	35.47	44.37	51.74	74.00	22.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

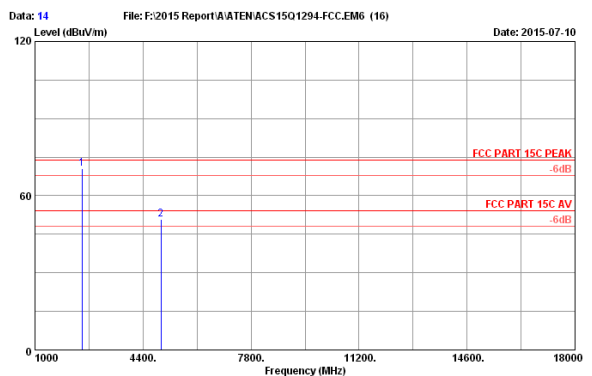

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.37	7.47	36.59	71.34	70.59	74.00	3.41	Peak
2	4960.000	33.32	9.52	35.47	43.46	50.83	74.00	23.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.29,14	1 Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.28,15	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.26,14	1 Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure


The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

5.4. Test result


PASS (The testing data was attached in the next pages.)

<p>GFSK</p>	
<p>2402MHz(30MHz-1GHz)</p>	<p>2402MHz(2.31GHz-2.405GHz)</p>
<p>2402MHz(1GHz-10GHz)</p>	<p>2440MHz(30MHz-1GHz)</p>
<p>2402MHz(10GHz-25GHz)</p>	<p>2440MHz(1GHz-10GHz)</p>


2440MHz(10GHz-25GHz)

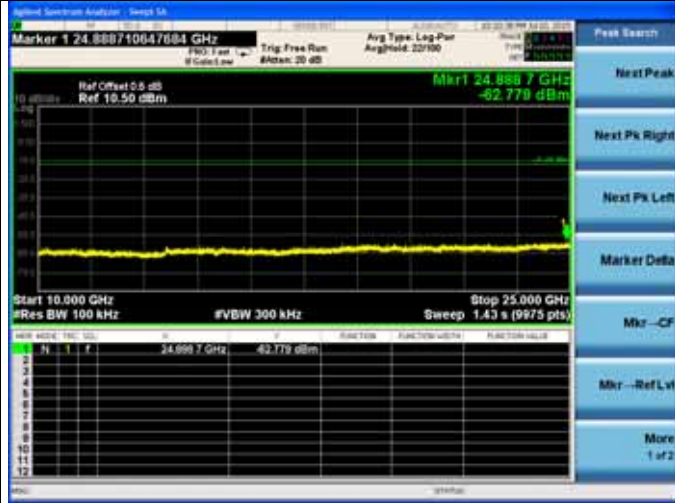

2480MHz(10GHz-25GHz)

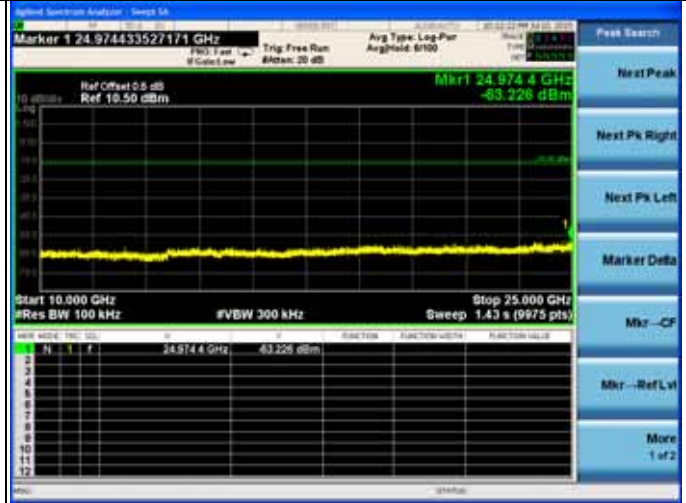



2480MHz(30MHz-1GHz)

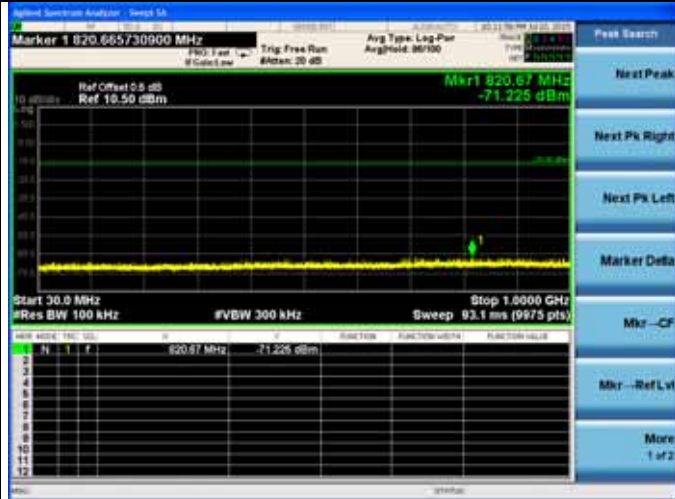

2480MHz(2.477GHz-2.51GHz)



2480MHz(1GHz-10GHz)

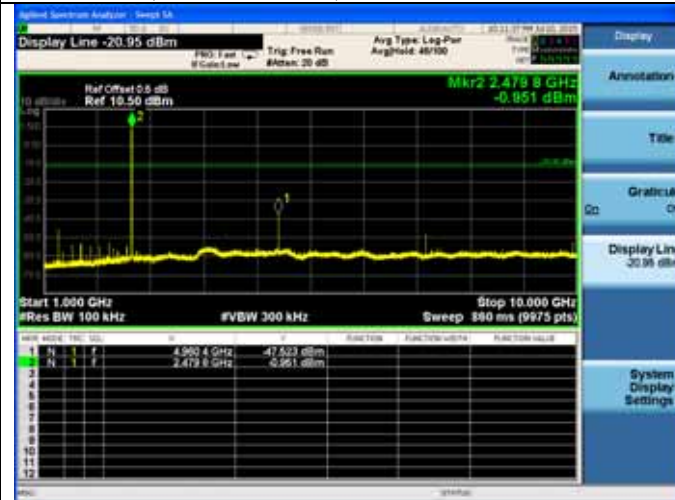

6. 6dB BANDWIDTH TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.29,14	1Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.28,15	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.26,14	1 Year

6.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

6.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

6.4. Test Results

EUT: KeySlate Bluetooth 4.0 Keyboard		
M/N: GKB641B		
Test date: 2015-07-10	Pressure: 101.5±1.0kpa	Humidity: 52.1±3.0%
Tested by: Donjon_Huang	Test site: RF site	Temperature: 22.6±0.6°C

Test Mode	Frequency (MHz)	-6dB bandwidth (kHz)	Limit (kHz)
GFSK	2402	503.6	>500
	2440	518.7	>500
	2480	505.4	>500
Conclusion : PASS			

<p>GFSK 2402MHz</p> <table border="1"> <tr> <td>Center Freq</td> <td>2.402 GHz</td> <td>#VBW</td> <td>300 kHz</td> <td>Span</td> <td>3 MHz</td> </tr> <tr> <td>#Res BW</td> <td>100 kHz</td> <td>#VBW</td> <td>300 kHz</td> <td>Sweep</td> <td>1.533 ms</td> </tr> <tr> <td>Occupied Bandwidth</td> <td colspan="2">1.4046 MHz</td> <td>Total Power</td> <td colspan="2">3.98 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>35.996 kHz</td> <td>OBW Power</td> <td colspan="3">99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>503.6 kHz</td> <td>x dB</td> <td colspan="3">-6.00 dB</td> </tr> </table>	Center Freq	2.402 GHz	#VBW	300 kHz	Span	3 MHz	#Res BW	100 kHz	#VBW	300 kHz	Sweep	1.533 ms	Occupied Bandwidth	1.4046 MHz		Total Power	3.98 dBm		Transmit Freq Error	35.996 kHz	OBW Power	99.00 %			x dB Bandwidth	503.6 kHz	x dB	-6.00 dB			<p>2480MHz</p> <table border="1"> <tr> <td>Center Freq</td> <td>2.480 GHz</td> <td>#VBW</td> <td>300 kHz</td> <td>Span</td> <td>3 MHz</td> </tr> <tr> <td>#Res BW</td> <td>100 kHz</td> <td>#VBW</td> <td>300 kHz</td> <td>Sweep</td> <td>1.533 ms</td> </tr> <tr> <td>Occupied Bandwidth</td> <td colspan="2">1.2465 MHz</td> <td>Total Power</td> <td colspan="2">4.45 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>59.343 kHz</td> <td>OBW Power</td> <td colspan="3">99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>505.4 kHz</td> <td>x dB</td> <td colspan="3">-6.00 dB</td> </tr> </table>	Center Freq	2.480 GHz	#VBW	300 kHz	Span	3 MHz	#Res BW	100 kHz	#VBW	300 kHz	Sweep	1.533 ms	Occupied Bandwidth	1.2465 MHz		Total Power	4.45 dBm		Transmit Freq Error	59.343 kHz	OBW Power	99.00 %			x dB Bandwidth	505.4 kHz	x dB	-6.00 dB		
Center Freq	2.402 GHz	#VBW	300 kHz	Span	3 MHz																																																								
#Res BW	100 kHz	#VBW	300 kHz	Sweep	1.533 ms																																																								
Occupied Bandwidth	1.4046 MHz		Total Power	3.98 dBm																																																									
Transmit Freq Error	35.996 kHz	OBW Power	99.00 %																																																										
x dB Bandwidth	503.6 kHz	x dB	-6.00 dB																																																										
Center Freq	2.480 GHz	#VBW	300 kHz	Span	3 MHz																																																								
#Res BW	100 kHz	#VBW	300 kHz	Sweep	1.533 ms																																																								
Occupied Bandwidth	1.2465 MHz		Total Power	4.45 dBm																																																									
Transmit Freq Error	59.343 kHz	OBW Power	99.00 %																																																										
x dB Bandwidth	505.4 kHz	x dB	-6.00 dB																																																										
<p>2440MHz</p> <table border="1"> <tr> <td>Center Freq</td> <td>2.440 GHz</td> <td>#VBW</td> <td>300 kHz</td> <td>Span</td> <td>3 MHz</td> </tr> <tr> <td>#Res BW</td> <td>100 kHz</td> <td>#VBW</td> <td>300 kHz</td> <td>Sweep</td> <td>1.533 ms</td> </tr> <tr> <td>Occupied Bandwidth</td> <td colspan="2">1.4522 MHz</td> <td>Total Power</td> <td colspan="2">4.50 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>29.516 kHz</td> <td>OBW Power</td> <td colspan="3">99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>518.7 kHz</td> <td>x dB</td> <td colspan="3">-6.00 dB</td> </tr> </table>	Center Freq	2.440 GHz	#VBW	300 kHz	Span	3 MHz	#Res BW	100 kHz	#VBW	300 kHz	Sweep	1.533 ms	Occupied Bandwidth	1.4522 MHz		Total Power	4.50 dBm		Transmit Freq Error	29.516 kHz	OBW Power	99.00 %			x dB Bandwidth	518.7 kHz	x dB	-6.00 dB																																	
Center Freq	2.440 GHz	#VBW	300 kHz	Span	3 MHz																																																								
#Res BW	100 kHz	#VBW	300 kHz	Sweep	1.533 ms																																																								
Occupied Bandwidth	1.4522 MHz		Total Power	4.50 dBm																																																									
Transmit Freq Error	29.516 kHz	OBW Power	99.00 %																																																										
x dB Bandwidth	518.7 kHz	x dB	-6.00 dB																																																										

7. MAXIMUM PEAK OUTPUT POWER TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.29,14	1Year
2.	Power meter	Anritsu	ML2487A	6K00002472	Aug.20,14	1Year
3.	Power sensor	Anritsu	MA2491A	0033005	Aug.20,14	1Year
4.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.28,15	1 Year
5.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.26,14	1 Year

7.2. Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm).

7.3. Test Procedure

Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power.

7.4. Test Results

EUT: KeySlate Bluetooth 4.0 Keyboard			
M/N: GKB641B			
Test date: 2015-07-15		Pressure: 101.3±1.0kpa	Humidity: 51.9±3.0%
Tested by: Donjon_Huang		Test site: RF site	Temperature: 22.1±0.6°C
Test Mode	Frequency (MHz)	Peak output Power (dBm)	Limit (dBm)
GFSK	2402	-1.736	30
	2440	-1.676	30
	2480	-1.248	30
Conclusion: PASS			

8. BAND EDGE COMPLIANCE TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Amp	HP	8449B	3008A02495	Apr.28,15	1 Year
2.	Horn Antenna	ETS	3115	9510-4877	Sep.20,14	1 Year
3.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr.28,15	1 Year

8.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.3. Test Produce

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

8.4. Test Results

Pass (The testing data was attached in the next pages.)


Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

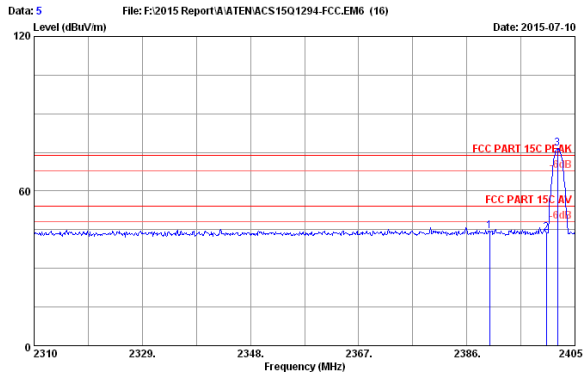

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.24	7.28	36.62	45.63	44.53	74.00	29.47	Peak
2	2400.000	28.25	7.32	36.62	44.94	43.79	74.00	30.21	Peak
3	2401.960	28.26	7.32	36.62	77.50	76.46	74.00	-2.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

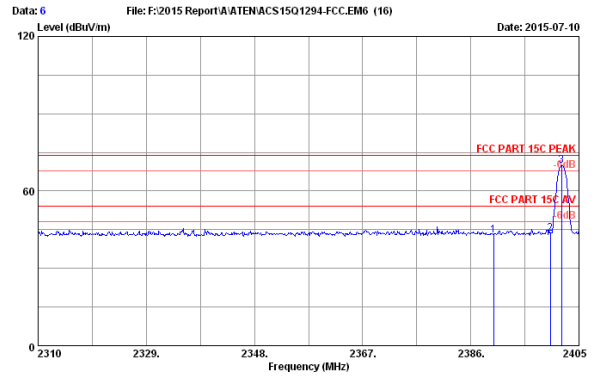

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.24	7.28	36.62	43.95	42.85	74.00	31.15	Peak
2	2400.000	28.25	7.32	36.62	44.50	43.45	74.00	30.55	Peak
3	2401.960	28.26	7.32	36.62	70.91	69.87	74.00	4.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

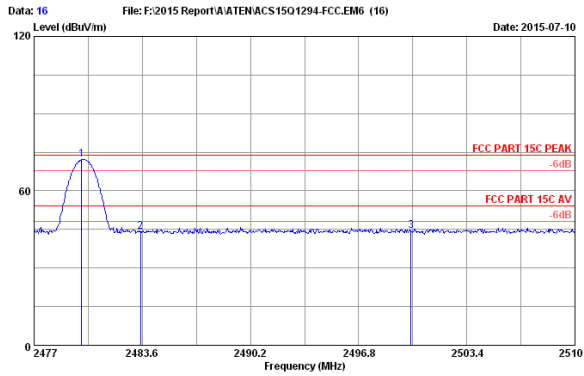

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.904	28.37	7.47	36.59	72.95	72.20	74.00	1.80	Peak
2	2483.500	28.38	7.51	36.59	44.67	43.97	74.00	30.03	Peak
3	2500.000	28.40	7.51	36.58	45.09	44.42	74.00	29.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

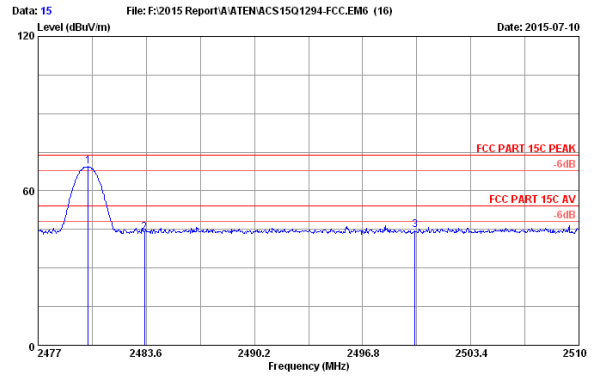

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2014 3115 9607-4877 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Donjon
 EUT : KeySlate Bluetooth 4.0 Keyboard
 Power rating : DC 3.7V
 Test Mode : GFSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.069	28.37	7.47	36.59	70.21	69.46	74.00	4.54	Peak
2	2483.500	28.38	7.51	36.59	44.62	43.92	74.00	30.08	Peak
3	2500.000	28.40	7.51	36.58	45.61	44.94	74.00	29.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
2.	Spectrum	Agilent	N9030A	MY51380221	Oct.29,14	1 Year
4.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.28,15	1 Year
5	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.26,14	1 Year

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

1. Connected the EUT's antenna port to spectrum analyzer device by 20dB attenuator.
2. Set the test frequency as center frequency, Set RBW=3KHz,VBW=10KHz,Span large enough capture the entire frequency, Read out maximum peak level frequency
3. Set the span to 1.5 times of the DTS Bandwidth Detector= Peak; Sweep time= Auto Couple; Trace Mode= Max hold.
4. Allow trace to fully stabilize use the peak marker function to determine the maximum amplitude level within the RBW.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude

9.4. Test Results

EUT: KeySlate Bluetooth 4.0 Keyboard		
M/N: GKB641B		
Test date: 2015-07-13	Pressure: 101.6±1.0kpa	Humidity: 52.5±3.0%
Tested by: Donjon_Huang	Test site: RF site	Temperature: 22.1±0.6°C

Test Mode	Frequency (MHz)	Power density (dBm/3KHz)	Limit (dBm/3KHz)
GFSK	2402	-13.118	8
	2440	-12.395	8
	2480	-11.383	8
Conclusion : PASS			

GFSK

2402MHz



2480MHz



2440MHz



10. ANTENNA REQUIREMENT

10.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are Dipole antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 0dBi.

11. DEVIATION TO TEST SPECIFICATIONS

[NONE]