



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul



**Electromagnetic  
Interference  
Test Report**

## Compliance Test Report for FCC

Report Number		ESTF150209-001			
Applicant	Company name	AMJEON PRECISION OPTICS CO., LTD			
	Address	#263-1, Samjung-Dong, Ojung-Gu, Bucheon-City, Kyeonggi-Do, Korea			
	Telephone	82-32-682-8811			
Product	Product name	CMOS Camera			
	Model No.	OptiCAM	Manufacturer	AMJEON PRECISION OPTICS CO., LTD	
	Serial No.	NONE	Country of origin	KOREA	
Test date	2002-09-02	~	2002-09-02	Date of issue	2002-09-03
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea				
Standard	FCC PART 15 2001 , ANSI C 63.4 2001				
Test item	■ Conducted Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK
	■ Radiated Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK
Measurement facility registration number		94696			
Tested by	Senior Engineer J.M. Yang			(Signature)	
Reviewed by	Director T.K. Lee			(Signature)	
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable				
<p>* Note</p> <ul style="list-style-type: none"><li>- This test report is not permitted to copy partly without our permission</li><li>- This test result is dependent on only equipment to be used</li><li>- This test result based on a single evaluation of one sample of the above mentioned</li></ul>					



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul



**Electromagnetic  
Interference  
Test Report**

## Contents

1. Laboratory Information .....	3
2. Description of EUT .....	4
3. Test Standards .....	5
4. Measurement condition .....	6
5. Measurement of radiated emission .....	8
5.1 Measurement equipment .....	8
5.2 Environmental conditions .....	8
5.3 Test data .....	9
6. Measurement of conducted emission .....	10
6.1 Measurement equipment .....	10
6.2 Environmental conditions .....	10
6.3 Test data .....	11
7. Photographs of test setup .....	12
8. Photographs of EUT .....	14

Appendix 1. Spectral diagram

Appendix 2. Photographs of EUT in side PCB

Appendix 3. Block diagram of EUT

Appendix 4. Circuit Diagram



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul



**Electromagnetic  
Interference  
Test Report**

## 1. Laboratory Information

### 1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

### 1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : 3 rd Fl., Chungdam Bldg., 119-1 Chungdam-dong Kangnam-gu , Seoul, Korea  
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea  
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

Branch Office : USA-ESTECH INC.  
21801 Stevens Creek Blvd. Suite 2A Cupertino, CA95014

### 1.3 Official Qualification(s)

MIC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul



**Electromagnetic  
Interference  
Test Report**

## 2. Description of EUT

### 2.1 Summary of Equipment Under Test

Product : CMOS Camera  
Model Number : OptiCAM  
Serial Number : NONE  
Manufacturer : AMJEON PRECISION OPTICS CO., LTD  
Country of origin : KOREA  
Rating : DC 12V  
Receipt Date : 2002-08-27

### 2.2 General descriptions of EUT

The OptiCAM is a high-resolution security camera of transmitting image or picture by 60 frames/sec through wire-cable in the place of indoor or outdoor and allow to function without S/W or additional programing.

This specifically designed OptiCAM can be mountable on the wall and ceiling in need of requirement connecting with RJ-45 Jack and RJ-Connection, and user can simply setup for it's specific surveillance.

- Array size : 510 × 492 pixels
- Image Area : 4.69 × 3.54 mm



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul



**Electromagnetic  
Interference  
Test Report**

### 3. Test Standards

**Test Standard : FCC PART 15 (2001)**

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

**Test Method : ANSI C 63.4 (2001)**

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul




**Electromagnetic  
Interference  
Test Report**

## 4. Measurement Condition

### 4.1 EUT Operation.

- \* The EUT was in the following operation mode during all testing
- \* The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission
- \* After capturing video by camera, replaying video by TV

### 4.2 Configuration and Peripherals

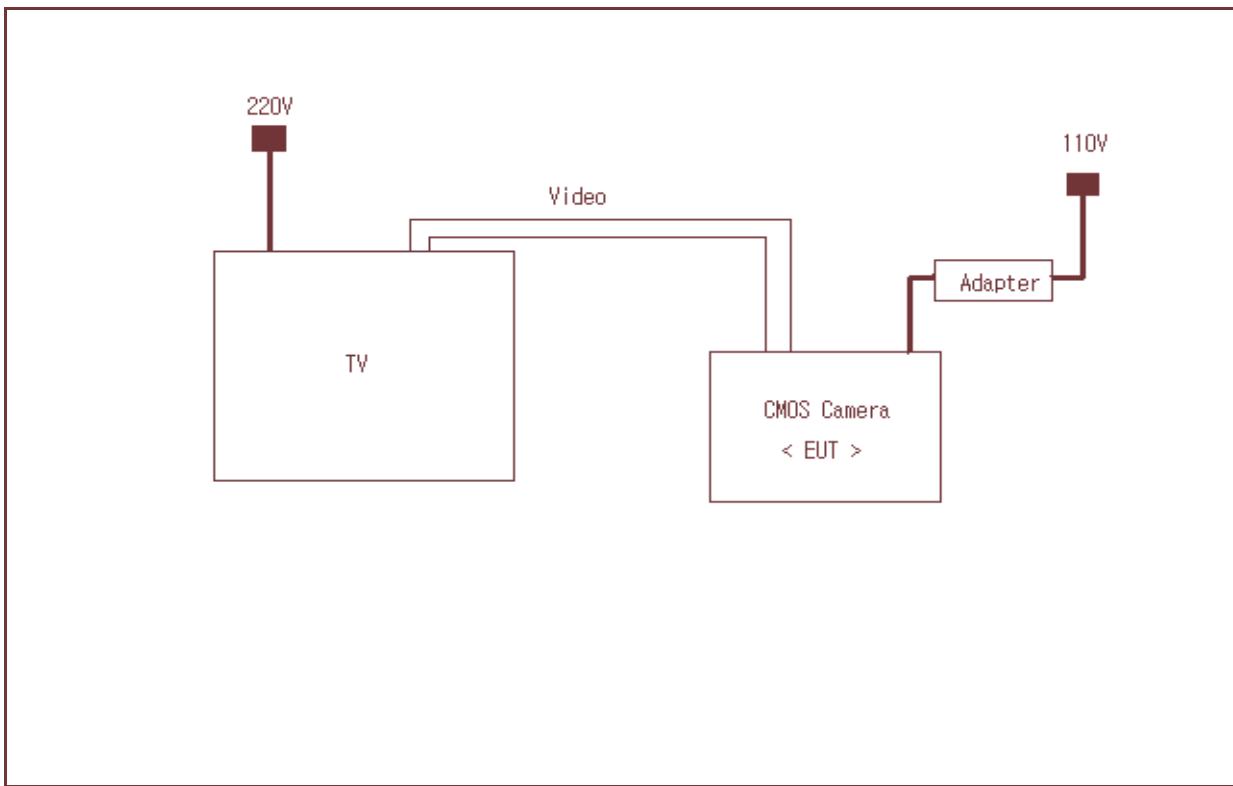

### 4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
CMOS Camera	OptiCAM	NONE	AMJEON PRECISION OPTICS CO., LTD	EUT
Adapter	DR-12500U	NONE	Dream Electronic Co., LTD	–
TV	CT-141F	32DJB00289	Samsung Electronics Co., Ltd.	–

### 4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
CMOS Camera	Video Out	TV	Video in	2.5	Un-Shielded	–
CMOS Camera	Power	Adapter	–	2.5	Un-Shielded	–

## 5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2001) & ANSI C 63.4 (2001). The test setup was made according to FCC Part 15 (2001) & ANSI C 63.4 (2001) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test set-up.

### 5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Receiver	ESPC	Rohde & Schwarz	845296/021	2003.6.21
Spectrum Analyzer	R3261B	ADVANTEST	1720302	2002.9.3
LogBicon Antenna	VULB 9160	S/B	3107	2003.6.7
Turn Table	2087	EMCO	2129	–
Antenna Mast	2070-01	EMCO	9702-203	–
Amplifier	310N	Sonoma Instrument	185817	2002.11.13
ANT Mast Controller	2090	EMCO	1535	–
Turn Table Controller	2090	EMCO	1535	–

### 5.2 Environmental Condition

Test Place : Open site(3m)  
 Temperature (°C) : 28 °C  
 Humidity (%) : 62 %



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul



## Electromagnetic Interference Test Report

### 5.3 Test data

Measurement Distance : 3 m



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul



**Electromagnetic  
Interference  
Test Report**

## 6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.45 to 30 MHz was measured in accordance to FCC Part 15 (2001) & ANSI C 63.4 (2001). The test setup was made according to FCC Part 15 (2001) & ANSI C 63.4 (2001) in a shielded. The EUT was placed on a non-conductive table at least 80 above the ground plan. A grounded vertical reference plane was positioned in a distance of 40cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0m.. The test receiver with Quasi Peak detector complies with CISPR 16.

### 6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	ESH3-Z5	Rohde & Schwarz	838979/010	2003. 2. 1
LISN	NNLA8120A	Schwarzbeck	NONE	2003. 2. 1
TEST Receive	ESPC	Rohde & Schwarz	845296/021	2003.6.21
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	2003.7.4

### 6.2 Environmental Condition

Test Place : Shield Room

Temperature (°C) : 21 °C

Humidity (%) : 60 %



**ESTECH Co., Ltd.**  
3rd Fl., Chungdam Bldg.,  
119-1 Chungdam-dong,  
Kangnamgu, Seoul




# Electromagnetic Interference Test Report

### 6.3 Test data

## Appendix 1. Spectral diagram

\* HOT

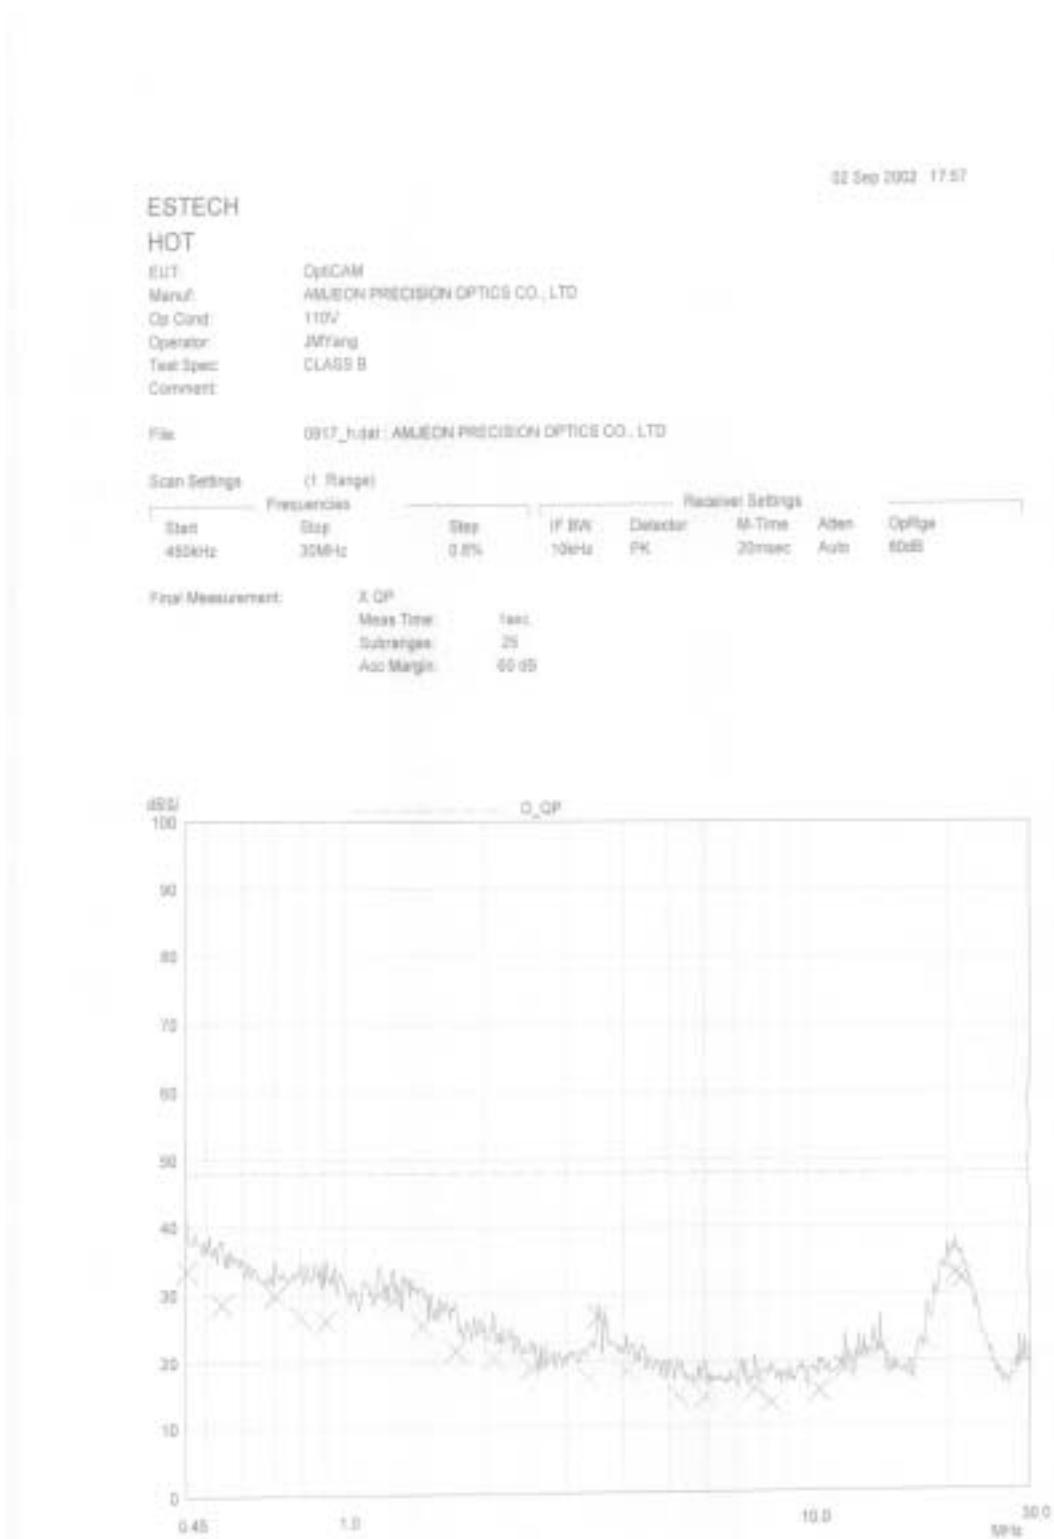

\*NETRUL

02 Sep 2002 18:05

ESTECH

NEUTRAL

EUT: OptCAM  
Manuf: AMUEON PRECISION OPTICS CO., LTD  
Op. Cond: 110V  
Operator: JMFang  
Test Spec: CLASS B  
Comment:

File: 0917\_n.dat : AMUEON PRECISION OPTICS CO., LTD

Scan Settings (1 Range)

	Frequencies			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Altan	OpRange
450kHz	30MHz	0.8%	10kHz	PK	20msec	Auto	60dB

Final Measurement: X QP  
Meas Time: 1sec  
Subranges: 25  
Acc Margin: 80 dB

