

# FCC REPORT (BLE)

**Applicant:** Xingtel Xiamen Group Co., Ltd.

**Address of Applicant:** Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District, Xiamen 361006, PR China

**Equipment Under Test (EUT)**

Product Name: Bluetooth Speaker

Model No.: BT-129, CWA BT310

Trade mark: iCreation, Cobra Electronics Corporation

**FCC ID:** QMHBT129

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** 03 Dec., 2013

**Date of Test:** 17 Dec., to 25 Dec., 2013

**Date of report issued:** 26 Dec., 2013

**Test Result:** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	26 Dec., 2013	Original

Prepared by:

*Shirley Li*

Date:

26 Dec., 2013

**Report Clerk**

Reviewed by:

*Abamb Yang*

Date:

26 Dec., 2013

**Project Engineer**

## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF E.U.T. ....	5
5.3 TEST ENVIRONMENT AND MODE.....	7
5.4 DESCRIPTION OF SUPPORT UNITS .....	7
5.5 LABORATORY FACILITY .....	7
5.6 LABORATORY LOCATION .....	7
5.7 TEST INSTRUMENTS LIST .....	8
6 TEST RESULTS AND MEASUREMENT DATA.....	9
6.1 ANTENNA REQUIREMENT: .....	9
6.2 CONDUCTED EMISSION.....	10
6.3 CONDUCTED OUTPUT POWER.....	13
6.4 OCCUPY BANDWIDTH.....	15
6.5 POWER SPECTRAL DENSITY.....	18
6.6 BAND EDGE.....	20
6.6.1 <i>Conducted Emission Method</i> .....	20
6.6.2 <i>Radiated Emission Method</i> .....	22
6.7 SPURIOUS EMISSION .....	27
6.7.1 <i>Conducted Emission Method</i> .....	27
6.7.2 <i>Radiated Emission Method</i> .....	29
7 TEST SETUP PHOTO .....	35
8 EUT CONSTRUCTIONAL DETAILS .....	37

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Emission Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

Applicant:	Xingtel Xiamen Group Co., Ltd.
Address of Applicant:	Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District, Xiamen 361006, PR China
Manufacturer:	iCreation Inc.
Address of Manufacturer:	Unit 202, 3621 Hwy 7 East Markham Ontario L3R 0G6 Canada
Factory:	Xingtel Xiamen Group Co., Ltd.
Address of factory:	Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District, Xiamen 361006, PR China

### 5.2 General Description of E.U.T.

Product Name:	Bluetooth Speaker
Model No.:	BT-129, CWA BT310
Trade mark:	iCreation, Cobra Electronics Corporation
Operation Frequency:	2402-2480MHz
Channel numbers:	40
Channel separation:	2 MHz
Modulation technology:	GFSK
Data speed :	1Mbps
Antenna Type:	Internal Antenna
Antenna gain:	0dBi
Power supply:	DC 3.7V 2200mAh Li-ion battery
Remark:	The Model: BT-129, CWA BT310 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name and appearance of colour.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz

## 5.3 Test environment and mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
<b>Test mode:</b>	
Operation mode	Keep the EUT in continuous transmitting with modulation
<p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. Duty cycle setting during the transmission is 100% with maximum power setting for all modulations.</p>	

## 5.4 Description of Support Units

N/A

## 5.5 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li> <b>FCC - Registration No.: 817957</b>                      Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.                 </li> <li> <b>IC - Registration No.: 10106A-1</b>                      The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.                 </li> <li> <b>CNAS - Registration No.: CNAS L6048</b>                      Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.                 </li> </ul>
---

## 5.6 Laboratory Location

<p>Shenzhen Zhongjian Nanfang Testing Co., Ltd.                  Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,                  Bao'an District, Shenzhen, Guangdong, China                  Tel: +86-755-23118282                  Fax: +86-755-23116366</p>
--

## 5.7 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2013	June 08 2014
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	May 25 2013	May 24 2014
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 25 2013	May 24 2014
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2013	Mar. 31 2014
6	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2013	Mar. 31 2014
7	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2013	Mar. 31 2014
8	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2013	Mar. 31 2014
9	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2013	Mar. 31 2014
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2013	Mar. 31 2014
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2013	June 08 2014
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2013	Mar. 31 2014
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2013	Mar. 29 2014
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 25 2013	May. 24 2014
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2013	Mar. 31 2014
18	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 12 2013	Aug. 11 2014
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	May. 25 2013	May. 24 2014
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	May. 25 2013	May. 24 2014

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2013	June 08 2014
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2013	May 24 2014
3	LISN	CHASE	MN2050D	CCIS0074	Apr 01 2013	Mar. 31 2014
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2013	Mar. 31 2014
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A



## 6 Test results and Measurement Data

### 6.1 Antenna requirement:

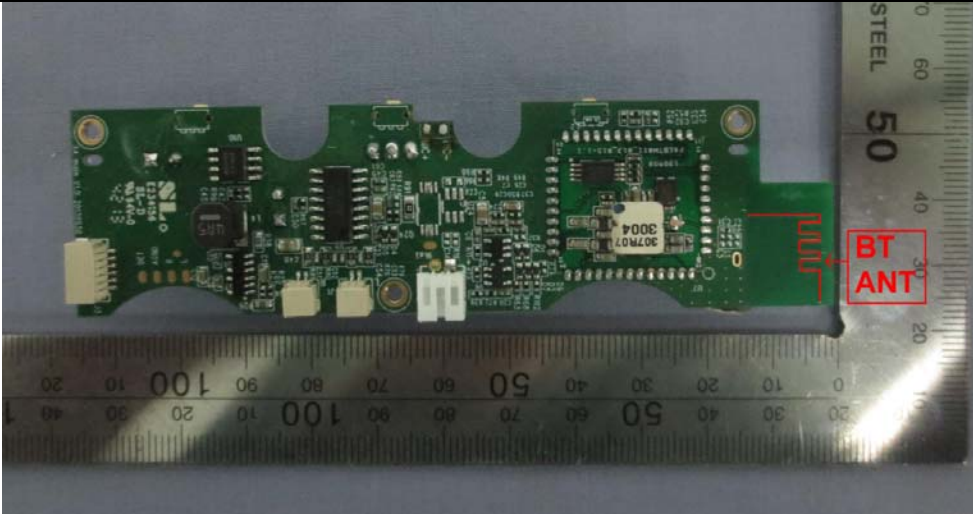
<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p><i>15.203 requirement:</i>  <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p><i>15.247(c) (1)(i) requirement:</i>  <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>	
<b>E.U.T Antenna:</b>	
<p><i>The antenna is an internal antenna which cannot replace by end-user, the best case gain of the antenna is 0 dBi.</i></p>	
	

## 6.2 Conducted Emission

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.4: 2003														
Test Frequency Range:	150 kHz to 30 MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9kHz, VBW=30kHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency range (MHz)		Limit (dBuV)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
0.5-5	56	46													
5-30	60	50													
* Decreases with the logarithm of the frequency.															
Test procedure	<ol style="list-style-type: none"> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol>														
Test setup:	<p><i>Remark</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>														
Test Instruments:	Refer to section 5.7 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Passed														

### Measurement Data


Neutral:

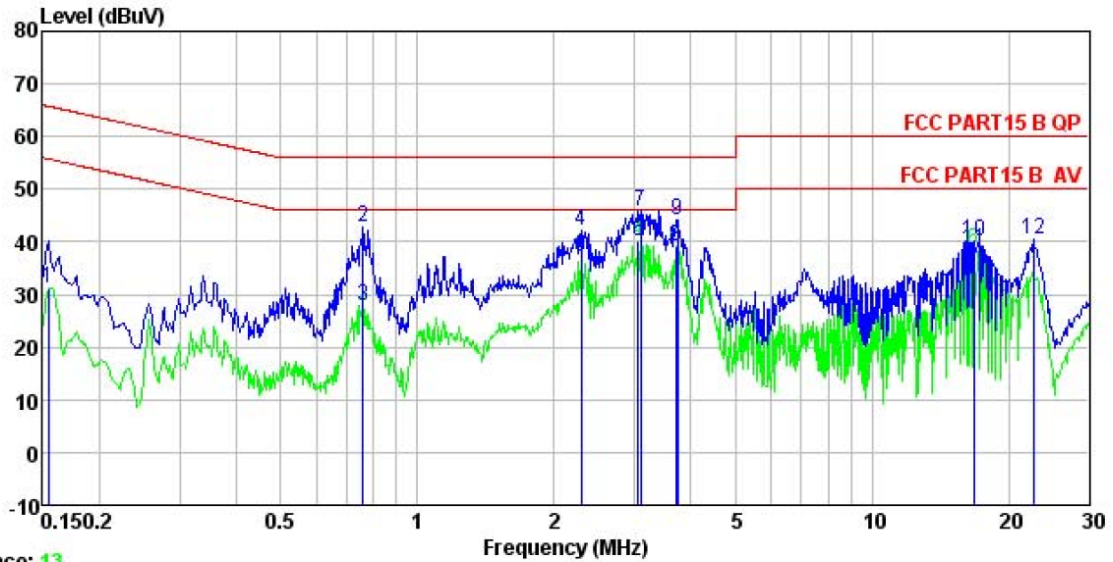

Trace: 13  
 Site : CCIS Conducted test Site  
 Condition : FCC PART15 B QP LISN NEUTRAL  
 Job No. : 529RF  
 EUT : Bluetooth Speaker  
 Model : BT-129  
 Test Mode : BT mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa  
 Test Engineer: A-bomb

	Read	LISN	Cable	Level	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.154	20.27	10.27	0.79	31.33	55.78	-24.45 Average
2	0.759	31.80	10.17	0.79	42.76	56.00	-13.24 QP
3	0.759	17.00	10.17	0.79	27.96	46.00	-18.04 Average
4	2.297	30.97	10.27	0.95	42.19	56.00	-13.81 QP
5	2.297	25.89	10.27	0.95	37.11	46.00	-8.89 Average
6	3.058	28.90	10.28	0.92	40.10	46.00	-5.90 Average
7	3.107	34.72	10.28	0.92	45.92	56.00	-10.08 QP
8	3.700	27.88	10.28	0.90	39.06	46.00	-6.94 Average
9	3.740	32.91	10.28	0.90	44.09	56.00	-11.91 QP
10	16.750	29.09	10.27	0.91	40.27	60.00	-19.73 QP
11	16.750	27.44	10.27	0.91	38.62	50.00	-11.38 Average
12	22.655	29.15	10.45	0.90	40.50	60.00	-19.50 QP


Line:

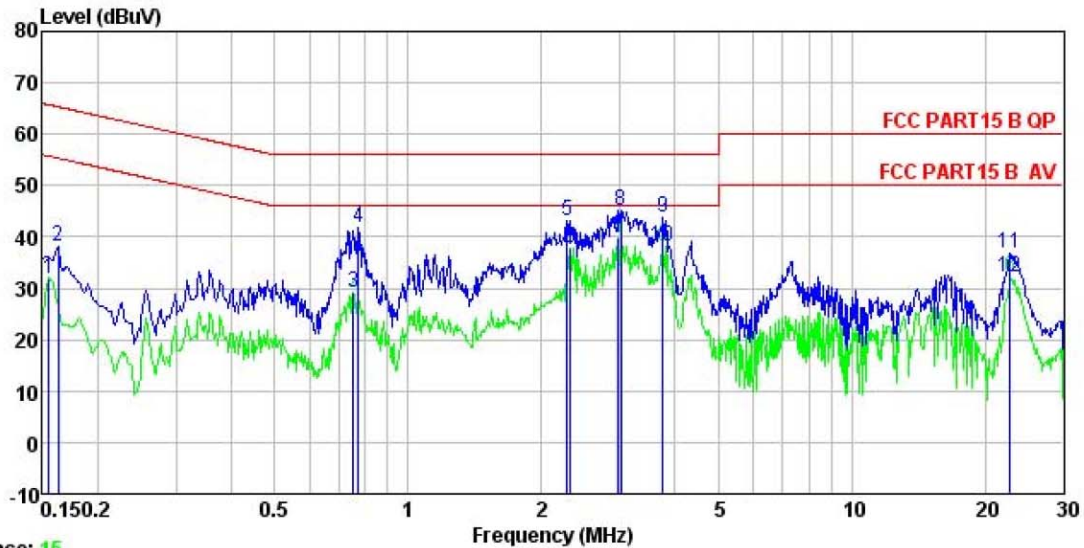

Trace: 15  
 Site : CCIS Conducted test Site  
 Condition : FCC PART15 B QP LISN LINE  
 Job No. : 529RF  
 EUT : Bluetooth Speaker  
 Model : BT-129  
 Test Mode : BT mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa  
 Test Engineer: A-bomb

	Freq	Read	LISN	Cable	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	dBuV	dBuV	Limit	
		dBuV	dB	dB	dBuV	dBuV	dB	
1	0.155	20.97	10.25	0.79	32.01	55.74	-23.73	Average
2	0.162	27.08	10.24	0.78	38.10	65.34	-27.24	QP
3	0.751	18.15	10.19	0.79	29.13	46.00	-16.87	Average
4	0.771	30.85	10.19	0.80	41.84	56.00	-14.16	QP
5	2.285	31.86	10.28	0.95	43.09	56.00	-12.91	QP
6	2.321	26.63	10.28	0.94	37.85	46.00	-8.15	Average
7	2.978	28.48	10.29	0.92	39.69	46.00	-6.31	Average
8	3.025	33.93	10.29	0.92	45.14	56.00	-10.86	QP
9	3.759	32.55	10.29	0.90	43.74	56.00	-12.26	QP
10	3.759	26.93	10.29	0.90	38.12	46.00	-7.88	Average
11	22.775	25.58	10.46	0.90	36.94	60.00	-23.06	QP
12	22.775	20.69	10.46	0.90	32.05	50.00	-17.95	Average

## 6.3 Conducted Output Power

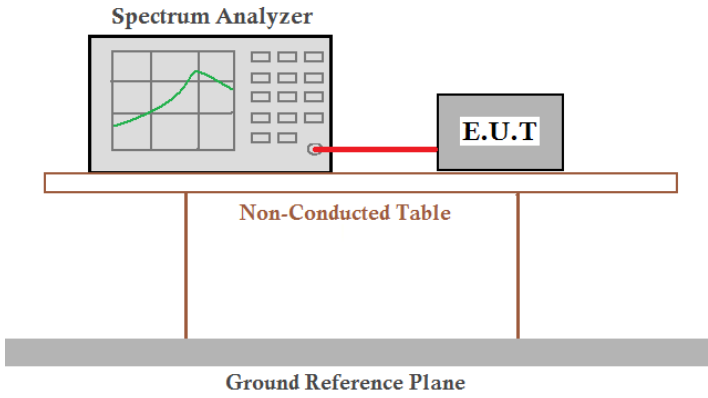
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	Test method refer to KDB558074 v03r01 (DTS Measure Guidance) section 9.2.2.2

### Measurement Data


Test CH	Maximum Conducted Output Power (dBm)	Limit(dBm)	Result
Lowest	7.72	30.00	Pass
Middle	9.66		
Highest	9.89		

### Test plot as follows:


Test mode: GFSK

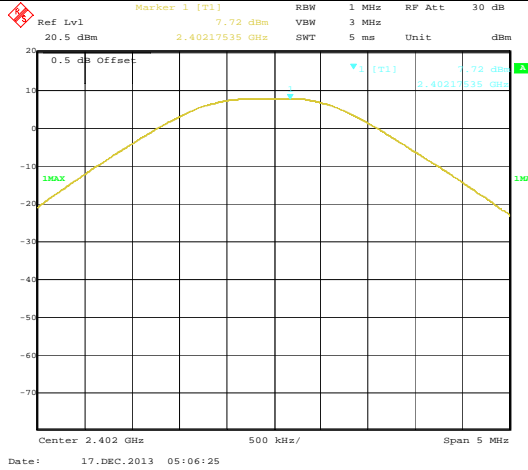

Lowest channel

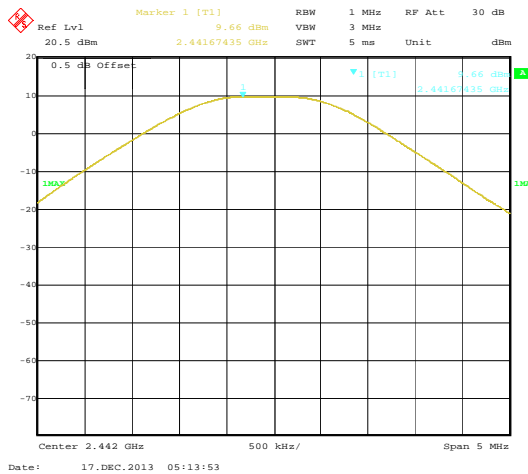


Middle channel

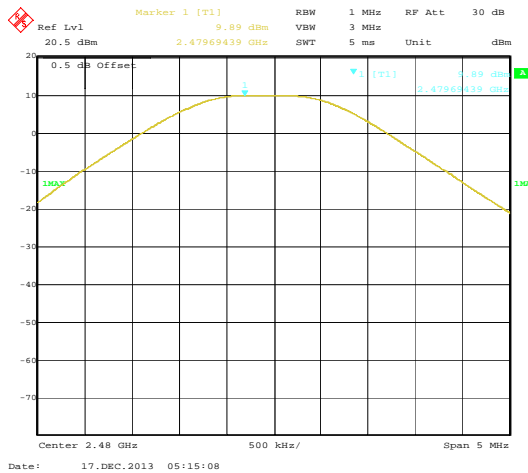

Highest channel

## 6.4 Occupy Bandwidth

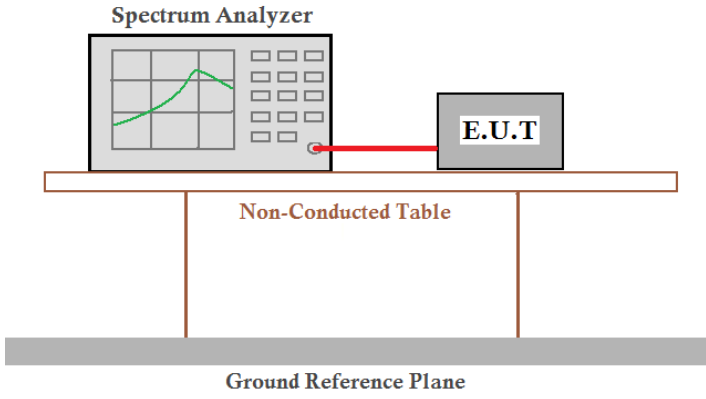Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	>500kHz
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


### Measurement Data

Test CH	6dB Emission Bandwidth (MHz)	Limit(kHz)	Result
Lowest	0.67	>500	Pass
Middle	0.68		
Highest	0.67		


Test CH	99% Occupy Bandwidth (MHz)	Limit(kHz)	Result
Lowest	1.07	N/A	N/A
Middle	1.06		
Highest	1.07		

Test plot as follows:


Test mode: 6dB EBW GFSK

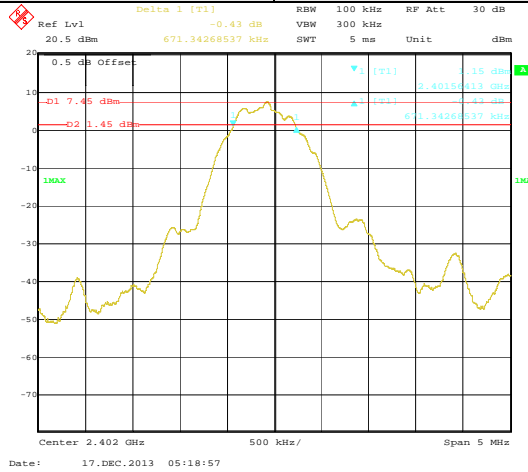

### Lowest channel

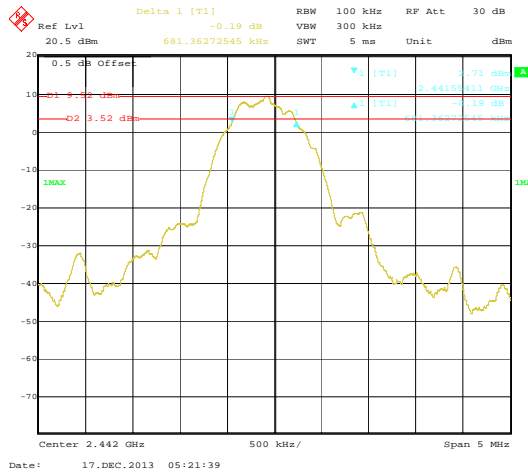


### Middle channel

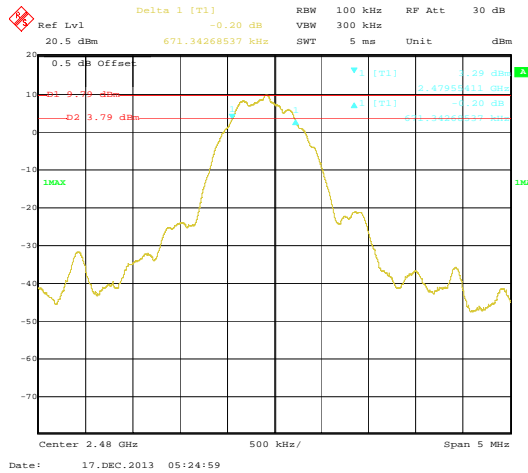


### Highest channel




Test mode:99% OBW GFSK

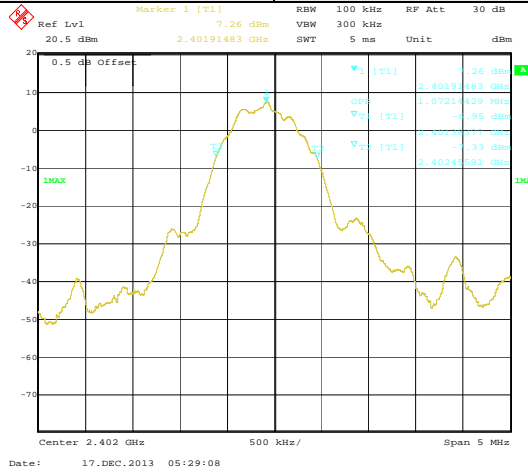

Lowest channel

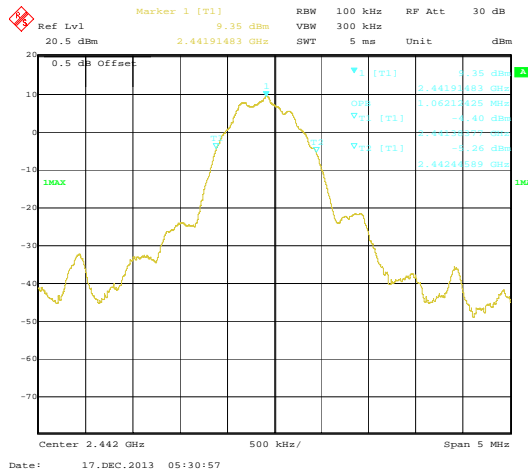


Middle channel

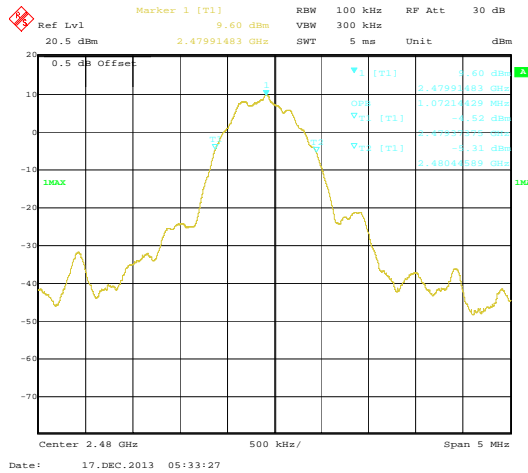

Highest channel

## 6.5 Power Spectral Density

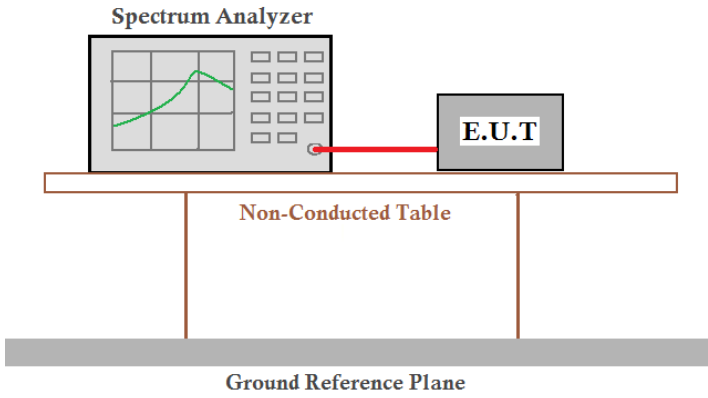
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	8 dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

### Measurement Data


Test CH	Power Spectral Density (dBm)	Limit(dBm)	Result
Lowest	7.19	8.00	Pass
Middle	2.87		
Highest	3.54		

Test plots as follow:


Test mode:

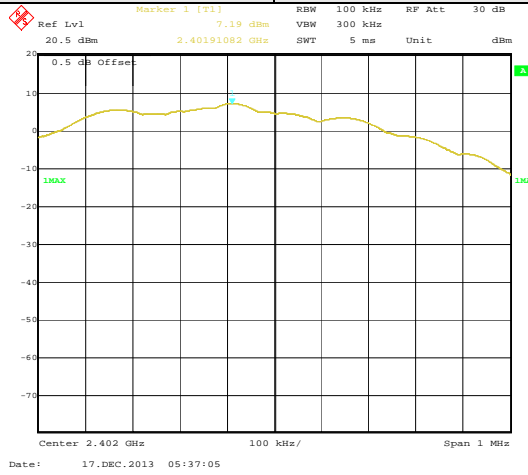

Lowest channel

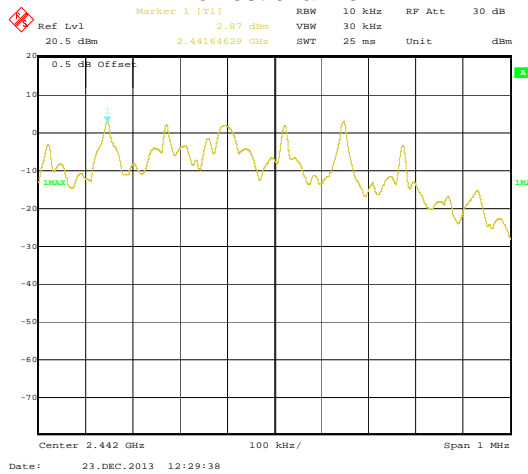


Middle channel

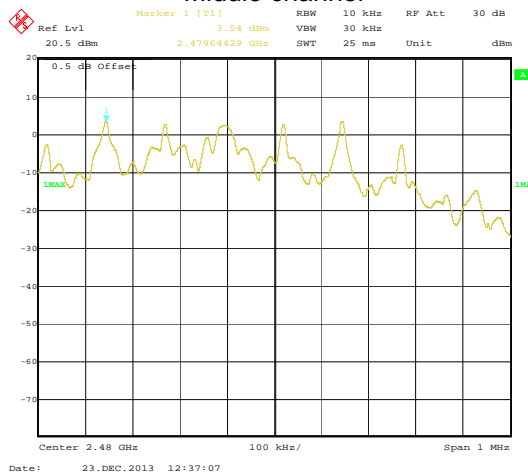

Highest channel


## 6.6 Band Edge

### 6.6.1 Conducted Emission Method

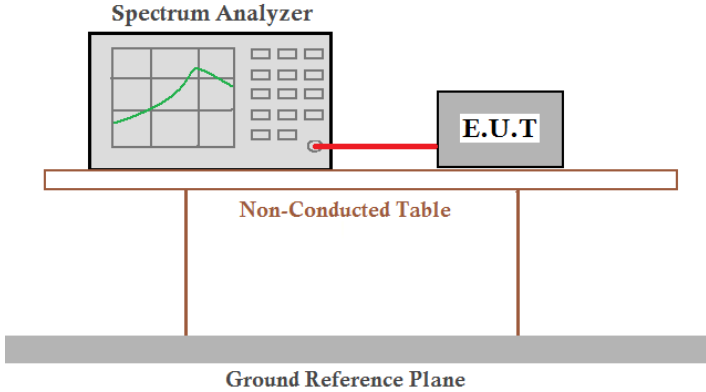
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follow:

Test mode:

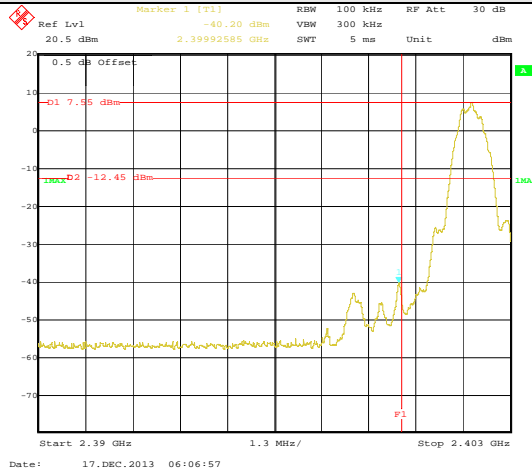

Lowest channel

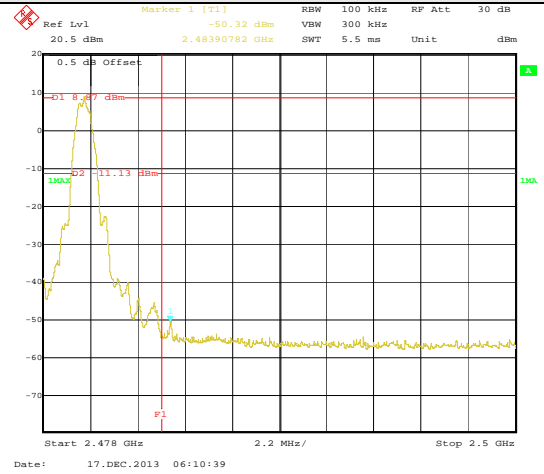


Highest channel

## 6.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205														
Test Method:	ANSI C63.4: 2003														
Test Frequency Range:	2.3GHz to 2.5GHz														
Test site:	Measurement Distance: 3m														
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark											
Above 1GHz	Peak	1MHz	3MHz	Peak Value											
	Peak	1MHz	10Hz	Average Value											
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>54.00</td> <td>Average Value</td> </tr> <tr> <td>74.00</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	54.00	Average Value	74.00	Peak Value						
Frequency	Limit (dBuV/m @3m)	Remark													
Above 1GHz	54.00	Average Value													
	74.00	Peak Value													
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>														
Test setup:															
Test Instruments:	Refer to section 5.7 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Passed														

Test channel: Lowest

Horizontal:

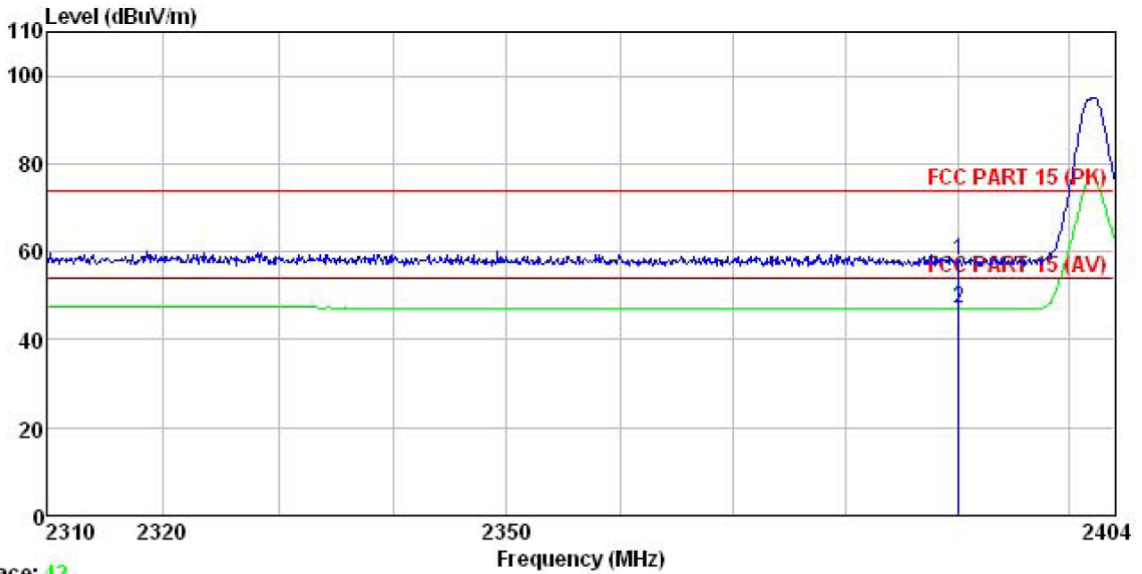


Trace: 42

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL  
 Job NO. : 529RF  
 EUT : Bluetooth Speaker  
 Model : BT-129  
 Test mode : BLE mode BE-L  
 Power Rating : DC 3.7V  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: A-bomb

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	24.78	27.58	5.67	0.00	58.03	74.00	-15.97 Peak
2	2390.000	13.79	27.58	5.67	0.00	47.04	54.00	-6.96 Average

Test channel: Lowest

Vertical:

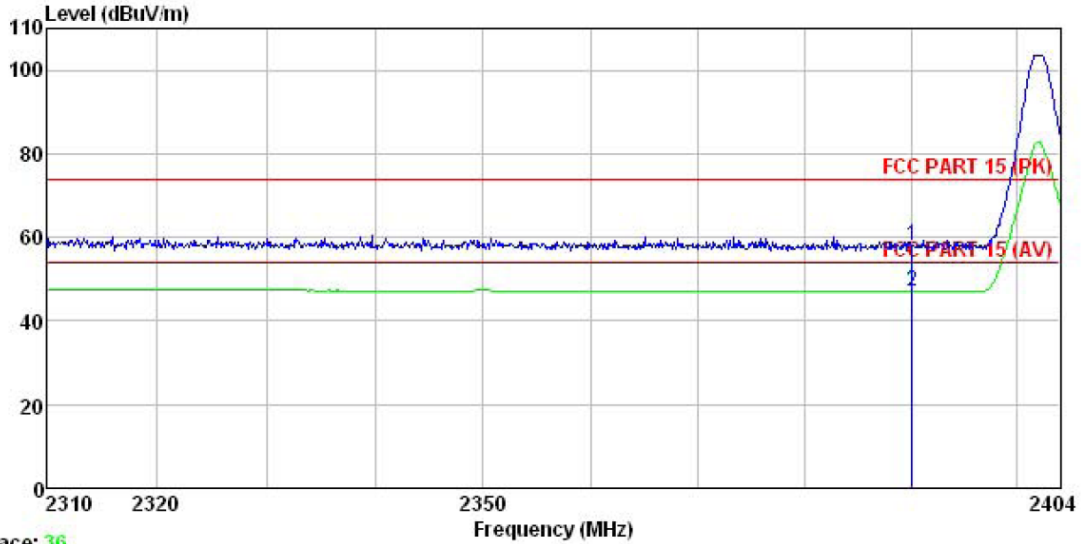


Trace: 36  
 Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL  
 Job NO. : 529RF  
 EUT : Bluetooth Speaker  
 Model : BT-129  
 Test mode : BLE mode BE-L  
 Power Rating : DC 3.7V  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: A-bomb

	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	24.72	27.58	5.67	0.00	57.97	74.00	-16.03 Peak
2	2390.000	13.81	27.58	5.67	0.00	47.06	54.00	-6.94 Average



Test channel: Highest

Horizontal:

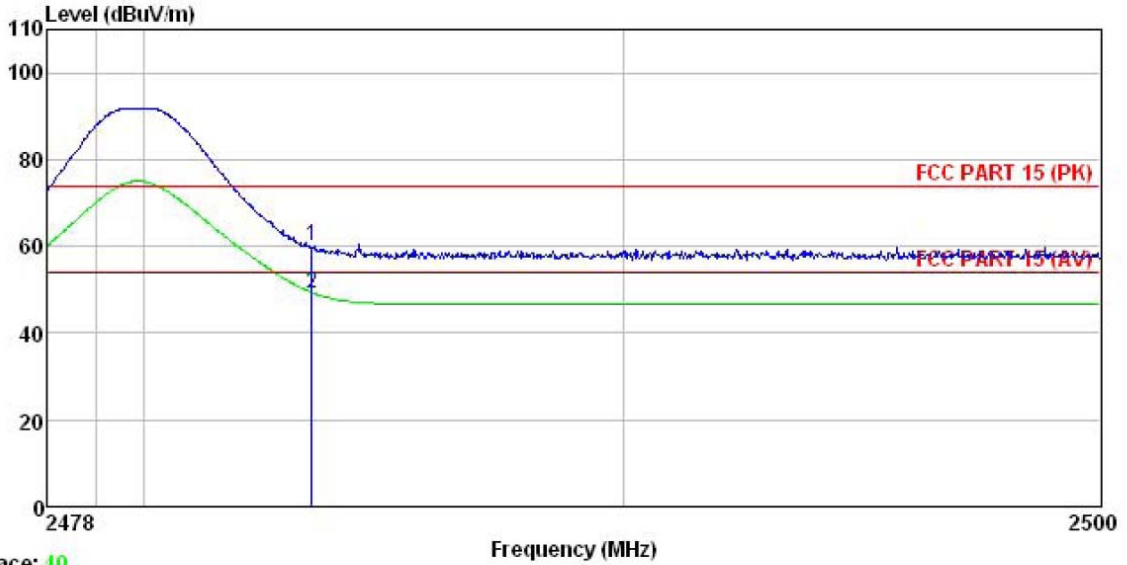


Trace: 40

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL  
 Job NO. : 529RF  
 EUT : Bluetooth Speaker  
 Model : BT-129  
 Test mode : BLE mode BE-H  
 Power Rating : DC 3.7V  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: A-bomb

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.98	27.52	5.70	0.00	60.20	74.00	-13.80	Peak
2	2483.500	15.85	27.52	5.70	0.00	49.07	54.00	-4.93	Average

Test channel: Highest

Vertical:

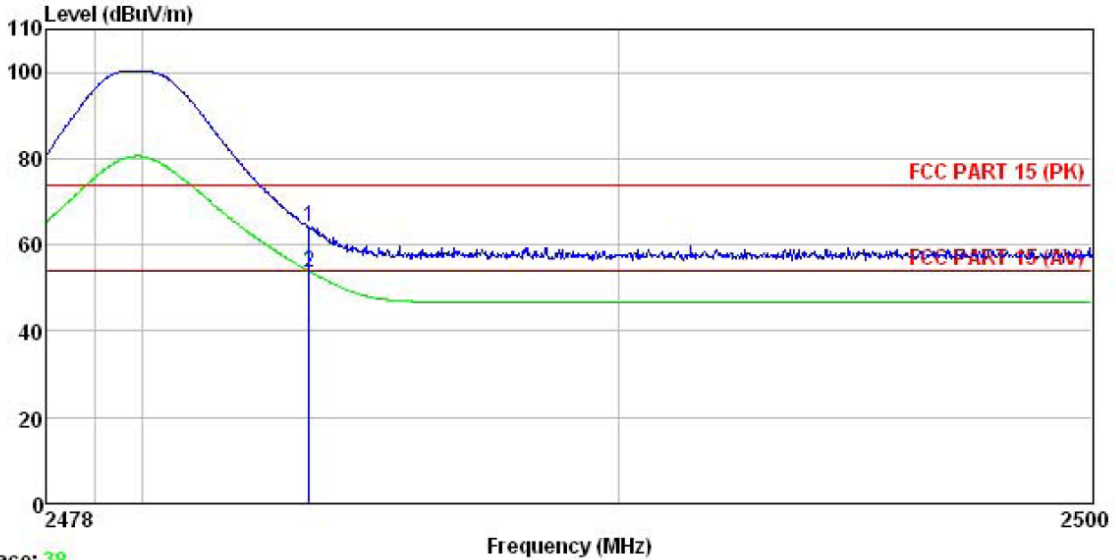


Trace: 38  
 Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL  
 Job NO. : 529RF  
 EUT : Bluetooth Speaker  
 Model : BT-129  
 Test mode : BLE mode BE-H  
 Power Rating : DC 3.7V  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: A-bomb

	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	30.84	27.52	5.70	0.00	64.06	74.00	-9.94 Peak
2	2483.500	20.26	27.52	5.70	0.00	53.48	54.00	-0.52 Average

## 6.7 Spurious Emission


### 6.7.1 Conducted Emission Method

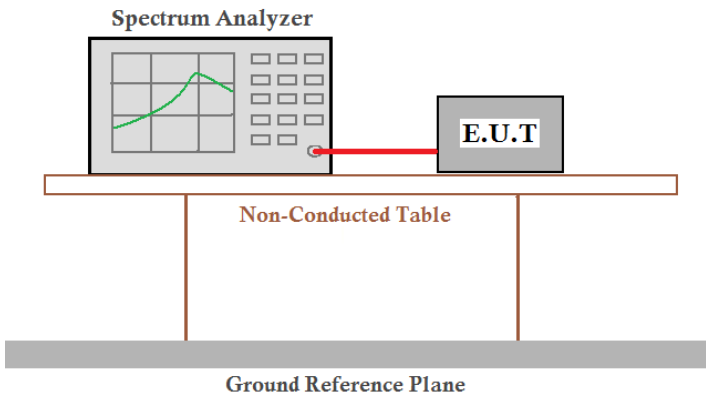Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

Test mode:


### Lowest channel

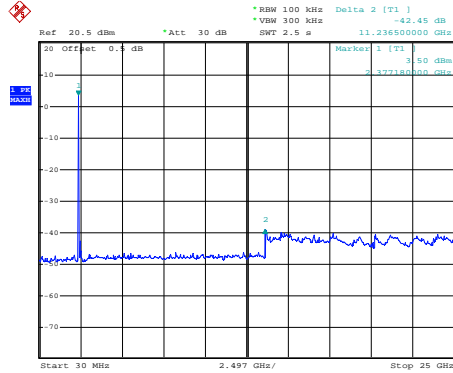

Date: 25.DEC.2013 08:43:52

### 30MHz~25GHz


### Middle channel

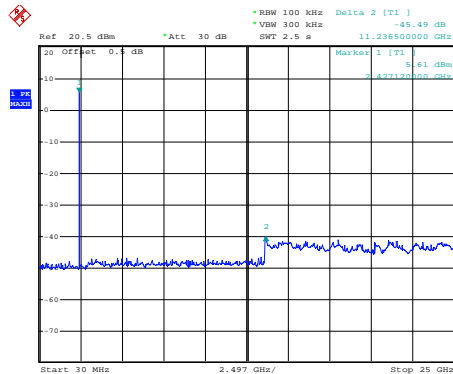

Date: 25.DEC.2013 08:45:35

### 30MHz~25GHz

### Highest channel


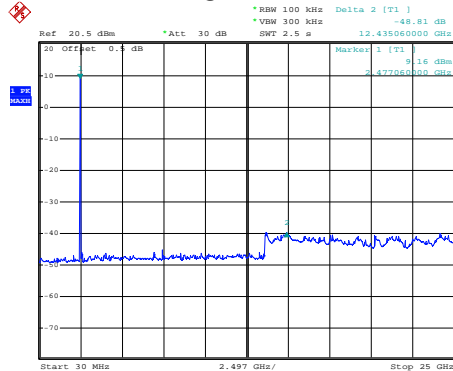


Date: 25.DEC.2013 08:52:02

### 30MHz~25GHz


## 6.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	9KHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>				
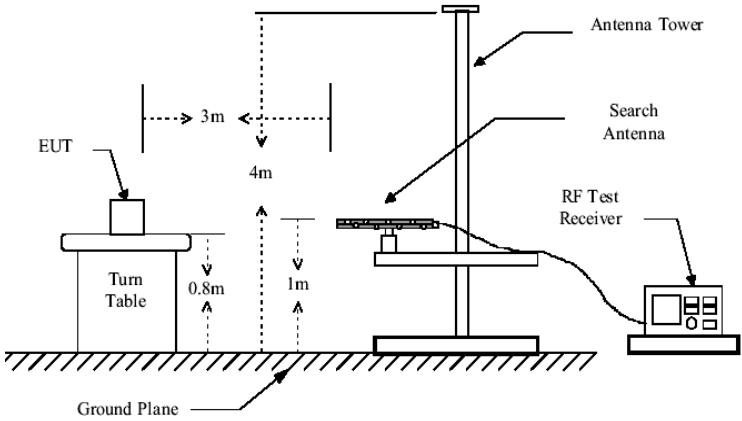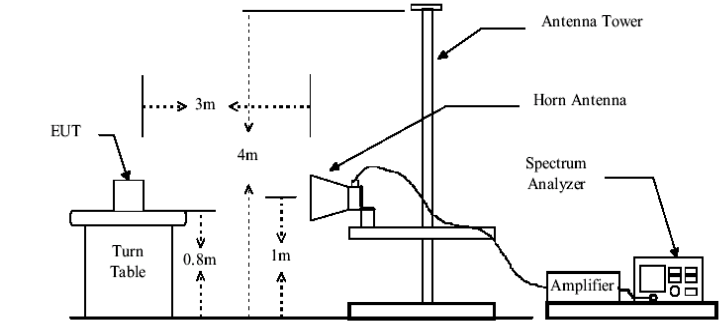
<p>Test setup:</p>	<p><b>Below 1GHz</b></p>  <p><b>Above 1GHz</b></p> 
<p>Test Instruments:</p>	<p>Refer to section 5.7 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Passed</p>
<p>Remark:</p>	<ol style="list-style-type: none"> <li>1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.</li> <li>2. 9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.</li> </ol>

**Below 1GHz**


Horizontal:

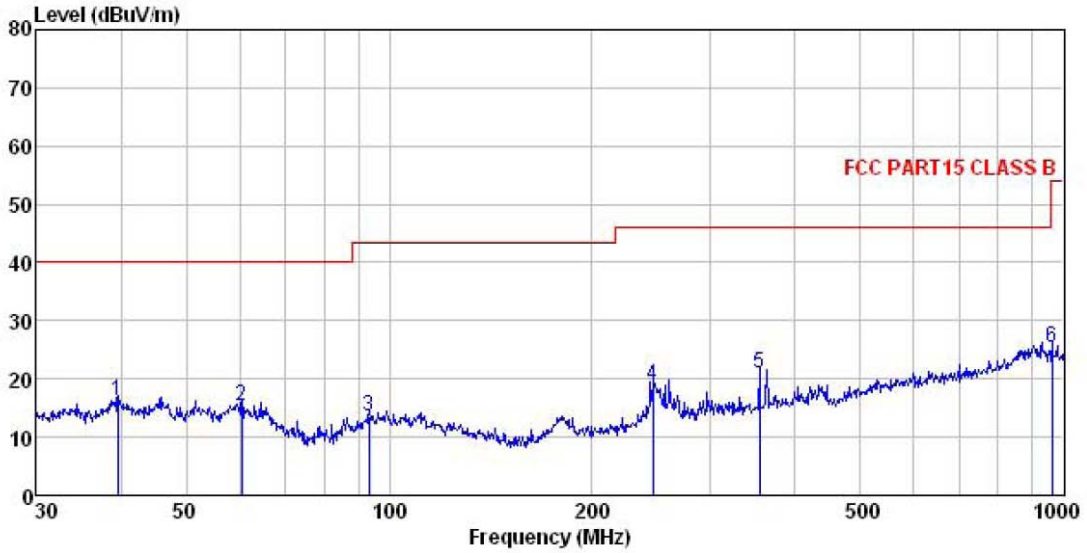

Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL  
 Job NO. : 529RF  
 EUT : Bluetooth Speaker  
 Model : BT-129  
 Test mode : BLE mode  
 Power Rating : DC 3.7V  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: A-bomb

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	39.576	28.68	13.49	1.21	27.21	16.17	40.00 -23.83 QP
2	60.492	30.80	12.56	1.38	29.26	15.48	40.00 -24.52 QP
3	93.440	28.96	12.58	2.02	30.08	13.48	43.50 -30.02 QP
4	245.951	33.54	12.08	2.81	29.62	18.81	46.00 -27.19 QP
5	354.183	33.14	14.33	3.10	29.70	20.87	46.00 -25.13 QP
6	962.162	29.61	21.49	4.27	29.90	25.47	54.00 -28.53 QP

Vertical:

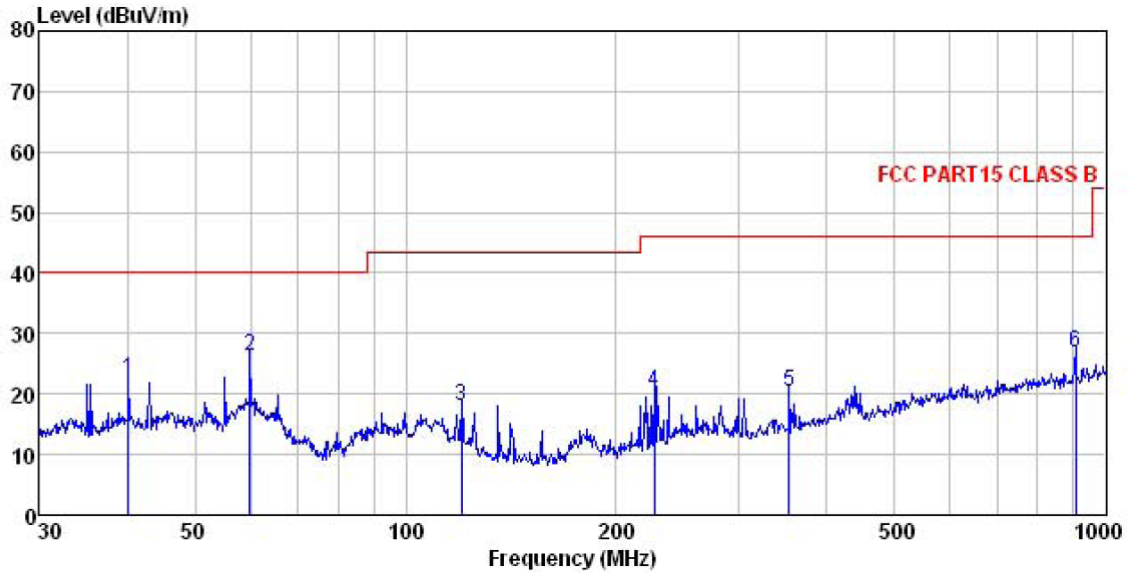

Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL  
 Job NO. : 529RF  
 EUT : Bluetooth Speaker  
 Model : BT-129  
 Test mode : BLE mode  
 Power Rating : DC 3.7V  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: A-bomb

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	40.135	34.79	13.58	1.22	27.27	22.32	40.00 -17.68 QP
2	59.859	41.41	12.71	1.38	29.19	26.31	40.00 -13.69 QP
3	120.277	35.01	10.38	2.17	29.69	17.87	43.50 -25.63 QP
4	226.894	35.85	11.51	2.84	29.69	20.51	46.00 -25.49 QP
5	352.943	32.54	14.33	3.10	29.69	20.28	46.00 -25.72 QP
6	906.482	32.17	21.15	3.78	30.11	26.99	46.00 -19.01 QP



**Above 1GHz**

**Lowest channel:**

Test channel:		Lowest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804	52.44	31.53	8.90	40.24	52.63	74.00	-21.37	Vertical
4804	52.29	31.53	8.90	40.24	52.48	74.00	-21.52	Horizontal

Test channel:		Lowest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	42.34	31.53	8.90	40.24	42.53	54	-11.47	Vertical
4804.00	43.15	31.53	8.90	40.24	43.34	54	-10.66	Horizontal

**Middle channel:**

Test channel:		Middle			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	53.11	31.58	8.98	40.15	53.52	74.00	-20.48	Vertical
4884.00	51.74	31.58	8.98	40.15	52.15	74.00	-21.85	Horizontal

Test channel:		Middle			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	43.26	31.58	8.98	40.15	43.67	54.00	-10.33	Vertical
4884.00	41.27	31.58	8.98	40.15	41.68	54.00	-12.32	Horizontal

**Highest channel:**

Test channel:		Highest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	53.63	31.69	9.08	40.03	54.37	74.00	-19.63	Vertical
4960.00	51.44	31.69	9.08	40.03	52.18	74.00	-21.82	Horizontal

Test channel:		Highest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	43.95	31.69	9.08	40.03	44.69	54.00	-9.31	Vertical
4960.00	41.67	31.69	9.08	40.03	42.41	54.00	-11.59	Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*