




# PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road · Columbia, MD 21045 · U.S.A.

TEL (410) 290-6652 · FAX (410) 290-6654

<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE FCC Part 24 & 22 Certification

**NOKIA MOBILE PHONES INC.**  
12278 Scripps Summit Drive  
San Diego, CA 92131  
Attn: Dan Laramie, Senior EMC Engineer

Dates of Tests: January 15-16, 2003  
Test Report S/N: 22/24.230113010-R1.QMN  
Test Site: PCTEST Lab, Columbia MD

FCC ID

**QMNRH-3**

APPLICANT

**NOKIA MOBILE PHONES INC.**

**Classification:** Licensed Portable Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §24(E), §22.901(d); §2  
**EUT Type:** Dual-Band CDMA Phone  
**Model:** 2285  
**Tx Frequency Range:** 824.70 – 848.31MHz (CDMA) / 1851.25MHz – 1908.75MHz (PCS CDMA)  
**Rx Frequency Range:** 869.70 – 893.31MHz (CDMA) / 1931.25MHz – 1988.75MHz (PCS CDMA)  
**Max. RF Output Power:** 0.435W ERP CDMA (26.383 dBm) / 0.327W EIRP PCS CDMA (25.151 dBm)  
**Emission Designator(s):** 1M25F9W (CDMA)  
**Test Device Serial No.:** Identical Prototype

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Alfred Cirwithian  
Vice President Engineering



2 3 0 1 1 3 0 1 0 . Q M N

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 1 of 23

## TABLE OF CONTENTS

---

1.1 SCOPE	3
2.1 INTRODUCTION	4
3.1 DESCRIPTION OF TESTS	5-7
4.1 EFFECTIVE RADIATED POWER OUTPUT	8
5.1 EQUIVALENT ISOTROPIC RADIATED POWER	9
6.1 RADIATED MEASUREMENTS	10-15
7.1 FREQUENCY STABILITY	16-19
8.1 PLOTS OF EMISSIONS	20
9.1 LIST OF TEST EQUIPMENT	21
10.1 SAMPLE CALCULATIONS	22
11.1 CONCLUSION	23



ATTACHMENT A: TEST PLOTS

ATTACHMENT B: FCC ID LABEL / LOCATION


ATTACHMENT C: TEST SETUP PHOTOGRAPHS

ATTACHMENT D: EXTERNAL PHOTOGRAPHS

ATTACHMENT E: INTERNAL PHOTOGRAPHS

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 2 of 23

# MEASUREMENT REPORT





## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

## §2.1033 General Information

<b>Applicant Name:</b>	<b>NOKIA MOBILE PHONES INC.</b>
<b>Address:</b>	<b>12278 Scripps Summit Drive San Diego, CA 92131</b>
<b>Attention:</b>	<b>Dan Laramie, Senior EMC Engineer</b>

- FCC ID: **QMNRH-3**
- Quantity: Quantity production is planned
- Emission Designators: 1M25F9W (CDMA)
- Tx Freq. Range: 824.70 – 848.31 MHz (CDMA)  
1851.25 – 1908.75 MHz (PCS CDMA)
- Rx Freq. Range: 869.70 – 893.31 MHz (CDMA)  
1931.25 – 1988.75 MHz (PCS CDMA)
- Max. Power Rating: 0.435W ERP CDMA (26.383 dBm)  
0.327W EIRP PCS CDMA (25.151 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Dual-Band CDMA Phone
- Modulation(s): CDMA
- Frequency Tolerance:  $\pm 0.00025\%$  (2.5 ppm)
- FCC Rule Part(s): § 24(E), §22.901(d)
- Dates of Tests: January 15-16, 2003
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 22/24.230113010-R1.QMN

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 3 of 23

## 2.1 INTRODUCTION

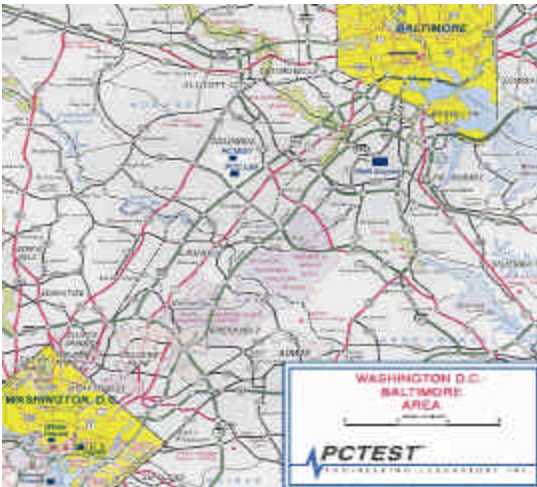


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

### Measurement Procedure

The radiated and spurious measurements were made outdoors at a 3-meter test range (see Figure2). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

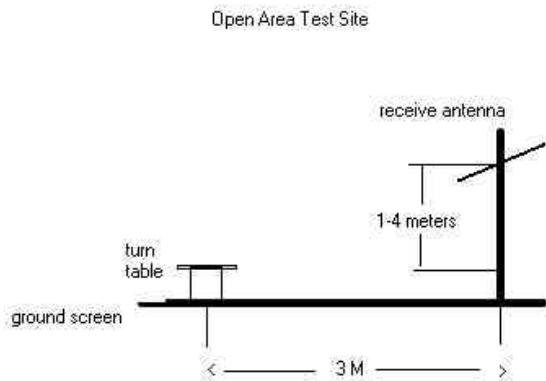




Figure 2. Diagram of 3-meter outdoor test range

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 4 of 23



### 3.1 DESCRIPTION OF TESTS

#### 3.2 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 - 1865	1930 - 1945
B	1870 - 1885	1950 - 1965
C	1895 - 1910	1975 - 1990
D	1865 - 1870	1945 - 1950
E	1885 - 1890	1965 - 1970
F	1890 - 1895	1970 - 1975

Table 1. Broadband PCS Service Frequency Blocks.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 5 of 23

## 3.1 DESCRIPTION OF TESTS (CONTINUED)

---

### 3.3 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10 GHz. The transmitter is modulated with a 2500Hz tone at a level of 16dB greater than that required to provide 50% modulation.



At the input terminals of the spectrum analyzer, an isolator (RF circulator with one port terminated with 50 ohms) and an 870 MHz to 890 MHz bandpass filter is connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The rejection of the bandpass filter to signals in the 825 – 845 MHz range is adequate to limit the transmit energy from the test transceiver which appears to a level which will allow the analyzer to measure signals less than –90dBm. Calibration of the test receiver is performed in the 870 – 890 MHz range to insure accuracy to allow variation in the bandpass filter insertion loss to be calibrated.

### 3.4 Frequencies

At the input terminals of the spectrum analyzer, an isolator (RF pad) and an high-pass filter are connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The high-pass filter (signals below 1.6 GHz) is to limit the fundamental frequency from interfering with the measurement of low-level spurious and harmonic emissions and to ensure that the preamplifier is not saturated.

### 3.5 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 6 of 23

## 4.0 Frequency Stability/Temperature Variation.

The frequency stability of the transmitter is measured by:



- a.) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

*Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5$  ppm) of the center frequency.*

### **Time Period and Procedure:**

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at 30°C (usually 14-16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at 30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

**NOTE: The EUT is tested down to the battery endpoint.**

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 7 of 23

## 4.1 Test Data

### 4.2 Effective Radiated Power Output

#### A. POWER: High (CDMA Mode)



Freq. Tuned (MHz)	REF. LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)	BATTERY
824.70	-15.300	V	0.39562	25.973	Standard
836.52	-15.100	V	0.42981	26.333	Standard
848.31	-15.200	V	0.43479	26.383	Standard

Note: Standard batteries are the only options for this phone

#### NOTES:

Effective Radiated Power Output Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 8 of 23



## 5.1 Test Data

### 5.2 Equivalent Isotropic Radiated Power (E.I.R.P.)

Radiated measurements at 3 meters

Supply Voltage: 3.7 VDC

Modulation: PCS CDMA



FREQ. (MHz)	REF. LEVEL (dBm)	POL (H/V)	Azimuth (o angle)	EIRP (dBm)	EIRP (W)	Battery
1851.25	-18.100	V	60	25.071	0.321	Standard
1880.00	-18.100	V	60	25.151	0.327	Standard
1908.75	-18.500	V	60	24.921	0.311	Standard

Note: Standard batteries are the only options for this phone

#### NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 9 of 23

## 6.1 Test Data

### 6.2 CELLULAR CDMA Radiated Measurements

#### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 824.70 MHz  
 CHANNEL: 1013 (Low)  
 MEASURED OUTPUT POWER: 26.383 dBm = 0.435 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.38 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-47.88	6.10	-41.78	V	68.2
2474.10	-57.78	6.70	-51.08	V	77.5
3298.80	-72.68	6.80	-65.88	V	92.3

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 10 of 23

## 6.1 Test Data (Continued)

### 6.3 CELLULAR CDMA Radiated Measurements

#### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 836.52 MHz  
 CHANNEL: 0384 (Mid)  
 MEASURED OUTPUT POWER: 26.383 dBm = 0.435 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.38 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-49.18	6.10	-43.08	V	69.5
2509.56	-57.88	6.70	-51.18	V	77.6
3346.08	-72.68	6.80	-65.88	V	92.3

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 11 of 23

## 6.1 Test Data (Continued)

### 6.4 CELLULAR CDMA Radiated Measurements

#### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 848.31 MHz  
 CHANNEL: 0777 (High)  
 MEASURED OUTPUT POWER: 26.383 dBm = 0.435 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.38 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-47.68	6.10	-41.58	V	68.0
2544.93	-57.88	6.70	-51.18	V	77.6
3393.24	-71.88	6.80	-65.08	V	91.5

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 12 of 23

## 6.1 Test Data (Continued)

### 6.5 PCS CDMA Radiated Measurements

#### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1851.25 MHz  
 CHANNEL: 0025 (Low)  
 MEASURED OUTPUT POWER: 25.151 dBm = 0.327 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  38.15 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-49.73	8.70	-41.03	V	66.2
5553.75	-65.53	9.70	-55.83	V	81.0
7405.00	-71.93	9.90	-62.03	V	87.2

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 13 of 23

## 6.1 Test Data (Continued)

### 6.6 PCS CDMA Radiated Measurements

#### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 0600 (Mid)  
 MEASURED OUTPUT POWER: 25.151 dBm = 0.327 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  38.15 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-49.53	8.70	-40.83	V	66.0
5640.00	-66.03	9.70	-56.33	V	81.5
7520.00	-70.53	9.90	-60.63	V	85.8

#### NOTES:

#### Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 14 of 23

## 6.1 Test Data (Continued)

### 6.7 PCS CDMA Radiated Measurements

#### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1908.75 MHz  
 CHANNEL: 1175 (High)  
 MEASURED OUTPUT POWER: 25.151 dBm = 0.327 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  38.15 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-49.23	8.70	-40.53	V	65.7
5726.25	-66.33	9.70	-56.63	V	81.8
7635.00	-70.93	9.90	-61.03	V	86.2

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 15 of 23

## 7.1 Test Data

### 7.2 FREQUENCY STABILITY (CDMA)



OPERATING FREQUENCY: 836,520,003 Hz

CHANNEL: 384

REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	836,520,003	0.000000
100 %		- 30	836,519,911	0.000011
100 %		- 20	836,519,928	0.000009
100 %		- 10	836,519,953	0.000006
100 %		0	836,519,978	0.000003
100 %		+ 10	836,519,961	0.000005
100 %		+ 20	836,520,003	0.000000
100 %		+ 25	836,519,986	0.000002
100 %		+ 30	836,519,944	0.000007
100 %		+ 40	836,520,053	-0.000006
100 %		+ 50	836,520,070	-0.000008
100 %		+ 60	836,520,078	-0.000009
85 %	3.17	+ 20	836,520,003	0.000000
115 %	4.26	+ 20	836,520,003	0.000000
BATT. ENDPOINT	2.94	+ 20	836,520,003	0.000000



PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 16 of 23



## 7.1 Test Data (Continued)
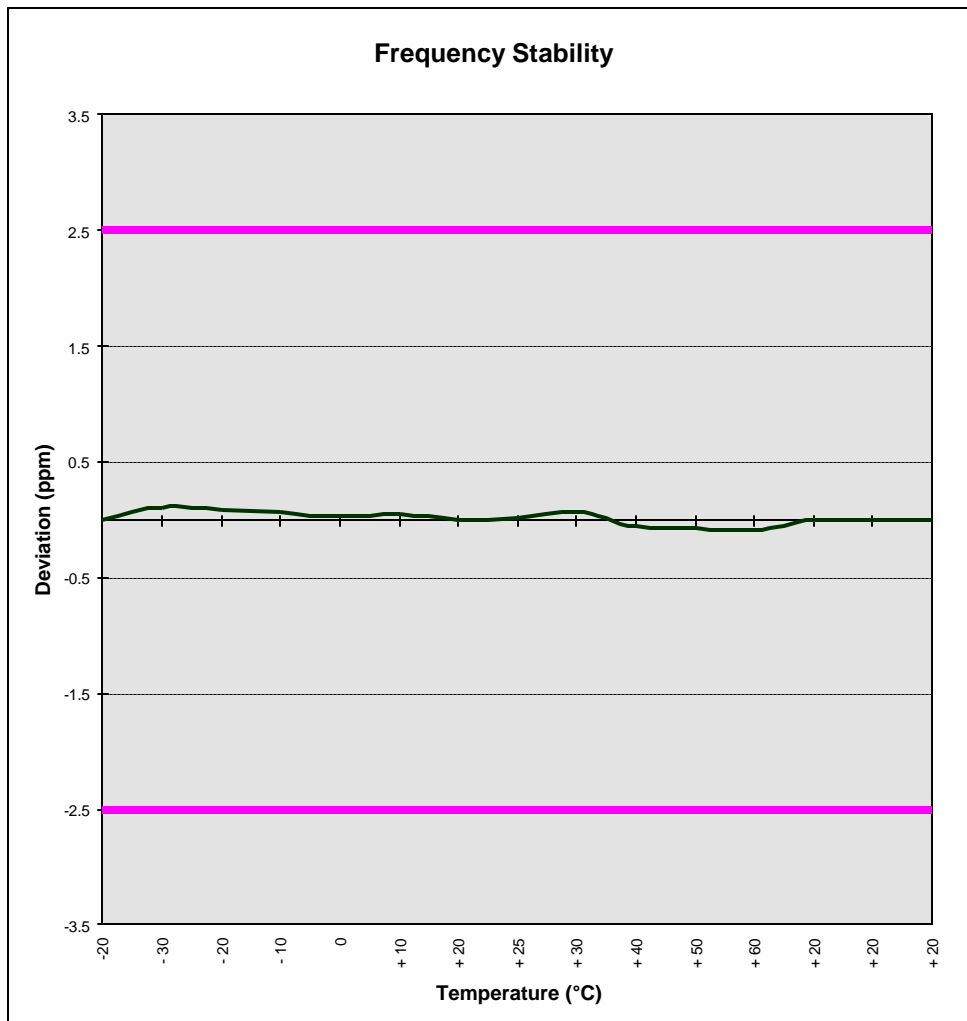
### 7.3 FREQUENCY STABILITY (CDMA)



PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 17 of 23

## 7.1 Test Data (Continued)

### 7.4 FREQUENCY STABILITY (PCS CDMA)



OPERATING FREQUENCY: 1,880,000,003 Hz

CHANNEL: 600

REFERENCE VOLTAGE: 3.7 VAC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm



VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	1,880,000,003	0.000000
100 %		- 30	1,879,999,815	0.000010
100 %		- 20	1,879,999,853	0.000008
100 %		- 10	1,879,999,909	0.000005
100 %		0	1,879,999,947	0.000003
100 %		+ 10	1,879,999,909	0.000005
100 %		+ 20	1,880,000,003	0.000000
100 %		+ 25	1,879,999,965	0.000002
100 %		+ 30	1,879,999,871	0.000007
100 %		+ 40	1,880,000,097	-0.000005
100 %		+ 50	1,880,000,135	-0.000007
100 %		+ 60	1,880,000,172	-0.000009
85 %	3.17	+ 20	1,880,000,003	0.000000
115 %	4.26	+ 20	1,880,000,003	0.000000
BATT. ENDPOINT	2.94	+ 20	1,880,000,003	0.000000

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 18 of 23

## 7.1 Test Data (Continued)
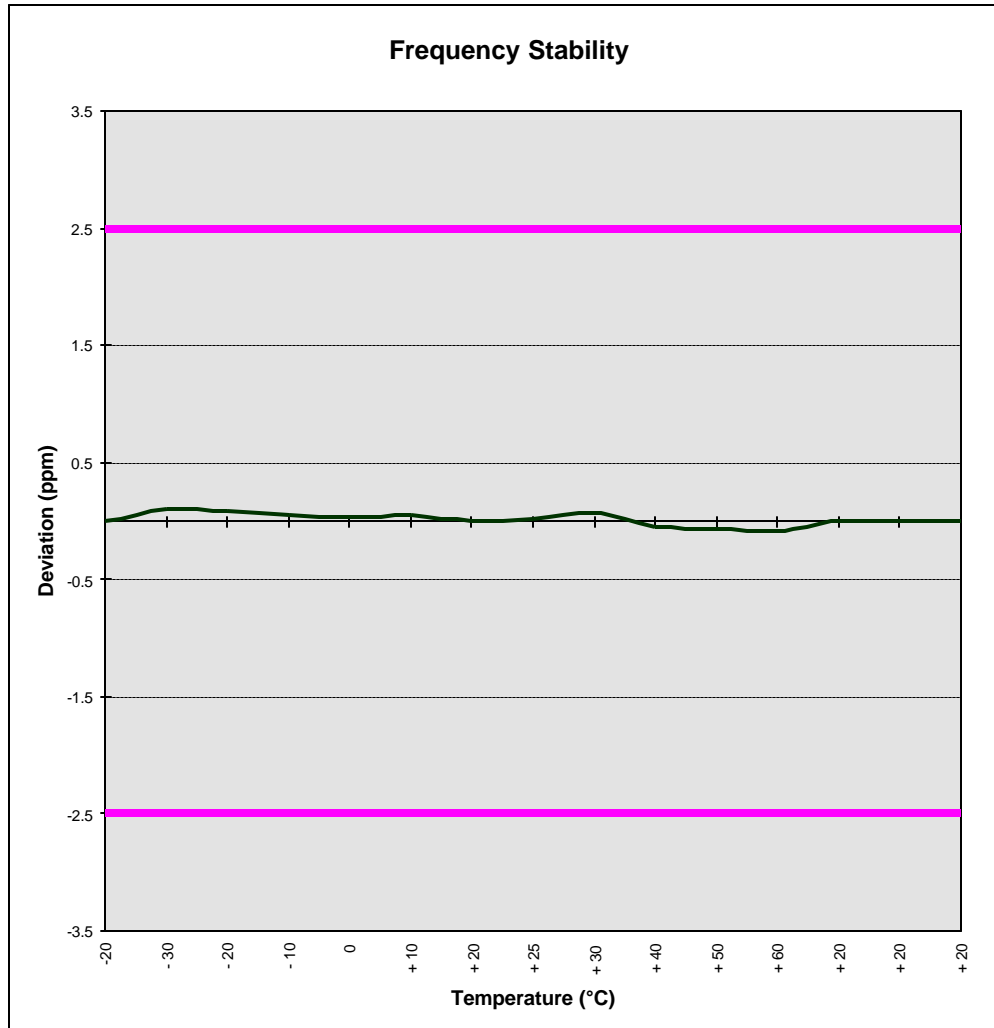
### 7.5 FREQUENCY STABILITY (PCS CDMA)





PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 19 of 23

## 8.1 PLOT(S) OF EMISSIONS

---



(SEE ATTACHMENT A)

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 20 of 23

## 9.1 TEST EQUIPMENT

Type	Model	Cal. Due Date	S/N
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	08/15/03	3638A08713
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/03	2542A11898
Spectrum Analyzer/Tracking Gen.	HP 8591A (100Hz-1.8GHz)	08/10/03	3144A02458
Signal Generator	HP 8640B (500Hz-1GHz)	06/03/03	2232A19558
Signal Generator	HP 8640B (500Hz-1GHz)	06/03/03	1851A09816
Signal Generator	Rohde & Schwarz (0.1-1000MHz)	09/11/03	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/03	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/03	0805-03334
Ailtech/Eaton Receiver	NM17/27A (0.1-32MHz)	09/17/03	0608-03241
Quasi-Peak Adapter	HP 85650A	08/15/03	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/03	0194-04082
Gigatronics Universal Power Meter	8657A		1835256
Gigatronics Power Sensor	80701A (0.05-18GHz)		1833460
Signal Generator	HP 8648D (9kHz-4GHz)		3613A00315
Amplifier Research	5SIG4 (5W, 800MHz-4.2GHz)		22322
Network Analyzer	HP 8753E (30kHz-3GHz)		JP38020182
Audio Analyzer	HP 8903B		3011A09025
Modulation Analyzer	HP 8901A		2432A03467
Power Meter	HP 437B		3125U24437
Power Sensor	HP 8482H (30μW-3W)		2237A02084
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)		3531A00115
Broadband Amplifier (2)	HP 8447D		1145A00470, 1937A03348
Broadband Amplifier	HP 8447F		2443A03784
Horn Antenna	EMCO Model 3115 (1-18GHz)		9704-5182
Horn Antenna	EMCO Model 3115 (1-18GHz)		9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design	1295, 1332, 0355	
Log-Spiral Antenna (3)	Ailtech/Eaton 93490-1		0608, 1103, 1104
Roberts Dipoles	Compliance Design (1 set)		
Ailtech Dipoles	DM-105A (1 set)		33448-111
EMCO LISN (6)	3816/2		1079
Microwave Preamplifier 40dB Gain	HP 83017A (0.5-26.5GHz)		3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)		
Ailtech/Eaton Receiver	NM37/57A-SL		0792-03271
Spectrum Analyzer	HP 8594A		3051A00187
Spectrum Analyzer (2)	HP 8591A		3034A01395, 3108A02053
Microwave Survey Meter	Holaday Model 1501 (2.450GHz)		80931
Digital Thermometer	Extech Instruments 421305		426966
Attenuator	HP 8495A (0-70dB) DC-4GHz		
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)		
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)
Environmental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285

\* Calibration traceable to the National Institute of Standards and Technology (NIST).

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 21 of 23

## 10.1 SAMPLE CALCULATIONS

---

### A. Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info



W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

### B. Spurious Radiated Emission - PCS Band

**Example: Channel 25 PCS Mode 2<sup>nd</sup> Harmonic (3702.50 MHz)**



The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80) = 50.3 dBc

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 22 of 23


## 11.1 CONCLUSION

---

The data collected shows that the **NOKIA Dual-Band CDMA Phone FCC ID: QMNRH-3** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.

PCTEST PT. 22/24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 22/24.230113010-R1.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Dual-Band CDMA	FCC ID: QMNRH-3	Page 23 of 23

Agilent

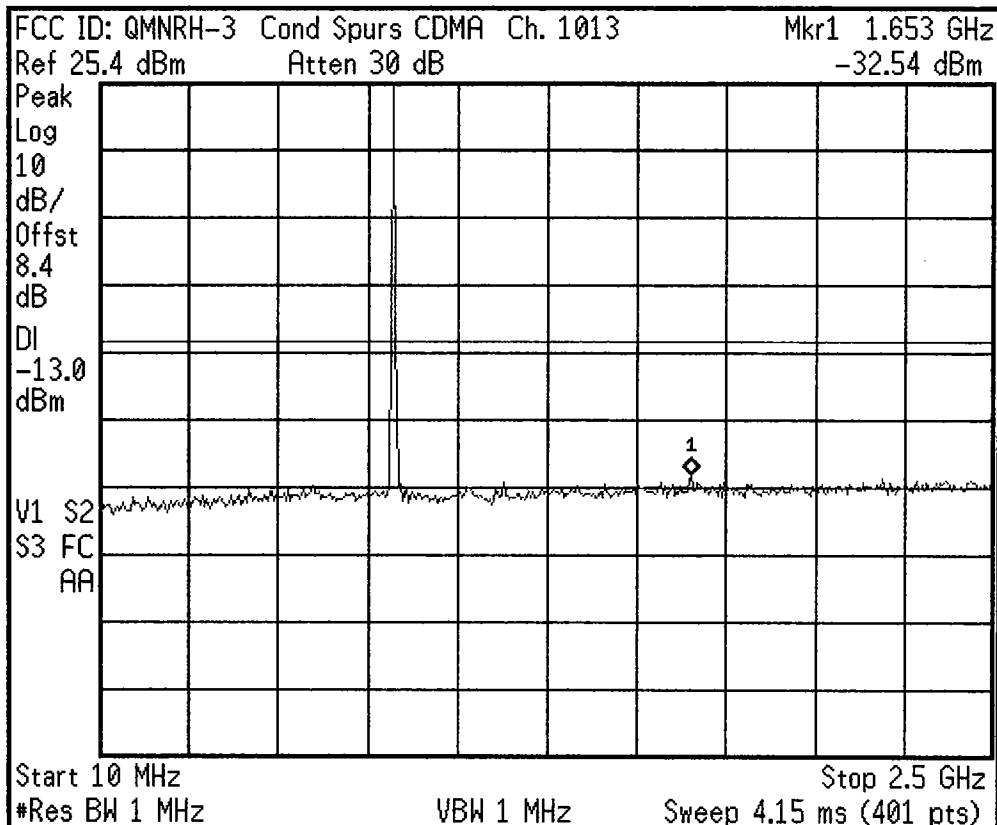

Freq/Channel

Center Freq  
 1.25500000 GHz

Start Freq  
 10.0000000 MHz

Stop Freq  
 2.50000000 GHz


CF Step  
 249.000000 MHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

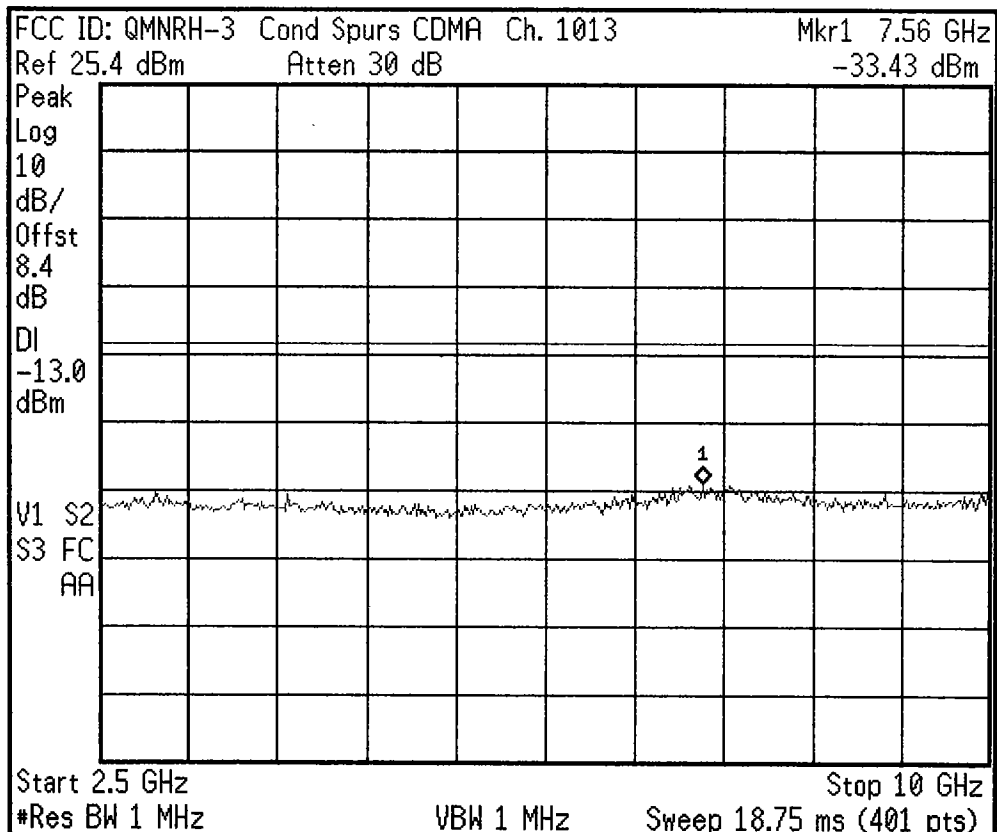

Freq/Channel

Center Freq  
 6.25000000 GHz

Start Freq  
 2.50000000 GHz

Stop Freq  
 10.0000000 GHz

CF Step  
 750.000000 MHz  
 Auto Man


Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin



Agilent

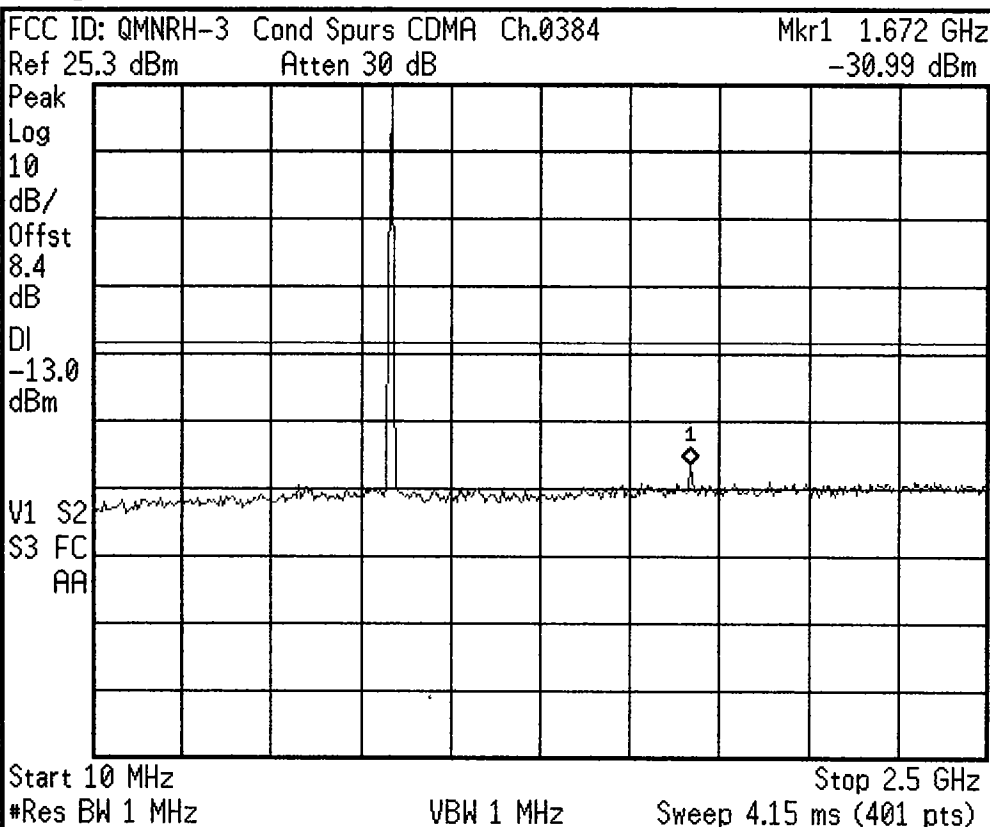

Freq/Channel

Center Freq  
 1.25500000 GHz

Start Freq  
 10.0000000 MHz

Stop Freq  
 2.50000000 GHz


CF Step  
 249.000000 MHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

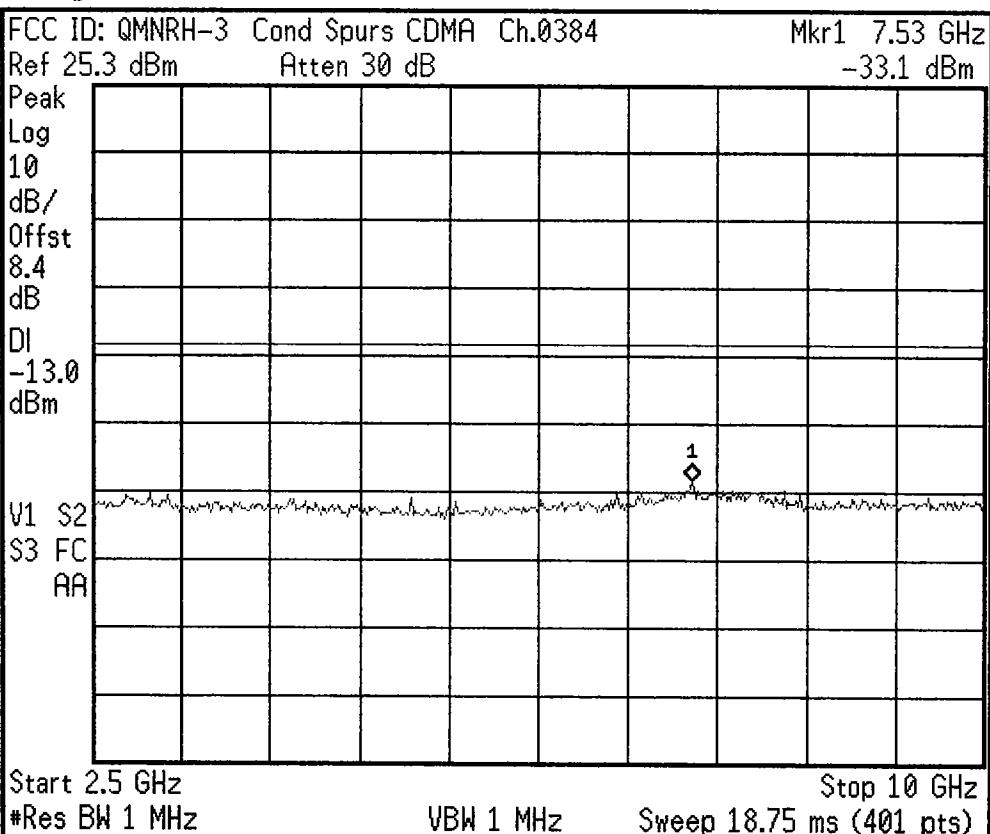

Freq/Channel

Center Freq  
 6.25000000 GHz

Start Freq  
 2.50000000 GHz

Stop Freq  
 10.0000000 GHz


CF Step  
 750.000000 MHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

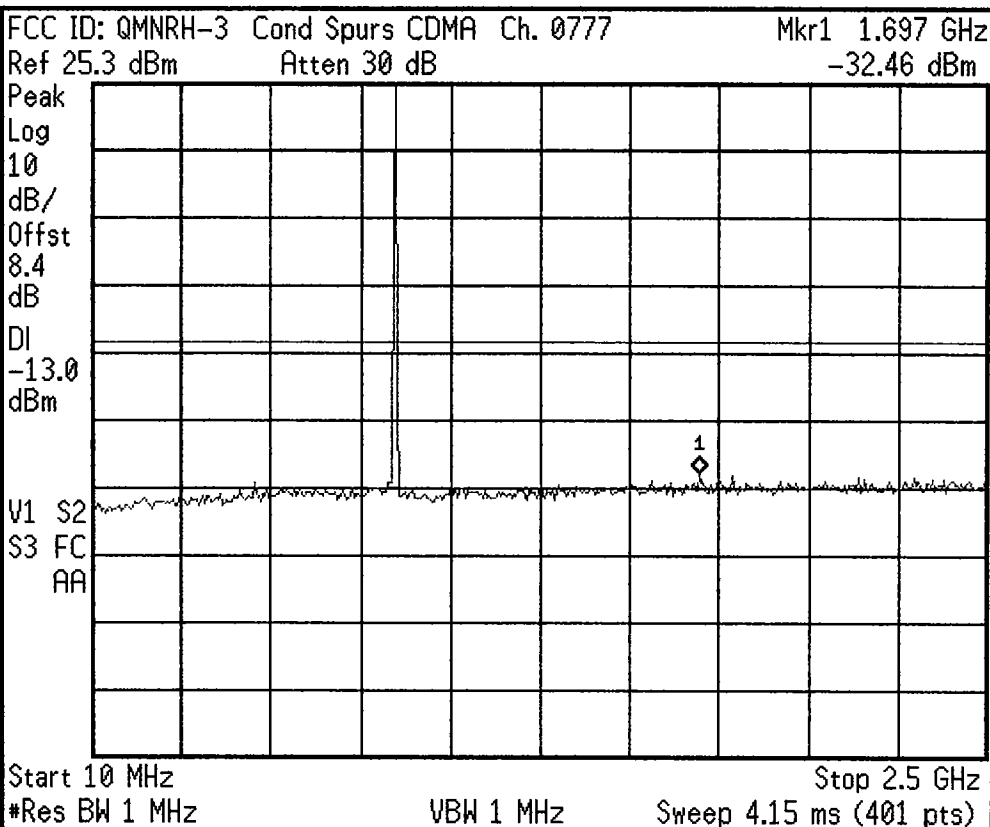

Freq/Channel

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On


Off

Scale Type

Log

Lin

Agilent

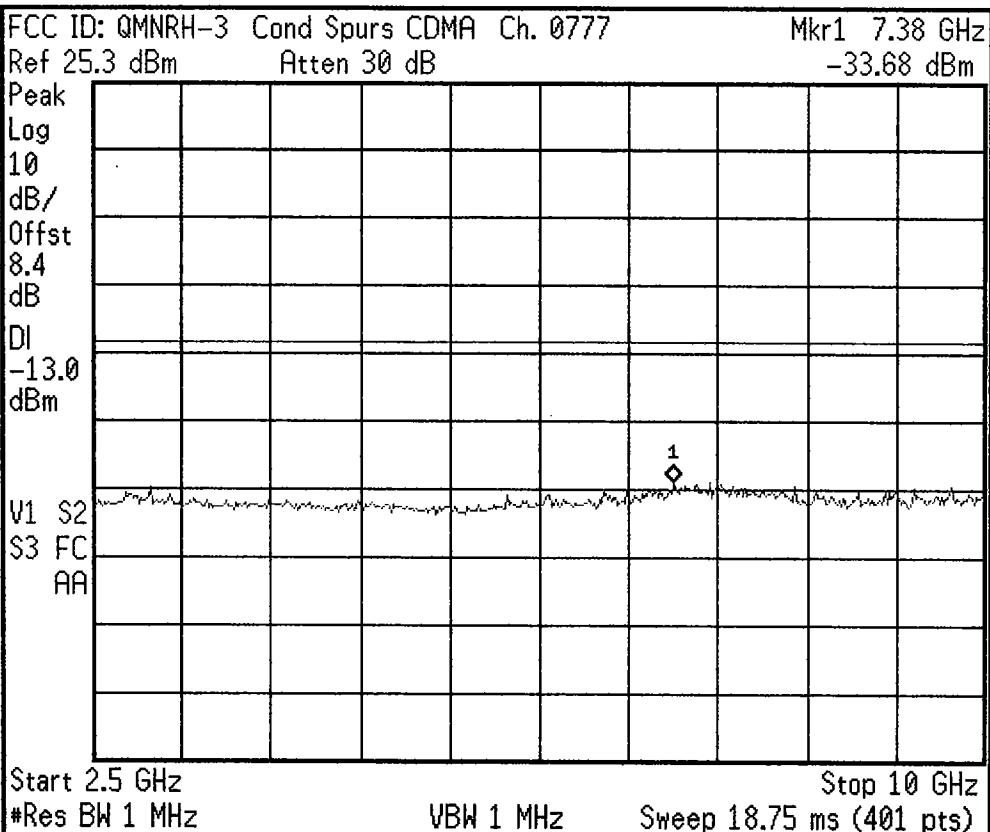

Freq/Channel

Center Freq

6.25000000 GHz

Start Freq

2.50000000 GHz

Stop Freq

10.0000000 GHz

CF Step

750.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin


Agilent

FCC ID: QMNRH-3 Power Out CDMA Ch. 1013

Ref 25.4 dBm Atten 30 dB

Samp  
Log  
10  
dB/  
Offst  
8.4  
dB

VAvg  
100  
V1 S2  
S3 FC  
AA

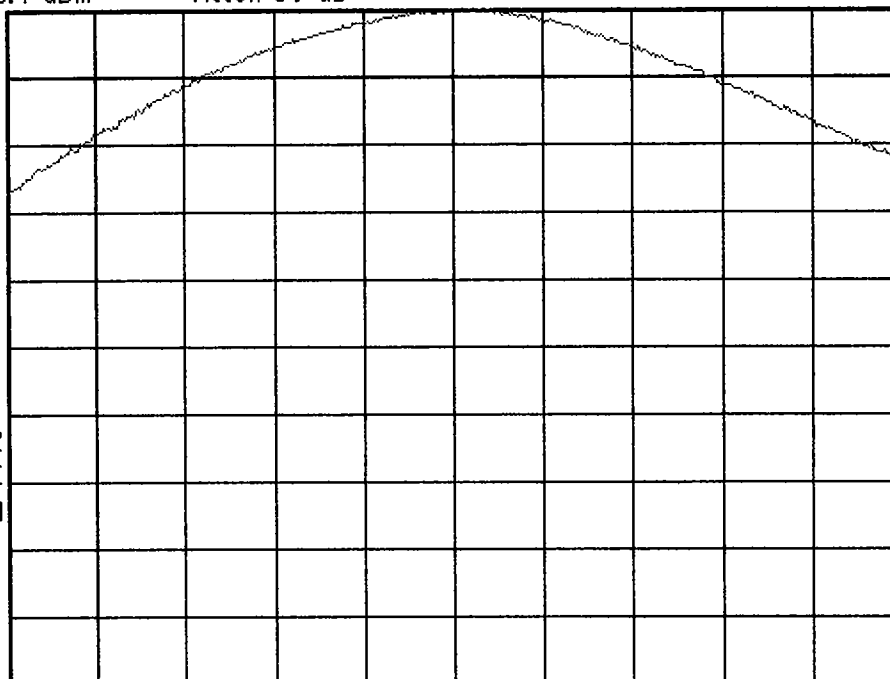

Center 824.7 MHz

\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz

Sweep 4 ms (401 pts)

Freq/Channel

Center Freq

824.700000 MHz

Start Freq

819.700000 MHz

Stop Freq

829.700000 MHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin


Agilent

FCC ID: QMNRH-3 Power Out CDMA Ch. 0384

Ref 25.3 dBm Atten 30 dB

Samp  
Log  
10  
dB/  
Offst  
8.4  
dB

VAvg  
100  
V1 S2  
S3 FC  
AA

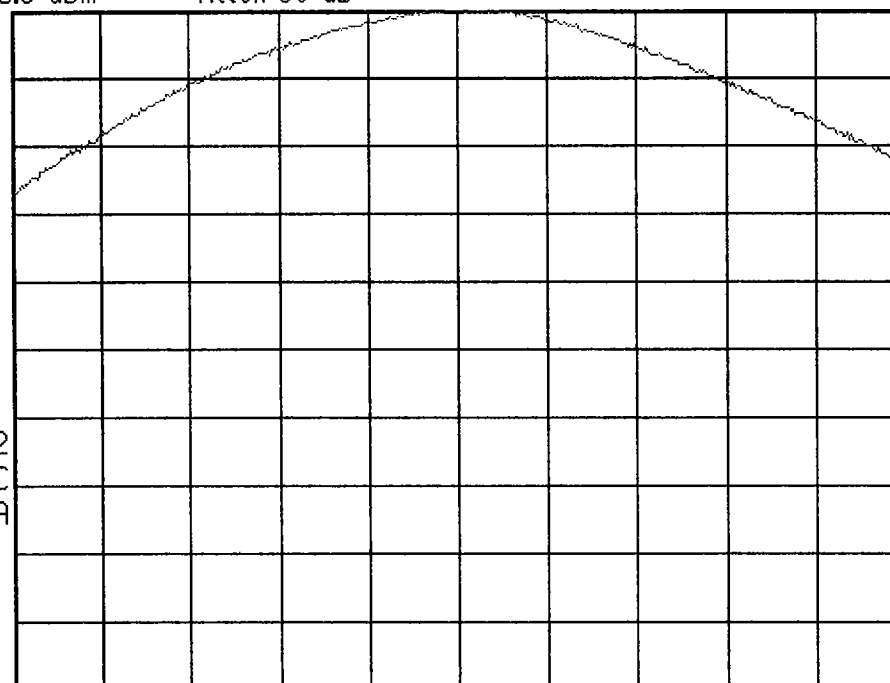

Center 836.5 MHz

\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz

Sweep 4 ms (401 pts)

Freq/Channel

Center Freq

836.520000 MHz

Start Freq

831.520000 MHz

Stop Freq

841.520000 MHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

Agilent

FCC ID: QMNRH-3 Power Out CDMA Ch. 0384

Ref 25.3 dBm Atten 30 dB

Samp  
Log  
10  
dB/  
Offst  
8.4  
dB


VAvg  
100  
V1 S2  
S3 FC  
AA

Center 836.5 MHz

\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz  
Sweep 4 ms (401 pts)

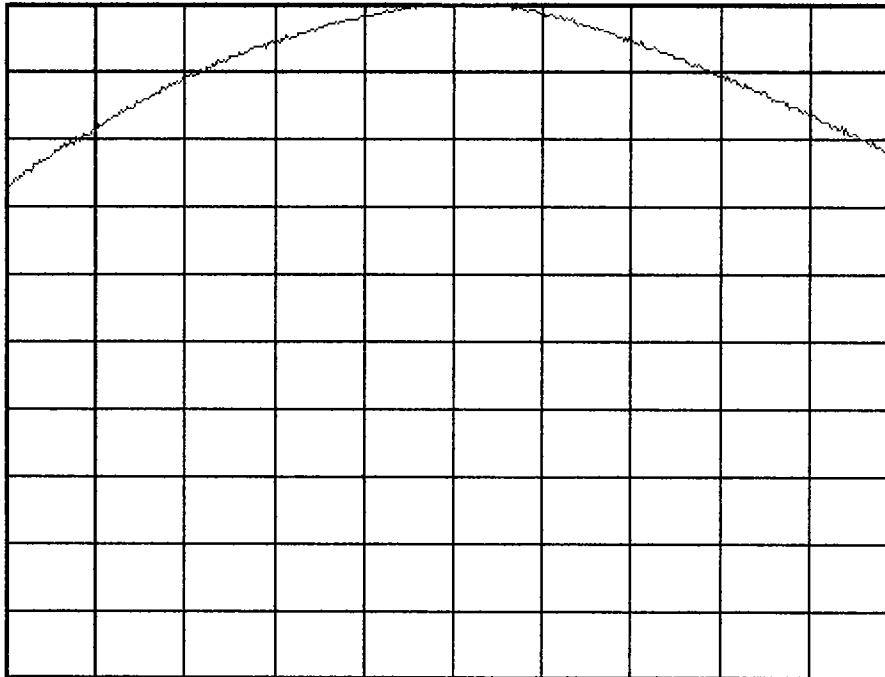

Freq/Channel

Center Freq

836.520000 MHz

Start Freq

831.520000 MHz

Stop Freq

841.520000 MHz

CF Step

1.00000000 MHz

Auto Man

Freq Offset

0.00000000 Hz

Signal Track

On Off

Scale Type

Log Lin

Agilent

FCC ID: QMNRH-3 Power Out CDMA Ch. 0777

Ref 25.3 dBm Atten 30 dB

Samp  
Log  
10  
dB/  
Offst  
8.4  
dB


VAvg  
100  
V1 S2  
S3 FC  
AA

Center 848.3 MHz

\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz  
Sweep 4 ms (401 pts)

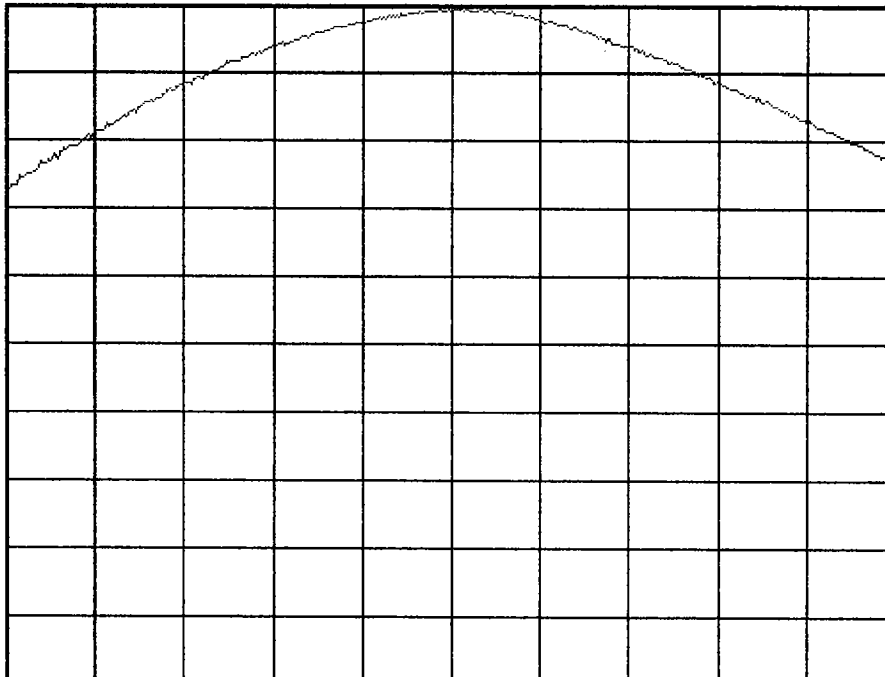

Freq/Channel

Center Freq

848.310000 MHz

Start Freq

843.310000 MHz

Stop Freq

853.310000 MHz

CF Step

1.00000000 MHz

Auto Man

Freq Offset

0.00000000 Hz


Signal Track

On Off

Scale Type

Log Lin

✱ Agilent

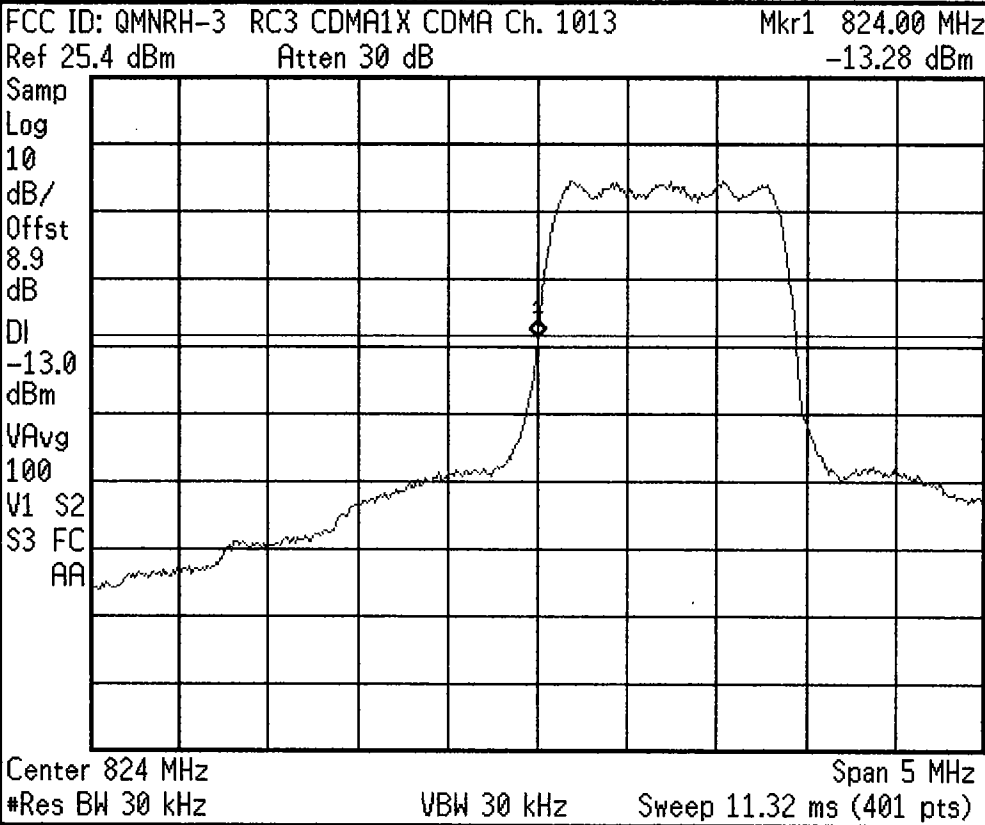

Freq/Channel

Center Freq  
 824.000000 MHz

Start Freq  
 821.500000 MHz

Stop Freq  
 826.500000 MHz


CF Step  
 500.000000 kHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

✱ Agilent

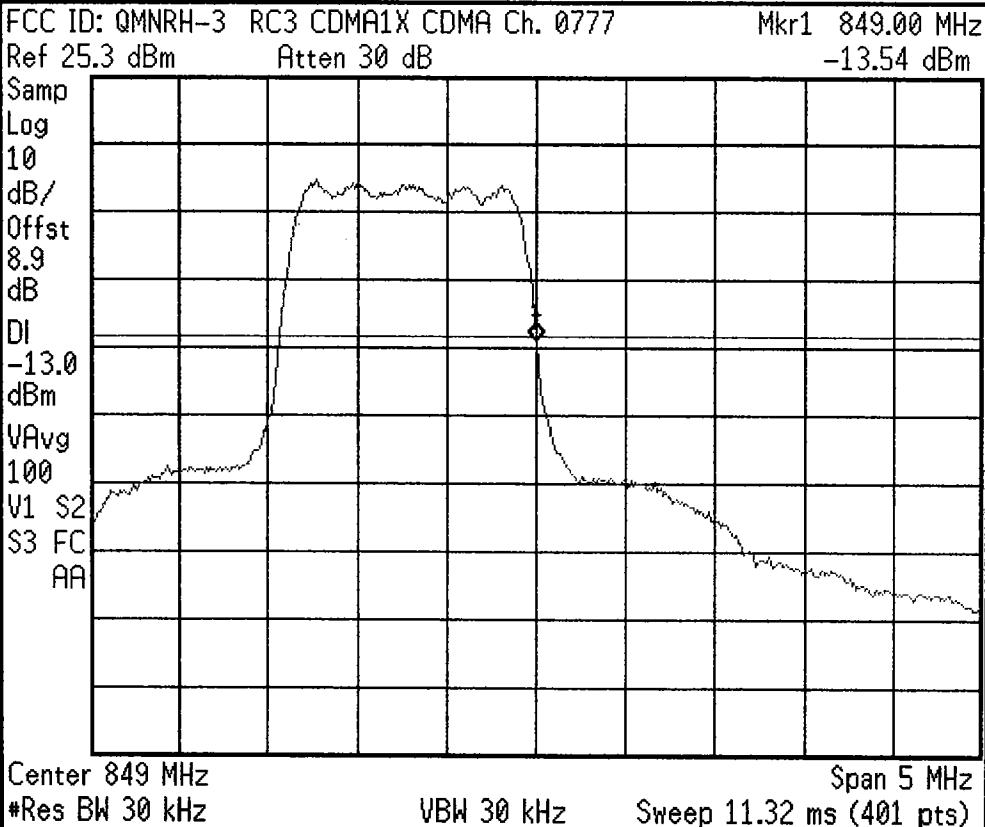

Freq/Channel

Center Freq  
 849.000000 MHz

Start Freq  
 846.500000 MHz

Stop Freq  
 851.500000 MHz


CF Step  
 500.000000 kHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

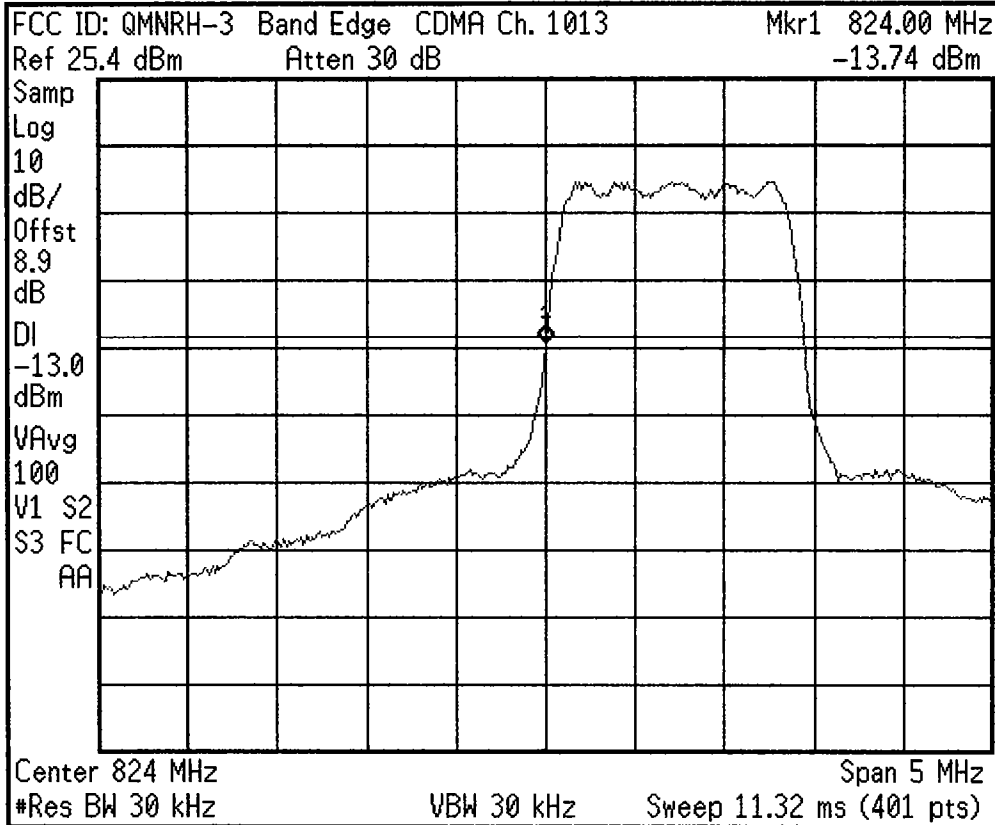

Freq/Channel

Center Freq  
 824.000000 MHz

Start Freq  
 821.500000 MHz

Stop Freq  
 826.500000 MHz


CF Step  
 500.000000 kHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

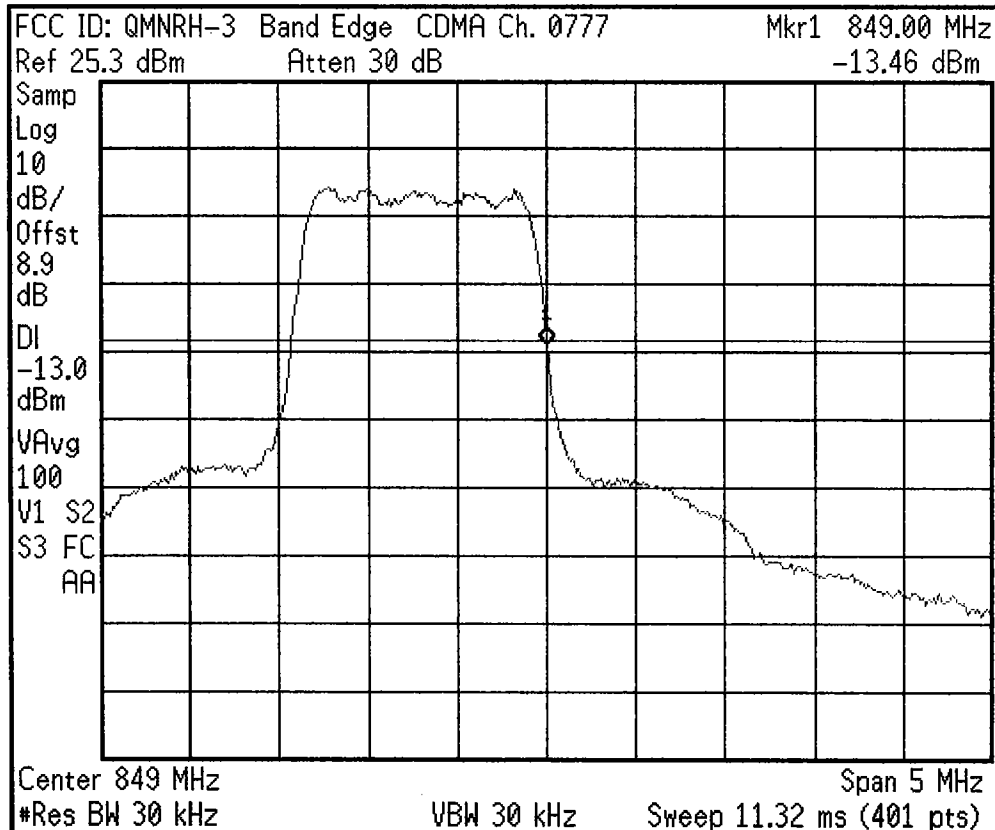

Freq/Channel

Center Freq  
 849.000000 MHz

Start Freq  
 846.500000 MHz

Stop Freq  
 851.500000 MHz


CF Step  
 500.000000 kHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off


Scale Type  
 Log Lin

~~HP~~ FCC ID: QMNRH-3 CDMA MODE MKR 883.37 MHz  
REF -60.0 dBm ATTEN 10 dB PG 25.0 dB -95.11 dBm

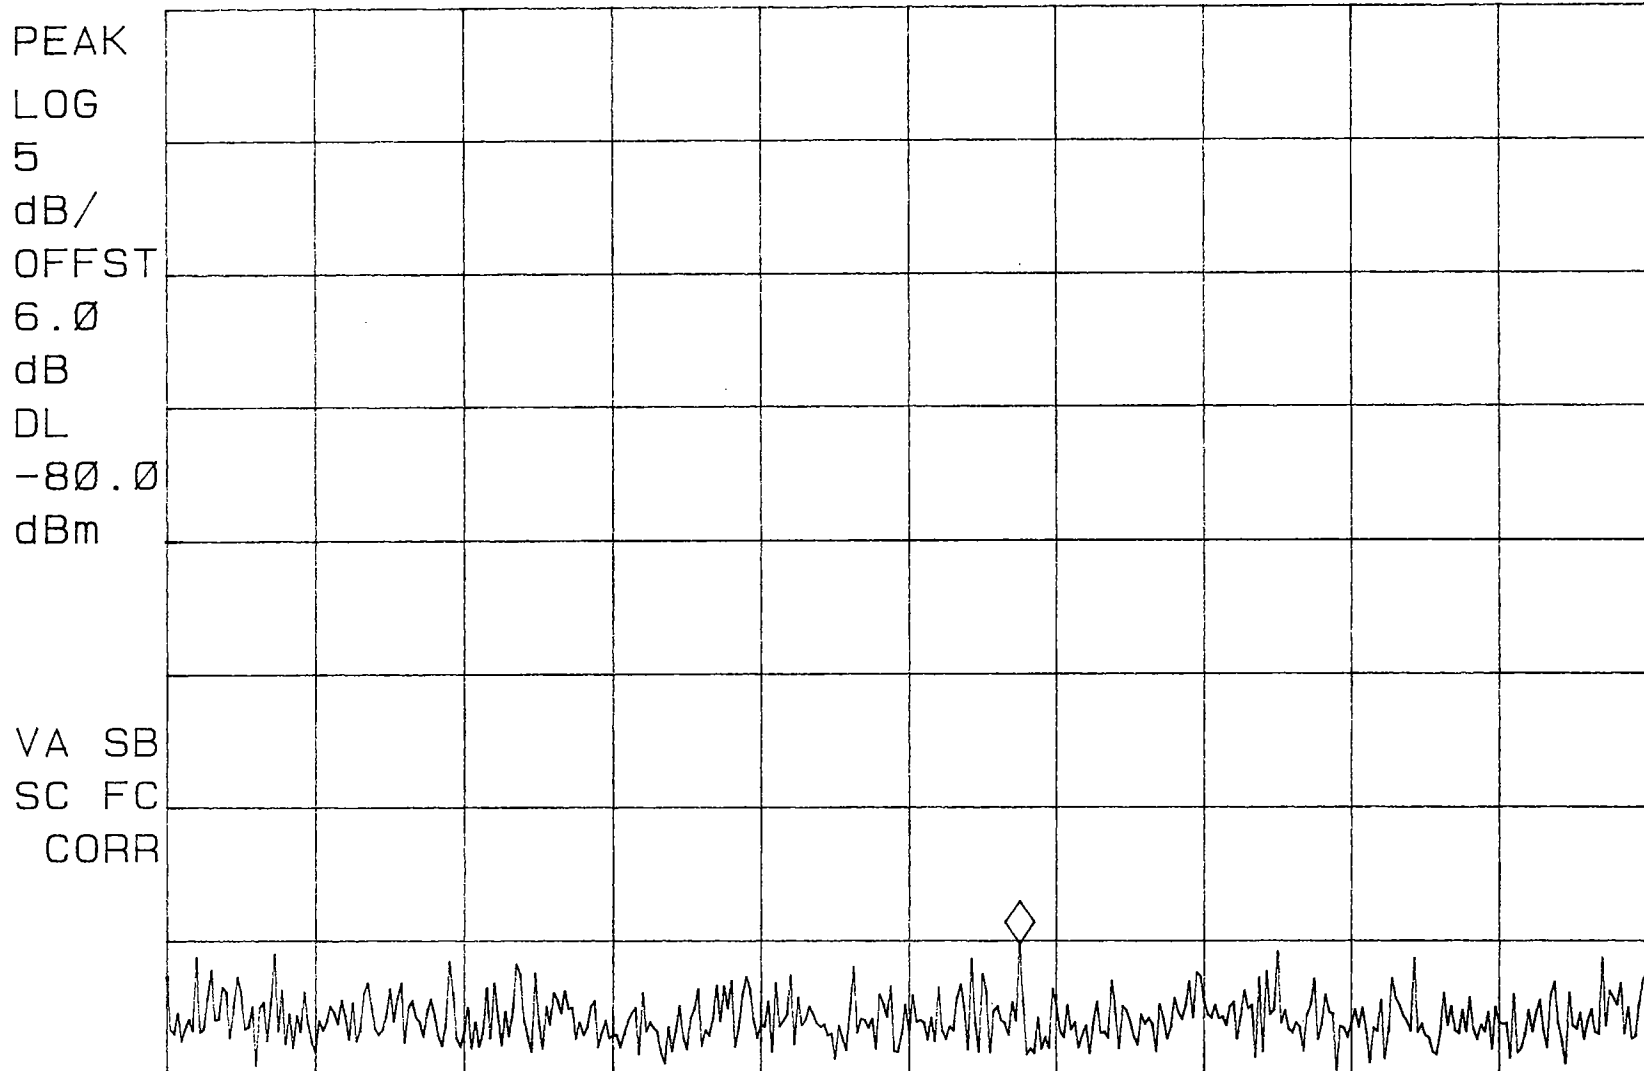

START 869.00 MHz STOP 894.00 MHz  
#RES BW 100 kHz #VBW 300 kHz SWP 20 msec

Agilent

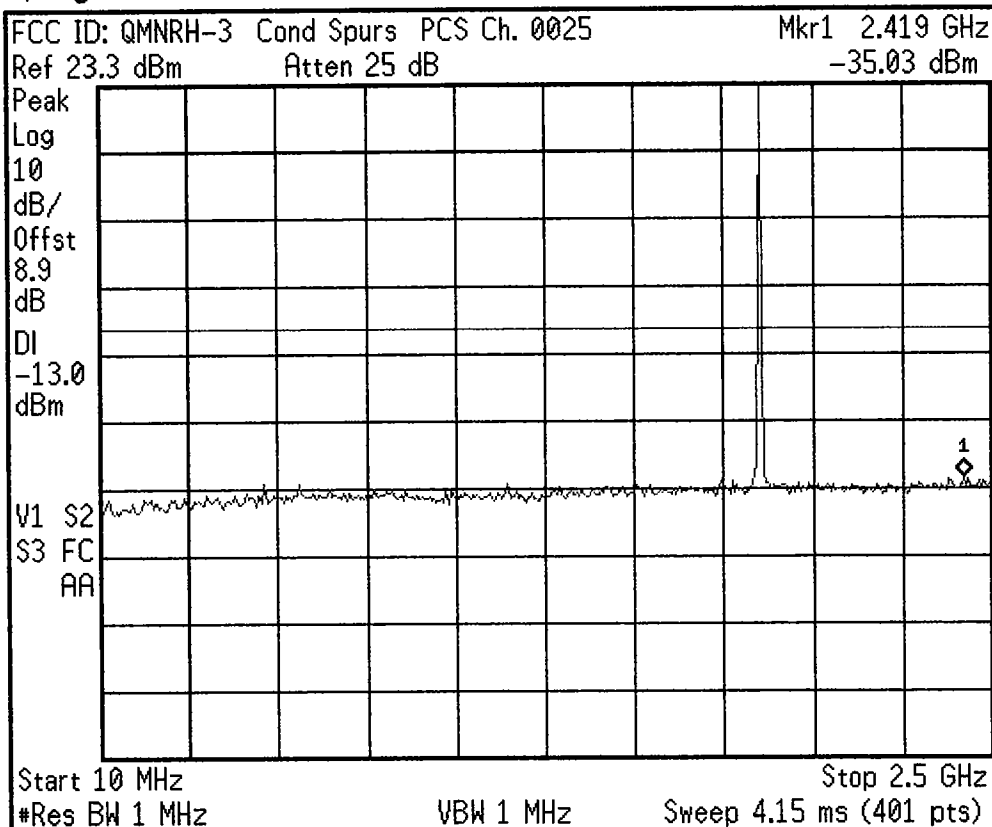

Freq/Channel

Center Freq  
 1.25500000 GHz

Start Freq  
 10.0000000 MHz

Stop Freq  
 2.50000000 GHz


CF Step  
 249.000000 MHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

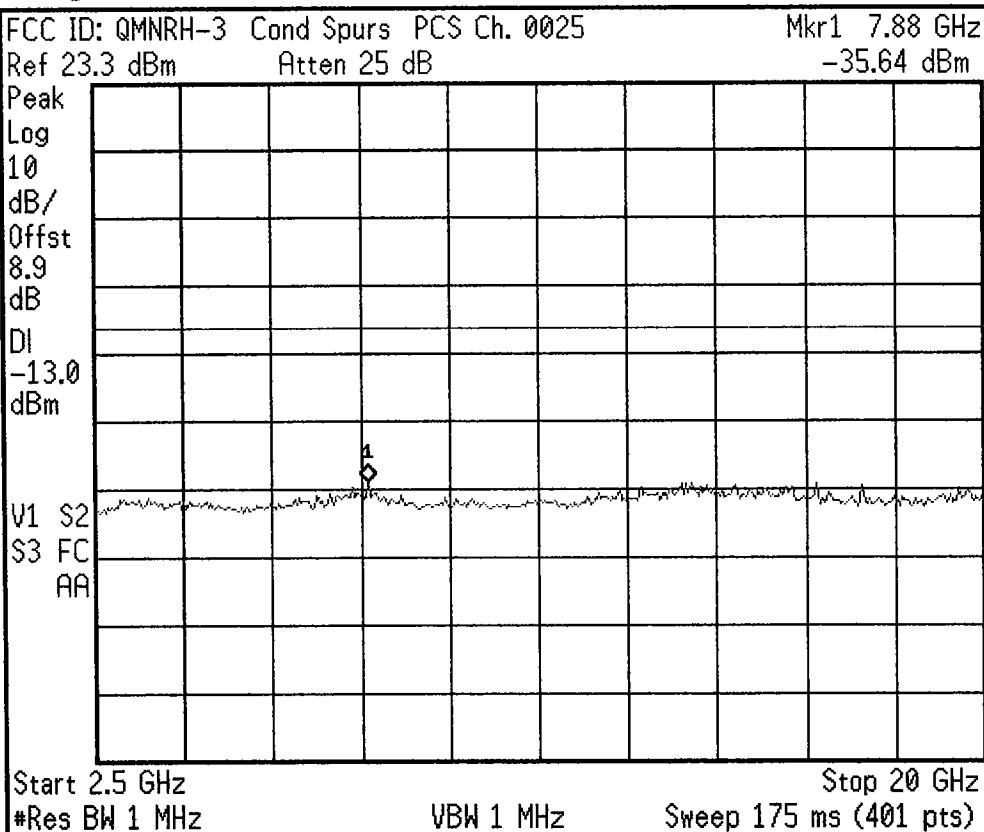

Freq/Channel

Center Freq  
 11.2500000 GHz

Start Freq  
 2.50000000 GHz

Stop Freq  
 20.0000000 GHz

CF Step  
 1.75000000 GHz  
 Auto Man


Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin



Agilent

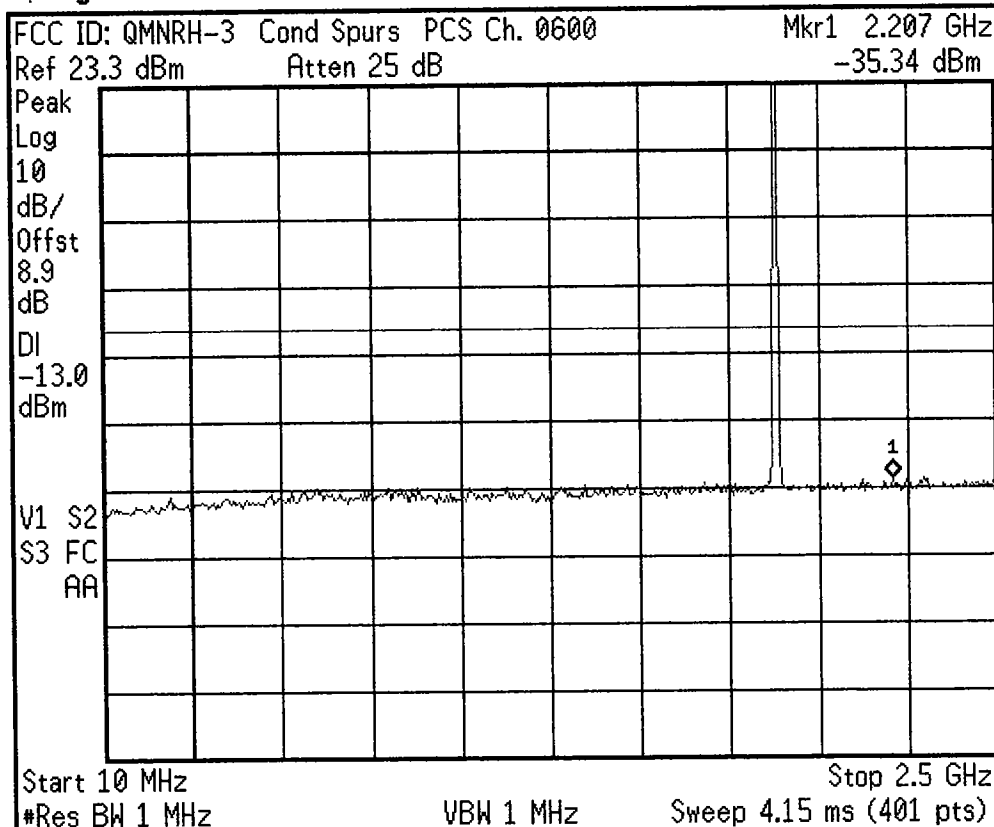

Freq/Channel

Center Freq  
 1.25500000 GHz

Start Freq  
 10.0000000 MHz

Stop Freq  
 2.50000000 GHz


CF Step  
 249.000000 MHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

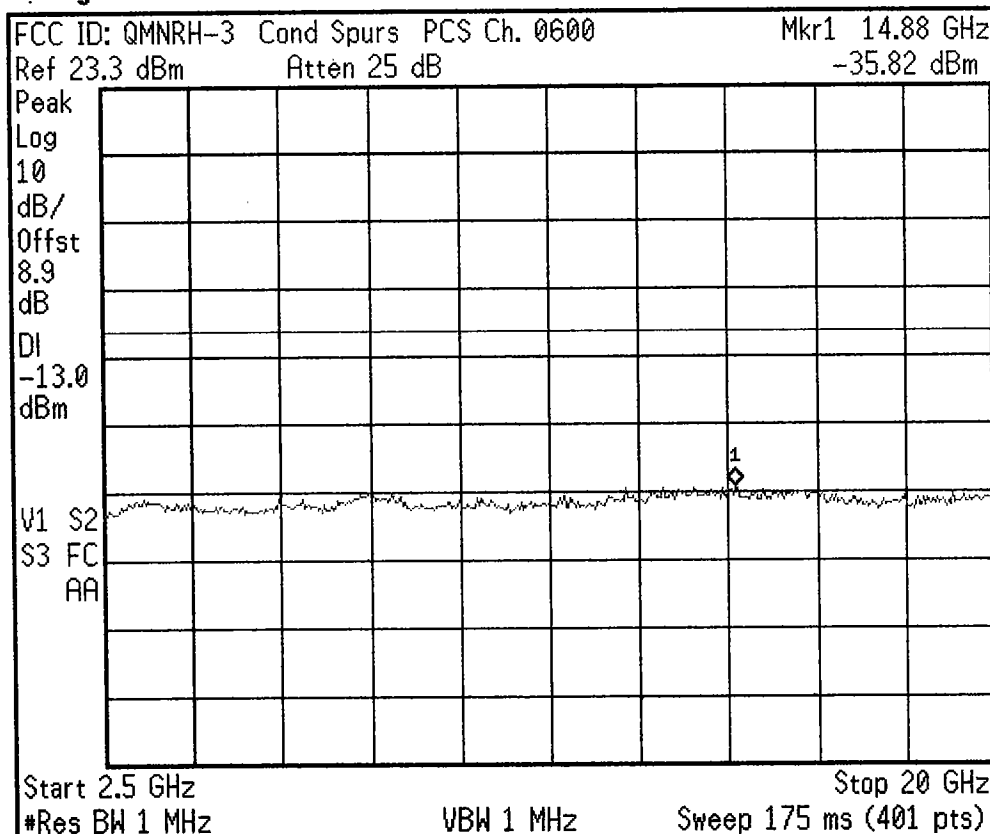

Freq/Channel

Center Freq  
 11.2500000 GHz

Start Freq  
 2.50000000 GHz

Stop Freq  
 20.0000000 GHz


CF Step  
 1.75000000 GHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

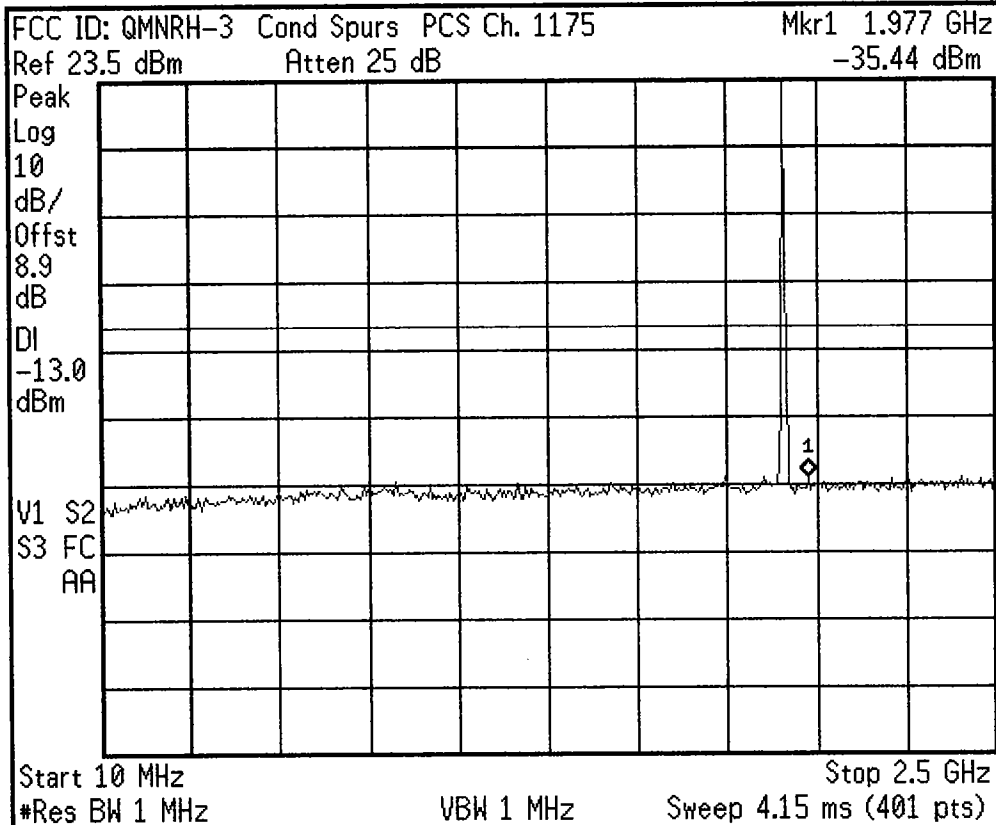

Freq/Channel

Center Freq  
 1.25500000 GHz

Start Freq  
 10.0000000 MHz

Stop Freq  
 2.50000000 GHz


CF Step  
 249.000000 MHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

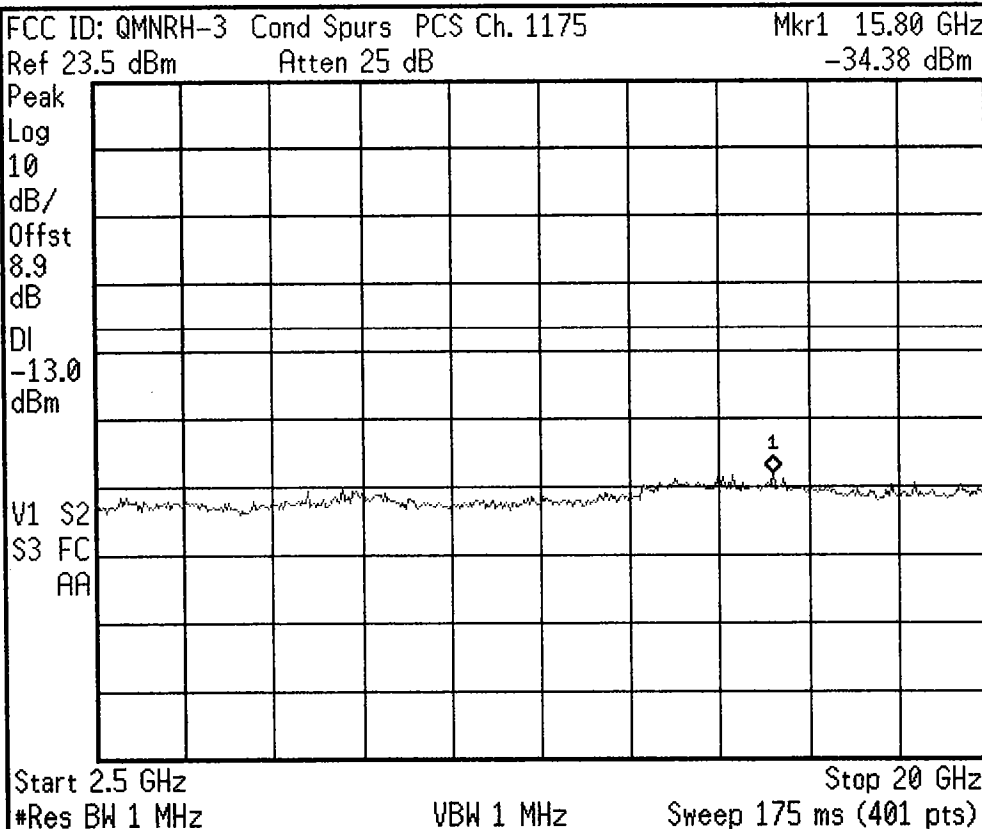

Freq/Channel

Center Freq  
 11.2500000 GHz

Start Freq  
 2.50000000 GHz

Stop Freq  
 20.0000000 GHz

CF Step  
 1.75000000 GHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

✱ Agilent

FCC ID: QMNRH-3 Power Out PCS Ch. 0025

Ref 23.3 dBm Atten 25 dB

Samp

Log

10

dB/

Offst

8.9

dB

VAvg

100

V1 S2

S3 FC

AA

Center 1.851 GHz

\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz

Sweep 4 ms (401 pts)

Freq/Channel

Center Freq

1.85125000 GHz

Start Freq

1.84625000 GHz

Stop Freq

1.85625000 GHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

✱ Agilent

FCC ID: QMNRH-3 Power Out PCS Ch. 0600

Ref 23.3 dBm Atten 25 dB

Samp

Log

10

dB/

Offst

8.9

dB

VAvg

100

V1 S2

S3 FC

AA

Center 1.88 GHz

\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz

Sweep 4 ms (401 pts)

Freq/Channel

Center Freq

1.88000000 GHz

Start Freq

1.87500000 GHz

Stop Freq

1.88500000 GHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log


Lin

✱ Agilent

FCC ID: QMNRH-3 Power Out PCS Ch. 0600  
Ref 23.3 dBm Atten 25 dB

Samp  
Log  
10  
dB/  
Offst  
8.9  
dB

VAvg  
100  
V1 S2  
S3 FC  
AA

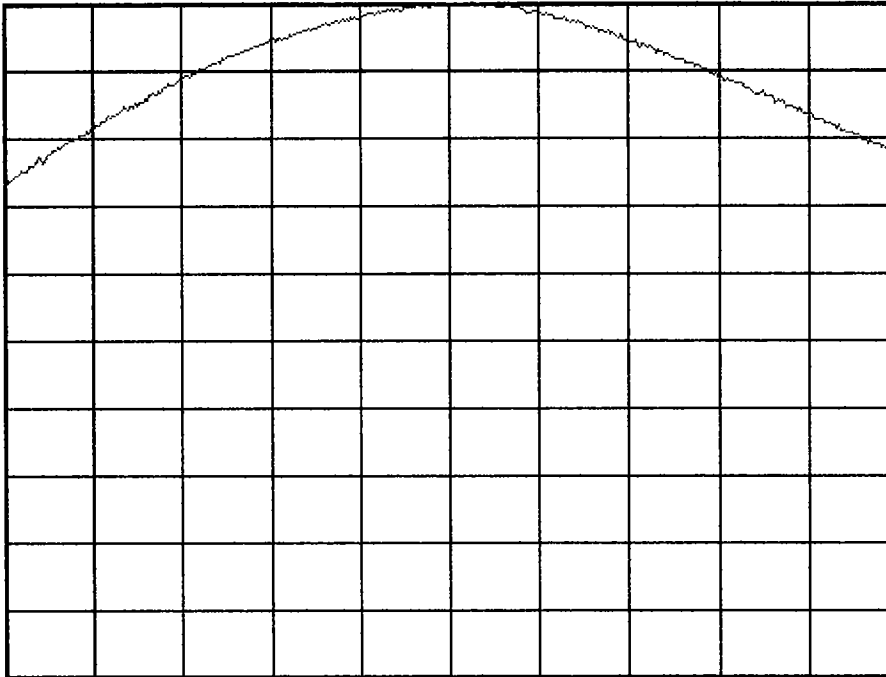

Center 1.88 GHz

\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz  
Sweep 4 ms (401 pts)

Freq/Channel

Center Freq

1.88000000 GHz

Start Freq

1.87500000 GHz

Stop Freq

1.88500000 GHz

CF Step

1.00000000 MHz

Auto Man

Freq Offset

0.00000000 Hz

Signal Track

On Off

Scale Type


Log Lin

✱ Agilent

FCC ID: QMNRH-3 Power Out PCS Ch. 1175  
Ref 23.5 dBm Atten 25 dB

Samp  
Log  
10  
dB/  
Offst  
8.9  
dB

VAvg  
100  
V1 S2  
S3 FC  
AA

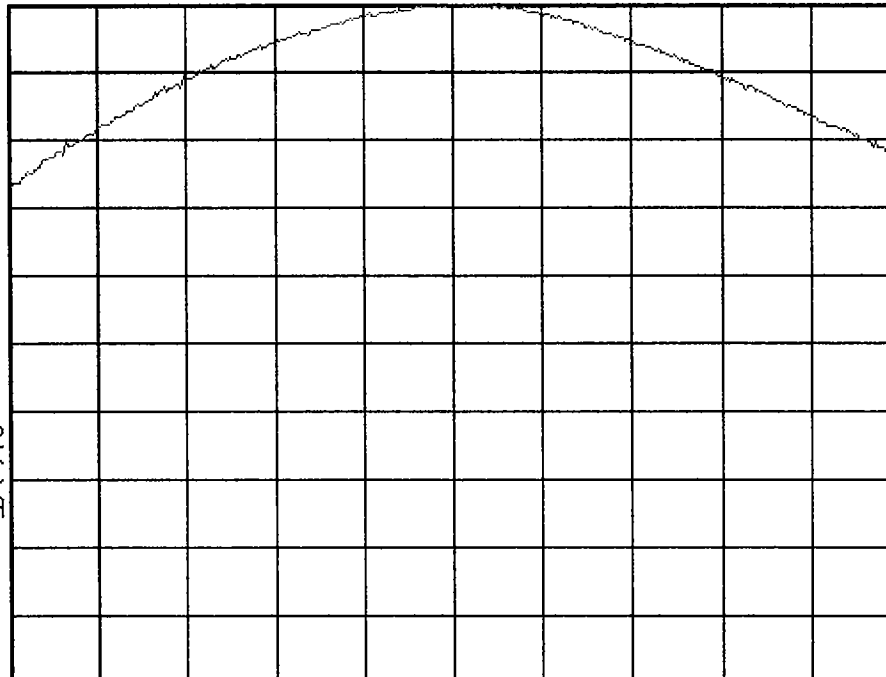

Center 1.909 GHz

\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz  
Sweep 4 ms (401 pts)

Freq/Channel

Center Freq

1.90875000 GHz

Start Freq

1.90375000 GHz

Stop Freq

1.91375000 GHz

CF Step

1.00000000 MHz

Auto Man

Freq Offset

0.00000000 Hz

Signal Track

On Off

Scale Type


Log Lin

✱ Agilent

Ch Freq 1.85125 GHz		Trig Free
Channel Power		

FCC ID: QMNRH-3 Power Out PCS Ch. 0025

Ref 23.3 dBm Atten 25 dB

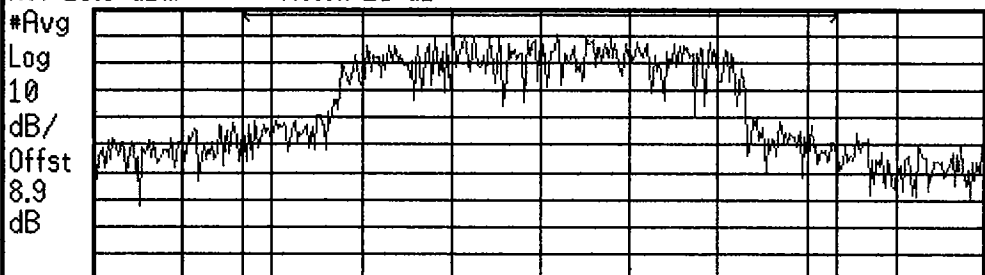

Center 1.851 GHz

Span 3 MHz

Res BW 30 kHz

VBW 300 kHz

Sweep 8 ms (401 pts)

Channel Power

Power Spectral Density

23.31 dBm /2.0000 MHz

-39.70 dBm/Hz

Freq/Channel

Center Freq  
1.85125000 GHz

Start Freq  
1.84975000 GHz

Stop Freq  
1.85275000 GHz

CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off


Scale Type  
Log Lin

✱ Agilent

Ch Freq 1.88 GHz		Trig Free
Channel Power		

FCC ID: QMNRH-3 Power Out PCS Ch. 0600

Ref 23.5 dBm Atten 25 dB

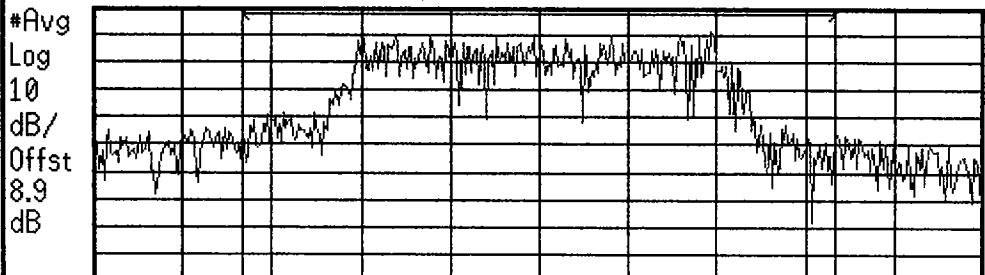

Center 1.88 GHz

Span 3 MHz

Res BW 30 kHz

VBW 300 kHz

Sweep 8 ms (401 pts)

Channel Power

Power Spectral Density

23.48 dBm /2.0000 MHz

-39.53 dBm/Hz

Freq/Channel

Center Freq  
1.88000000 GHz

Start Freq  
1.87850000 GHz

Stop Freq  
1.88150000 GHz


CF Step  
300.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Scale Type  
Log Lin

Agilent

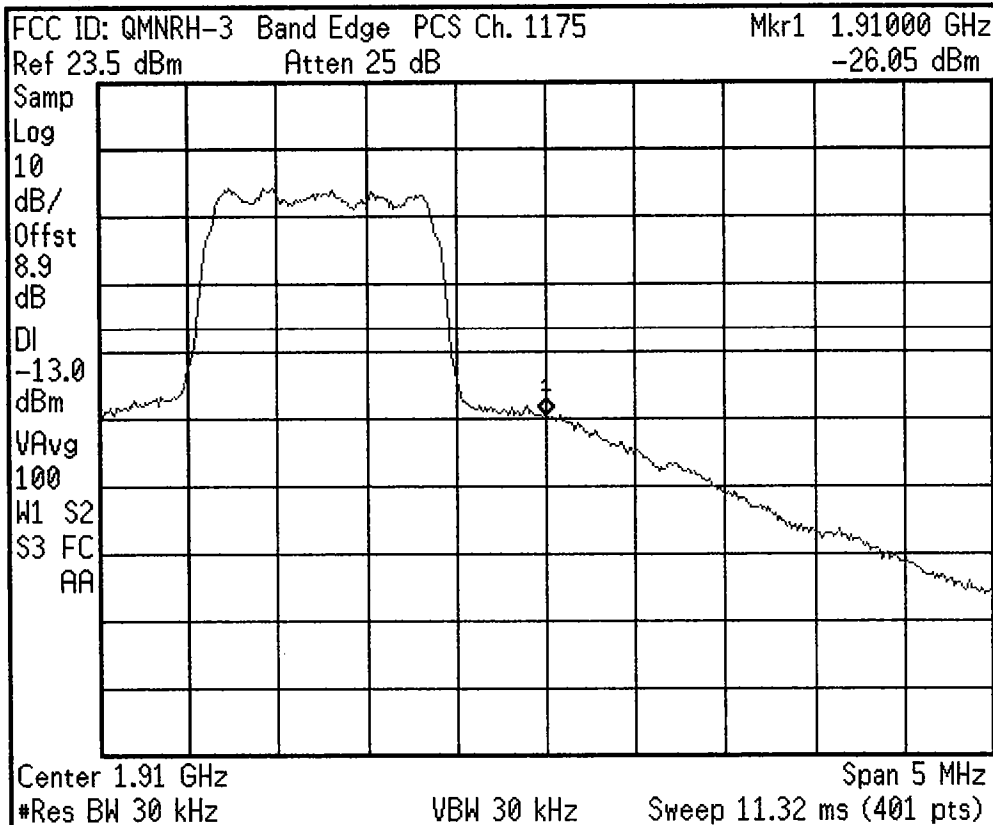

Freq/Channel

Center Freq  
 1.91000000 GHz

Start Freq  
 1.90750000 GHz

Stop Freq  
 1.91250000 GHz


CF Step  
 500.000000 kHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

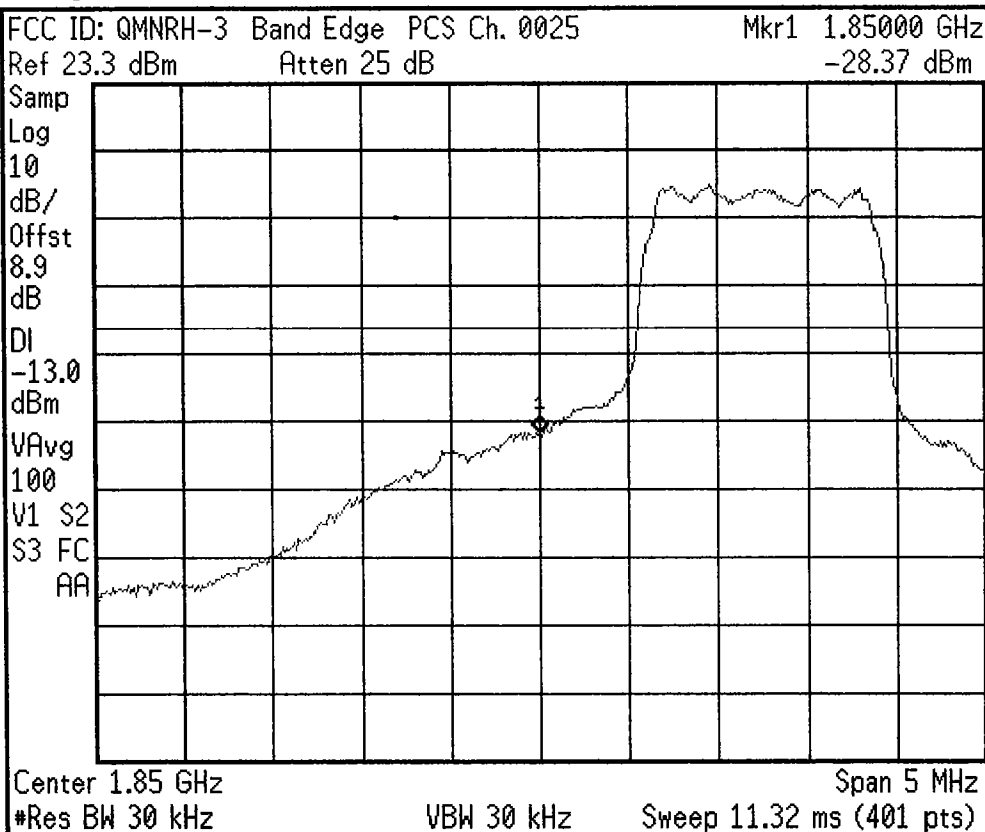

Freq/Channel

Center Freq  
 1.85000000 GHz

Start Freq  
 1.84750000 GHz

Stop Freq  
 1.85250000 GHz


CF Step  
 500.000000 kHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

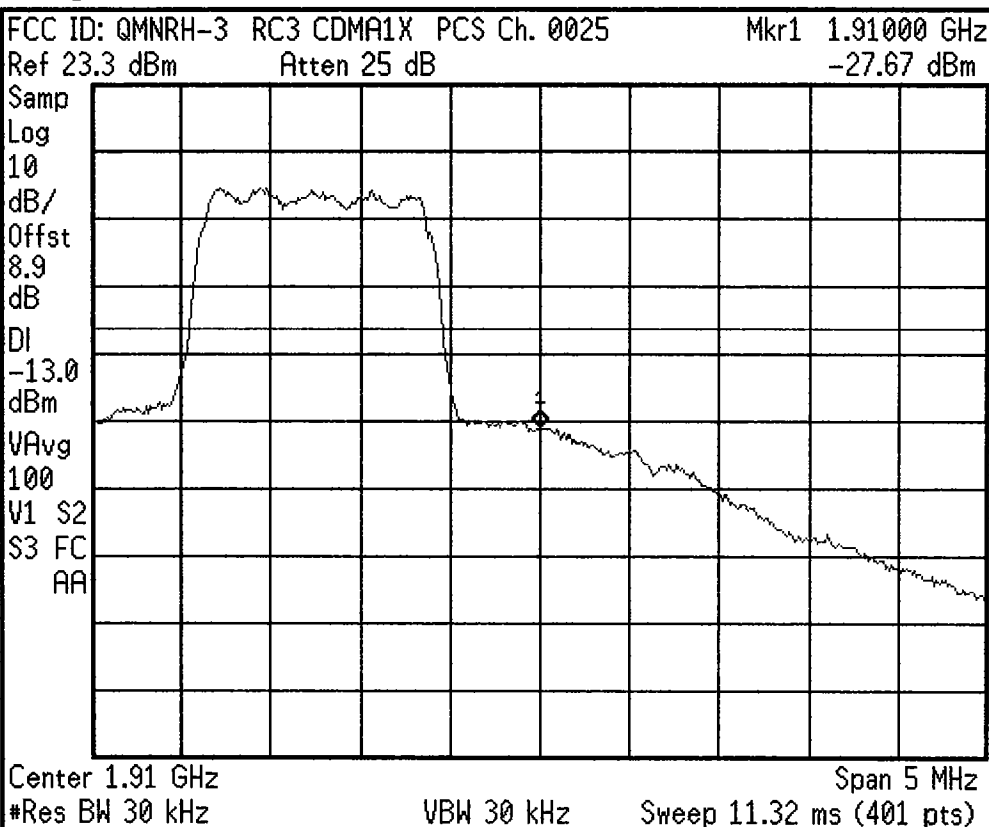

Freq/Channel

Center Freq  
 1.91000000 GHz

Start Freq  
 1.90750000 GHz

Stop Freq  
 1.91250000 GHz


CF Step  
 500.000000 kHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

Agilent

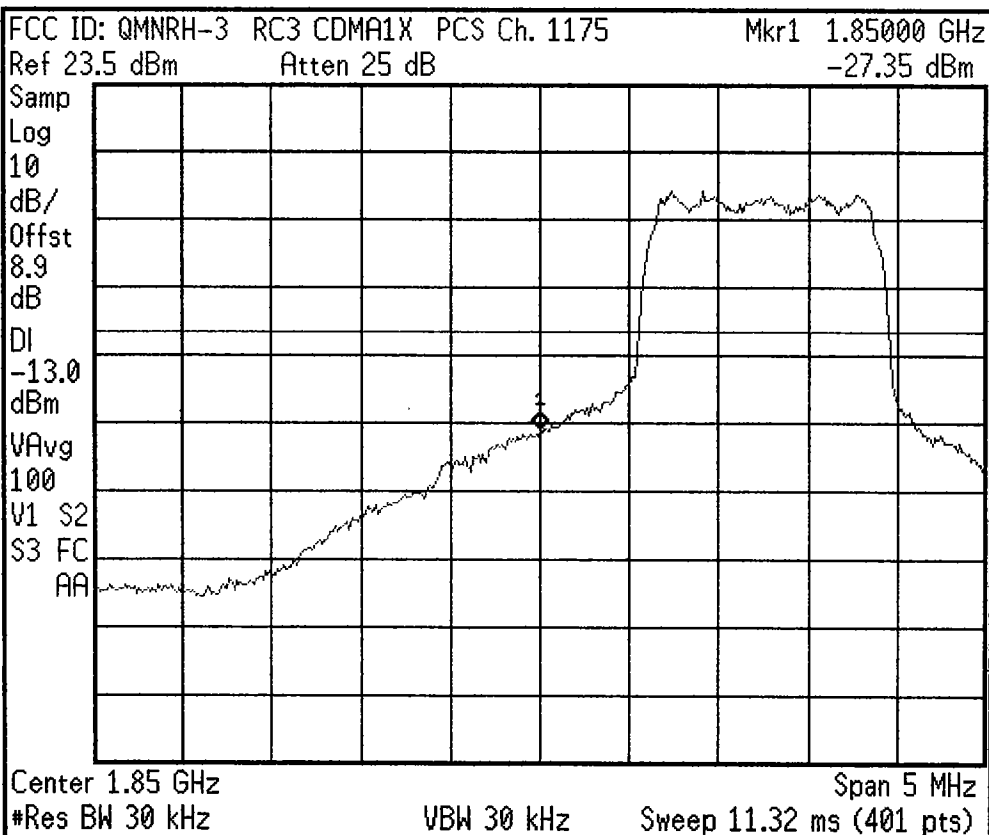

Freq/Channel

Center Freq  
 1.85000000 GHz

Start Freq  
 1.84750000 GHz

Stop Freq  
 1.85250000 GHz


CF Step  
 500.000000 kHz  
 Auto Man

Freq Offset  
 0.00000000 Hz

Signal Track  
 On Off

Scale Type  
 Log Lin

✱ Agilent

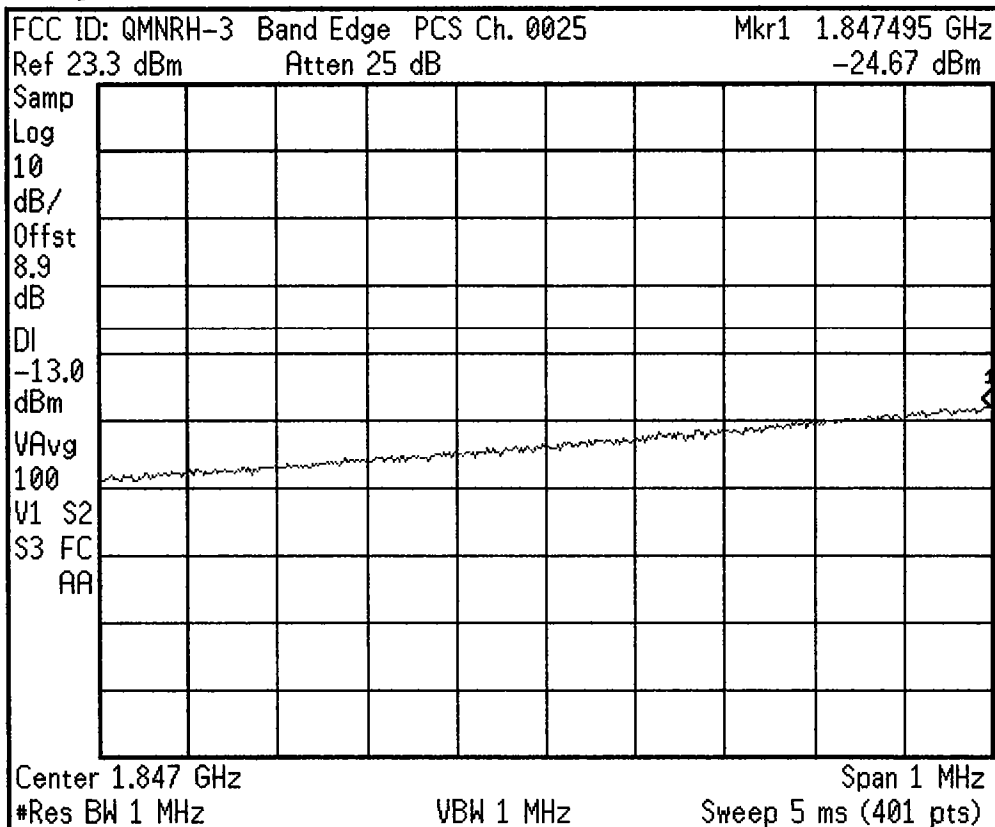

Freq/Channel

Center Freq

1.84700000 GHz

Start Freq

1.84650000 GHz

Stop Freq

1.84750000 GHz

CF Step

100.000000 kHz

Auto Man

Freq Offset

0.00000000 Hz


Signal Track

On Off

Scale Type

Log Lin

✱ Agilent

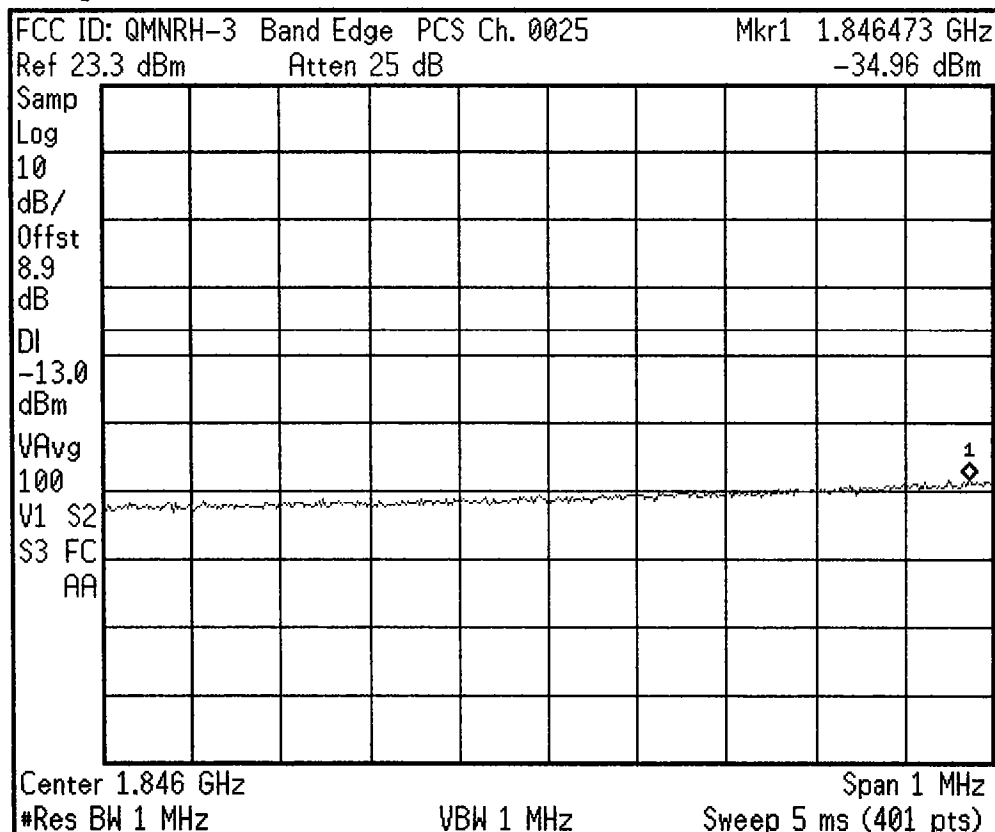

Freq/Channel

Center Freq

1.84600000 GHz

Start Freq

1.84550000 GHz

Stop Freq

1.84650000 GHz

CF Step

100.000000 kHz

Auto Man

Freq Offset

0.00000000 Hz

Signal Track

On Off

Scale Type

Log Lin