

Setup photos for HAC RF Emissions and T-Coil Test Report

Test report no.:	Salo_HAC_0721_04	Date of report:	2007-05-21
Template version:	2.0	Number of pages:	3
Testing laboratory:	TCC Salo P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
Responsible test engineer:	Ari Orte	Product contact person:	Bill Griffin
Measurements made by:	Ari Orte		
Tested devices:	RM-289 (Hearing aid mode), HW: 4002		
FCC ID:	QMNRM-289	IC:	661X-RM289
Supplement reports:	Salo_HAC_0719_10 Salo_HAC_0719_11		
Testing has been carried out in accordance with:	ANSI C63.19-2006 American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1.1	PICTURE OF DEVICE	3
1.2	TEST POSITIONS.....	3
1.2.1	<i>Scan area centered at the speaker output</i>	3

1.1 Picture of Device



Flip closed



Flip open

1.2 Test Positions

1.2.1 Scan area centered at the acoustic output

The device was positioned such that Device Reference plane was touching the bottom of the Test Arch. The scan is centered at the acoustic output by aligning the acoustic output with the intersection of the Test Arch's middle bar and dielectric wire.

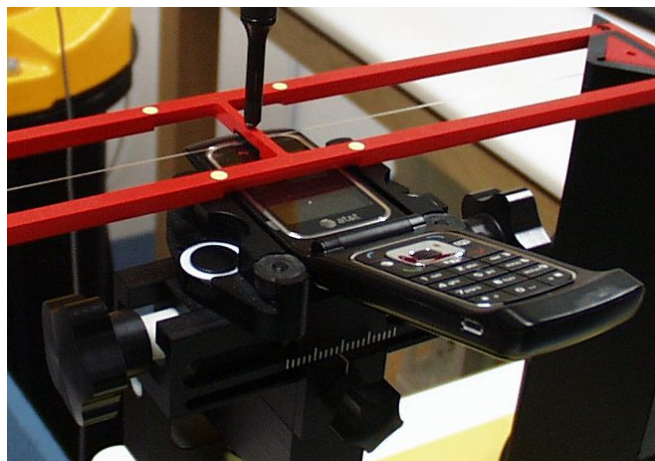


Photo of the device positioned under Test Arch