

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-707_19.docx	Date of Report:	25-Feb-2011
Number of pages:	9	Customer's Contact person:	Griffin Bill
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-707 / AC charger AC-10U / Data cable CA-101 / Headset WH-701 / Laptop IBM Thinkpad T40, AC adapter 02K6543, Printer HP deskjet 1600CC3540A, Parallel cable for printer		
FCC ID:	QMNRM-707	IC:	661X-RM707
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009), RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Hannu Söderholm, Senior Engineer, EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	14-Jan-2011
Testing completed	22-Feb-2011
The customer's contact person	Griffin Bill
Test Plan referred to	T:\Projects\RM-707\TestPlan\RS_testplan_RM-707.xls
Notes	-
Document name	RM-707\EMC\FCC15B_RM-707_19.docx

1.1. EUT and Accessory Information

The EUT is a 9-band (GSM850/900/1800/1900) and WCDMA Band (I/II(1900)/IV(1700)/V(850)/VIII/) mobile phone with GPRS, EGPRS, HSDPA, HSUPA and WLAN and Bluetooth.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-707	004402134050636;059G0F7	0100	-	020.027	42465
AC charger	AC-10U	3997910023090100786;0675474	-	-	-	42466
Data cable	CA-101	07306348391T1249258	-	-	-	42467
Headset	WH-701	069482302751A600081	-	-	-	42468
Laptop	IBM Thinkpad T40	99ARTGD	-	-	-	41868
AC Adapter	02K6543	-	-	-	-	40202
Printer	HP deskjet 1600CC3540A	USB8302546	-	-	-	40077
Parallel cable for printer	-	-	-	-	-	40087

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in ICES-003 (RSS-139)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (6.6)	Radiated emissions	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	4
2.2. Test method and limit	4
3. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	6
3.2. Test method and limit	6
4. Test Equipment	8
4.1. Conducted measurements	8
4.2. Radiated measurements	8

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-707, DUT 42465
Accessories with DUT numbers	AC-10U, DUT 42466 ; CA-101, DUT 42467 ; WH-701, DUT 42468
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	AC-10U connected to LISN
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 101.2
Date of measurements	22-Feb-2011
Measured by	Jari Jantunen

2.1.1 Test Setup

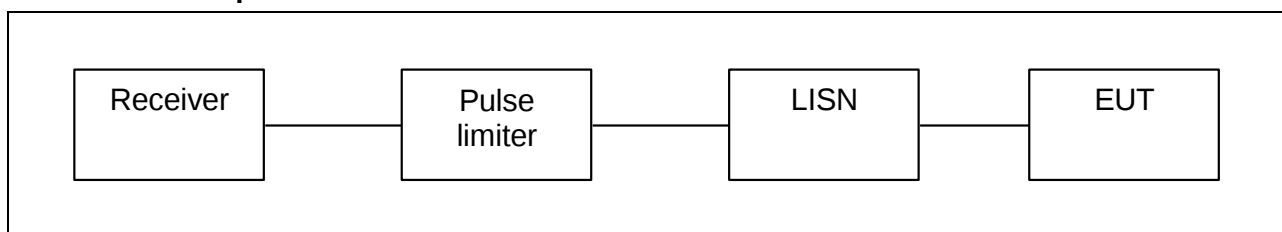

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [\text{dB}\mu\text{V}/\text{m}] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.2.1 WLAN Test Results

RX mode, channel 7 / 2442 MHz

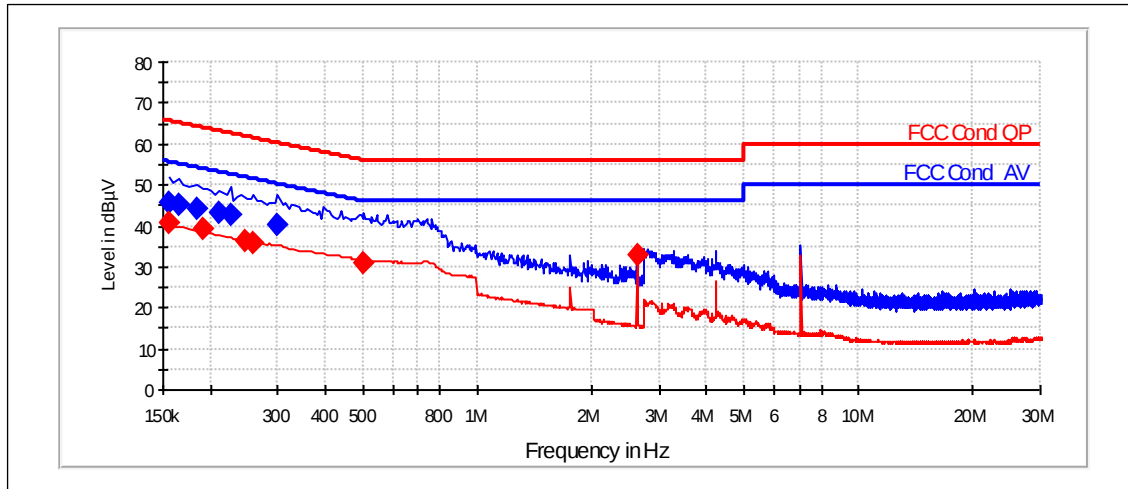

Quasi peak

Frequency [MHz]	U [dBμV]	IF-BW[kHz]	Line	Margin	Result
0.155	45.86	10	N	19.83	PASSED
0.165	45.31	10	L1	19.91	PASSED
0.185	44.31	10	L1	19.96	PASSED
0.21	43.24	10	N	20.01	PASSED
0.225	42.81	10	L1	19.83	PASSED
0.3	40.3	10	L1	19.94	PASSED


Average

Frequency [MHz]	U [dBμV]	IF-BW[kHz]	Line	Margin	Result
0.155	40.58	10	N	15.13	PASSED
0.19	39.07	10	N	14.94	PASSED
0.245	36.46	10	N	15.42	PASSED
0.26	36.01	10	L1	15.43	PASSED
0.505	30.74	10	L1	15.3	PASSED
2.625	32.85	10	L1	13.2	PASSED

3. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-707, DUT 42465
Accessories with DUT numbers	CA-101, DUT 42467 ; WH-701, DUT 42468, IBM Thinkpad T40 DUT 41868, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	Laptop AC charger connected to LISN. Continuous data transfer active between phone and computer
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 101.2
Date of measurements	22-Feb-2011
Measured by	Jari Jantunen

3.1.1 Test Setup

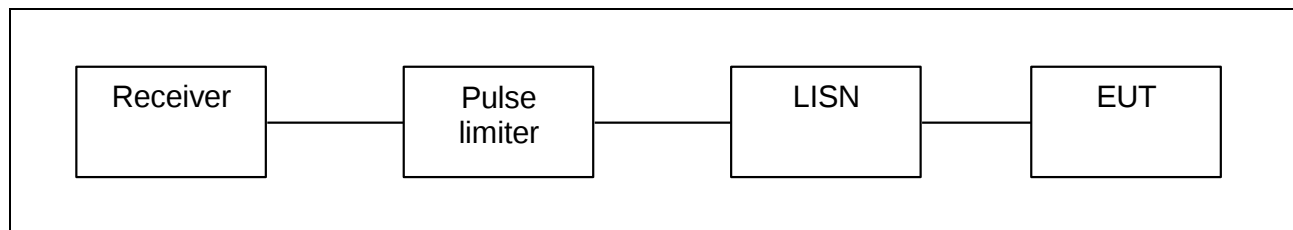

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V/m] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

3.2.1 WLAN Test Results

RX mode, channel 7 / 2442 MHz

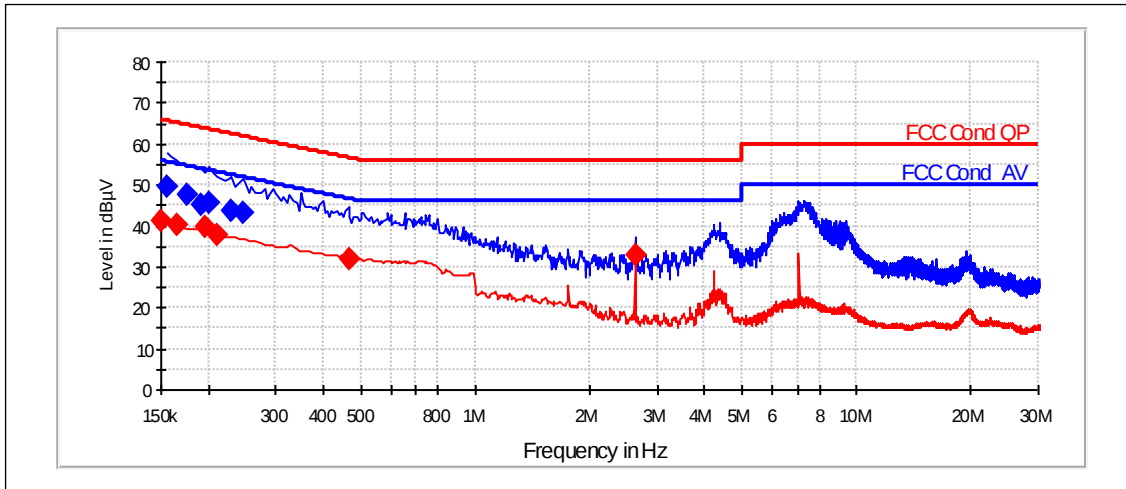

Quasi peak

Frequency [MHz]	U [dBμV]	IF-BW[kHz]	Line	Margin	Result
0.155	49.67	10	N	16.03	PASSED
0.175	47.59	10	N	17.12	PASSED
0.19	45.37	10	L1	18.64	PASSED
0.2	45.81	10	N	17.81	PASSED
0.23	43.61	10	N	18.85	PASSED
0.245	43.07	10	N	18.82	PASSED

Average

Frequency [MHz]	U [dBμV]	IF-BW[kHz]	Line	Margin	Result
0.15	41.29	10	N	14.7	PASSED
0.165	40.34	10	N	14.91	PASSED
0.195	39.57	10	L1	14.22	PASSED
0.21	37.95	10	N	15.21	PASSED
0.465	32.05	10	N	14.6	PASSED
2.625	32.94	10	N	13.1	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
-	High pass filter	F-90-1500-6-R	RLC Electronics	22/24/27, 15C, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRC1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C