

## Test Setup photos for RM-860 SAR Compliance Test Report

<b>Test report no.:</b>	SAR_Photo_RM-860_04	<b>Date of report:</b>	2013-02-22
<b>Template version:</b>	19.3	<b>Number of pages:</b>	7
<b>Testing laboratory:</b>	<p>TCC Nokia San Diego Laboratory 16620 West Bernardo Drive SAN DIEGO CA. 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500</p> <p>TCC Nokia Salo Laboratory</p>	<b>Client:</b>	<p>Nokia Corporation 16620 West Bernardo Drive SAN DIEGO CA. 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500</p>
<b>Responsible test engineer:</b>	Virpi Tuominen	<b>Product contact person:</b>	Mary Thomas
<b>Measurements made by:</b>	Jose Gomez, Angelina Belden, Ray Ventura, Guy Abadilla, Jani Tuomela, Juha-Matti Varjonen, Teuvo Miettinen, Nina Koskinen, Anni Manninen		
<b>Tested device:</b>	RM-860		
<b>FCC ID:</b>	QMNRM-860	<b>IC:</b>	661X-RM860
<b>Supplement reports:</b>	FCC_RM-860_01		
<b>Testing has been carried out in accordance with:</b>	<p><b>47CFR §2.1093</b> Radiofrequency Radiation Exposure Evaluation: Portable Devices <b>FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)</b> Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p><b>RSS-102</b> Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields</p> <p><b>IEEE 1528 - 2003</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique</p>		
<b>Documentation:</b>	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
<b>Test results:</b>	<p><b>The tested device complies with the requirements in respect of all parameters subject to the test.</b> The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.</p>		

### Date and signatures:

For the contents:

SAR Report  
SAR\_Photo\_RM-860\_04  
Applicant: Nokia Corporation

Type: RM-860

Copyright © 2013 TCC Nokia

---

**CONTENTS**

<b>1. SUMMARY OF SAR TEST REPORT.....</b>	<b>3</b>
1.1 TEST DETAILS.....	3
1.2 PICTURE OF THE DEVICE.....	3
<b>2. TEST POSITIONS .....</b>	<b>4</b>
2.1 AGAINST PHANTOM HEAD .....	4
2.2 BODY WORN CONFIGURATION .....	4
2.3 WIRELESS ROUTER CONFIGURATION.....	5

---

## 1. SUMMARY OF SAR TEST REPORT

### 1.1 Test Details

Period of test	2012-12-17 to 2013-02-19
SN, HW and SW numbers of tested device	SN:354106050008223, HW:0103 , SW:1532.5701.9200.10205.56, DUT: 31297 SN:354106050008181, HW:0103 , SW:1532.5701.9200.10205.56, DUT: 31300 SN:354106050008330, HW:0103 , SW:1532.5951.1250.0000, DUT: 31299 SN:354106050008215, HW:0103 , SW:1532.5701.9200.10205.56, DUT: 30688 SN:354106050008991, HW:0103 , SW:1532.5701.9200.10205.56, DUT: 31296 SN:354106050008207, HW:0103 , SW:1532.5951.1250.0000, DUT: 30691 SN:354106050008405, HW:0103 , SW:1532.5951.1250.0002, DUT: 31298 SN:354106050008363, HW:0103 , SW:1532.5701.9200.10205.56, DUT: 30690 SN:354106050009023, HW:0103 , SW:1532.5951.1250.0000, DUT: 31301 SN:354106050008918, HW:0103 , SW: 1532.5701.9200.10205.56, DUT: 17071 SN:354106050008199, HW:0103 , SW: 1532.5701.9200.10205.56, DUT: 17228 SN:354106050007371, HW:0103 , SW: 1532.5701.9200.10205.56, DUT: 17229
Batteries used in testing	-
Headsets used in testing	WH-902, DUT:30648
Other accessories used in testing	
State of sample	Prototype unit
Notes	-

### 1.2 Picture of the Device



## 2. TEST POSITIONS

### 2.1 Against Phantom Head

Measurements were made in "cheek" position on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

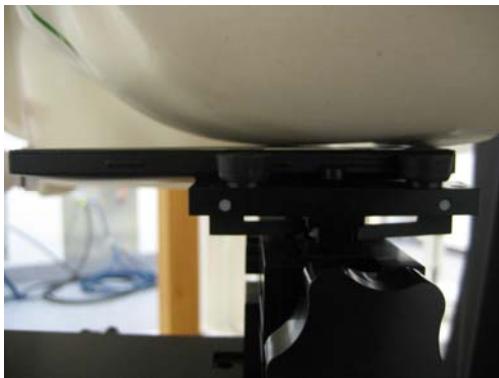


Photo of the Device in "cheek" position



Photo of the Device in "tilt" position

### 2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements.



Photo of the device positioned for Body SAR measurement.  
The spacer was removed for the tests.

---

Nokia body-worn accessories are commonly available for the separation distance used in this testing.

### 2.3 Wireless Router Configuration

The device was placed in the SPEAG holder using the Nokia spacer and, in sequence, the back, display and each of the 4 edges was positioned 10.0mm away from the flat phantom. The spacer was removed before the start of the measurements.

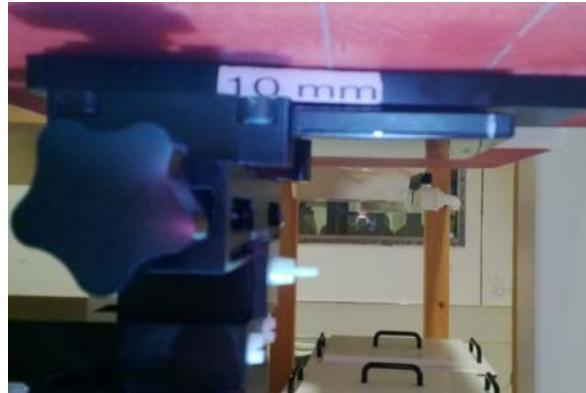


Photo of the device positioned for WR mode measurement – back facing phantom.  
The spacer was removed before the start of the measurements.

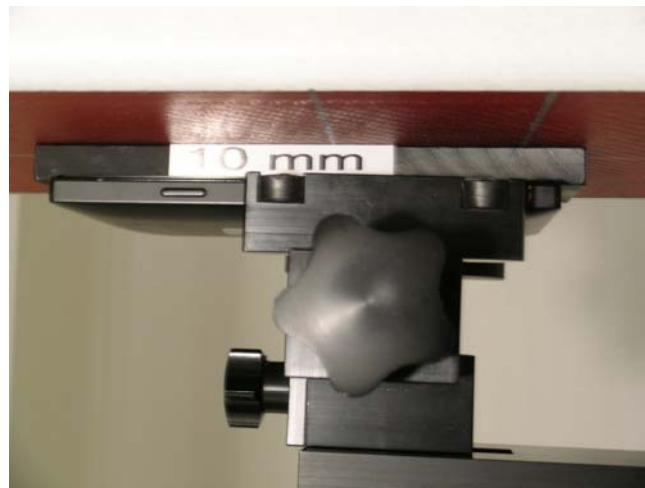


Photo of the device positioned for WR mode measurement – display facing phantom.  
The spacer was removed before the start of the measurements.



Photo of the device positioned for WR mode measurement – top edge facing phantom.  
The spacer was removed before the start of the measurements.



Photo of the device positioned for WR mode measurement – bottom edge facing phantom.  
The spacer was removed before the start of the measurements.

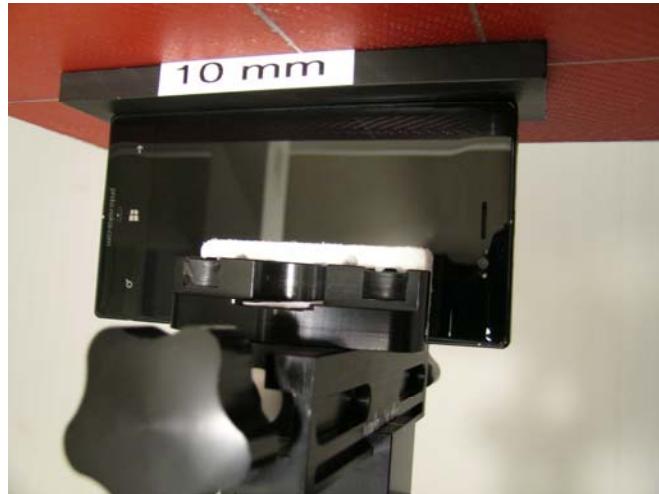


Photo of the device positioned for WR mode measurement – left edge facing phantom.  
The spacer was removed before the start of the measurements.

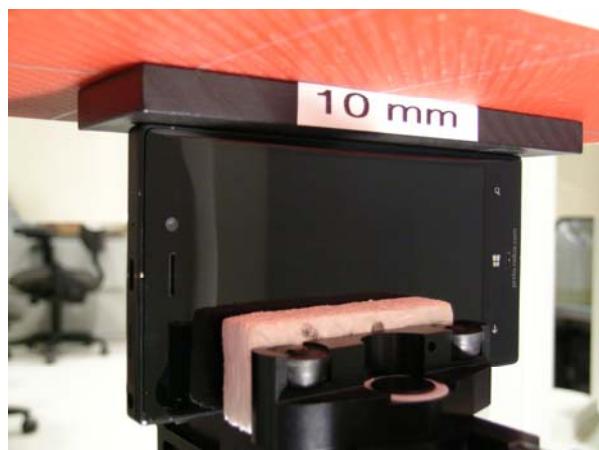


Photo of the device positioned for WR mode measurement – right edge facing phantom.  
The spacer was removed before the start of the measurements.