

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RM-878_17.docx	Date of Report:	20-Sep-2012
Number of pages:	12	Customer's Contact person:	Jerry Williams
Testing laboratory:	TCC Nokia San Diego Laboratory 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500	Customer:	Nokia, Inc. 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 385 1598
FCC listing no.:	586140		
IC recognition no.:	10162A-1		
Tested devices/accessories:	Phone RM-878 / Battery BP-4W		
FCC ID:	QMNRM-878	IC:	661X-RM878
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24/27, TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Feng You, Senior Specialist

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	23-Aug-2012
Testing completed	07-Sep-2012
The customer's contact person	Jerry Williams
Test Plan referred to	T:\Projects\RM-878\TestPlan\RS_testplan_RM-878_EMC_FCC_SAR.xlsm
Notes	-
Document name	T:\Projects\RM-878\EMC\FCC22&24&27_RM-878_17.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-878	004402471091631	0205	060	1530.0035.8516.9754.12312	30627
Battery	BP-4W	3932132274140101601;0670672	-	-	-	30588
Battery	BP-4W	3932132155140101183;0670671	-	-	-	30616
Charger	AC-50U	4090492185270514505;0675620	NA	NA	NA	30619
Micro USB cable	CA-190CD	NA	NA	NA	NA	30620
Headset	WH-208	NA	NA	NA	NA	30621

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
-------------------	-------------------------------	------------------	--------

§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1700 (Band IV):

Section in CFR 47	Section in RSS-GEN or RSS-139	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(2)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§27.53(g)	6.5	Band edge compliance	NP
§27.53(g), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

LTE1700 (Band 4):

Section in CFR 47	Section in RSS-GEN or RSS-139	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(4)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§27.53(h)	6.5	Band edge compliance	PASSED
§27.53(h), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§27.53(h), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 22/24/27 Compliance Test Report	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), §27.50(d)(2), §27.53(h), RSS-132 4.4, RSS-133 6.4).....	5
2.2. Test method and limit.....	5
2.3. LTE 1700 (Band IV) TX Test results.....	6
2.4. LTE 1700 (Band IV) test results	6
3. Band edge compliance (FCC §22.917(a), §24.238(a), §27.53(g), §27.53(h), RSS-132 4.5, RSS-133 6.5)	7
3.2. Test method and limit.....	7
3.3. LTE 1700 (Band IV) test results	8
4. Spurious radiated emissions (FCC §22.917(a), §2.1053, §24.238(a), §2.1053, §27.53(g), §2.1053, §27.53(h), RSS- 132 4.5, RSS-133 6.5).....	9
4.2. Test method and limit.....	9
4.3. LTE 1700 (Band IV) test results	11
5. Test Equipment.....	12
5.1. Radiated measurements	12

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), §27.50(d)(2), §27.53(h), RSS-132 4.4, RSS-133 6.4)

EUT with DUT number	RM-878, DUT 30627
Accessories with DUT numbers	BP-4W, DUT 30588
Operation Voltage [V] / [Hz]	N/A
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	17.9 / 43.9%
Date of measurements	24-Aug-2012
Measured by	Feng You

2.1.1 Test Setup

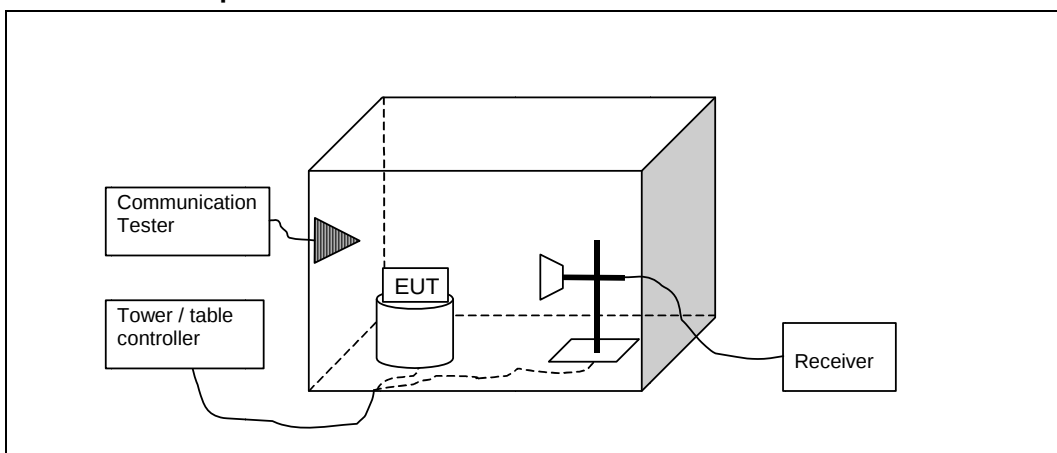

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. The measurement results are obtained as described below:

$$P[dBm] = P_{SUBST\ TX} + P_{MEAS} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where $P_{SUBST\ TX}$ is signal generator level. P_{MEAS} is measured power level from the EUT. $P_{SUBST\ RX}$ is measured power level in substitute measurement. $L_{SUBST\ CABLE}$ is the loss of the cable between the signal generator and the substitution antenna and $G_{SUBST\ TX\ ANT}$ is substitution antenna gain.

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7 ERP	38.5
1710 - 1755	1 EIRP	30
1850 - 1910	2 EIRP	33

2.3. LTE 1700 (Band IV) TX Test results

FDD, CBW 5MHz, 1RB, Peak detector

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
19975 / 1712.5	28.82	0.763	-15.77	44.59	VERTICAL	PASSED
20175 / 1732.5	29.15	0.823	-15.72	44.87	VERTICAL	PASSED
20375 / 1752.5	29.95	0.988	-14.87	44.82	VERTICAL	PASSED

2.4. LTE 1700 (Band IV) test results

FDD, CBW 5MHz, 1RB, RMS detector


Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Results
19975 / 1712.5	24.57	0.287	-19.64	44.21	VERTICAL	PASSED
20175 / 1732.5	24.49	0.281	-20.28	44.77	VERTICAL	PASSED
20375 / 1752.5	25.35	0.343	-19.36	44.71	VERTICAL	PASSED

3. Band edge compliance

(FCC §22.917(a), §24.238(a), §27.53(g), §27.53(h), RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-878, DUT 30627
Accessories with DUT numbers	BP-4W, DUT 30588
Operation Voltage [V] / [Hz]	N/P
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	17.9 / 43.9%
Date of measurements	24-Aug-2012
Measured by	Feng You

3.1.1 Test Setup

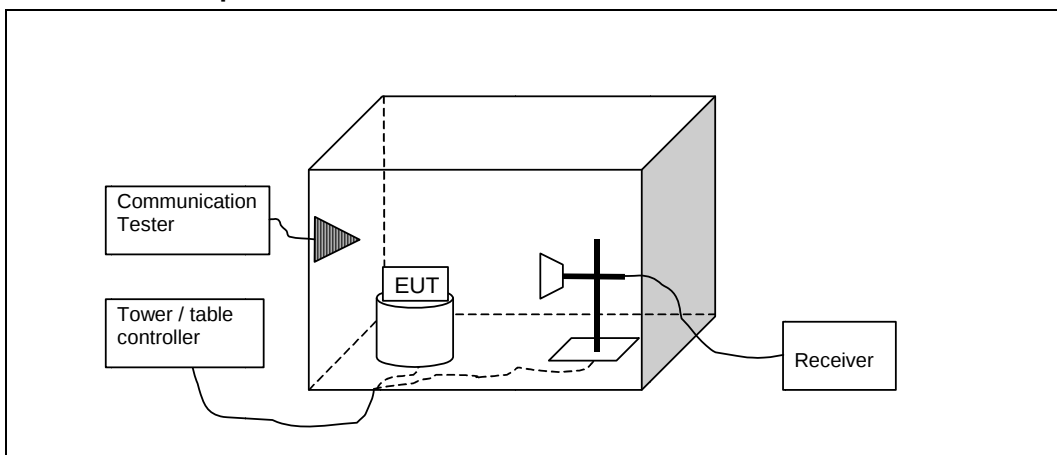


3.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24, 27 and IC standards , RSS-132, RSS-133.

Limits for band edge compliance measurements


Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	Below 824 and above 849	-13
WCDMA 1700 / LTE 1700	Below 1710 and above 1755	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13

3.3. LTE 1700 (Band IV) test results

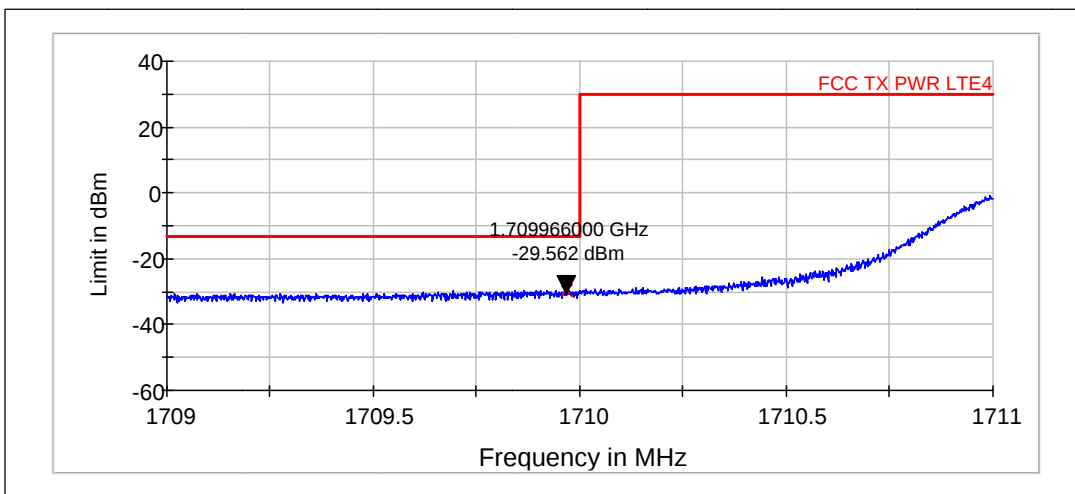

RMS (RBW: 200 kHz, VBW: 200 kHz, Max hold)

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 20MHz, QPSK, 100 RB	19975 / 1712.5	-29.56	PASSED

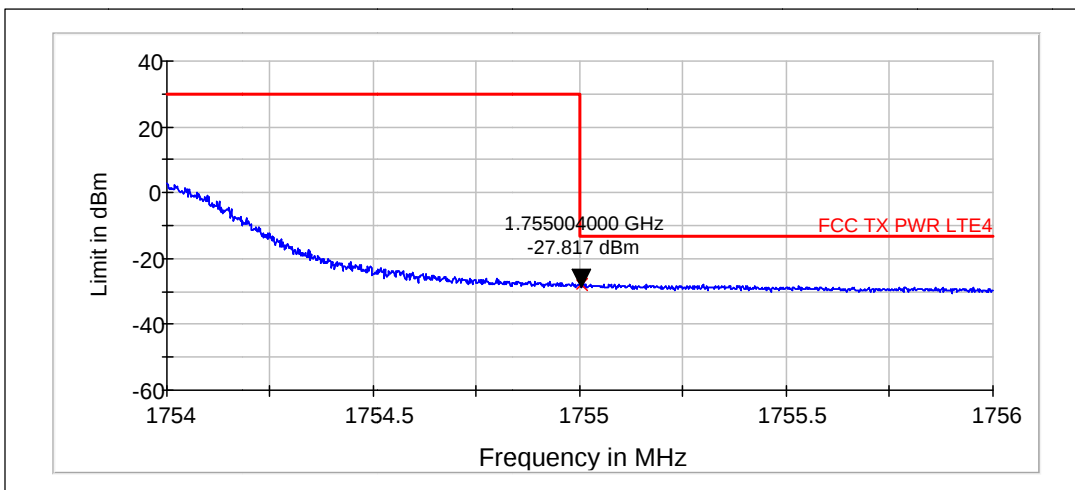

RMS (RBW: 200 kHz, VBW: 200 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD, CBW 20MHz, QPSK, 100 RB	20375 / 1752.5	-27.82	PASSED

4. Spurious radiated emissions

(FCC §22.917(a), §2.1053, §24.238(a), §2.1053, §27.53(g), §2.1053, §27.53(h), RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-878, DUT 30627
Accessories with DUT numbers	BP-4W, DUT 30616 ; AC-50U, DUT 30619 ; CA-190CD, DUT 30620 ; WH-208, DUT 30621
Operation Voltage [V] / [Hz]	115V / 60Hz
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	17.9 / 43.9%
Date of measurements	24-Aug-2012
Measured by	Feng You

4.1.1 Test Setup

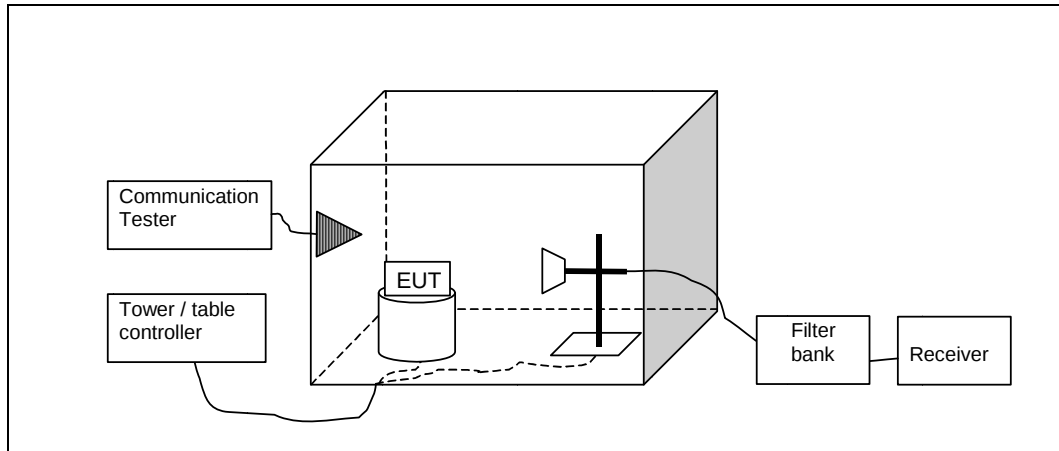

4.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used.

The measurement results are obtained as described below:

$$P \text{ [dBm]} = P_{\text{SUBST TX}} + G_{\text{SUBST TX ANT}} - L_{\text{SUBST CABLE}}$$

Where $P_{\text{SUBST TX}}$ is signal generator level, which produces the same receiver reading P_{MEAS} in dBm as EUT. $G_{\text{SUBST TX ANT}}$ is substitution antenna gain and $L_{\text{SUBST CABLE}}$ is the loss of the cable between the signal generator and the substitution antenna.

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1900 WCDMA 1700 / LTE 1700	30 - 18000	-13

4.3. LTE 1700 (Band IV) test results

Channel 20175 / 1732.5 MHz

FDD, CBW 5MHz, QPSK, 1 RB, RMS detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
3455	-57.18	0.00191	-79.7	22.52	HORIZONTAL	PASSED
5188.149	-55.51	0.00281	-79.39	23.88	VERTICAL	PASSED
6935.844	-54.42	0.00362	-79.98	25.56	VERTICAL	PASSED
8652.5	-52.05	0.00624	-79.87	27.82	HORIZONTAL	PASSED
10400.065	-49.9	0.01024	-80.3	30.4	VERTICAL	PASSED

5. Test Equipment

5.1. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
N/A	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
7984	Data Logger	Testo175H1	Testo	-
3397	Signal Generator	83630B	Agilent	-
7591	Antenna	HL562	R&S	-
N/A	RF immunity / Emission Software	EMC32	R&S	-
7459	Open switch and control unit	TS-RSP	R&S	-
5729	Open switch and control unit	TS-RSP	R&S	-
N/A	Notch Filter	GSM1900	TTE	24
N/A	Notch Filter	GSM850	Trilithic	22
7572	Antenna	3117	EMCO	-
5730	Preamplifier/Switch Box	TS-ANA	R&S	-
N/A	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	-
N/A	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
N/A	Band Reject Filter	WRC824/849-0,2-6SS	Wainwright	22
4406	Communication Tester	CMU200	R&S	-
7646	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS-Lindgren	-
7451	EMI Receiver	ESU-26	R&S	-
3406	Mast/Turntable Controller	SC99V	Sunol	-