


11G-Ant1-High-2462--3.58




11N20SISO-Ant1-Low-2412--0.90

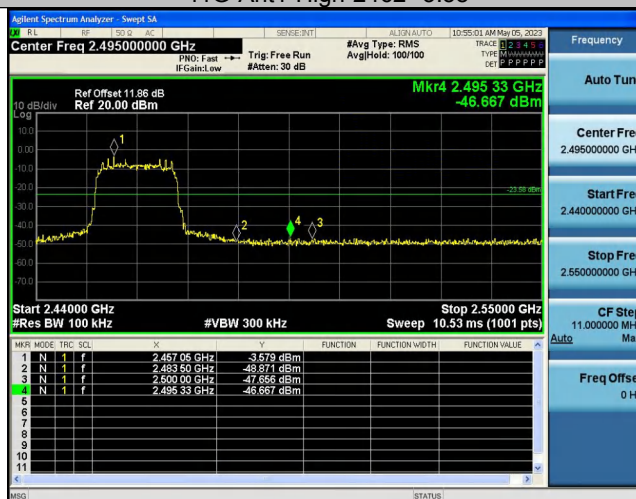

11N20SISO-Ant1-High-2462--1.12



Report No.: PTC23050300102E-FC01

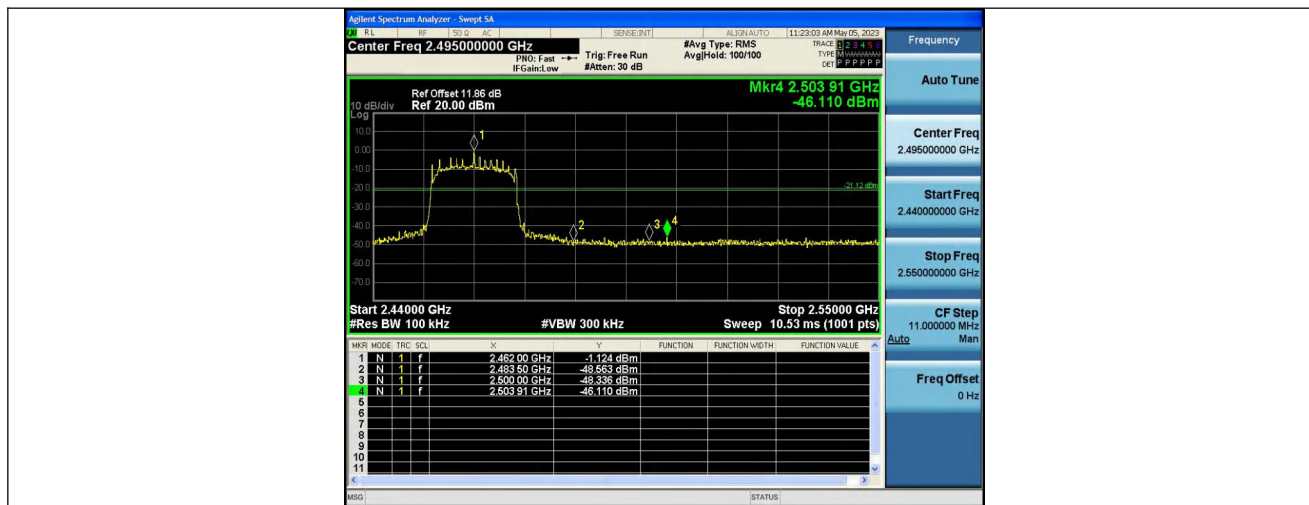



8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

8.2 Test Setup



8.3 Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	11.520	2406.960	2418.480	0.5	PASS
11B	Ant1	2437	8.640	2432.360	2441.000	0.5	PASS
11B	Ant1	2462	10.000	2457.000	2467.000	0.5	PASS
11G	Ant1	2412	15.120	2404.400	2419.520	0.5	PASS
11G	Ant1	2437	15.000	2429.480	2444.480	0.5	PASS
11G	Ant1	2462	14.640	2454.840	2469.480	0.5	PASS
11N20SISO	Ant1	2412	15.000	2404.520	2419.520	0.5	PASS
11N20SISO	Ant1	2437	18.080	2427.960	2446.040	0.5	PASS
11N20SISO	Ant1	2462	12.600	2456.920	2469.520	0.5	PASS



11B-Ant1-2412



11B-Ant1-2437




11B-Ant1-2462




11G-Ant1-2412




11G-Ant1-2437

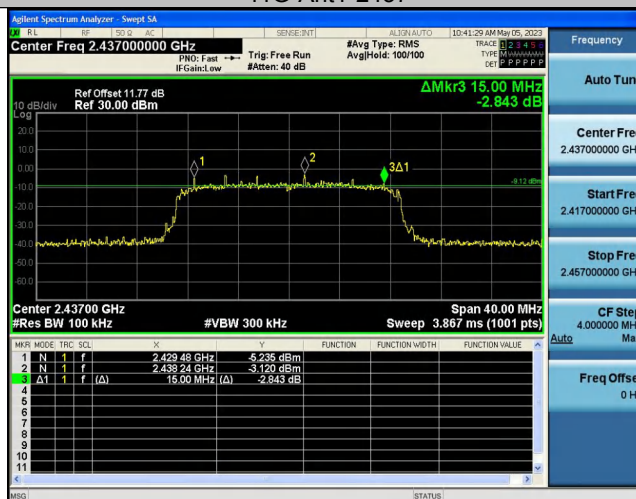

11G-Ant1-2462

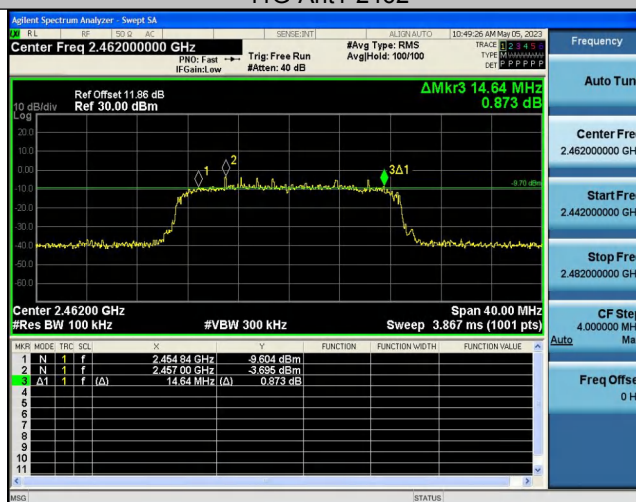

11N20SISO-Ant1-2412

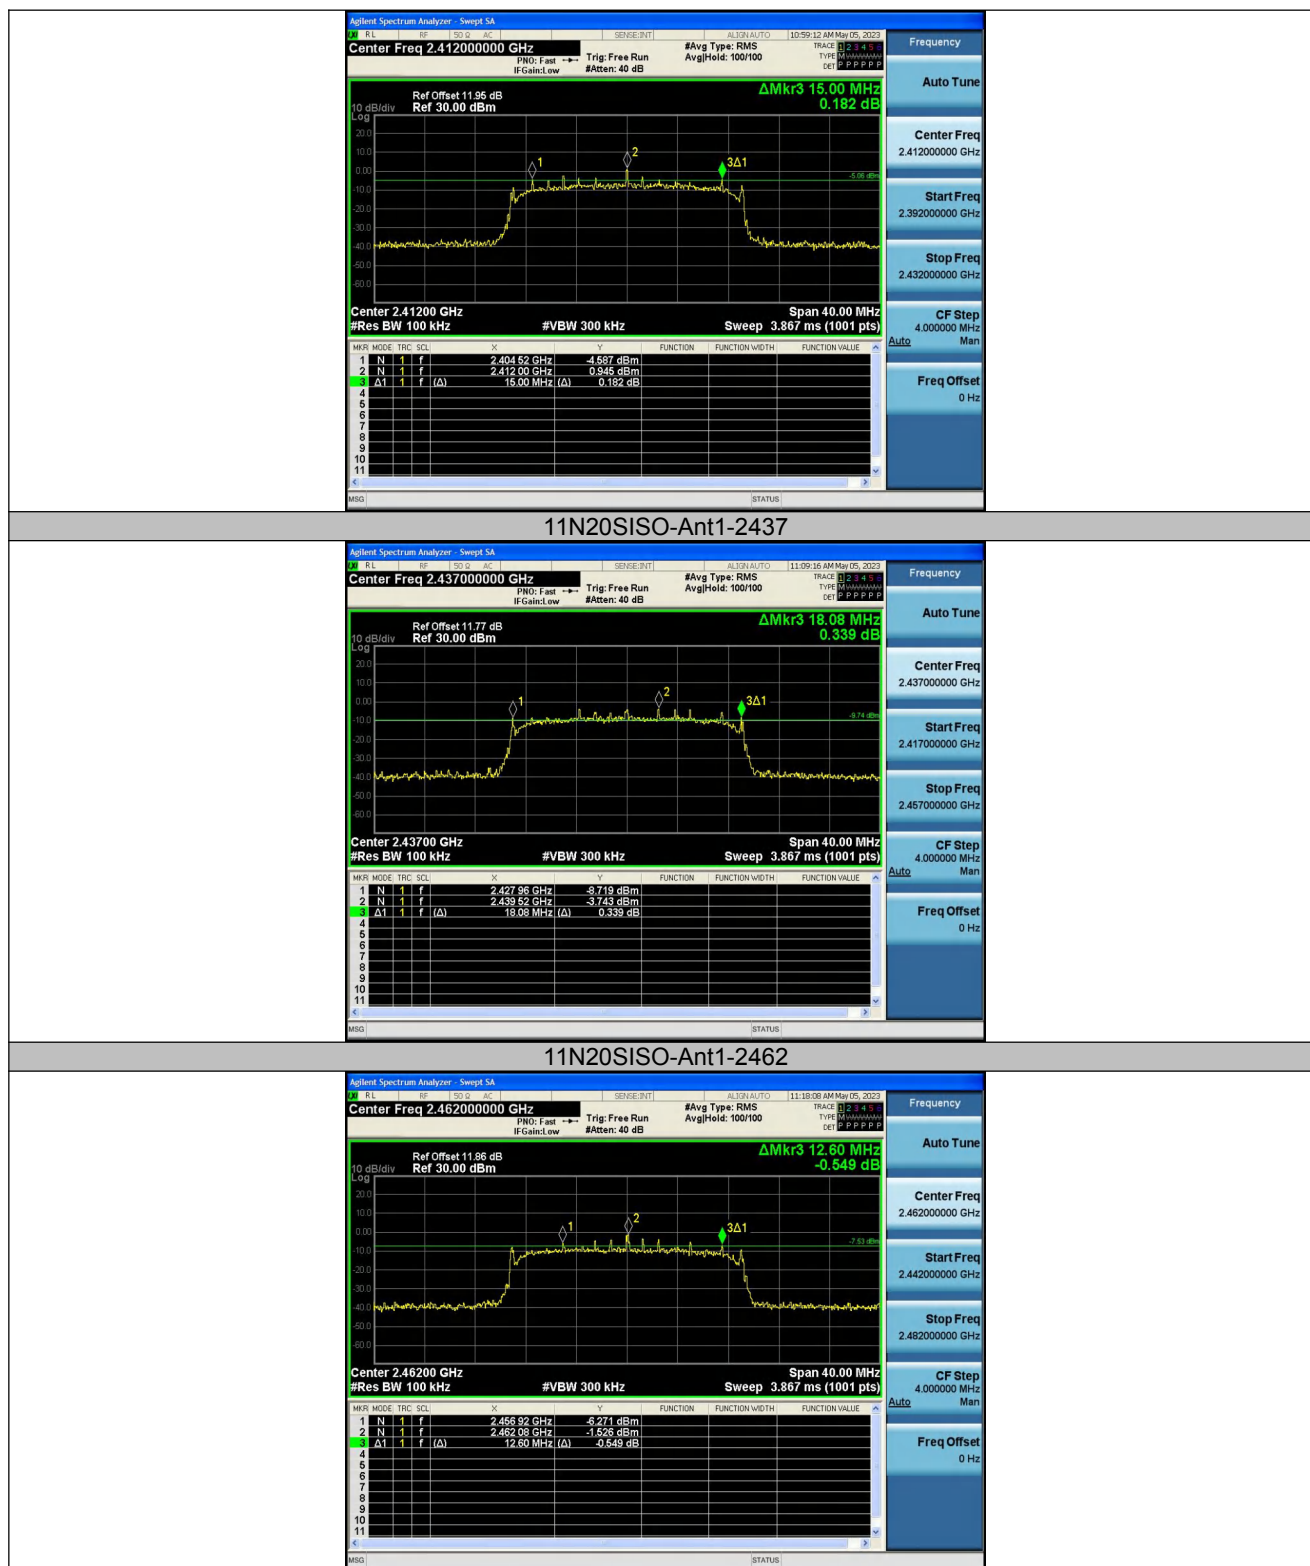



9 Maximum conducted output power

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

9.1 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.2.2.
2. The RF output of EUT Connect the antenna port(s) to the spectrum analyzer input. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

9.2 Test Setup



9.3 Test Result

TestMode	Antenna	Frequency[MHz]	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	---	16.53	≤30.00	PASS
11B	Ant1	2437	---	15.64	≤30.00	PASS
11B	Ant1	2462	---	15.51	≤30.00	PASS
11G	Ant1	2412	---	14.56	≤30.00	PASS
11G	Ant1	2437	---	13.56	≤30.00	PASS
11G	Ant1	2462	---	13.07	≤30.00	PASS
11N20SISO	Ant1	2412	---	14.45	≤30.00	PASS
11N20SISO	Ant1	2437	---	13.56	≤30.00	PASS
11N20SISO	Ant1	2462	---	12.12	≤30.00	PASS




11B-Ant1-2412-----16.53-0-0




11B-Ant1-2437-----15.64-0-0




11B-Ant1-2462-----15.51-0-0

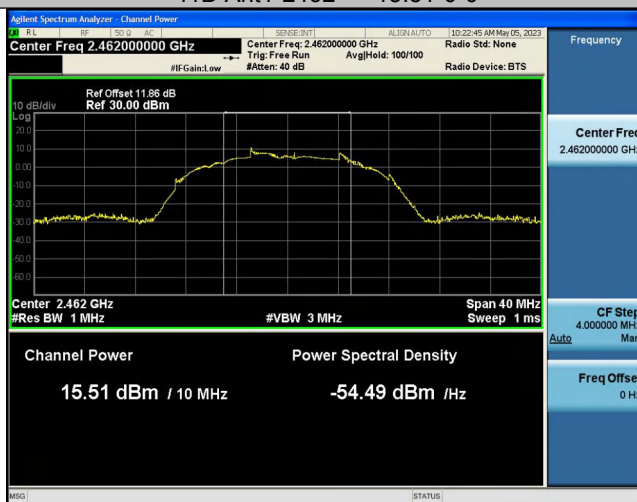


11G-Ant1-2412-----14.56-0-0

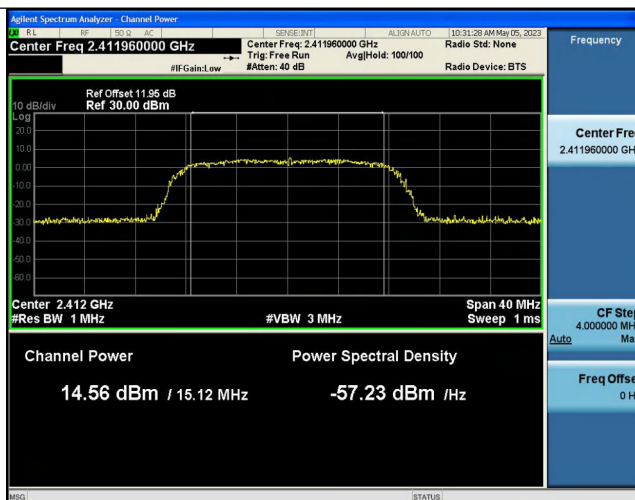


11G-Ant1-2437-----13.56-0-0

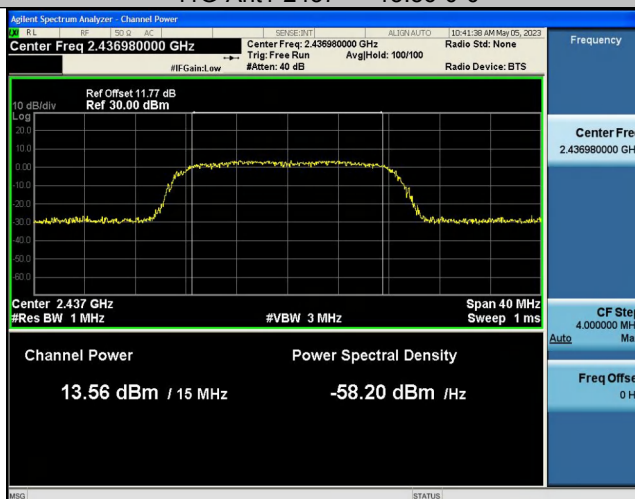

11G-Ant1-2462-----13.07-0-0

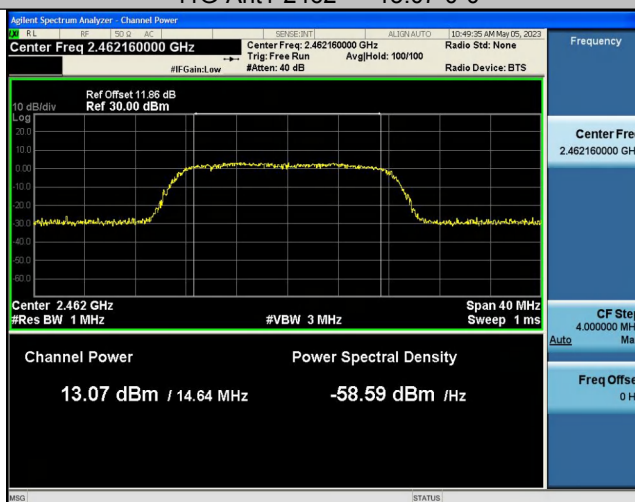


11N20SISO-Ant1-2412-----14.45-0-0

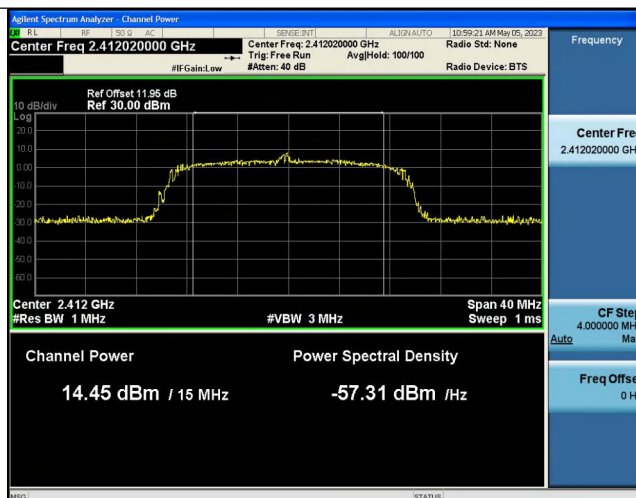

11N20SISO-Ant1-2437-----13.56-0-0



11N20SISO-Ant1-2462-----12.12-0-0

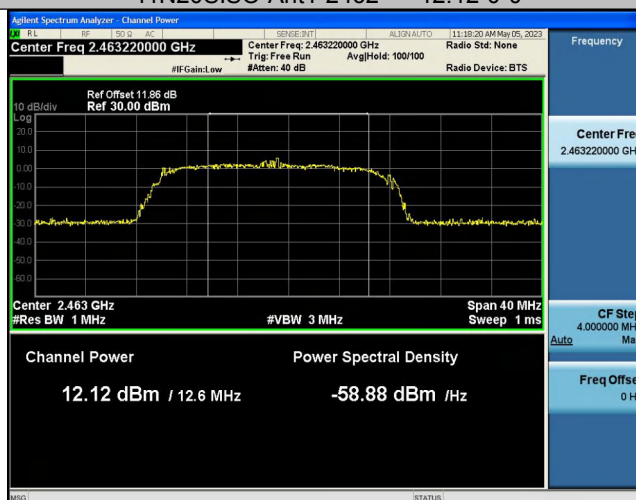




10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.1 Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span = 1.5 times the DTS bandwidth
RBW = 3KHz, VBW = 10KHz
Sweep time = auto couple
Detector = peak
Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

10.2 Test Setup



10.3 Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-10.49	≤8.00	PASS
11B	Ant1	2437	-11.44	≤8.00	PASS
11B	Ant1	2462	-11.51	≤8.00	PASS
11G	Ant1	2412	-16.54	≤8.00	PASS
11G	Ant1	2437	-17.55	≤8.00	PASS
11G	Ant1	2462	-18.07	≤8.00	PASS
11N20SISO	Ant1	2412	-16.76	≤8.00	PASS
11N20SISO	Ant1	2437	-17.91	≤8.00	PASS
11N20SISO	Ant1	2462	-18.46	≤8.00	PASS



11B-Ant1-2412--10.49-0.00-0.00-0.00




11B-Ant1-2437--11.44-0.00-0.00-0.00




11B-Ant1-2462--11.51-0.00-0.00-0.00




11G-Ant1-2412--16.54-0.00-0.00-0.00

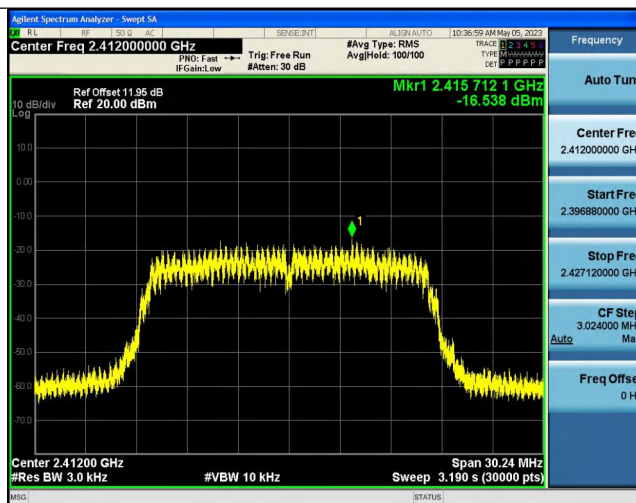


11G-Ant1-2437--17.55-0.00-0.00-0.00

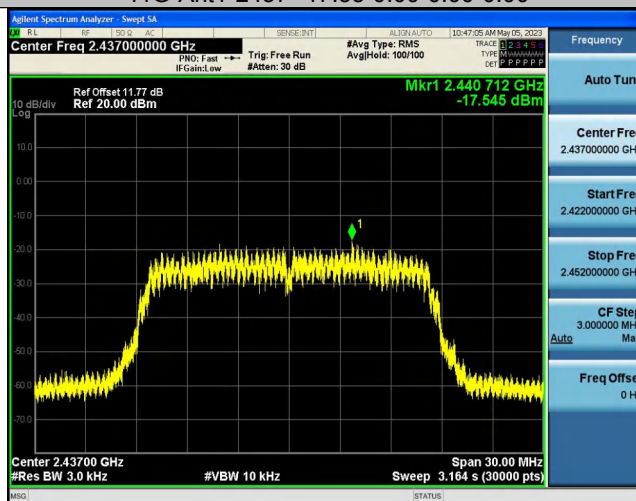


11G-Ant1-2462--18.07-0.00-0.00-0.00

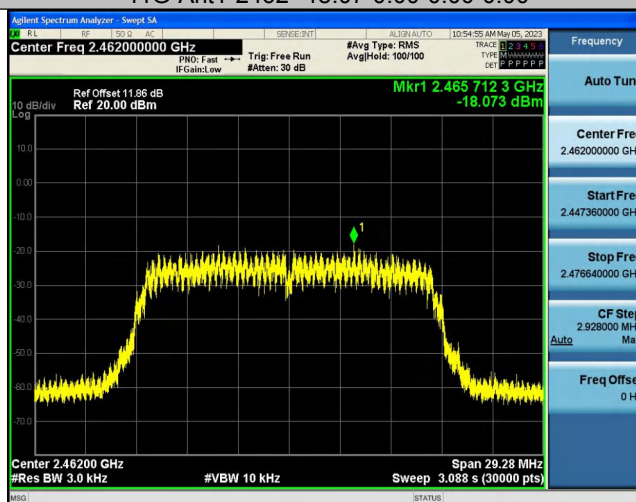


11N20SISO-Ant1-2412--16.76-0.00-0.00-0.00

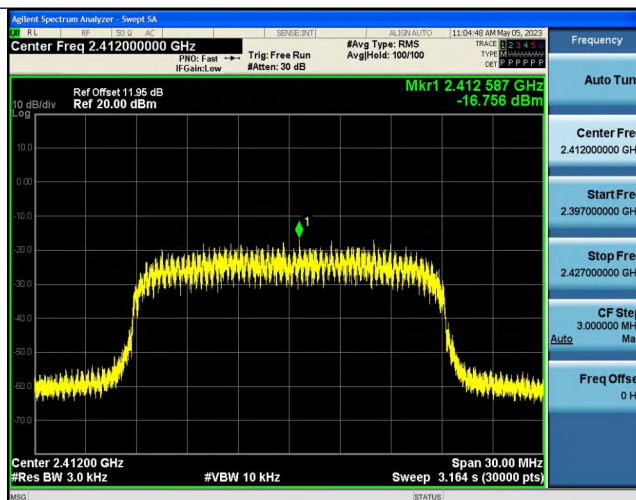

11N20SISO-Ant1-2437--17.91-0.00-0.00-0.00

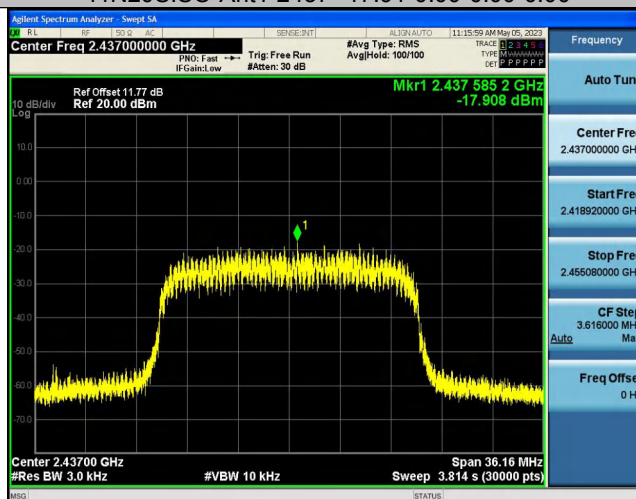

11N20SISO-Ant1-2462--18.46-0.00-0.00-0.00

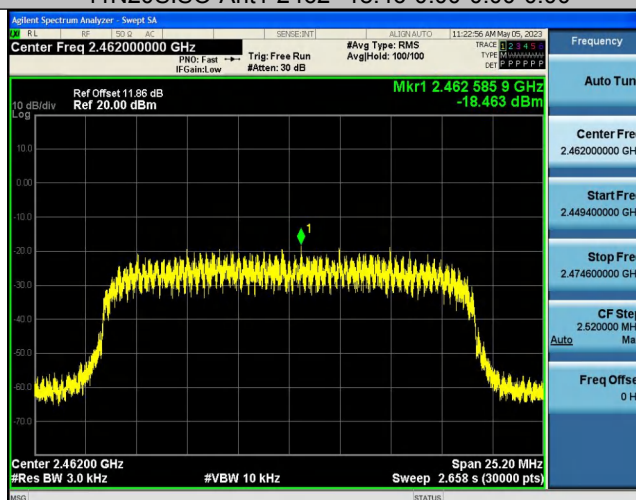



11 Antenna Application

11.1 Antenna Requirement


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result

The EUT'S antenna, permanent attached antenna, is PCB Antenna. The antenna's gain is -0.51 dBi and meets the requirement.

12 Test Setup

Conducted Emissions

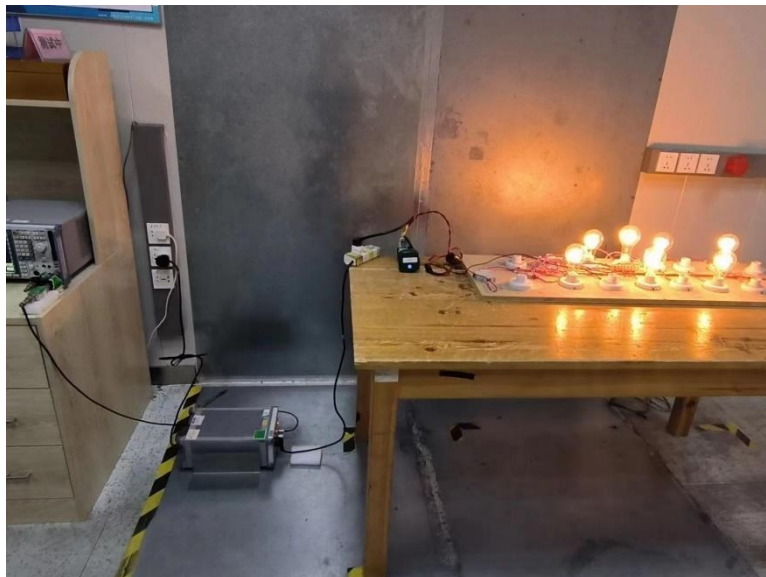

Radiated Spurious Emissions From 30MHz-1000MHz



Test frequency from Above 1GHz






13 EUT PHOTOS









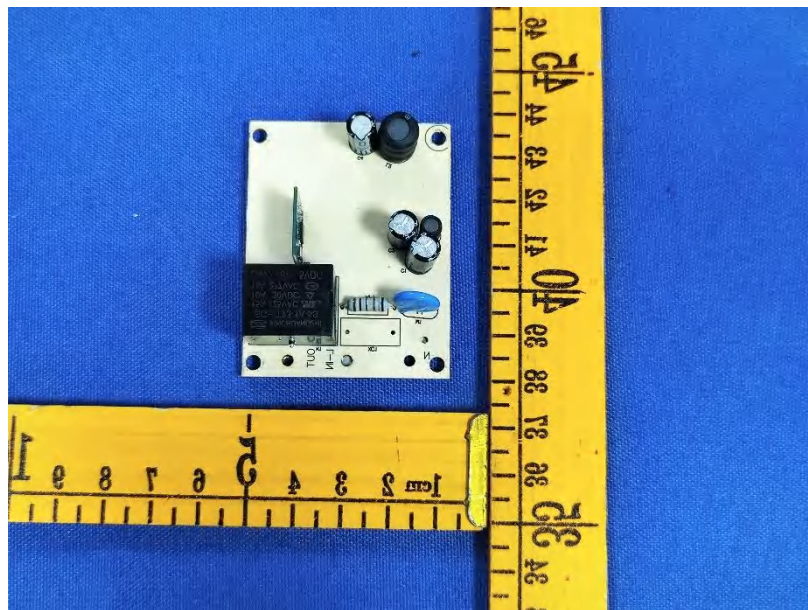

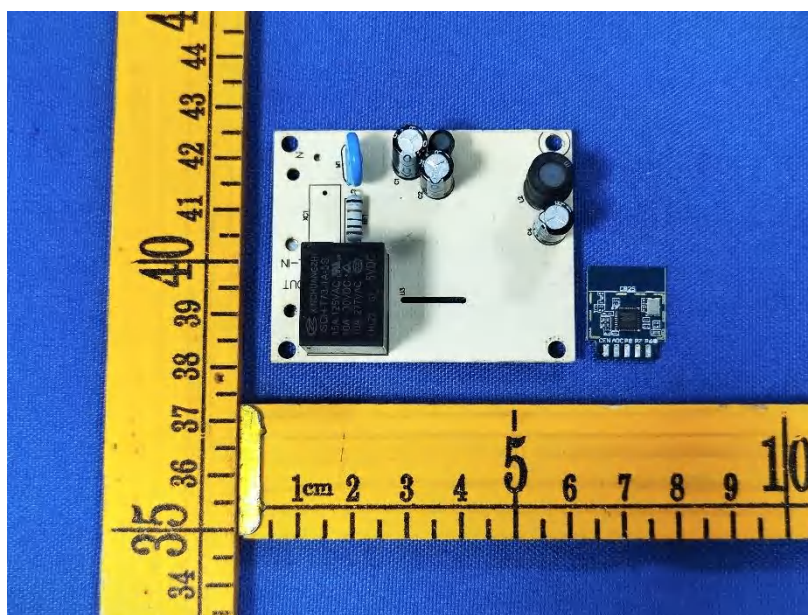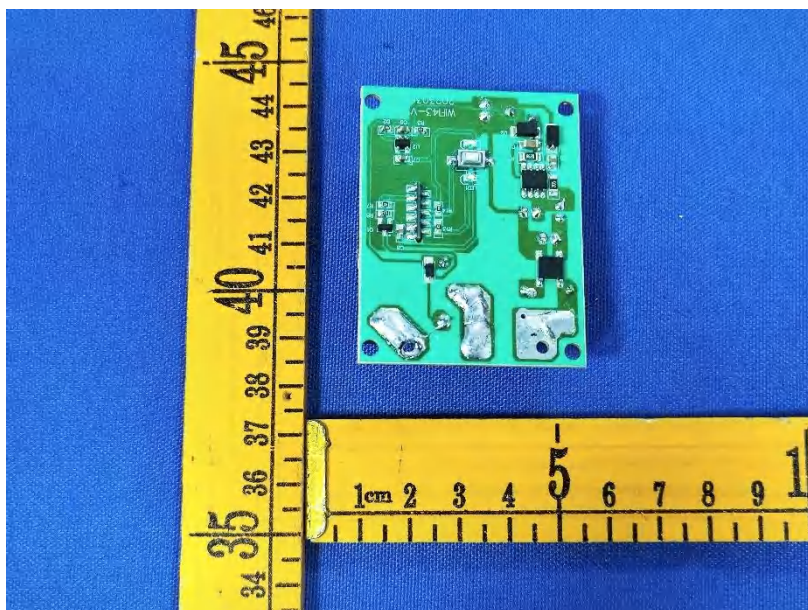

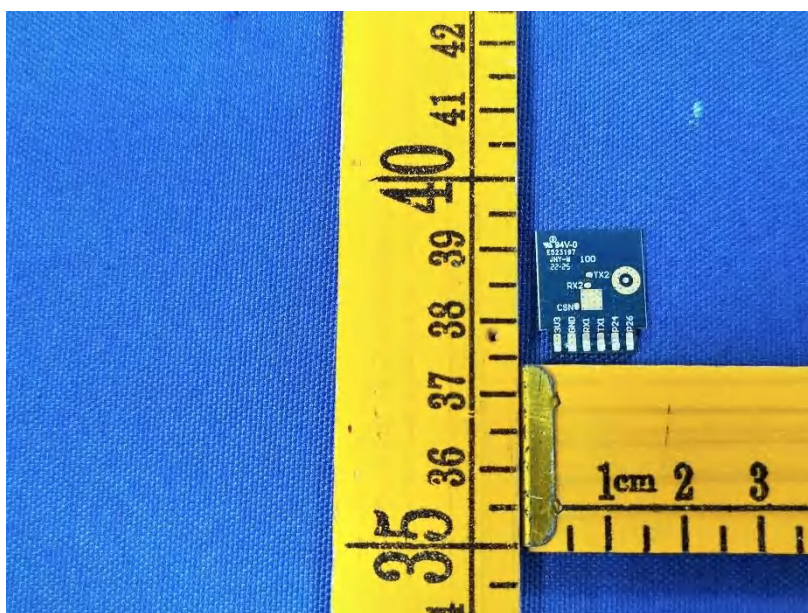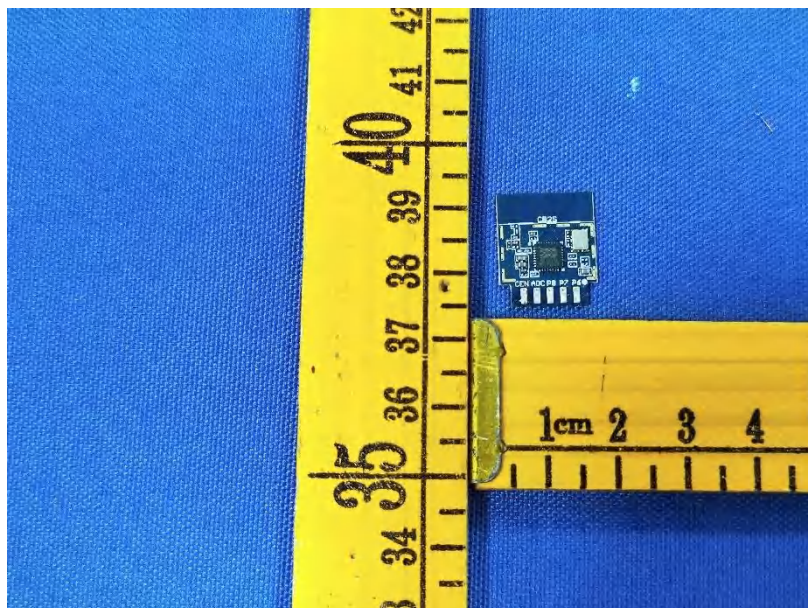

*****THE END REPORT*****