



FCC LISTED, REGISTRATION
 NUMBER: 720267

Informe de ensayo nº:
 Test report No:

ISED LISTED REGISTRATION
 NUMBER 4621A-2

NIE: 53513RRF.001A1

Partial test report (Modification 1)

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz.

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

General Requirements and Information for the Certification of Radio Apparatus.

Identificación del objeto ensayado.....: Identification of item tested	Bluetooth BDR/EDR module
Marca Trademark	Bluegiga
Modelo y/o referencia tipo Model and /or type reference	WT41u
Other identification of the product	FCC ID: QQQWT41U IC ID: 5123A-WT41U
Final HW version	1.0
Final SW version	1.0
Características Features	BDR, EDR
Solicitante Applicant	SILICON LABORATORIES FINLAND OY Alberga Business Park, Bertel Jungin aukio 3, 02600 Espoo, Finland
Método de ensayo solicitado, norma.....: Test method requested, standard	USA FCC Part 15.247 10-1-15 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. <ul style="list-style-type: none"> - FCC Section 15.247 Subclause (d) Emission limitations radiated (Transmitter). - FCC Section 15.247 Subclause (d). Band-edge emissions compliance (Transmitter). USA FCC Part 15.209 10-1-15 Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 1 (May 2015). <ul style="list-style-type: none"> - RSS-247 Clause 5.5 Emission limitations radiated (Transmitter) - RSS-247 Clause 5.5. Band-edge emissions compliance (Transmitter) CANADA RSS-Gen Issue 4 (November 2014). ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Resultado.....: Summary	See Appendix A

Aprobado por (nombre / cargo y firma) Approved by (name / position & signature)	A. Llamas RF Lab. Manager
Fecha de realización Date of issue	2017-08-07
Formato de informe No..... Report template No	FDT11_20

Index

Competences and guarantees.....	4
General conditions.....	4
Uncertainty	5
Usage of samples.....	5
Test sample description	5
Identification of the client	5
Testing period.....	5
Environmental conditions.....	5
Modifications to the reference test report.....	6
Remarks and comments.....	6
Testing verdicts	7
Appendix A – Test result (Bluetooth EDR)	8

Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

DEKRA Testing and Certification is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: ISED 4621A-2.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

The measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification internal document PODT000.

Usage of samples

Samples undergoing test have been selected by: **the client**

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
53513/001	Test board	---	---	2017-05-08
53513/003	Antenna	---	---	2017-05-10

1. Sample S/01 has undergone following test(s).

All radiated tests indicated in appendix A.

Test sample description

The test sample consists of a Bluetooth BDR+EDR module.

Identification of the client

SILICON LABORATORIES FINLAND OY

Alberga Business Park, Bertel Jungin aukio 3, 02600 Espoo, Finland

Testing period

The performed test started on 2017-05-22 and finished on the same day.

The tests have been performed at DEKRA Testing and Certification.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 k Ω
Reference resistance to earth	< 1 Ω

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 1 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

Modifications to the reference test report

It was introduced the following modifications in respect to the test report number 53513RRF.001 related with the same samples, in the next clauses and sub-clauses:

Clauses / Sub-clauses	Modification	Justification
Cover sheet/ Other identification of the product	IC ID is changed from 5123A-BGTWT41U to 5123A-WT41U	Typo indicated by client

This modification test report cancels and replaces the test report 53513RRF.001.

Remarks and comments

- 1: Tests have been performed by the technical personnel: Pedro Parada and Carlos Alberto Contreras.
- 2: The test was not requested by the client.
- 3: Used instrumentation:

Radiated Measurements

		Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2.	Biconical Log antenna ETS LINDGREN 3142E	2017/04	2020/04
3.	Multi Device Controller EMCO 2090	N.A.	N.A.
4.	Double-ridge Guide Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2016/11	2019/11
5.	Broadband Horn antenna 18-40 GHz SCHWARZBECK BBHA 9170	2017/03	2020/03
6.	EMI Test Receiver R&S ESU 40	2016/03	2018/03
7.	Spectrum analyser Rohde & Schwarz FSW50	2015/12	2017/12
8.	RF pre-amplifier 20 MHz-7 GHz PAM-0207	2016/09	2017/09
9.	RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-1M	2016/02	2018/02
10.	RF pre-amplifier 18-40 GHz BONN ELEKTRONIK BLMA 1840-1M	2015/12	2017/12

Testing verdicts

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

1. - BT EDR

FCC PART 15 PARAGRAPH / RSS-247		VERDICT			
		NA	P	F	NM
FCC 15.247 Subclause (a) (1) / RSS-247 Clause 5.1 (2)	20 dB Bandwidth and Carrier frequency separation				N/M ²
FCC 15.247 Subclause (a)(1)(iii) / RSS-247 Clause 5.1 (4)	Number of hopping channels				N/M ²
FCC 15.247 Subclause (a)(1)(iii) / RSS-247 Clause 5.1 (4)	Time of occupancy (Dwell Time)				N/M ²
FCC 15.247 Subclause (b) / RSS-247 Clause 5.4 (2)	Maximum peak output power and antenna gain				N/M ²
FCC 15.247 Subclause (d) / RSS-247 Clause 5.5	Band-edge emissions compliance (Transmitter)		P		
FCC 15.247 Subclause (d) / RSS-247 Clause 5.5	Emission limitations conducted (Transmitter)				N/M ²
FCC 15.247 Subclause (d) / RSS-247 Clause 5.5	Emission limitations radiated (Transmitter)		P		

2: See section “Remarks and comments”.

Appendix A – Test result (Bluetooth EDR)

INDEX

TEST CONDITIONS	10
FCC Section 15.247 Subclause (d) / RSS-247 Clause 5.5. Band-edge emissions compliance (Transmitter)	13
FCC Section 15.247 Subclause (d) / RSS-247 Clause 5.5 Emission limitations radiated (Transmitter)	18

TEST CONDITIONS

Power supply (V):

$V_{\text{nominal}} = 3.3 \text{ Vdc}$

Type of power supply = External power supply

Type of antenna: External antenna

TEST FREQUENCIES:

Lowest channel: 2402 MHz

Middle channel: 2441 MHz

Highest channel: 2480 MHz

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission.

It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

An additional horn antenna is used to control the equipment under test with the Bluetooth signalling unit (Bluetooth test set).

Radiated measurements setup $f < 1$ GHz

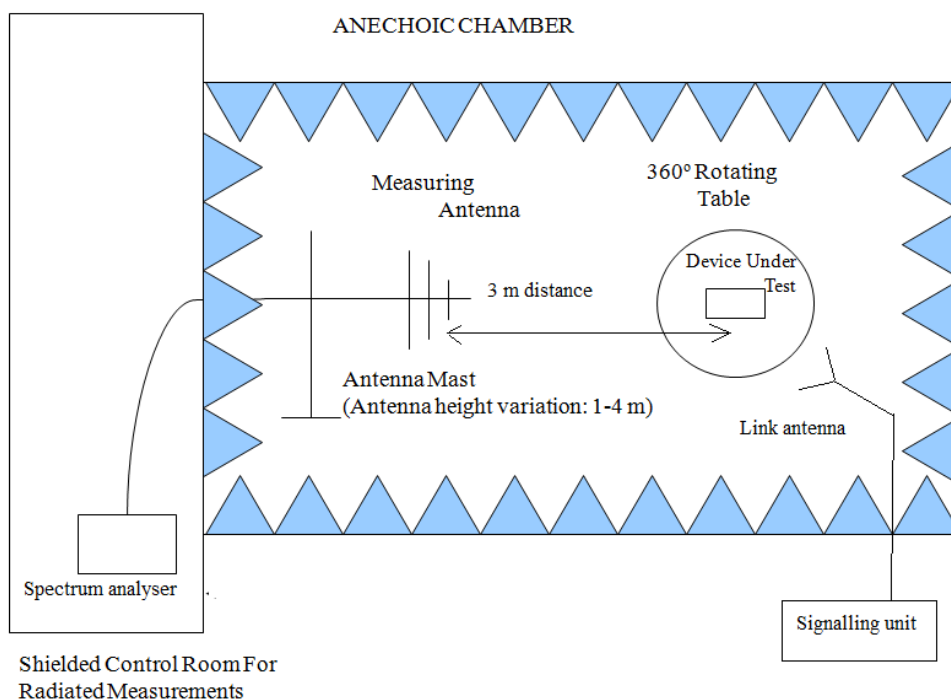

Radiated measurements setup $f > 1$ GHz

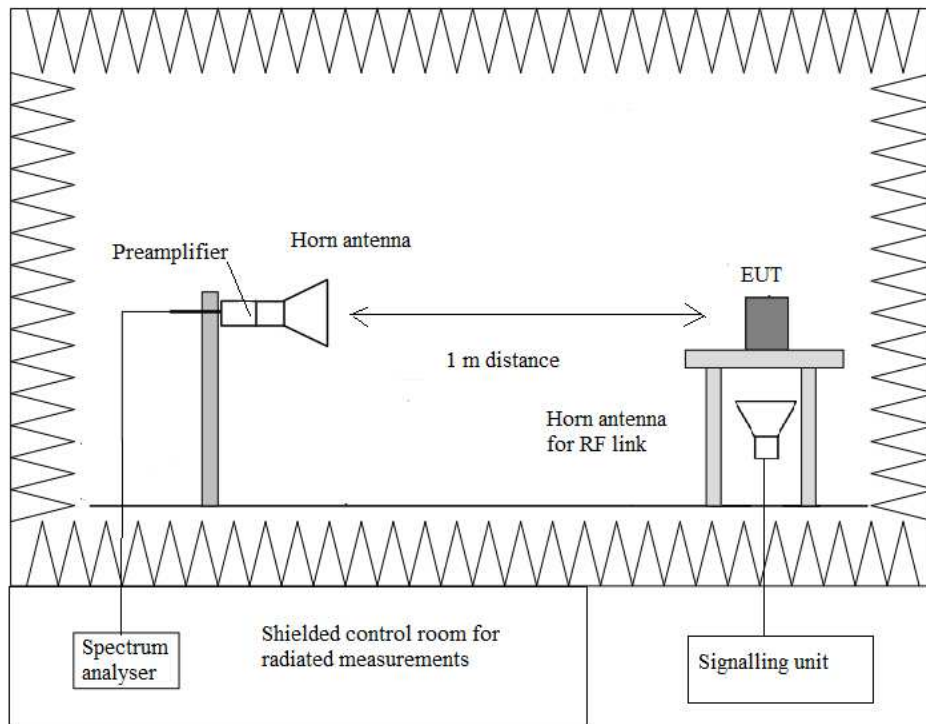

FCC Section 15.247 Subclause (d) / RSS-247 Clause 5.5. Band-edge emissions compliance (Transmitter)

SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

RESULTS:


Band-edge compliance of radiated emissions.

Modulation: $\Pi/4$ -DQPSK


Maximum peak and average field strength of fundamental emission at 3 m distance.

HIGHEST CHANNEL (2480 MHz)


Maximum field strength at 3 m. Peak value.

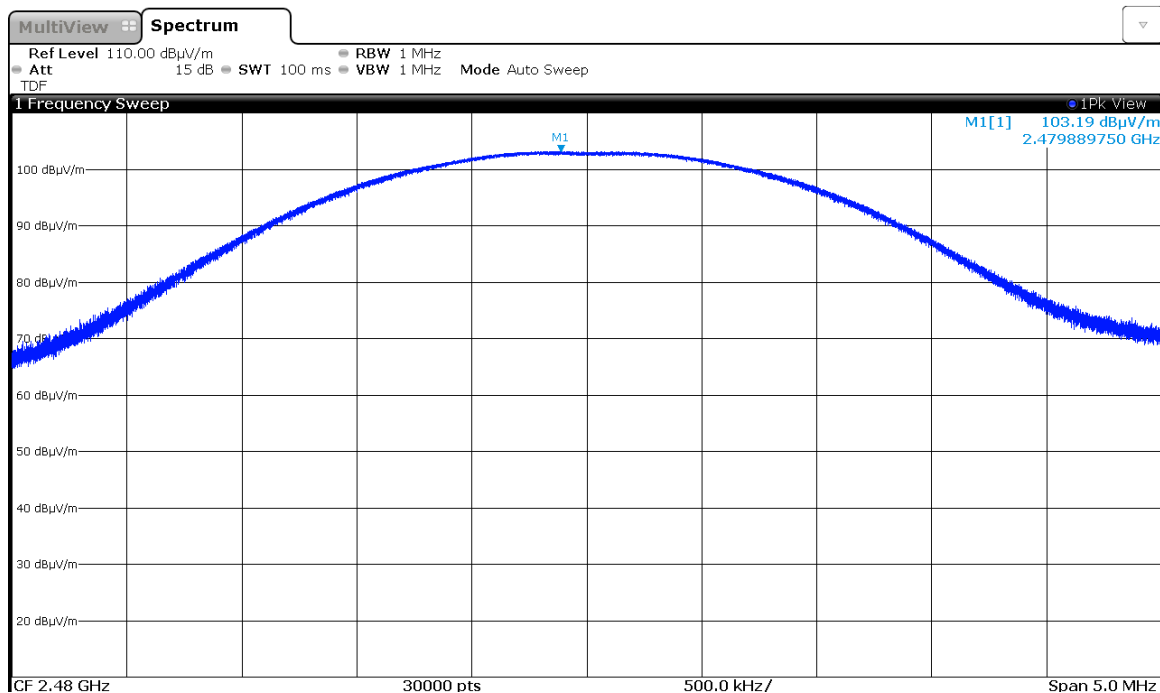

Maximum field strength at 3 m. Average value.

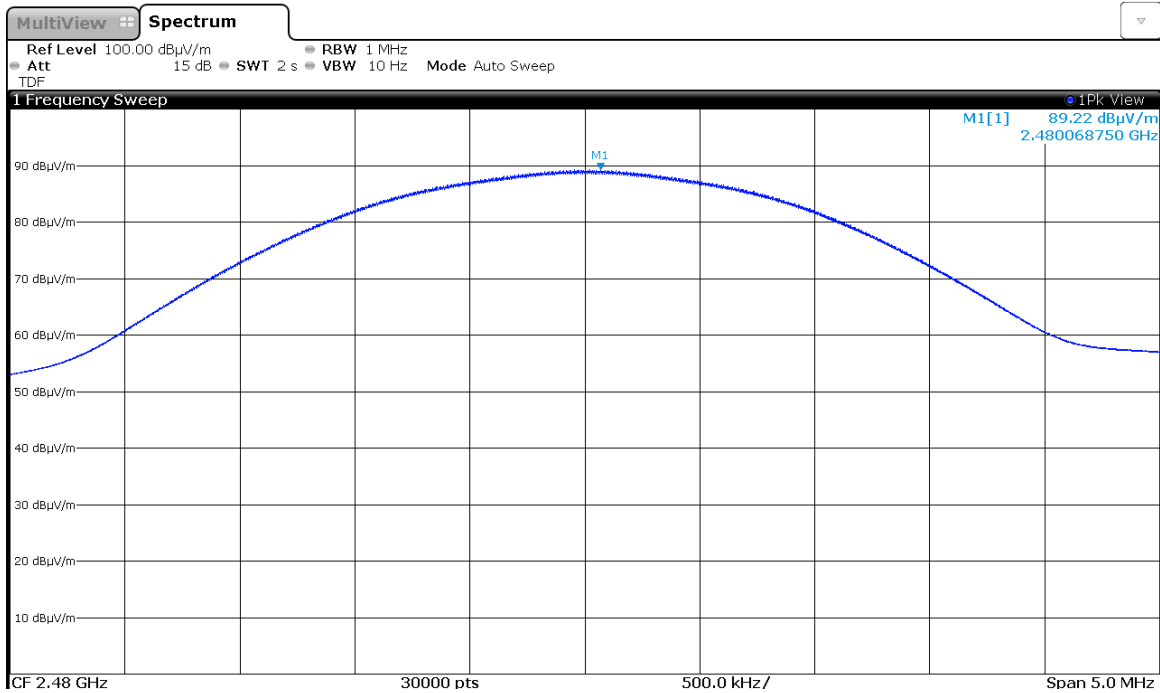

BAND-EDGE COMPLIANCE. RADIATED. Marker-Delta Method.

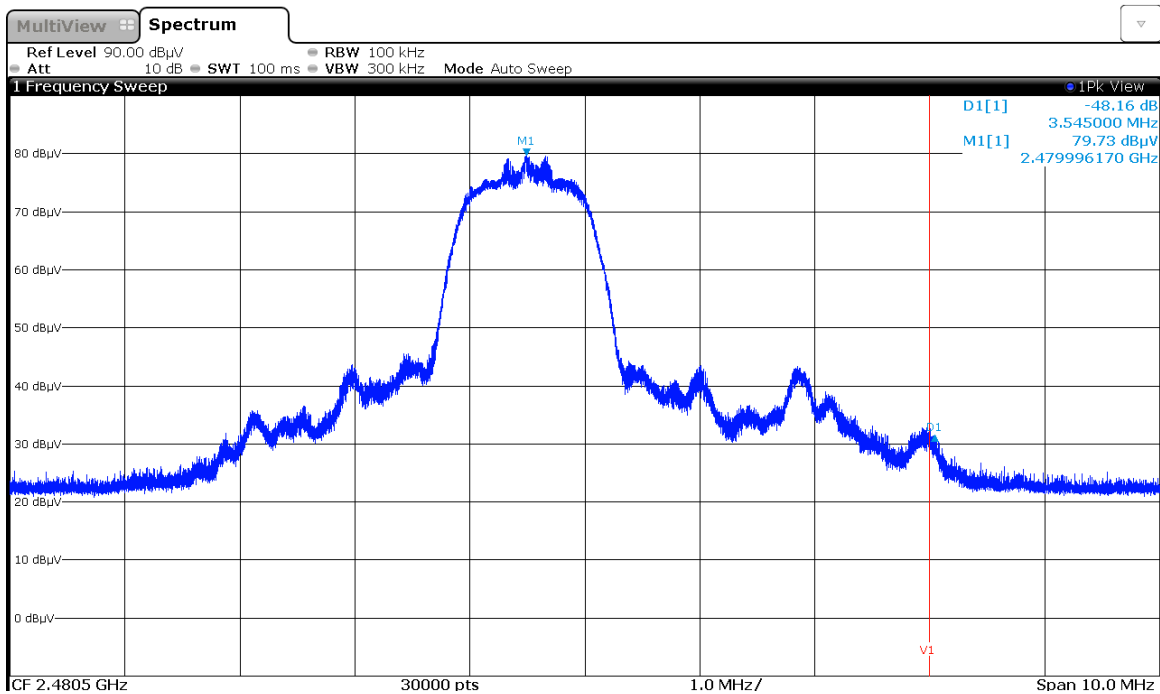

Note: No correction is applied for this relative measurement.

Band edge compliance of radiated emissions

Fundamental max. average value 3 m	Delta value	Calculated value 3 m	Limit
89.22 dB μ V/m	48.16 dB	41.06 dB μ V/m	54 dB μ V/m

Fundamental max. Peak value 3 m	Delta value	Calculated value 3 m	Limit
103.19 dB μ V/m	48.16 dB	55.03 dB μ V/m	74 dB μ V/m


Verdict: PASS

Modulation: 8-DPSK


Maximum peak and average field strength of fundamental emission at 3 m distance.

HIGHEST CHANNEL (2480 MHz)


Maximum field strength at 3 m. Peak value.

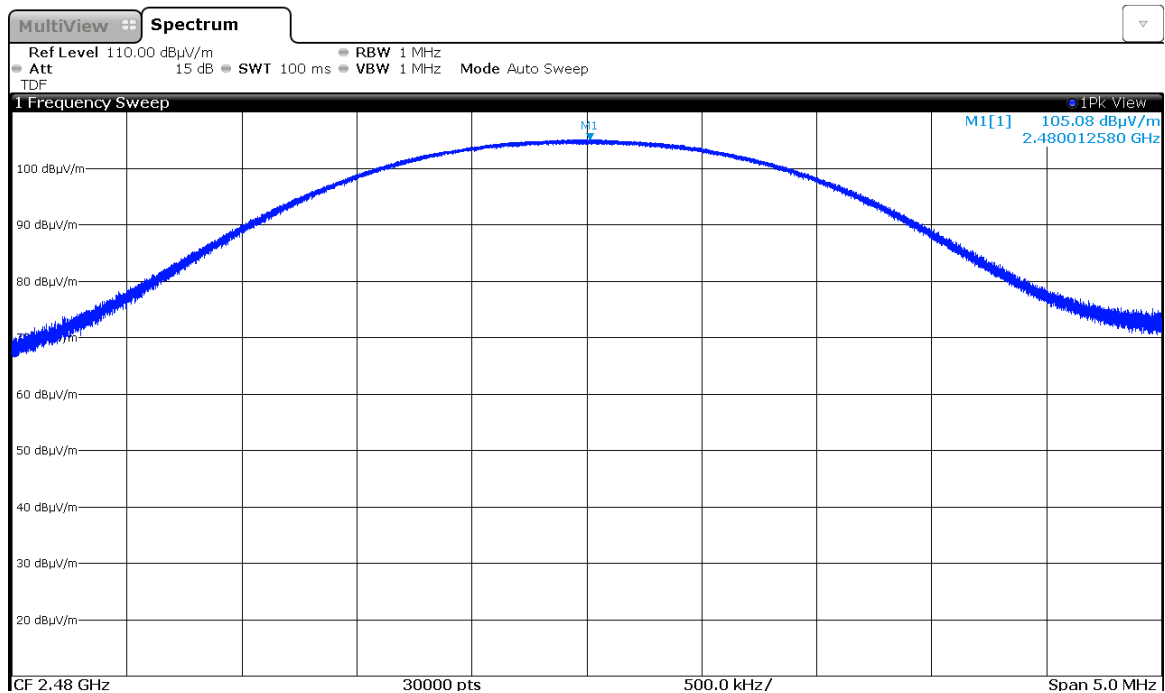

Maximum field strength at 3 m. Average value.

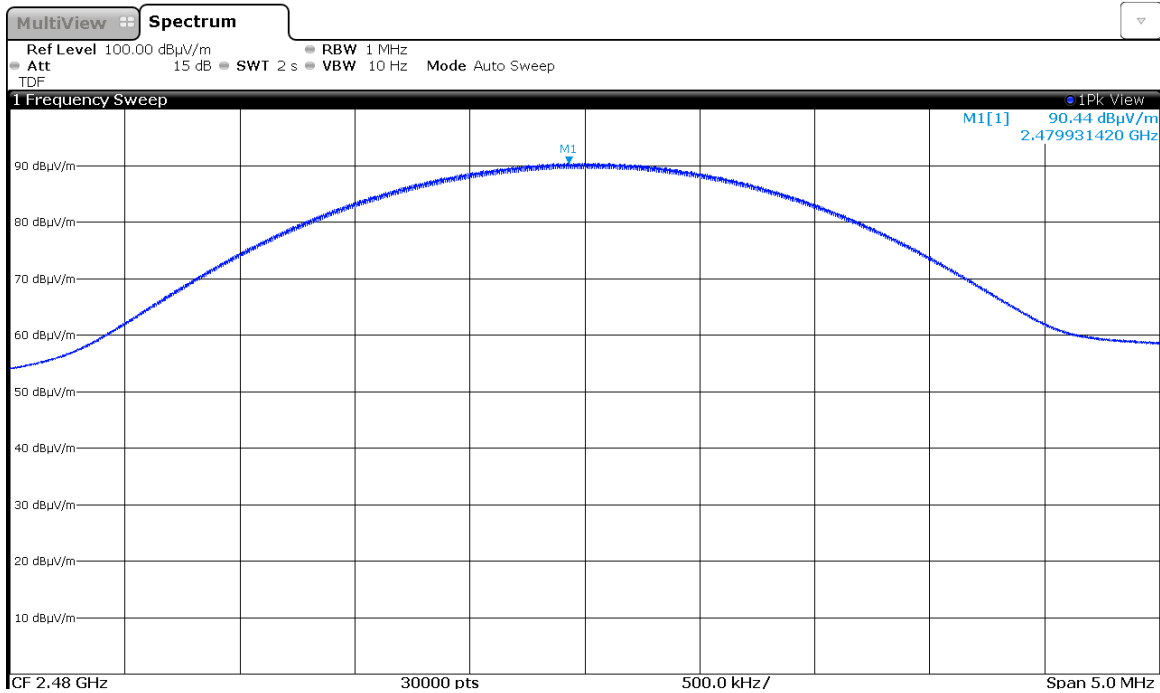

BAND-EDGE COMPLIANCE. RADIATED. Marker-Delta Method.

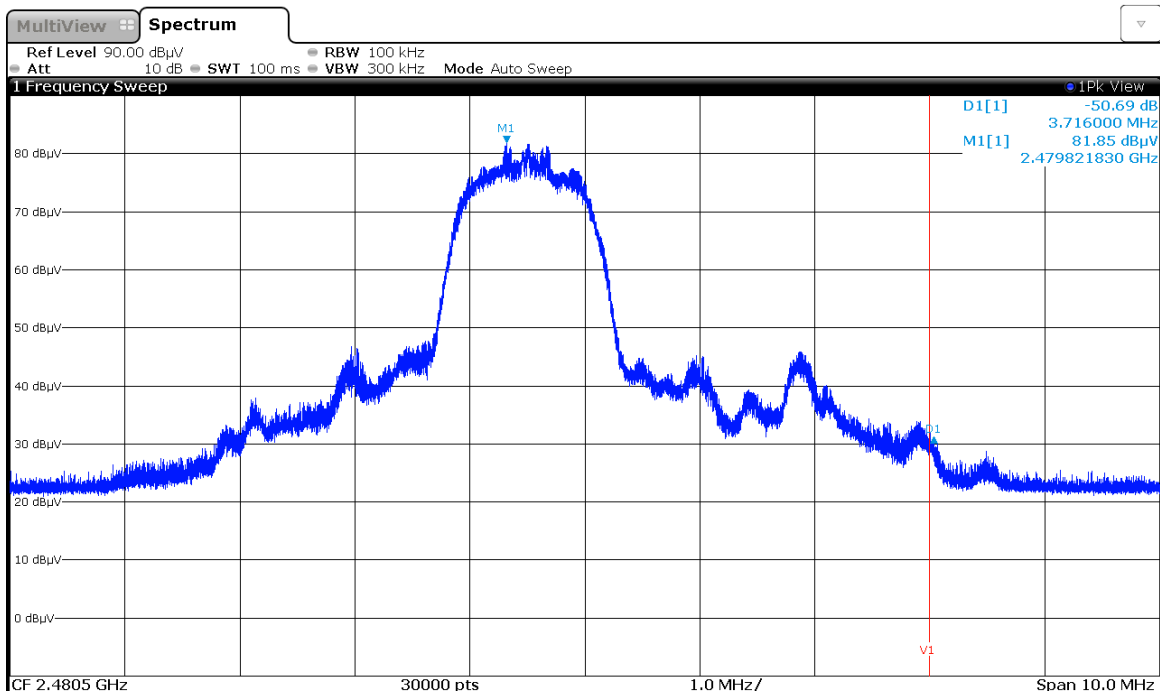

Note: No correction is applied for this relative measurement.

Band edge compliance of radiated emissions

Fundamental max. average value 3 m	Delta value	Calculated value 3 m	Limit
90.44 dB μ V/m	50.69 dB	39.75 dB μ V/m	54 dB μ V/m

Fundamental max. Peak value 3 m	Delta value	Calculated value 3 m	Limit
105.08 dB μ V/m	50.69 dB	54.39 dB μ V/m	74 dB μ V/m

Verdict: PASS

FCC Section 15.247 Subclause (d) / RSS-247 Clause 5.5 Emission limitations radiated (Transmitter)

SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
30.42750	V	Quasi-Peak	27.96	± 3.88
126.95150	V	Quasi-Peak	27.12	± 3.88

Frequency range 1 GHz-25 GHz

The results in the next tables show the maximum measured levels in the 1-25 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

Modulation: GFSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.60170	V	Peak	47.49	± 4.87
2.37591	V	Peak	51.70	± 4.87
2.38602	V	Peak	52.42	± 4.87
2.49795	V	Peak	49.81	± 4.87
4.80425	V	Peak	52.53	± 4.87
9.60725	V	Peak	51.89	± 4.87

2. CHANNEL: MIDDLE (2441 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.62763	V	Peak	47.67	± 4.87
2.31301	H	Peak	49.24	± 4.87
2.34488	V	Peak	49.31	± 4.87
2.37706	H	Peak	49.34	± 4.87
4.88175	V	Peak	51.49	± 4.87
9.76325	V	Peak	50.14	± 4.87

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.65370	H	Peak	48.43	± 4.87
2.50603	V	Peak	52.44	± 4.87
2.31999	H	Peak	47.07	± 4.87
2.35176	H	Peak	47.83	± 4.87
2.38412	V	Peak	47.98	± 4.87
2.48353	V	Peak	60.66	± 4.87
		Average	51.06	± 4.87
2.48606	V	Peak	55.55	± 4.87
		Average	46.36	± 4.87
2.49032	V	Peak	52.84	± 4.87
2.49573	V	Peak	53.09	± 4.87
4.95975	V	Peak	48.30	± 4.87
7.44025	V	Peak	42.43	± 4.87
9.91975	V	Peak	48.78	± 4.87

Verdict: PASS

Modulation: $\Pi/4$ -DQPSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.60190	V	Peak	47.81	± 4.87
2.36995	V	Peak	49.86	± 4.87
2.37582	H	Peak	50.62	± 4.87
2.38604	V	Peak	53.06	± 4.87
4.80375	V	Peak	41.27	± 4.87
9.60875	V	Peak	47.69	± 4.87

2. CHANNEL: MIDDLE (2441 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.62750	V	Peak	48.30	± 4.87
4.88225	V	Peak	39.59	± 4.87

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.65383	V	Peak	48.70	± 4.87
2.48554	H	Peak	53.93	± 4.87
2.49595	V	Peak	51.12	± 4.87
4.96025	V	Peak	37.66	± 4.87

Verdict: PASS

Modulation: 8-DPSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.60183	V	Peak	47.84	± 4.87
2.37000	H	Peak	48.58	± 4.87
2.37606	V	Peak	51.35	± 4.87
2.38604	H	Peak	54.16	± 4.87
		Average	48.73	± 4.87
4.80425	V	Peak	42.50	± 4.87
9.60725	H	Peak	48.50	± 4.87

2. CHANNEL: MIDDLE (2441 MHz).


Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.62777	V	Peak	47.83	± 4.87
2.31301	H	Peak	48.71	± 4.87
4.88175	V	Peak	41.11	± 4.87
9.76425	V	Peak	46.82	± 4.87

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.65357	V	Peak	47.82	± 4.87
2.35181	V	Peak	48.67	± 4.87
2.48555	H	Peak	54.49	± 4.87
		Average	44.79	± 4.87
2.49598	V	Peak	53.31	± 4.87
4.96025	V	Peak	38.60	± 4.87

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

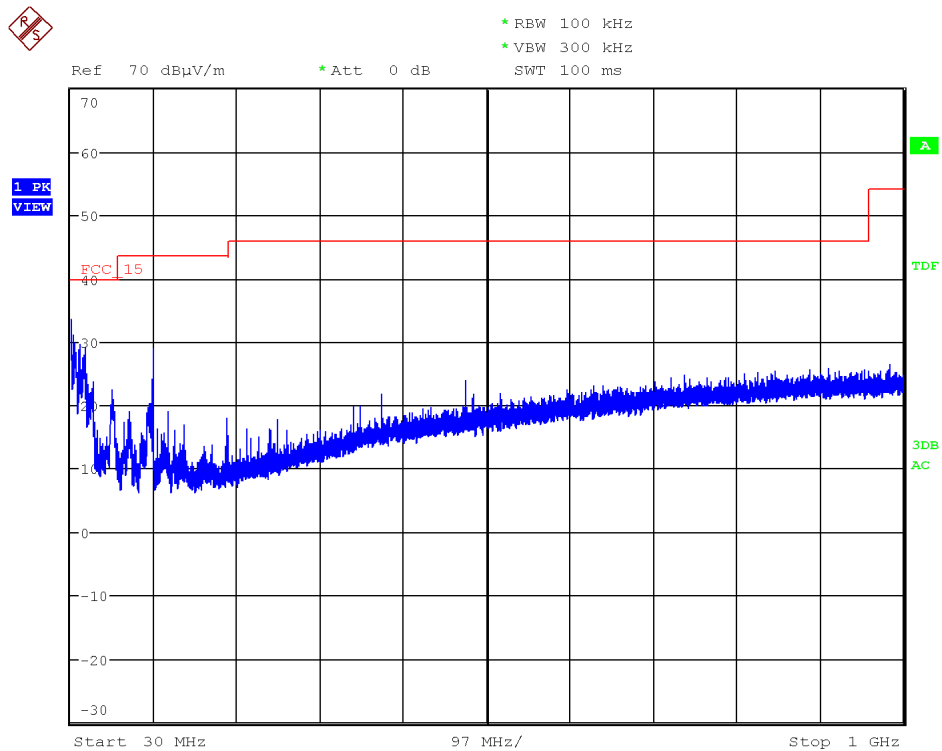


(This plot is valid for all three channels and all modulation modes).

FREQUENCY RANGE 1 GHz to 3 GHz.


Modulation: GFSK

CHANNEL: Lowest (2402 MHz).

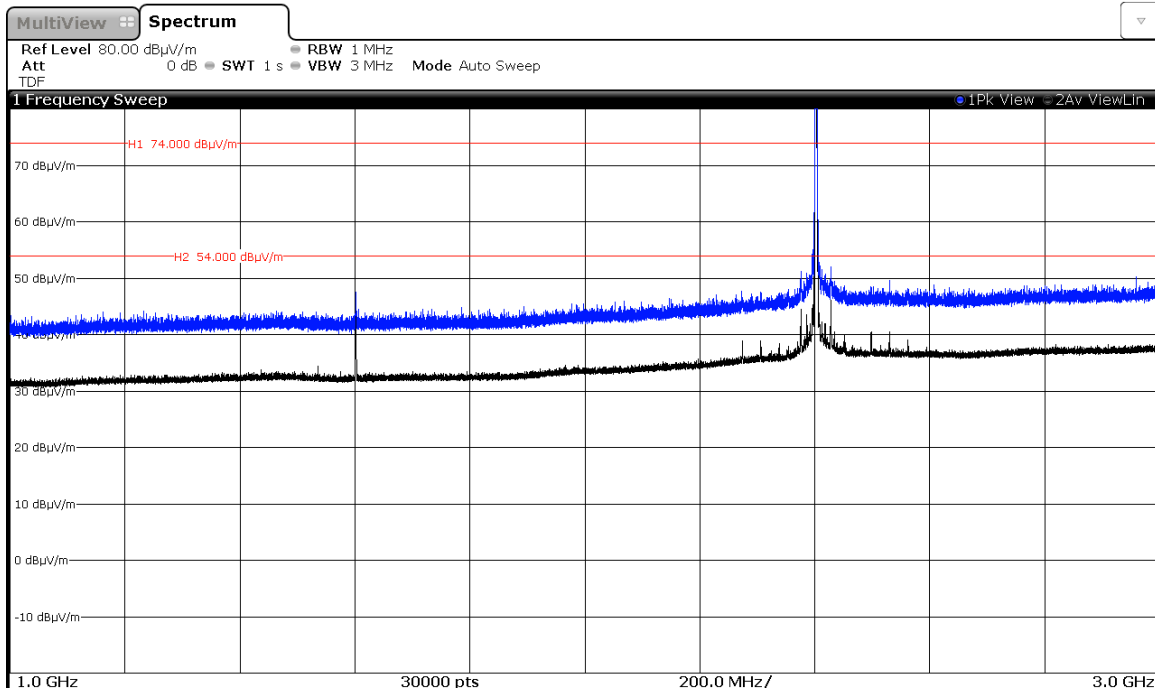


Note: The peak shown in the plot above the limits is the carrier frequency.

CHANNEL: Middle (2441 MHz).

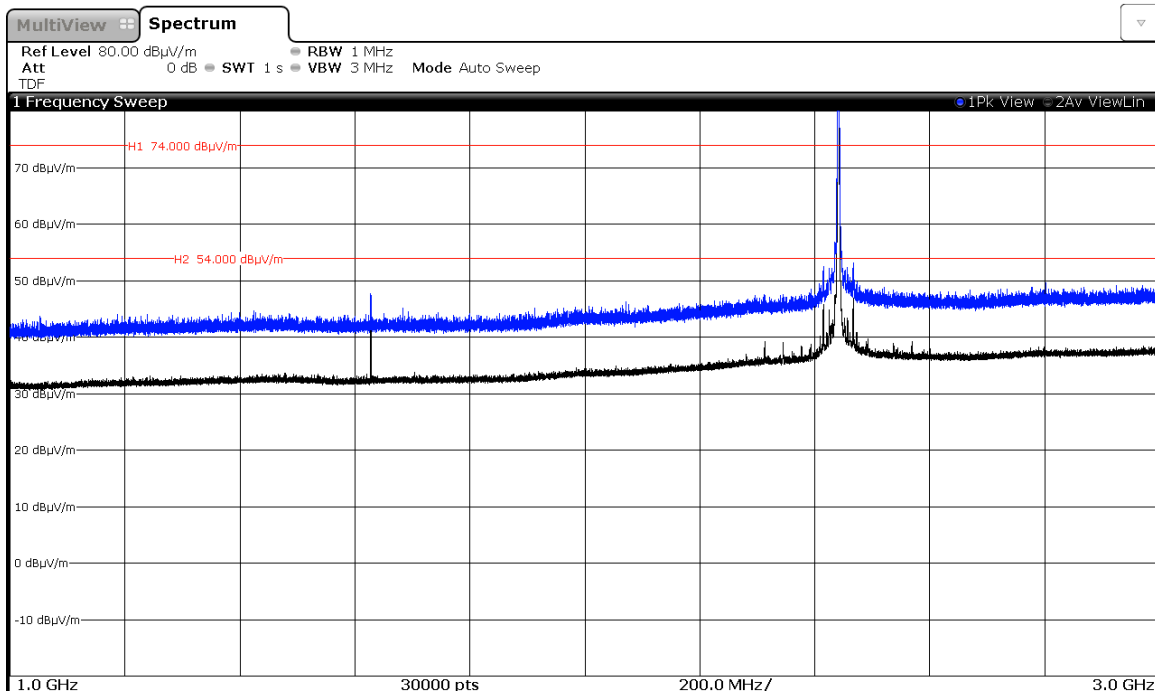

Note: The peak shown in the plot above the limits is the carrier frequency.


CHANNEL: Highest (2480 MHz).

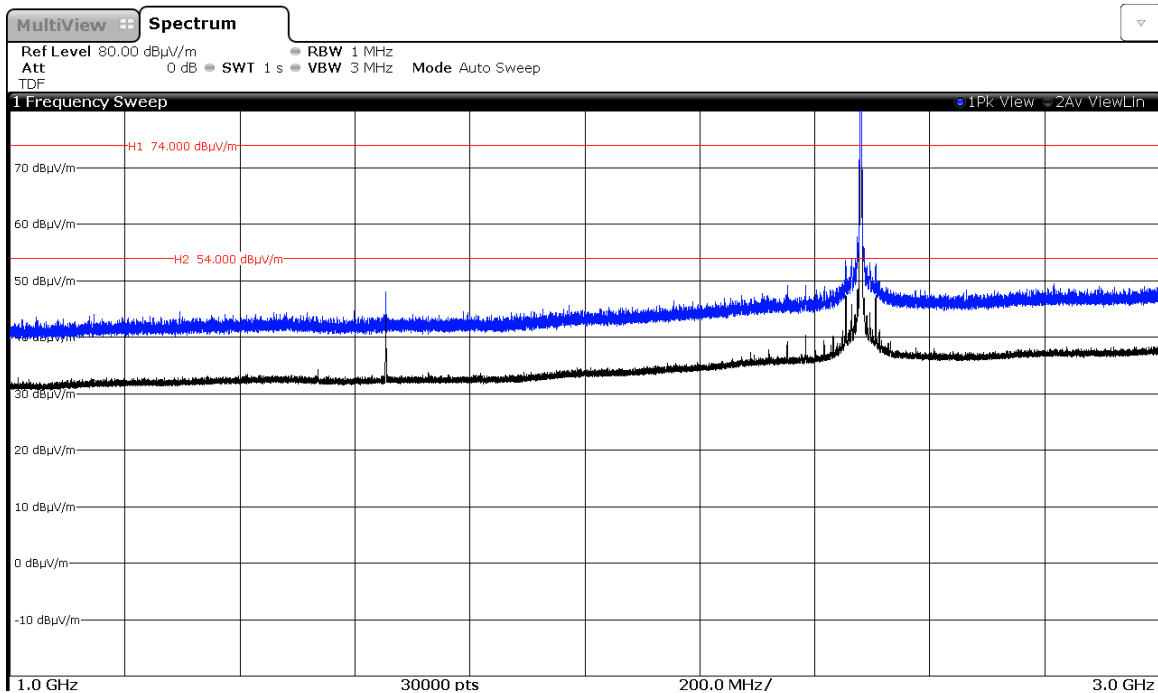

Note: The peak shown in the plot above the limits is the carrier frequency.


Modulation: $\Pi/4$ -DQPSK

CHANNEL: Lowest (2402 MHz).

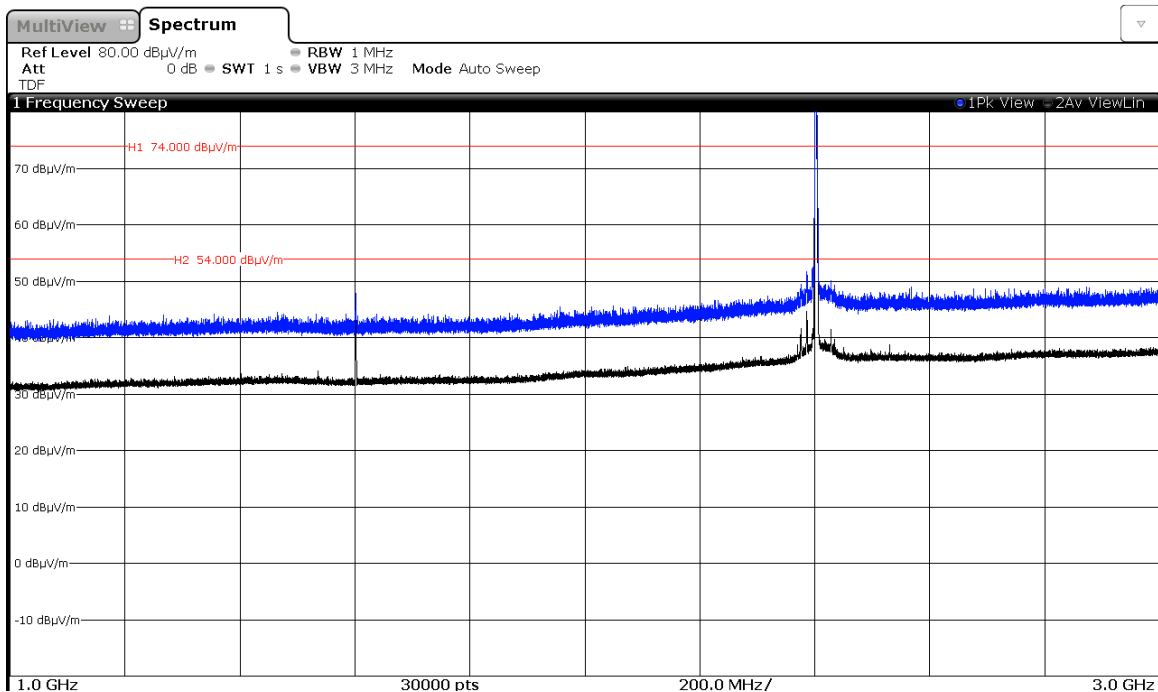


Note: The peak shown in the plot above the limits is the carrier frequency.

CHANNEL: Middle (2441 MHz).

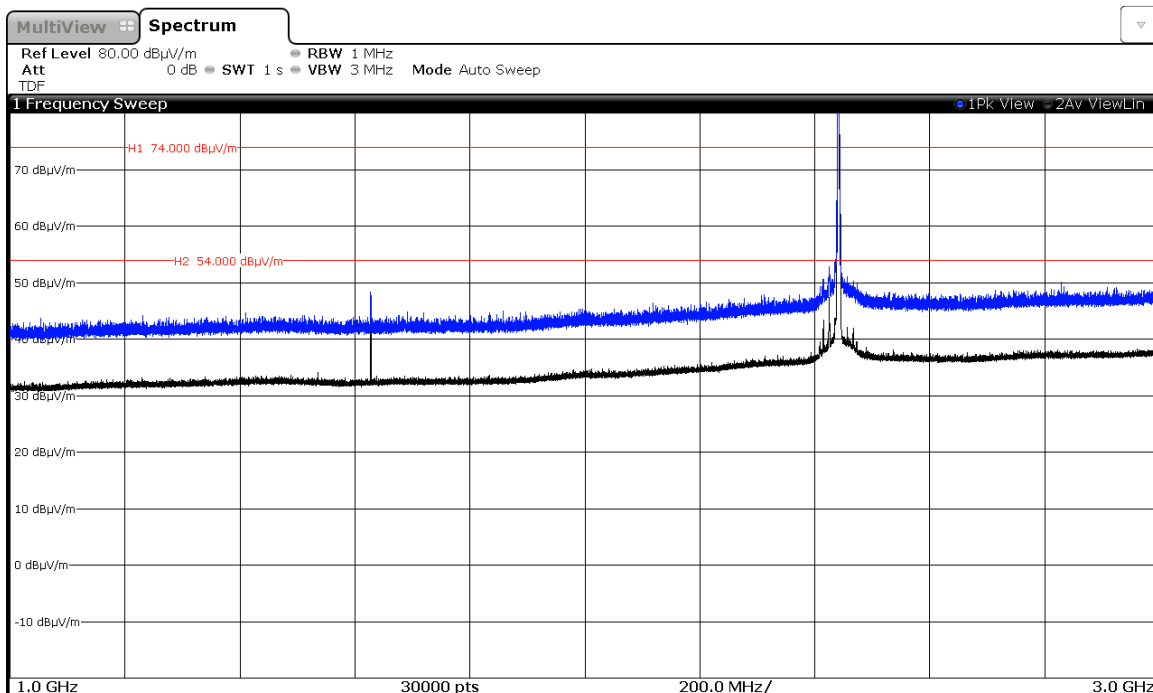

Note: The peak shown in the plot above the limits is the carrier frequency.


CHANNEL: Highest (2480 MHz).

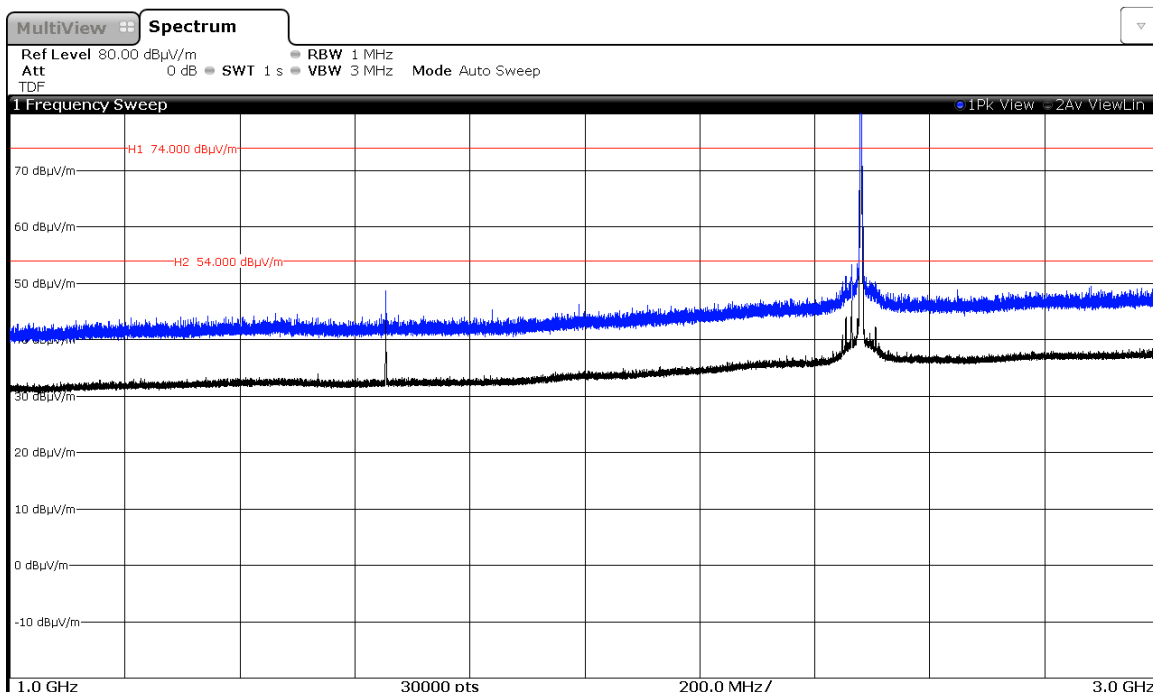

Note: The peak shown in the plot above the limits is the carrier frequency.


Modulation: 8-DPSK

CHANNEL: Lowest (2402 MHz).

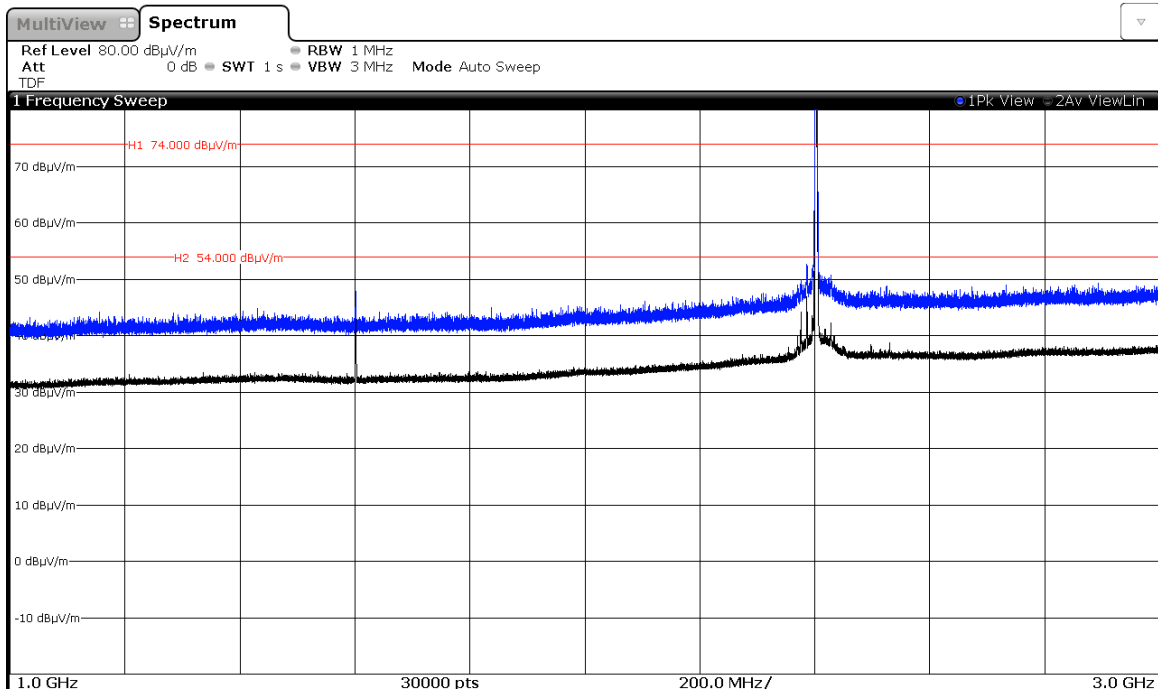


Note: The peak shown in the plot above the limits is the carrier frequency.

CHANNEL: Middle (2441 MHz).

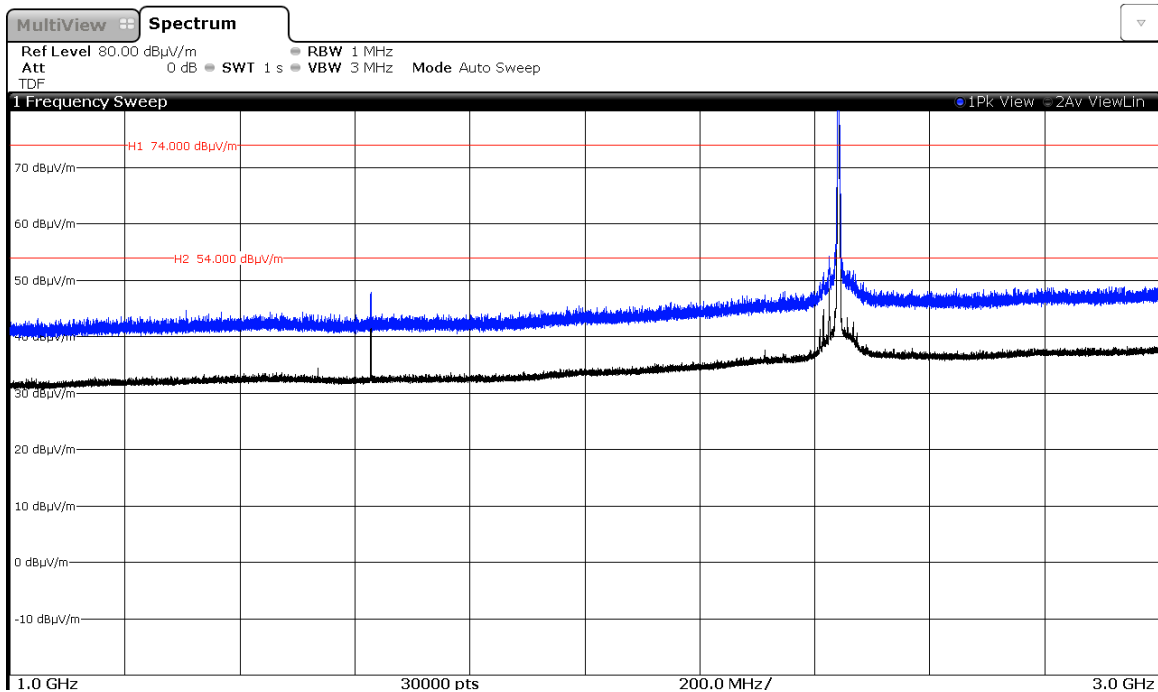

Note: The peak shown in the plot above the limits is the carrier frequency.

CHANNEL: Highest (2480 MHz).

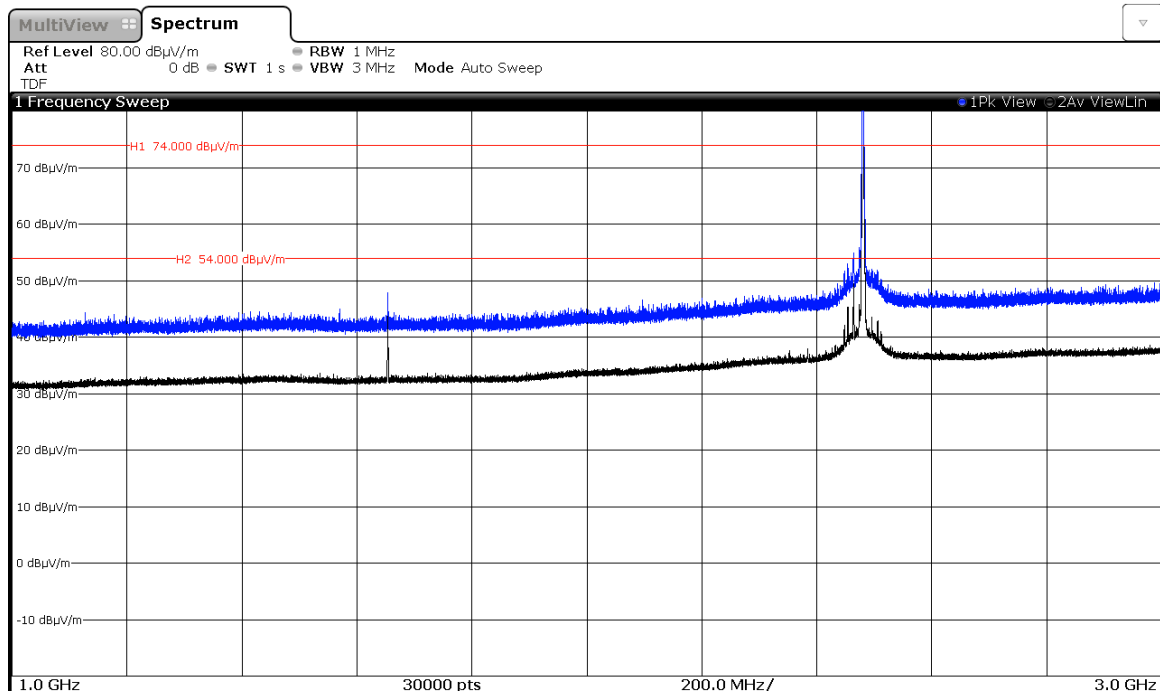


Note: The peak shown in the plot above the limits is the carrier frequency.


FREQUENCY RANGE 3 GHz to 18 GHz.

Modulation: GFSK


CHANNEL: Lowest (2402 MHz).

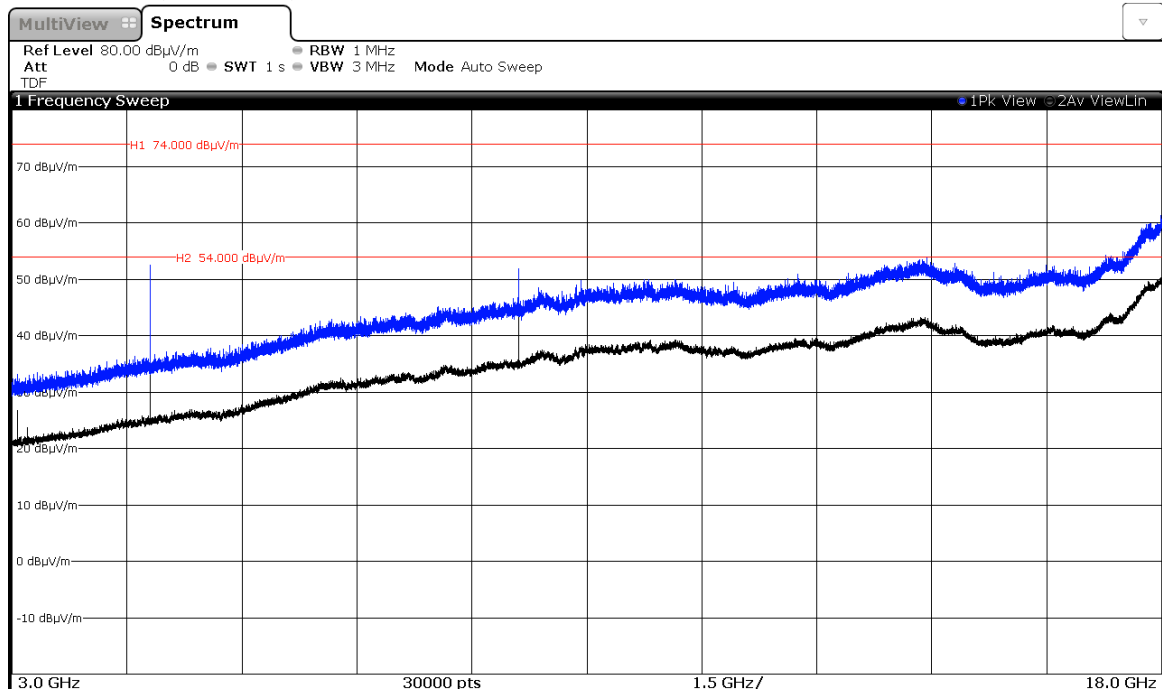

CHANNEL: Middle (2441 MHz).

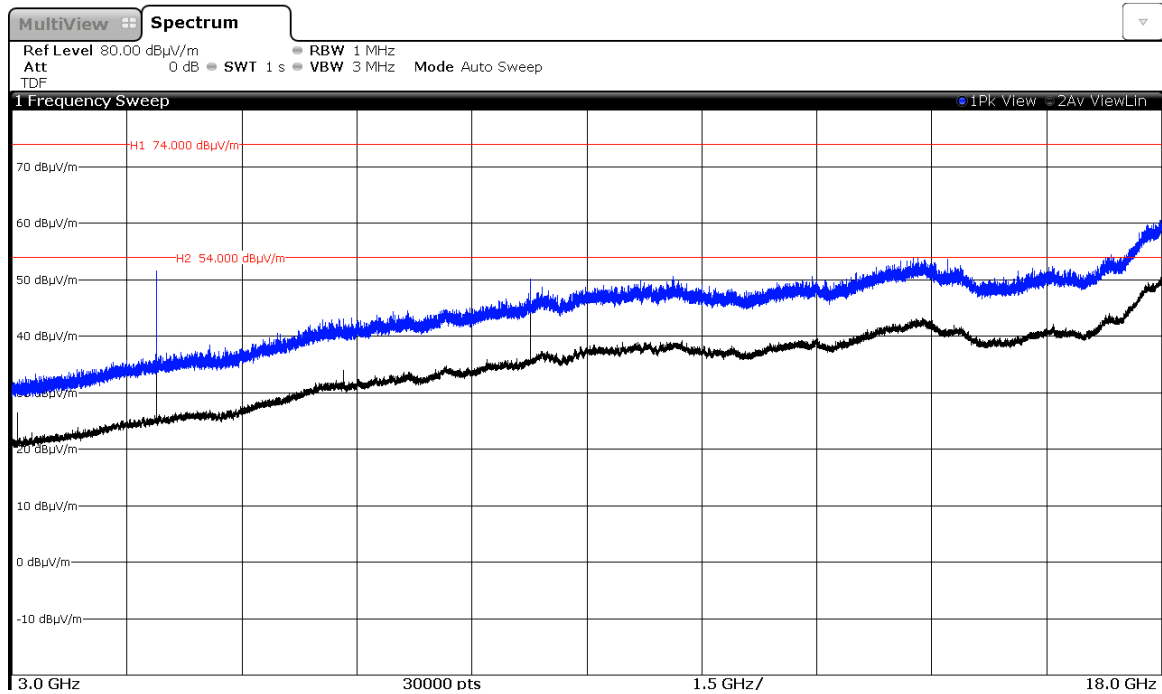


CHANNEL: Highest (2480 MHz).

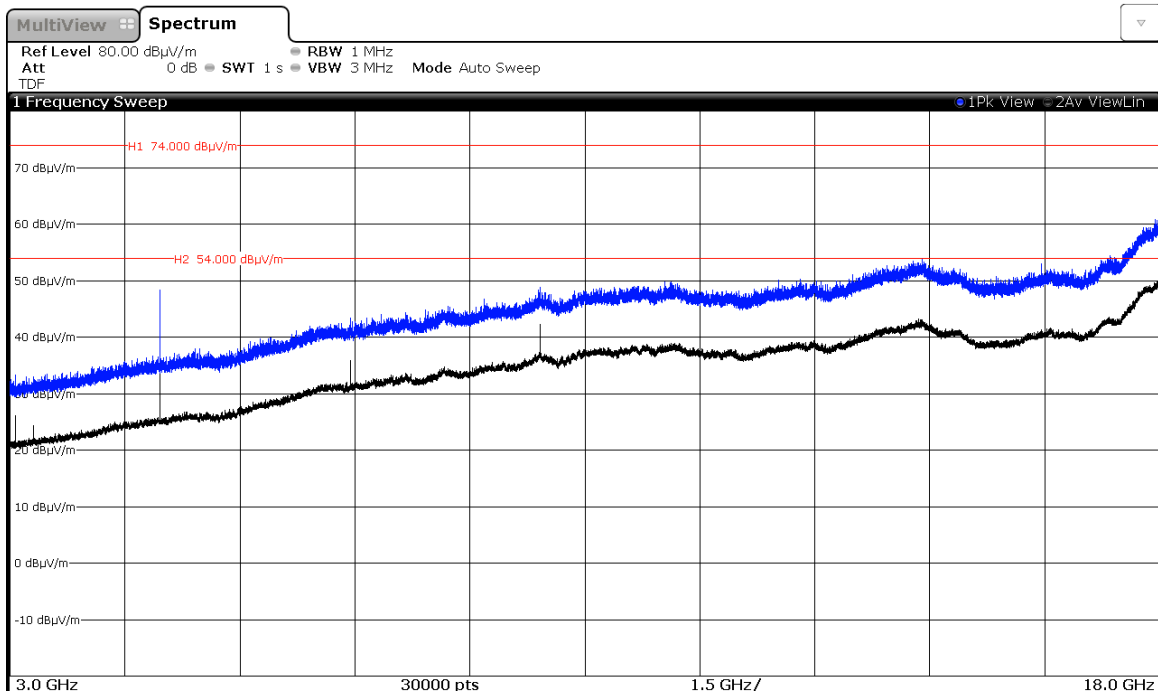


Modulation: $\Pi/4$ -DQPSK


CHANNEL: Lowest (2402 MHz).

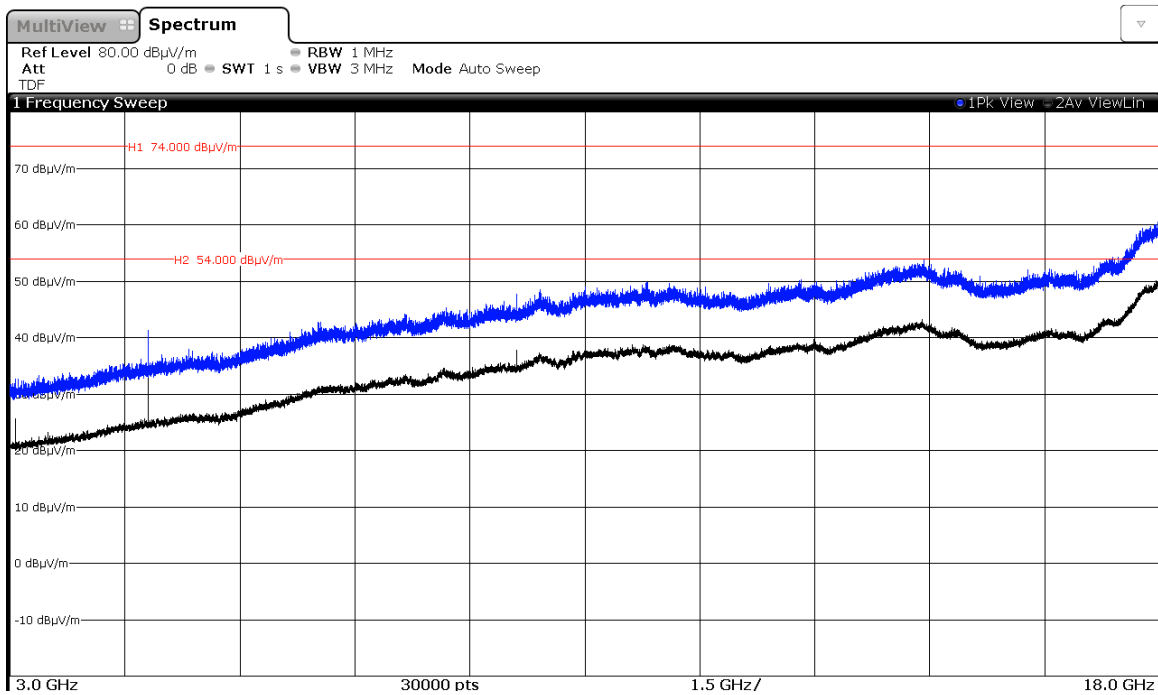

CHANNEL: Middle (2441 MHz).

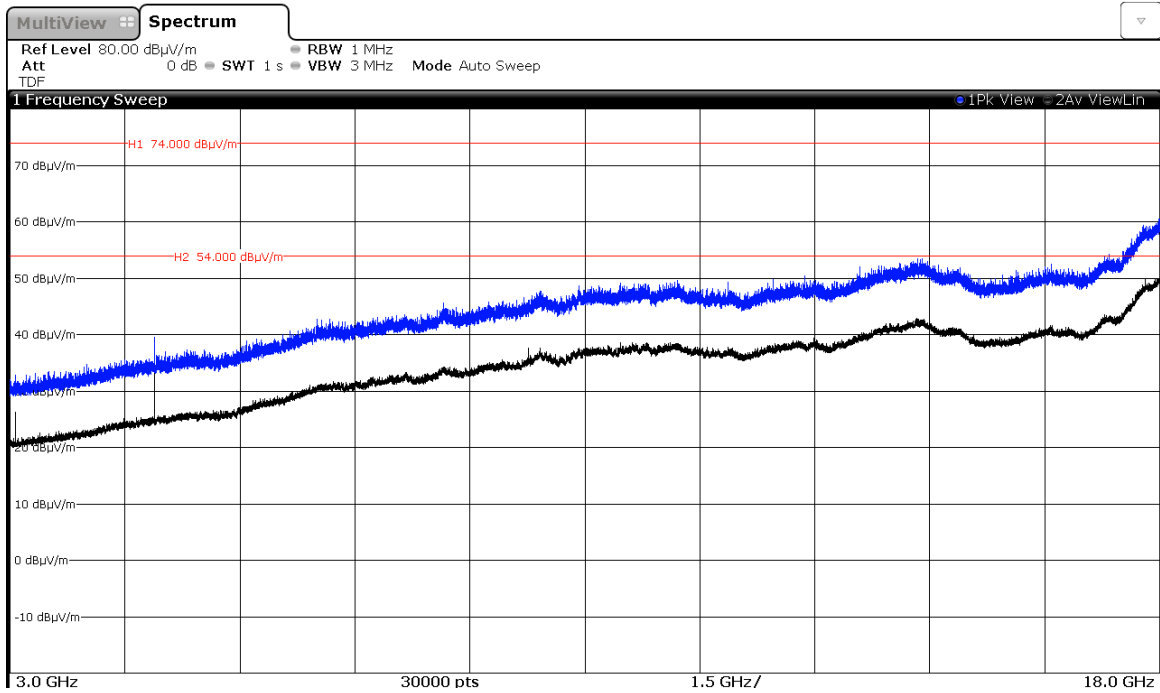


CHANNEL: Highest (2480 MHz).

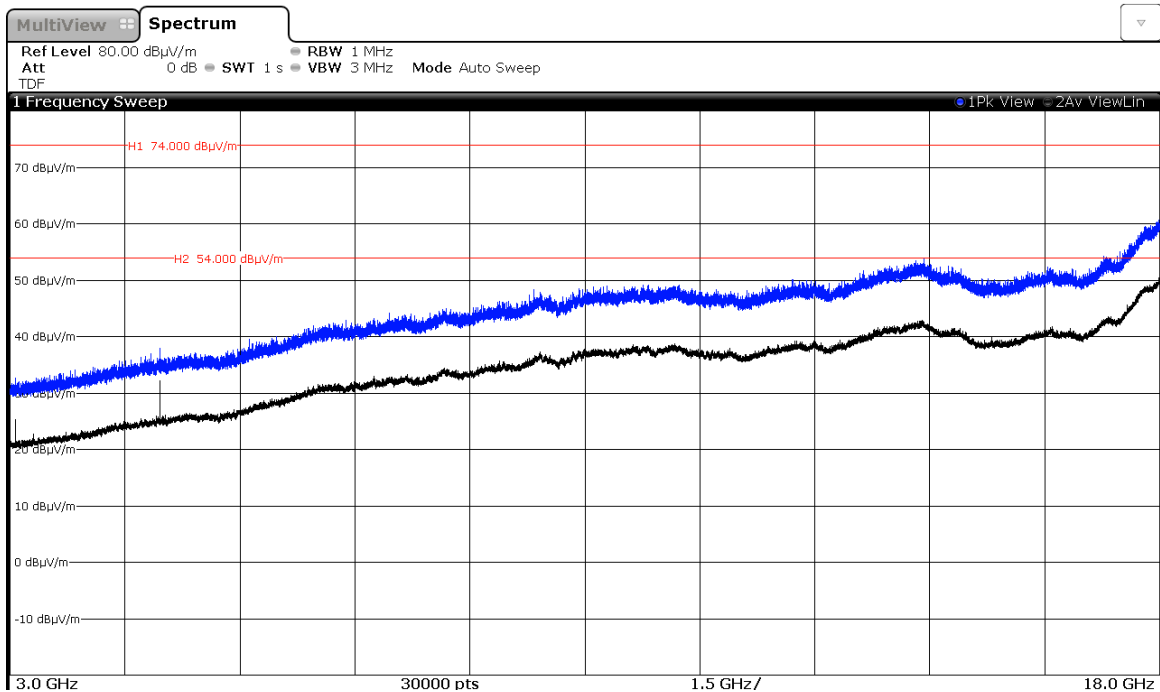


Modulation: 8-DPSK


CHANNEL: Lowest (2402 MHz).

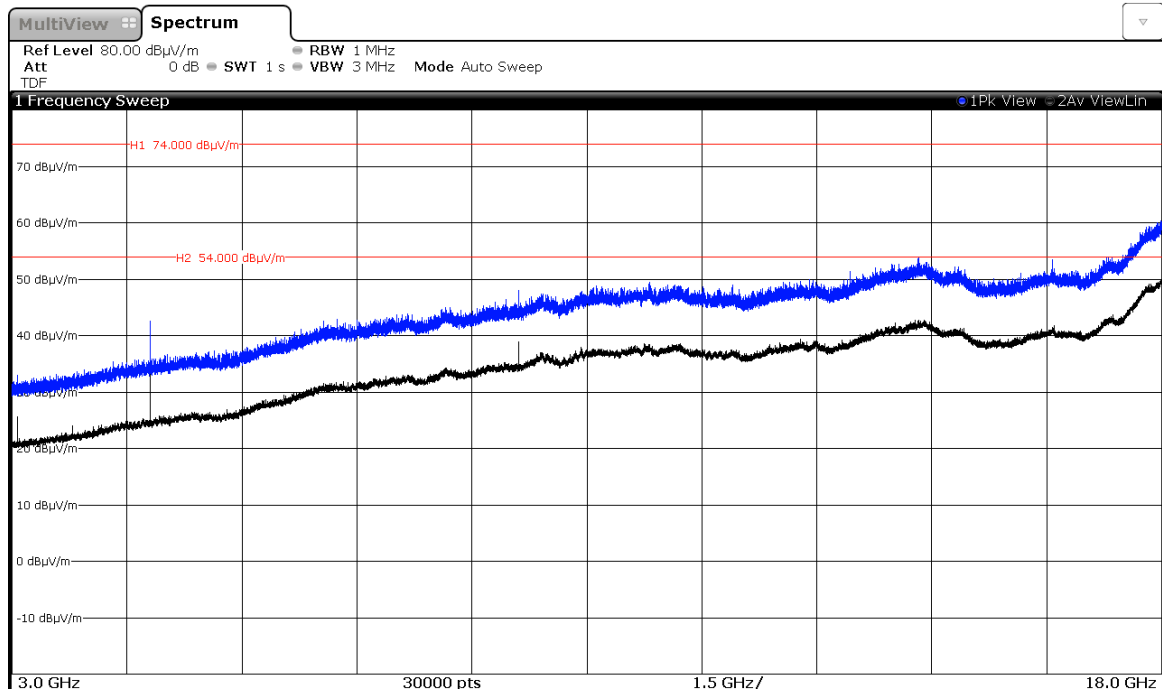


CHANNEL: Middle (2441 MHz).

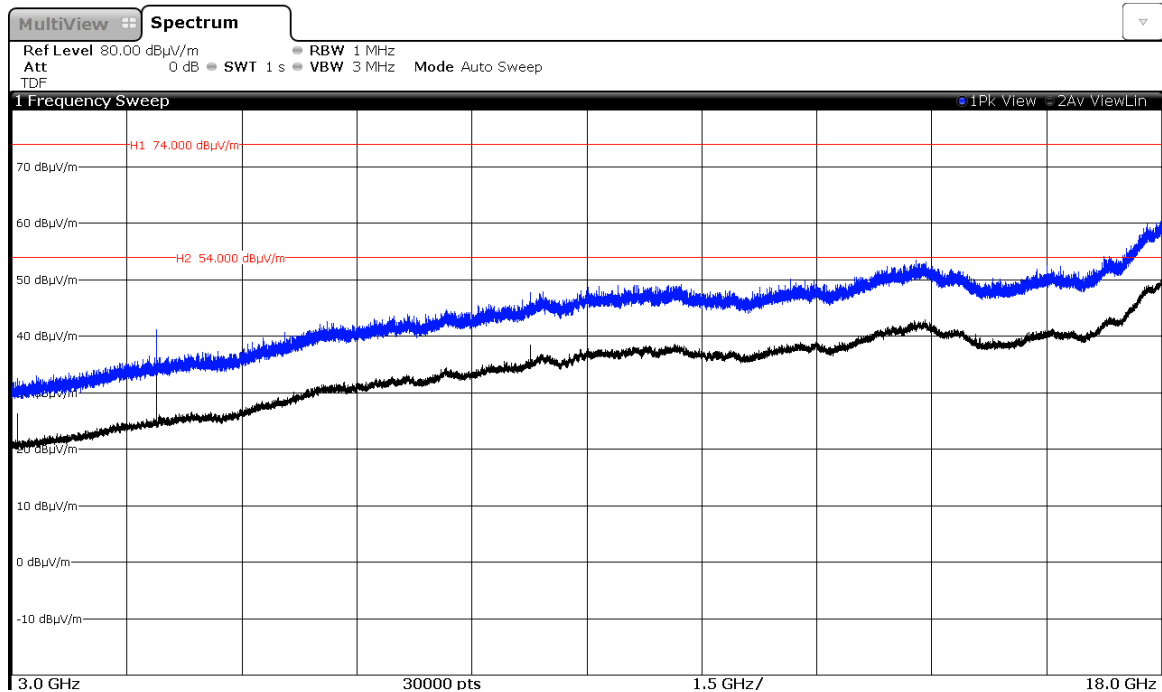

CHANNEL: Highest (2480 MHz).

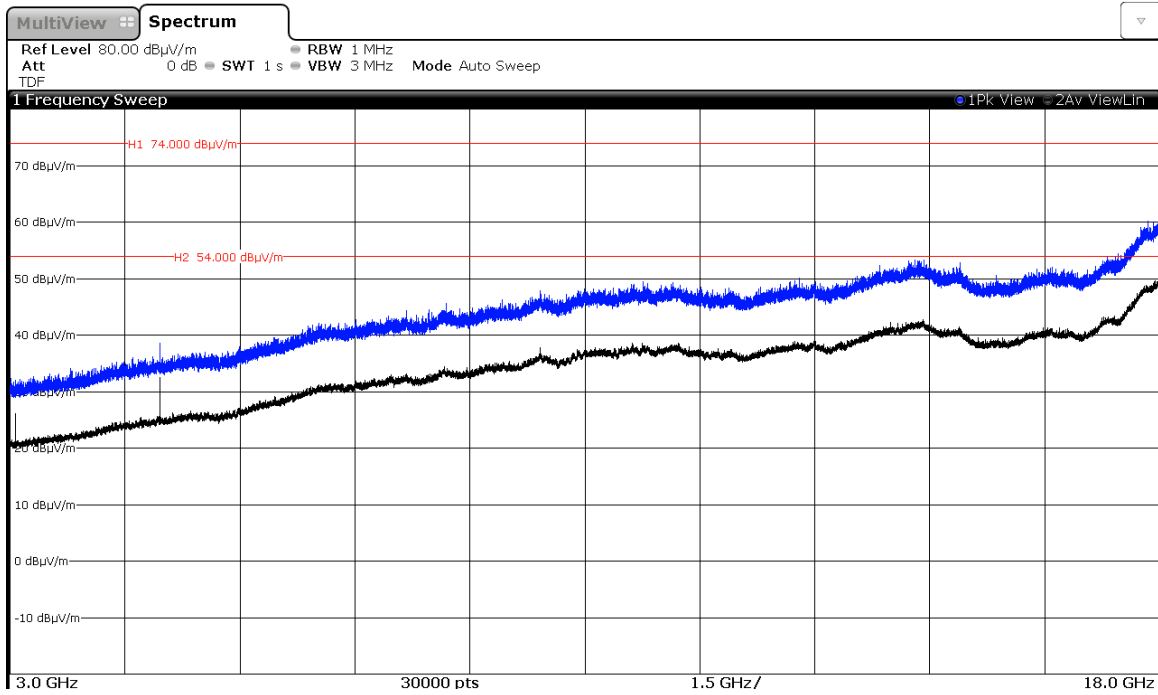

FREQUENCY RANGE 18 GHz to 26 GHz.

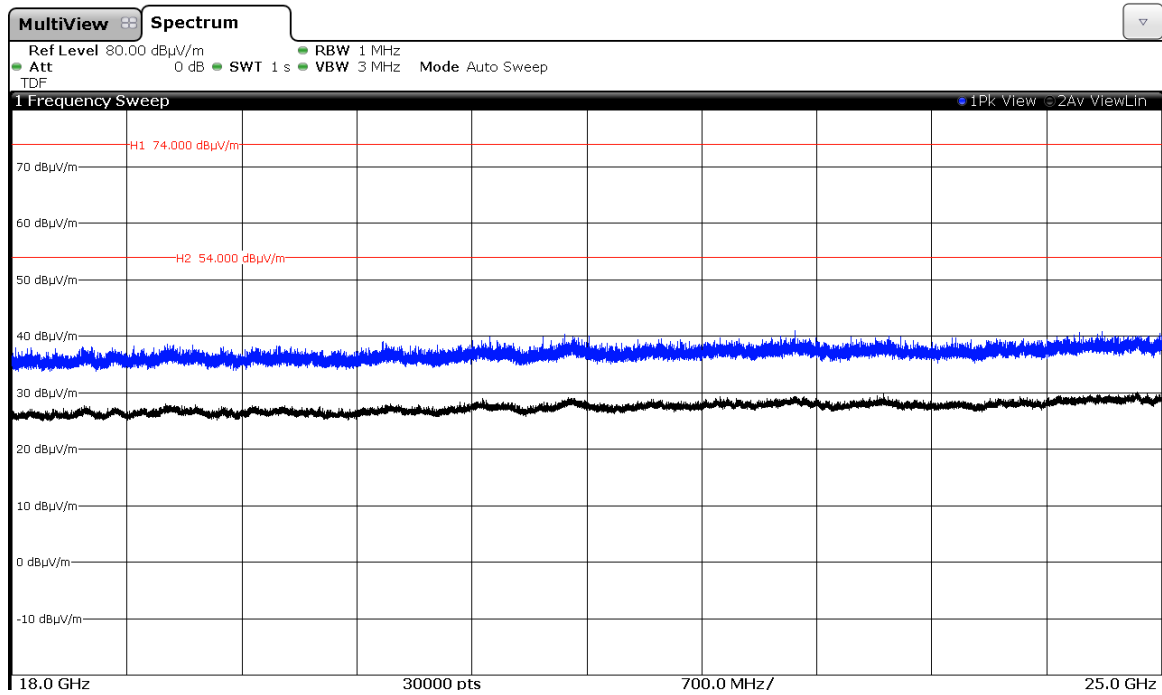


(This plot is valid for all three channels and all modulation modes).


FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)

CHANNEL: Lowest


Modulation: GFSK

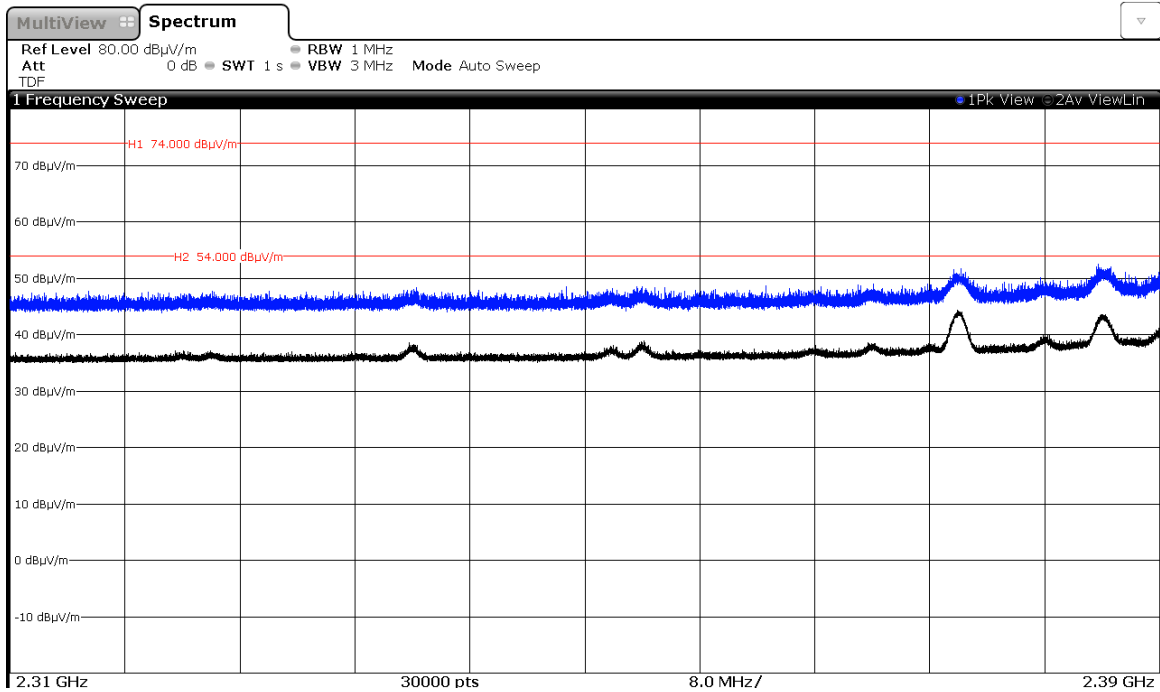

Modulation: $\Pi/4$ -DQPSK

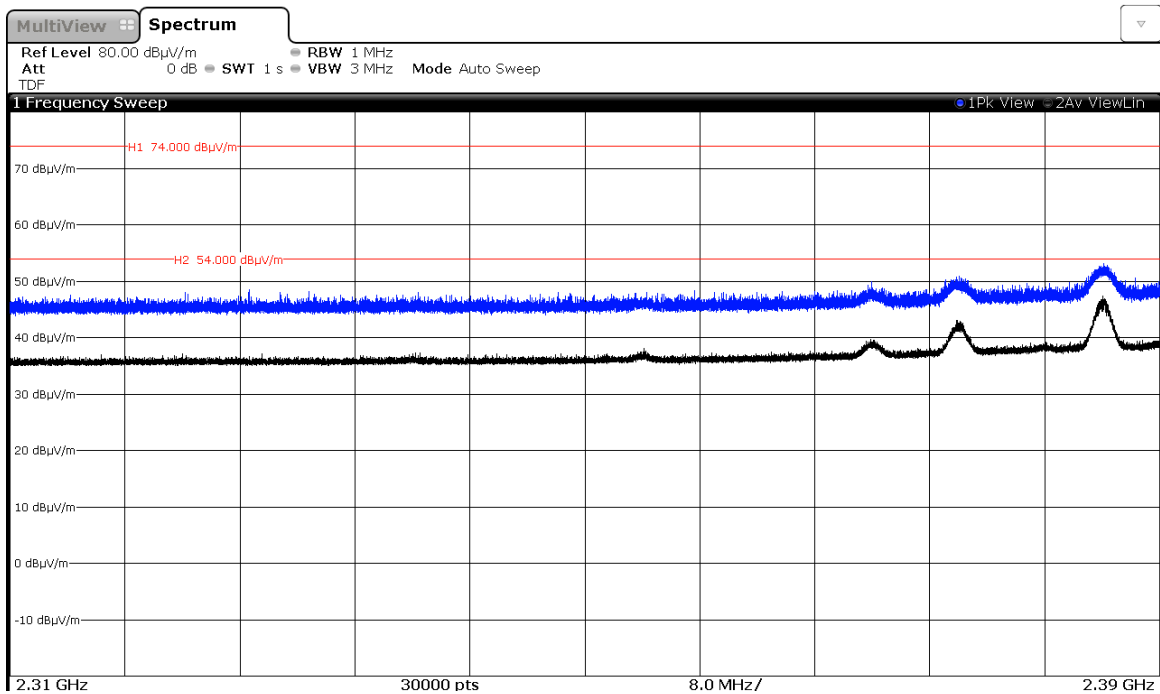


Modulation: 8-DPSK

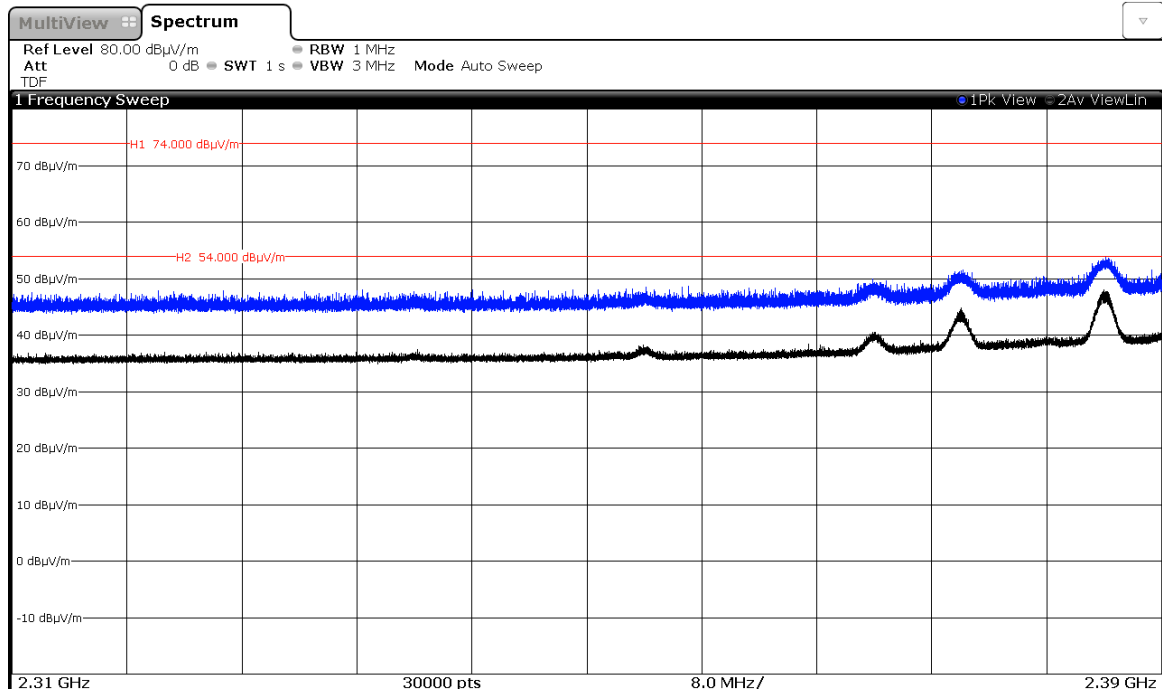


CHANNEL: Middle


Modulation: GFSK

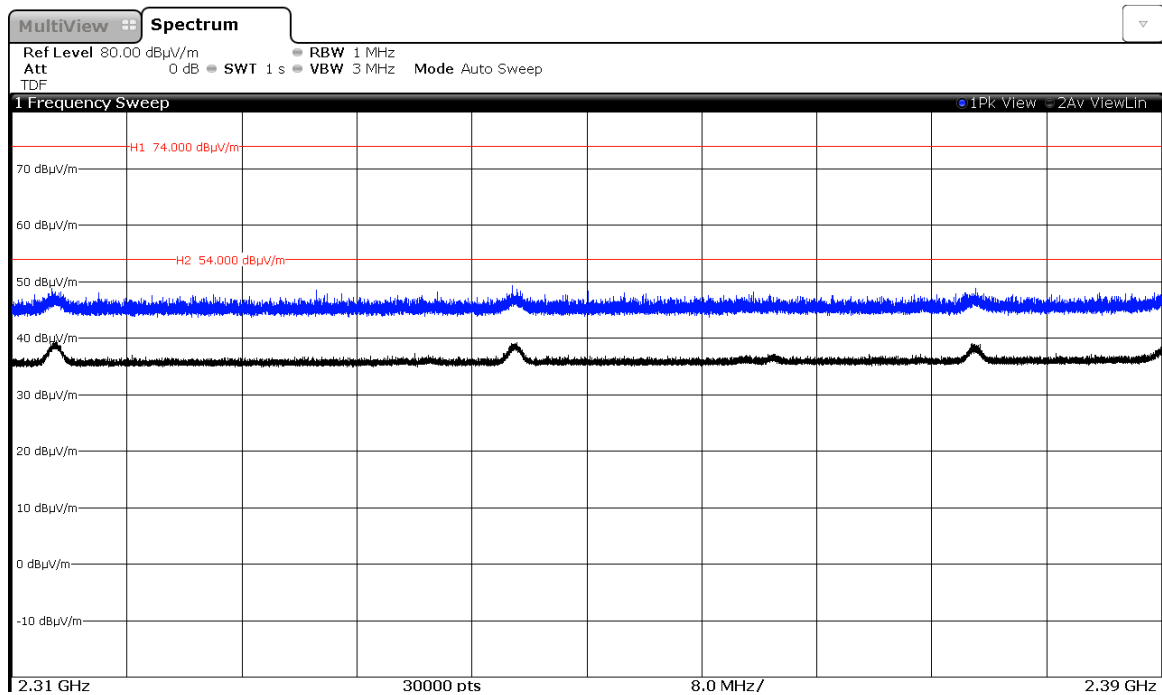

Modulation: $\Pi/4$ -DQPSK

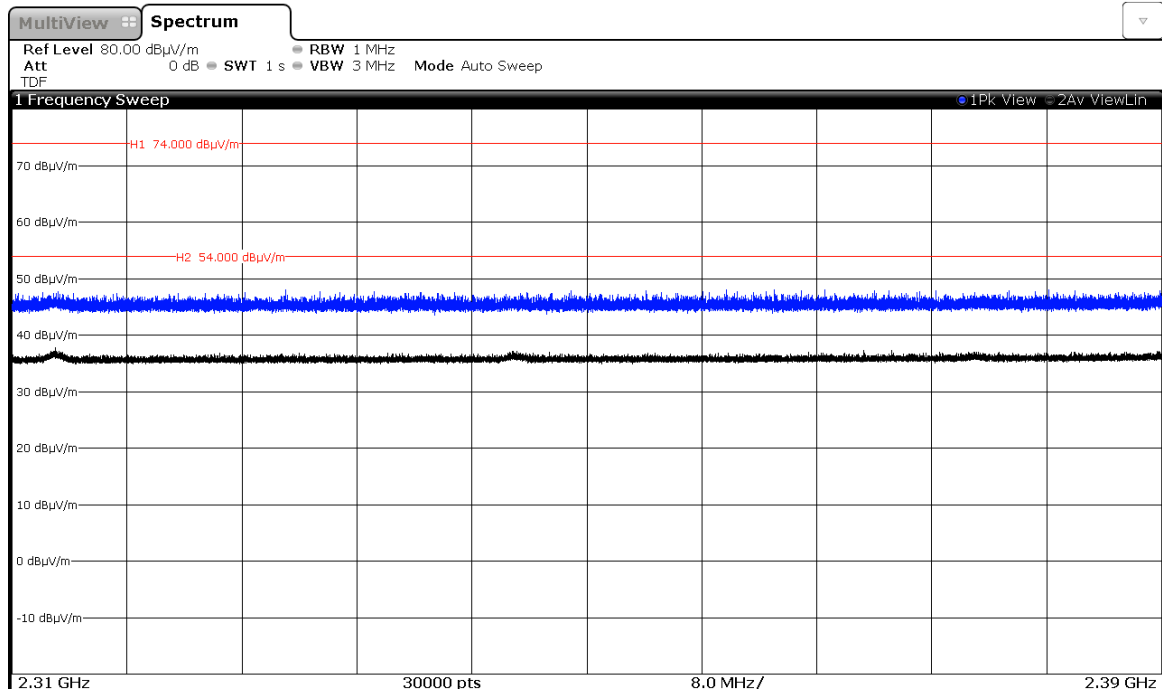


Modulation: 8-DPSK

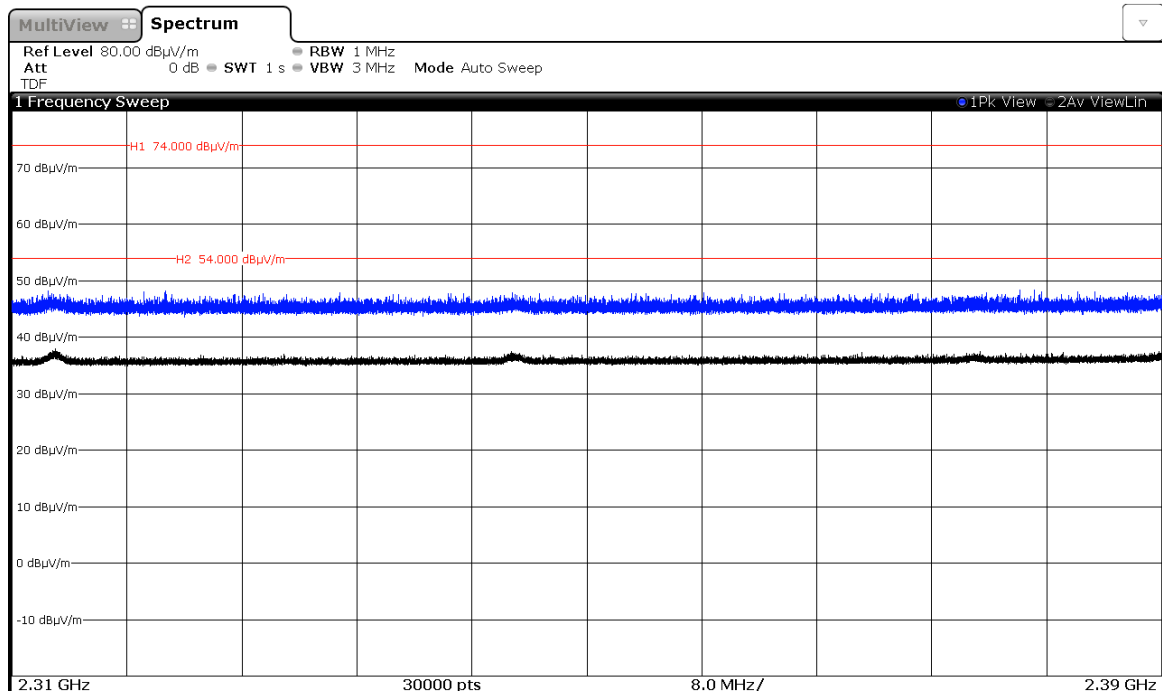


CHANNEL: Highest


Modulation: GFSK

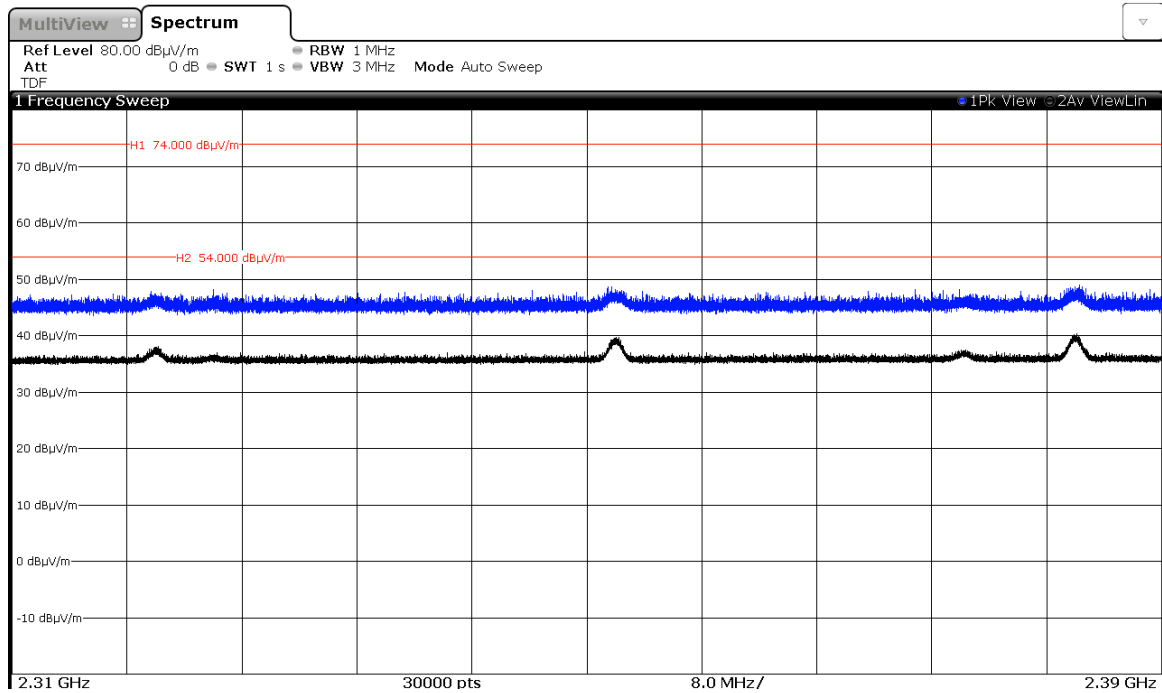

Modulation: $\Pi/4$ -DQPSK

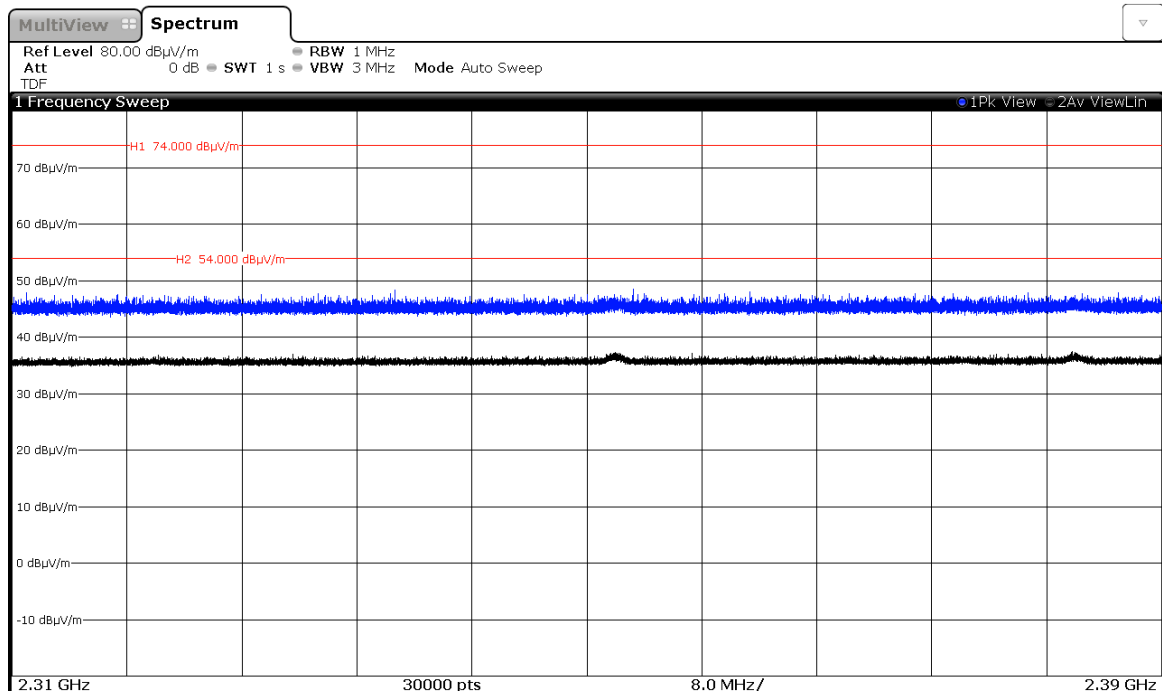


Modulation: 8-DPSK

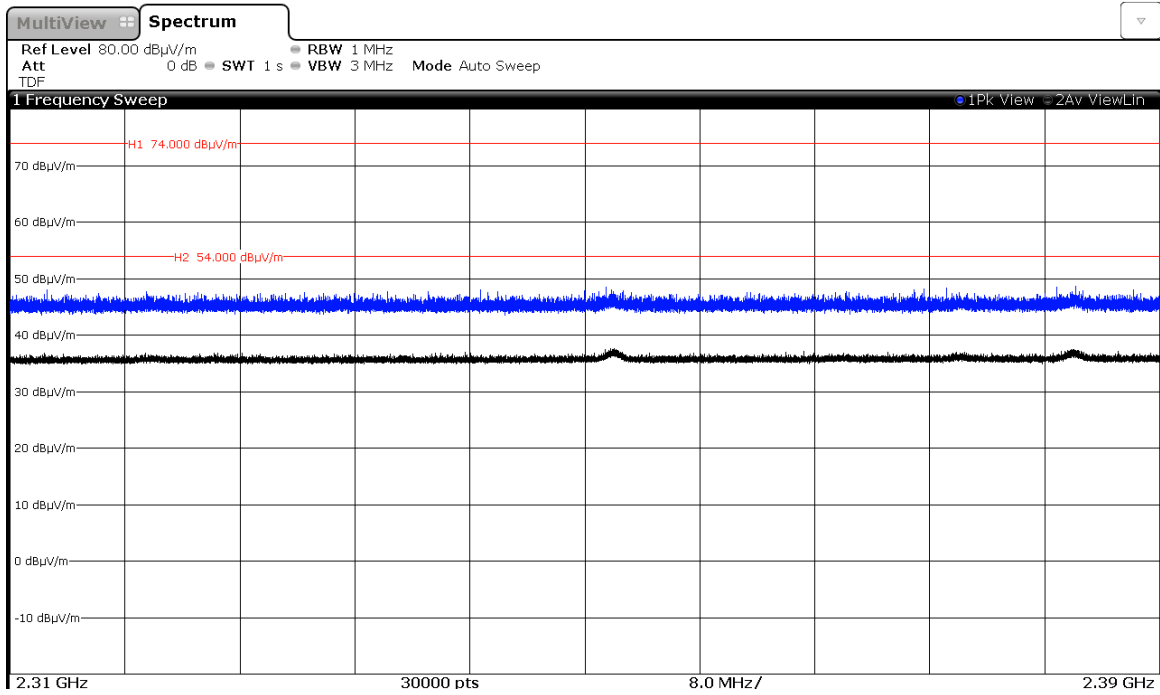


FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)

CHANNEL: Lowest


Modulation: GFSK

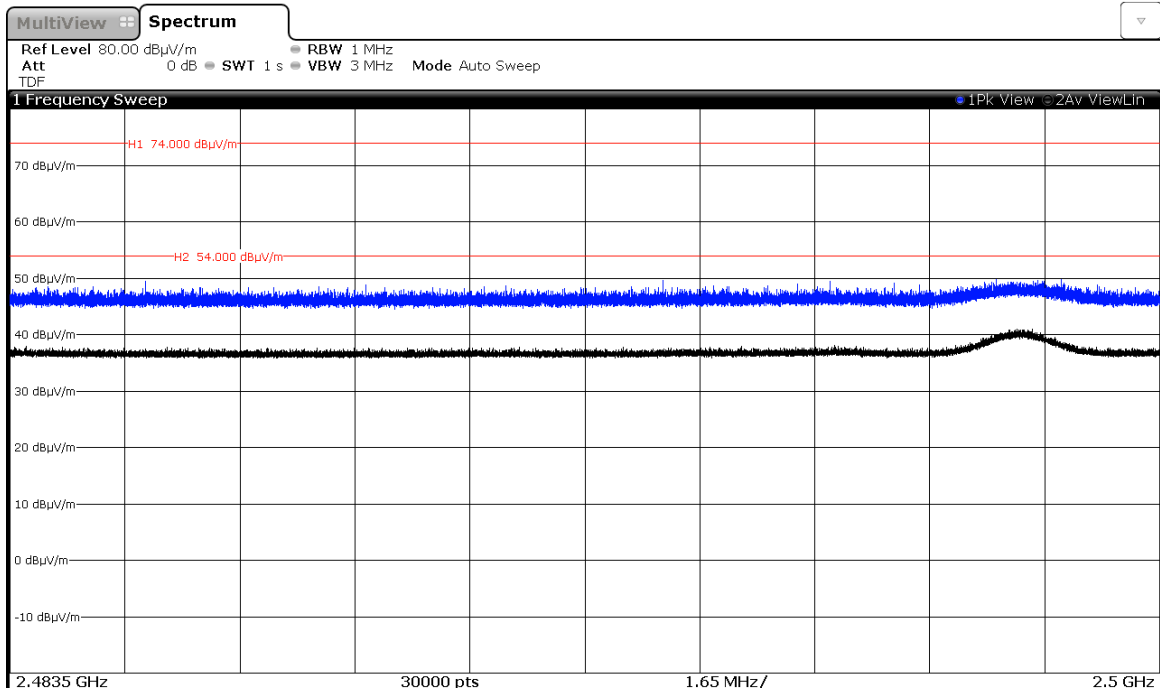

Modulation: $\Pi/4$ -DQPSK

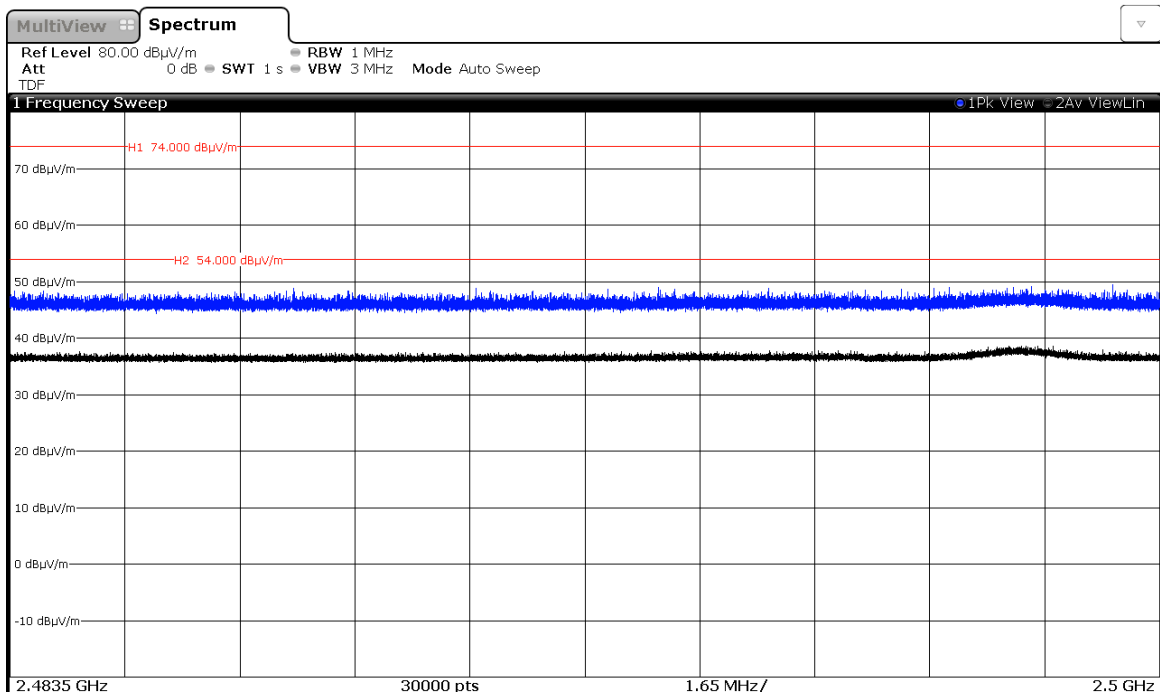


Modulation: 8-DPSK

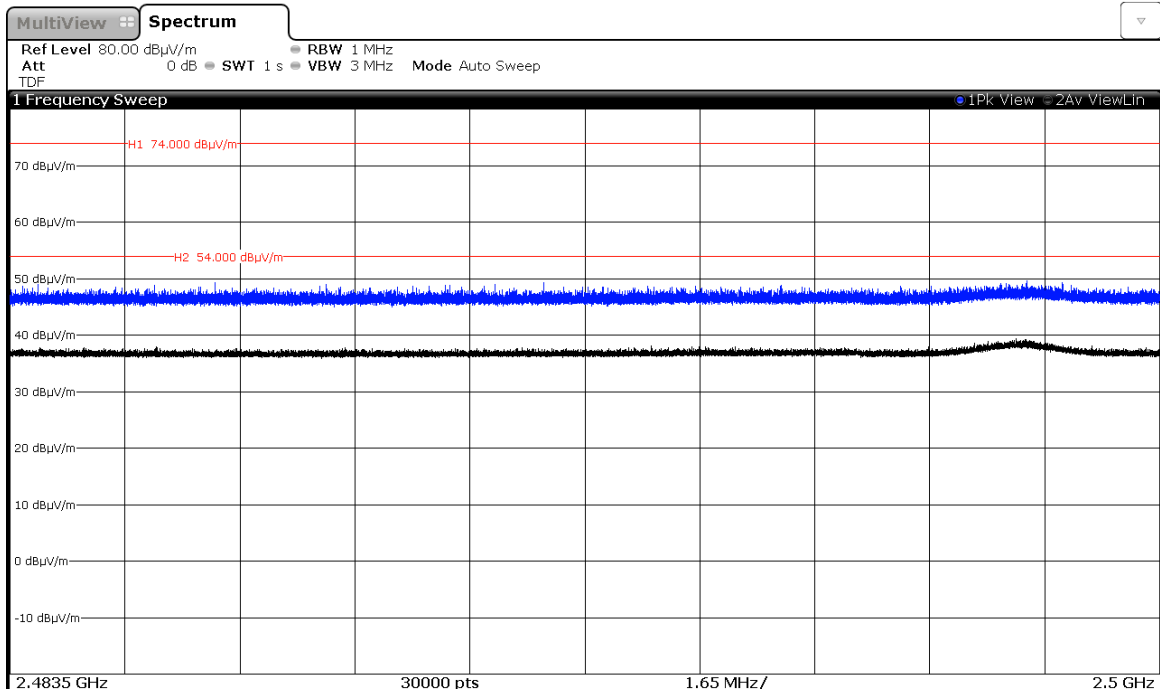


CHANNEL: Middle


Modulation: GFSK

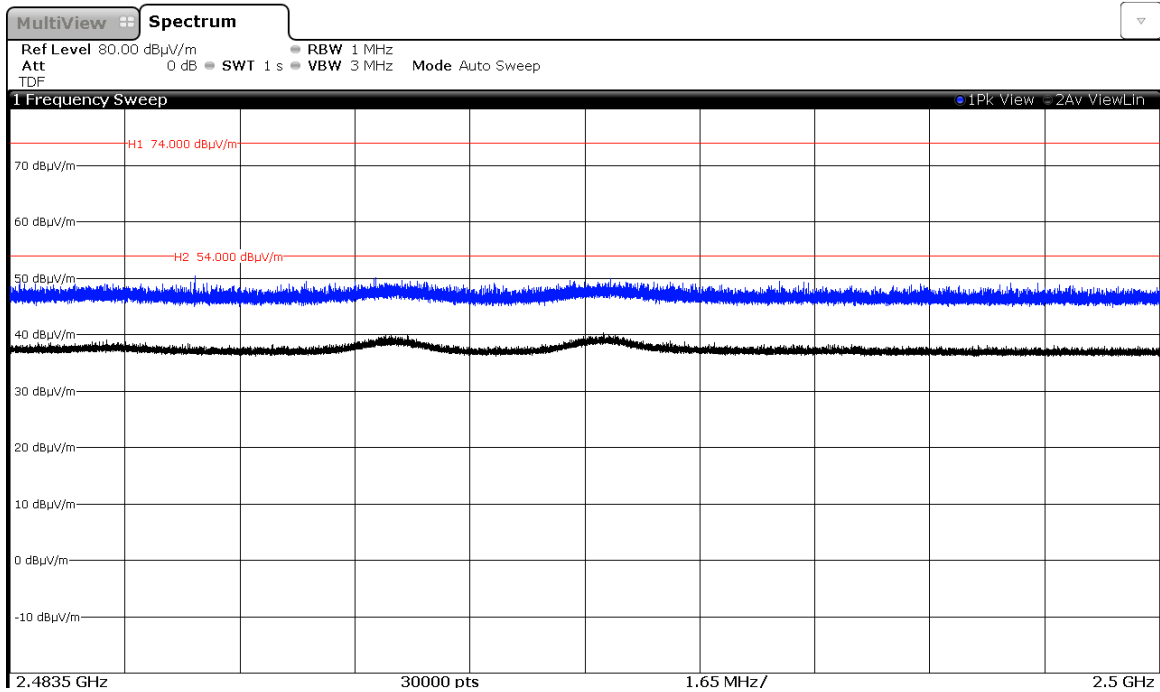

Modulation: $\Pi/4$ -DQPSK

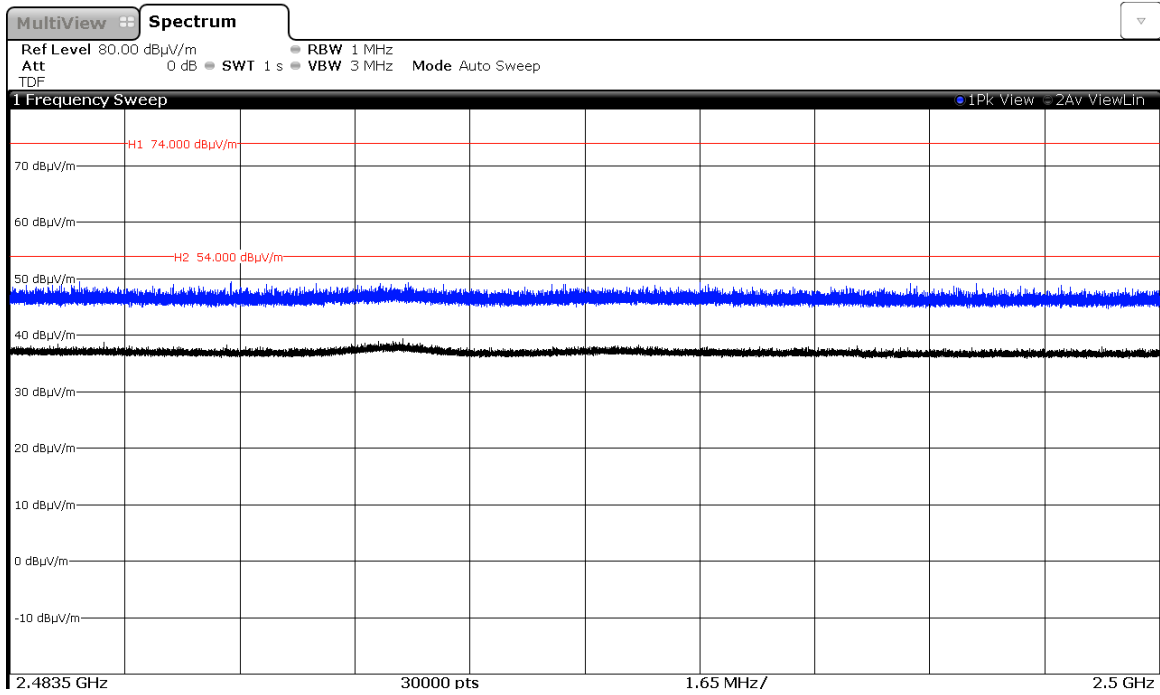


Modulation: 8-DPSK

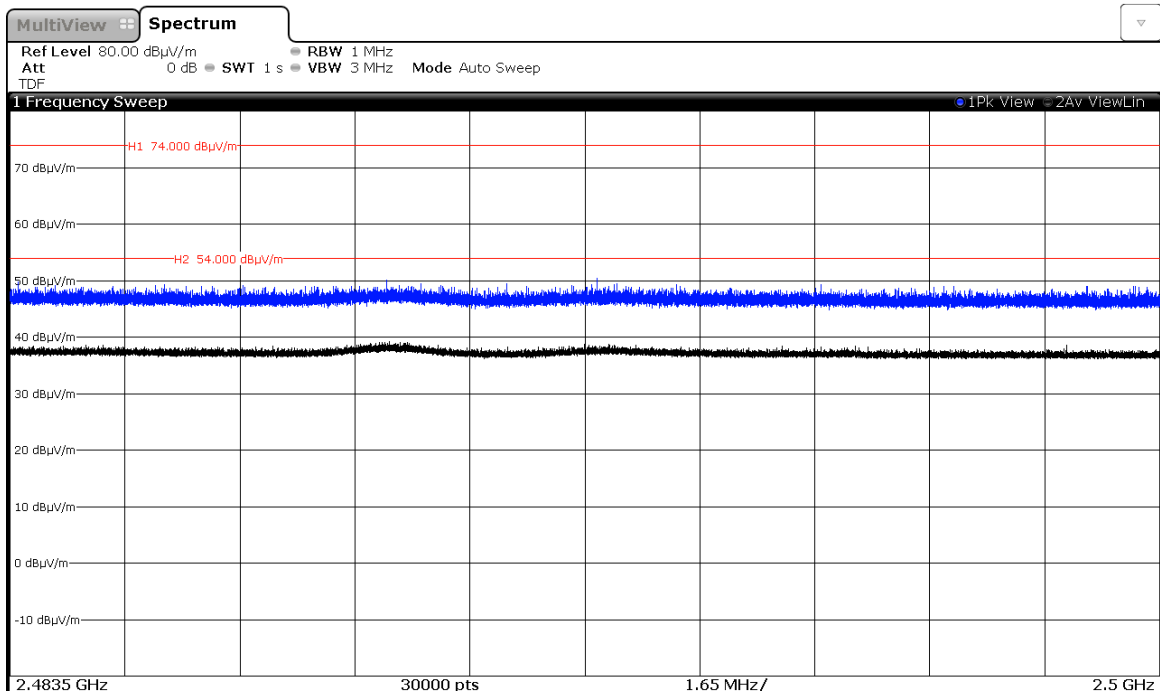


CHANNEL: Highest

Modulation: GFSK

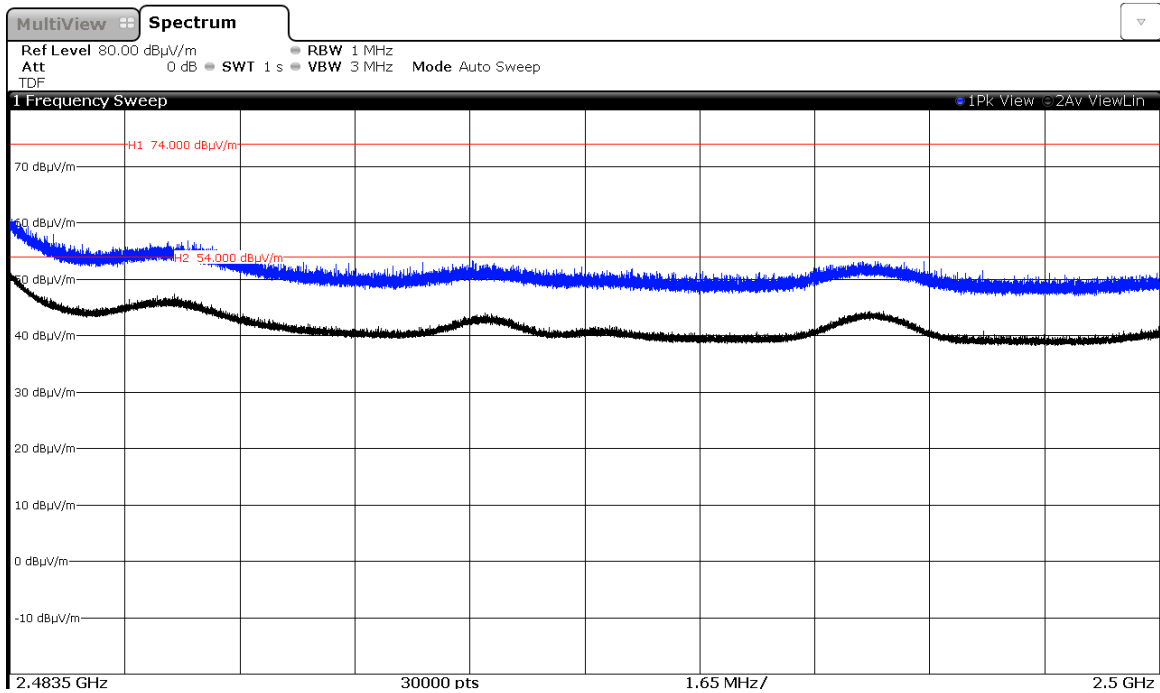

Modulation: Π/4-DQPSK

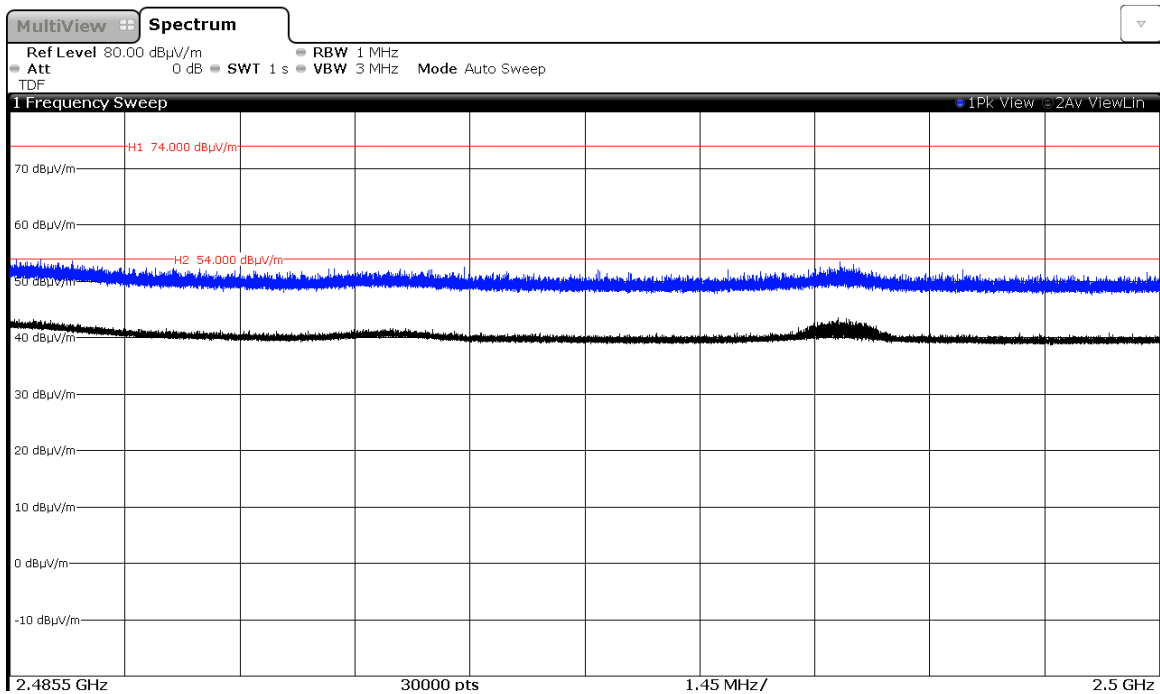

Modulation: 8-DPSK

