







### ISO/IEC17025 Accredited Lab.

Report No: FCC1207074 File reference No: 2012-09-23

Applicant: TBS Avionics Limited

Product: Video Transmitter

Model No: TBS GREENHORN

Brand Name: TBS

Test Standards: FCC Part 15 Subpart C, Paragraph 15.249

Test result: It is herewith confirmed and found to comply with the requirements set up by ANSI C63.4&FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: September 22, 2012

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1207074 Page 2 of 32

Date: 2012-09-22



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

# IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.



Report No: 1207074 Date: 2012-09-22



# Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	5
3.0	Technical Details	6
3.1	Summary of Test Results	6
3.2	Test Standards	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT.	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test.	9
5.1	Test Method and Test Procedure.	9
5.2	Configuration of the EUT	9
6.3	EUT Operation Condition.	9
6.4	Radiated Emission Limit.	10
6.5	Test Result.	11
7.0	Band Edge	19
7.1	Test Method and Test Procedure.	19
7.2	Radiated Test Setup.	19
7.3	Configuration of the EUT.	19
7.4	EUT Operating Condition.	19
7.5	Band Edge Limit.	19
7.6	Band Edge Test Result.	20
8.0	Antenna Requirement.	24
9.0	20dB bandwidth measurement.	25
10.0	FCC ID Label	28
11.0	Photo of Test Setup and EUT View	29

Report No: 1207074 Date: 2012-09-22



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

#### 1.2 Applicant Details

Applicant: TBS Avionics Limited

Address: Room 1302 13/F CRE Building, 303 Hennessy Road Wanchai, Hong Kong

Telephone: +852 2138 1338 Fax: +852 2877 1220

#### 1.3 Description of EUT

Product: Video Transmitter

Manufacturer: TBS Avionics Limited

Address: Room 1302 13/F CRE Building, 303 Hennessy Road Wanchai, Hong Kong

Brand Name: TBS

Model Number: TBS GREENHORN

Additional Model Name N/A
Additional Trade Name N/A
Rating: N/A
Number of Channels: 3
Modulation Type: FM

Operation Frequency 5.865GHz、5.845GHz、5.825GHz、5.805GHz、5.785GHz、5.765GHz、5.745GHz、

5.735GHz

Antenna Designation Omni antenna with gain 2.0dBi

#### 1.4 Submitted Sample

4 Samples

#### 1.5 Test Duration

2012-07-18 to 2012-8-12

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1207074 Page 5 of 32

Date: 2012-09-22

1.6 Test Uncertainty Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

Terry Tang 1.7 Test Engineer The sample tested by

Print Name: Terry Tang

2.0		Test Equi	pments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2012-08-21	2013-08-20
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2012-08-21	2013-08-20
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2012-08-21	2013-08-20
Ultra Broadband ANT	Schwarebeck	VULB9163	9163/340	2012-08-21	2013-08-20
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2012-08-21	2013-08-20
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2012-08-21	2013-08-20
Power meter	Anritsu	ML2487A	6K00003613	2012-08-21	2013-08-20
Power sensor	Anritsu	MA2491A	32263	2012-08-21	2013-08-20
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2012-08-21	2013-08-20
Spectrum	ROHDE&SCHWARZ	FSP40	1164.4391.26	2012-08-21	2013-08-20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2012-08-21	2013-08-20
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2012-08-21	2013-08-20

Report No: 1207074 Page 6 of 32

Date: 2012-09-22



#### 3.0 Technical Details

### 3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249

#### 4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Page 7 of 32

Report No: 1207074 Date: 2012-09-22



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

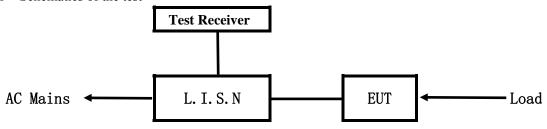


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

#### Block diagram of Test setup

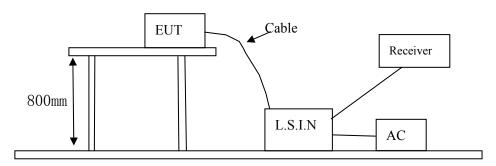

# 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

#### A. EUT

Device	Manufacturer	Model	FCC ID
Video Transmitter	TBS Avionics Limited	TBS GREENHORN	QOS-VIDEOTX

#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1207074 Page 8 of 32

Date: 2012-09-22



# C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
			FCC ID	

#### 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

	<u>e e i</u>						
	Eraguanay(MHz)	Class A Li	mits (dBµV)	Class B Limits (dBµV)			
Frequency(MHz)		Quasi-peak Level	Average Level	Quasi-peak Level	Average Level		
	$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
	$0.50 \sim 5.00$	73.0	60.0	56.0	46.0		
	5.00 ~ 30.00	73.0	60.0	60.0	50.0		

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Due to DC operation, this test item not applicable.

Report No: 1207074 Page 9 of 32


Date: 2012-09-22



#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

# **Block diagram of Test setup**

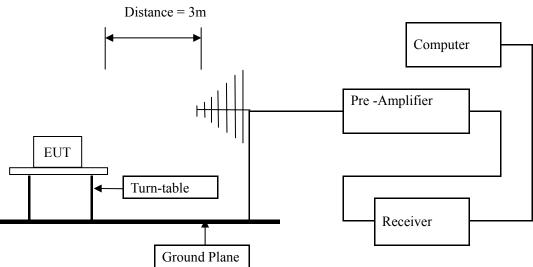

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

Report No: 1207074 Page 10 of 32

Report No: 1207074 Date: 2012-09-22



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

#### A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field S	trength of Harmo	onics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
5725-5875	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

### B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-40G, the final emission level got using PK and AV detector.

Report No: 1207074 Page 11 of 32

Date: 2012-09-22



#### 6.5 Test result

#### **Fundamental & Harmonics Radiated Emission Data** $\mathbf{A}$

Product:	Video Transmitter	Test Mode:	keep transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	5VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(GHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
5.865	84.53(PK)	Н	114/94	-9.47
5.865	87.12 (PK)	V	114/94	-6.88
11.730		H/V	74/54	
17.595		H/V	74/54	
23.460		H/V	74/54	
29.325		H/V	74/54	
35.190		H/V	74/54	

Report No: 1207074 Page 12 of 32

Product:	Video Transmitter	Test Mode:	keep transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	5VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(GHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
5.805	82.78 (PK)	Н	114/94	-11.22
5.805	87.22 (PK)	V	114/94	-6.78
11.610		Н	74/54	
17.415		V	74/54	
23.220		H/V	74/54	
29.025		H/V	74/54	
34.830		H/V	74/54	

Report No: 1207074 Page 13 of 32

Date: 2012-09-22



Product:	Video Transmitter	Test Mode:	keep transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	3.7VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(GHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
5.735	81.29 (PK)	Н	114/94	-12.71
5.735	85.08 (PK)	V	114/94	-8.92
11.470		H/V	74/54	
17.205		H/V	74/54	
22.940		H/V	74/54	
28.675		H/V	74/54	
34.410		H/V	74/54	

Note: (1) PK= Peak, AV= Average

(2) Emission Level = Reading Level + Antenna Factor + Cable Loss.


- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) The measured PK value less than the AV limit.

Report No: 1207074 Date: 2012-09-22




Please refer to the following test plots for details:

#### **Channel 5865MHz: Horizontal**

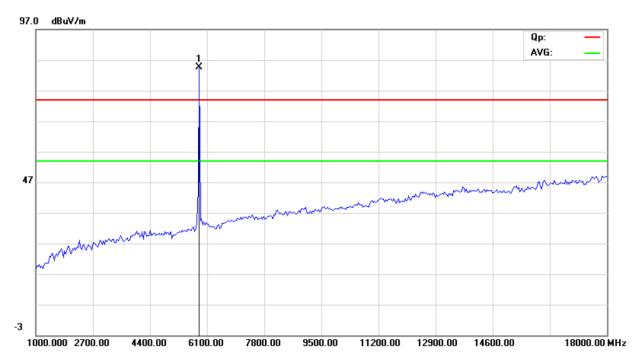

#### Channel 5865MHz: Vertical

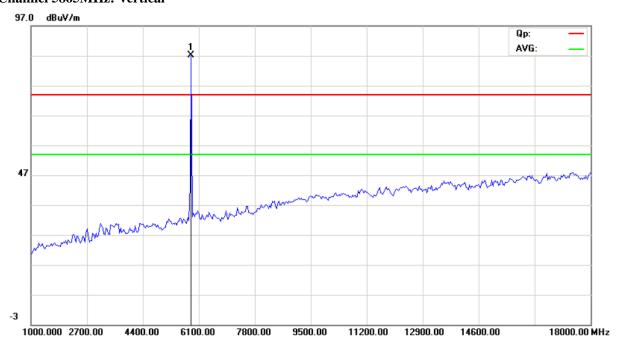

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 15 of 32


Report No: 1207074 Date: 2012-09-22



#### Channel 5805MHz: Horizontal

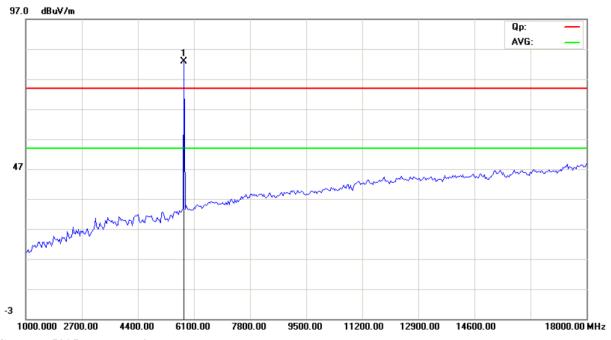


#### Channel 5805MHz: Vertical

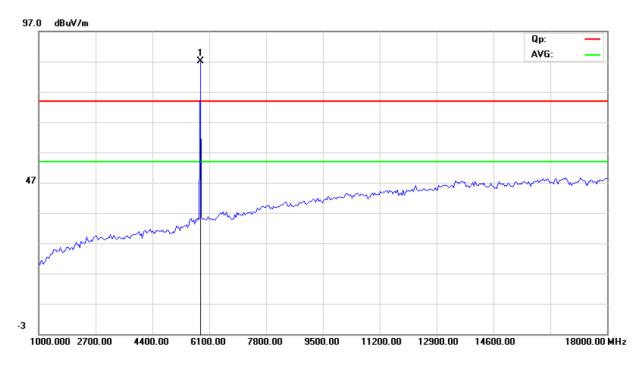


Report No: 1207074 Date: 2012-09-22



#### Channel 5735MHz: Horizontal

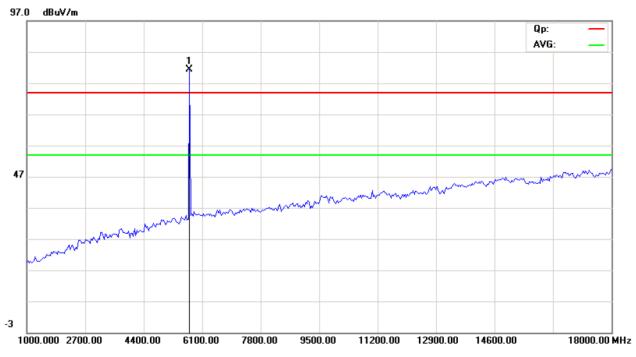

#### Channel 5735MHz: Vertical

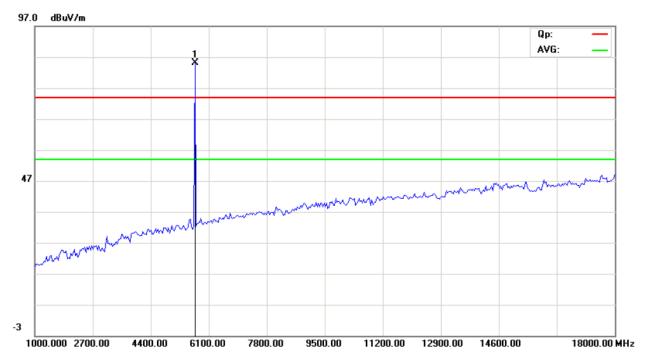

Note: for the radiated emissions from 18-40GHz, it was the floor noise.

Report No: 1207074 Page 17 of 32

Date: 2012-09-22




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

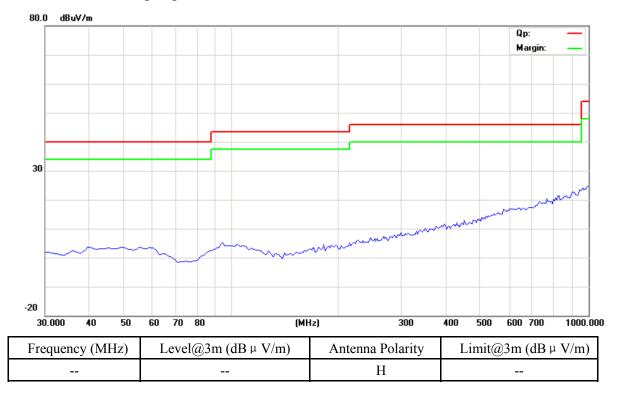

<sup>-</sup>The test data shows much less than the limit, no necessary take down the results.

Report No: 1207074 Page 18 of 32

Date: 2012-09-22




## Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

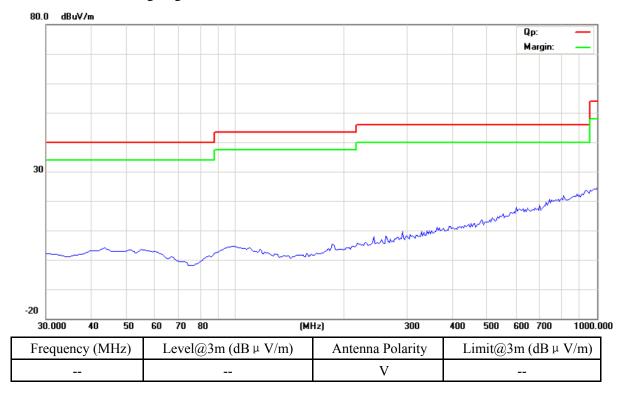

<sup>-</sup>The test data shows much less than the limit, no necessary take down the results.

Report No: 1207074 Date: 2012-09-22




# 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) Set Spectrum as RBW=VBW=1MHz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

# 7. 2 Radiated Test Setup

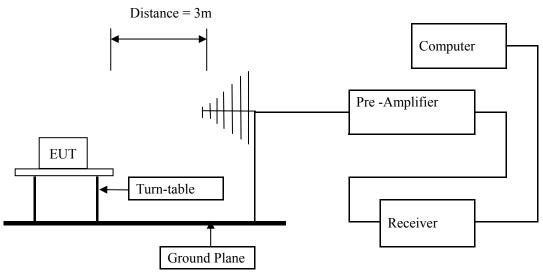

For the actual test configuration, please refer to the related items – Photos of Testing

## 7.3 Configuration of The EUT

Same as section 5.3 of this report

#### 7.4 EUT Operating Condition

Same as section 5.4 of this report.

#### 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Report No: 1207074 Page 20 of 32


Date: 2012-09-22



#### 7.6 Test Result

Product:	Video Transmitter		Test Mode:	Keep transmitting-High Channel
Mode	Keeping Transmitting		Test Voltage	DC5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
5875.000MHz	PK (dBμV/m)	43.42	Limit	74(dBμV/m)
	AV(dBμV/m)			54(dBµV/m)

#### Horizontal

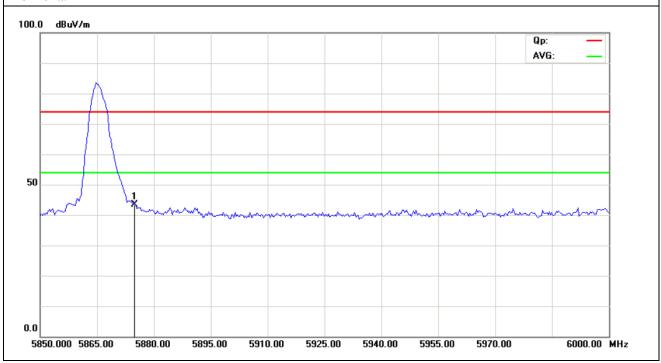


Report No: 1207074 Page 21 of 32

Date: 2012-09-22



Product:	Video Transmitter		Test Mode:	Keep transmitting-High Channel
Mode	Keeping Transmitting		Test Voltage	DC5V
Temperature	24 deg	g. C,	Humidity	56% RH
Test Result:	Pas	SS	Detector	PK
5875.000MHz	PK (dBμV/m)	41.72	Limit	$74(dB\mu V/m)$
	AV(dBμV/m)			54(dBμV/m)

### Vertical

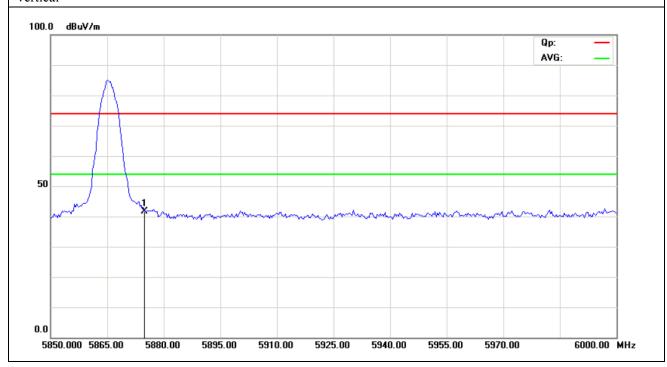


Report No: 1207074 Page 22 of 32

Date: 2012-09-22



Product:	Video Transmitter		Test Mode:	Keep transmitting-Low Channel
Mode	Keeping Transmitting		Test Voltage	DC5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pas	SS	Detector	PK
5725.000MHz	PK (dBμV/m)	40.12	Limit	74(dBμV/m)
	$AV(dB\mu V/m)$			54(dBµV/m)

### Horizontal

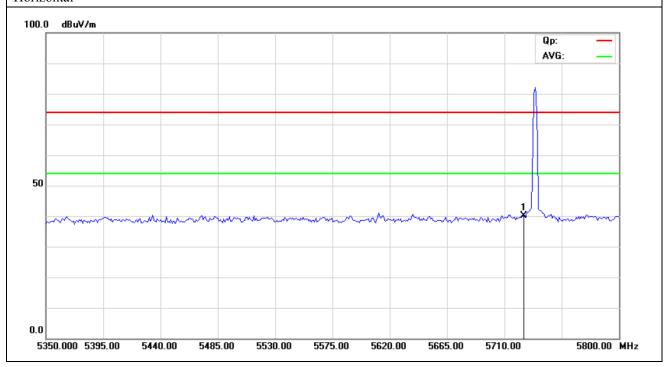


Report No: 1207074 Page 23 of 32

Date: 2012-09-22



Product:	Video Transmitter		Test Mode:	Keep transmitting-Low Channel
Mode	Keeping Transmitting		Test Voltage	DC5V
Temperature	24 deg	g. C,	Humidity	56% RH
Test Result:	Pas	SS	Detector	PK
5725.000MHz	PK (dBμV/m)	41.03	Limit	$74(dB\mu V/m)$
	AV(dBμV/m)			54(dBμV/m)

#### Vertical

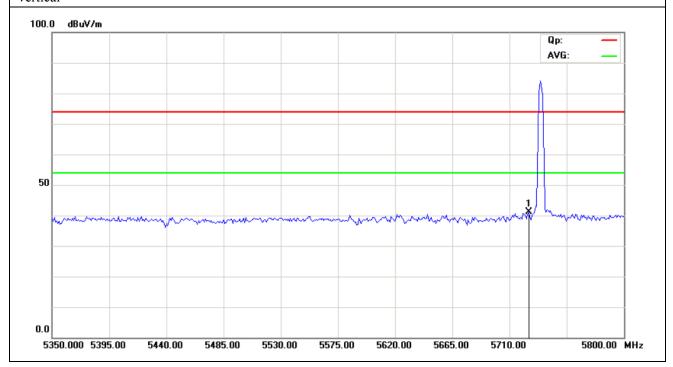

Report No: 1207074 Page 24 of 32

Date: 2012-09-22



## 8.0 Antenna Requirement

## **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.


This product has an Omni antenna with gain 2.0dBi, fulfill the requirement of this section.

Test Result: Pass

Report No: 1207074 Page 25 of 32



9.0 20dB Bandwidth Measurement					
Product:	Video Transmitter	Test Mode:	Keep transmitting-5865MHz		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	3.307MHz				

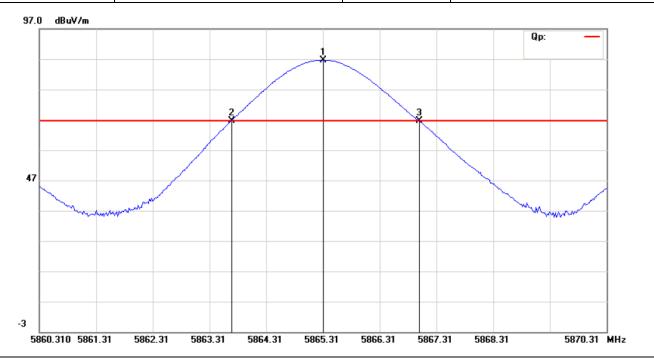

Report No: 1207074 Page 26 of 32




Product:	Video Transmitter	Test Mode:	Keep transmitting-5805MHz
Mode	Keeping Transmitting	g Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
0dB Bandwidth	3.227MHz		
97.0 dBuV/m			
		ı	Qp: —
	3	3	
47			
1	www.		
and the san			Musam

Report No: 1207074 Page 27 of 32



9.2 20dB Bandwidth Measurement					
Product:	Video Transmitter	Test Mode:	Keep transmitting-5735MHz		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	3.287MHz				

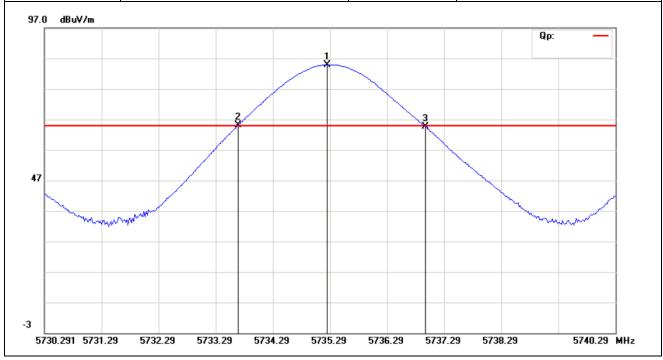

Report No: 1207074 Page 28 of 32

Date: 2012-09-22




#### 10.0 FCC ID Label

# FCC ID: QOS-VIEDOTX

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Mark Location:

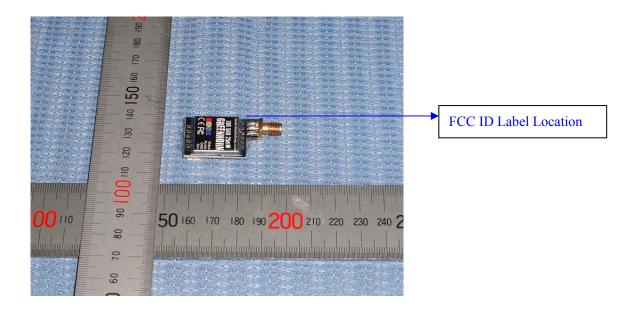

Page 29 of 32

Report No: 1207074 Date: 2012-09-22



#### 11.0 **Photo of testing**

#### Conducted test View—N/A 11.1

#### 11.2 Radiated emission test view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 30 of 32

Report No: 1207074 Date: 2012-09-22



## Photographs - EUT



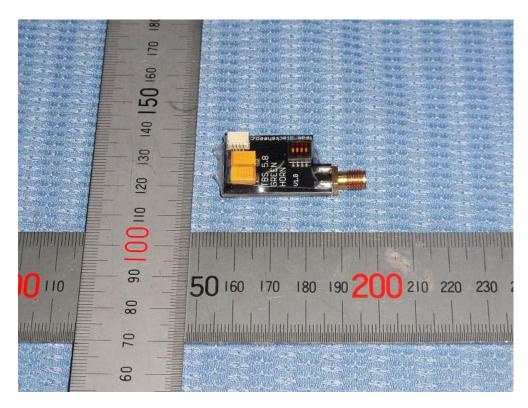

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 31 of 32

Report No: 1207074 Date: 2012-09-22



# Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate. Report No: 1207074 Page 32 of 32

Date: 2012-09-22



# Photographs - EUT

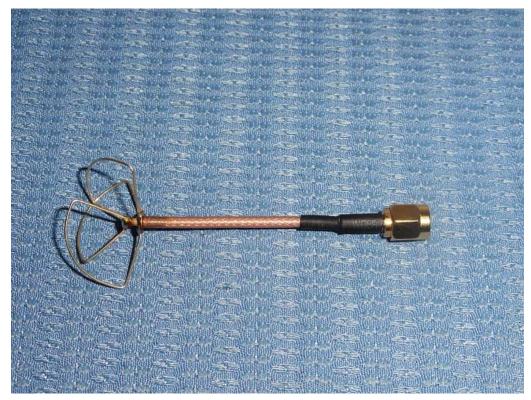

-End of the report--