



TEST REPORT

No. I20N00390-RF-UMTS

for

MobiWire SAS

4G Smart Feature Phone

Model Name: HomePhone 4G

FCC ID: QPN-HOMEPHONE

with

Hardware Version: V01

Software Version: MOBIWIRE_HOMEPHONE4G_V01_200413

Issued Date: 2020-05-19

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I20N00390-RF-UMTS	Rev.0	1st edition	2020-05-19

CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS.....	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA.....	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS.....	9
7. STATEMENT	10
8. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12
A.1 OUTPUT POWER	12
A.2 FIELD STRENGTH OF SPURIOUS RADIATION	17
A.3 FREQUENCY STABILITY	25
A.4 OCCUPIED BANDWIDTH.....	28
A.5 EMISSION BANDWIDTH.....	37
A.6 BAND EDGE COMPLIANCE.....	45
A.7 CONDUCTED SPURIOUS EMISSION	48
A.8 PEAK-TO-AVERAGE POWER RATIO	64

1. SUMMARY OF TEST REPORT

1.1. Test Items

Description	4G Smart Feature Phone
Model Name	HomePhone 4G
Applicant's name	MobiWire SAS
Manufacturer's Name	MobiWire SAS

1.2. Test Standards

FCC Part 2/22/24	10-1-18
	Edition
ANSI C63.26	2015
KDB971168 D01	v03r01

1.3. Test Result

All test items are pass. Please refer to "6 Summary of Test Results" for detail.

1.4. Testing Location


Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026

1.5. Project Data


Testing Start Date: 2020-03-18

Testing End Date: 2020-05-03


1.6. Signature

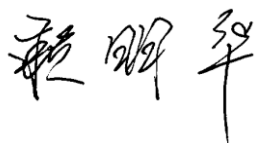

Lai Minghua
(Prepared this test report)

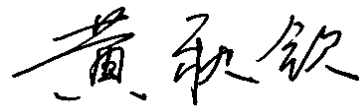

Huang Qiuqin
(Reviewed this test report)



Zhang Hao
(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: MobiWire SAS
Address /Post: 79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX
France.
Contact Person: Leander.Xu
Contact Email leander.xu@mobiwire.com.cn
Telephone: +86 574 59555707
Fax: /

2.2. Manufacturer Information

Company Name: MobiWire SAS
Address /Post: 79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX
France.
Contact Person: Leander.Xu
Contact Email leander.xu@mobiwire.com.cn
Telephone: +86 574 59555707
Fax: /

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT

(AE)

3.1. About EUT

Description	4G Smart Feature Phone
Model Name	HomePhone 4G
FCC ID	QPN-HOMEPHONE
Frequency Bands	WCDMA Band 2,5
Antenna	Integrated
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.7VDC)
Extreme temp. Tolerance	-10°C to +55°C
Condition of EUT as received	No abnormality in appearance

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Sample Arrival Date
UT06aa	355245110000918	V01	MOBIWIRE_HOMEPH ONE4G_V01_200413	2020-03-17
UT01aa	355245110000595	V01	MOBIWIRE_HOMEPH ONE4G_V01_200413	2020-03-17

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery

AE1

Model	5C 1000mAh (178136112)
Manufacturer	Shenzhen Aerospace Electronic Co.,Ltd.
Capacity	1000mAh
Nominal Voltage	3.7V

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model 4G Smart Feature Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-18 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-18 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-18 Edition
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio Service	2015
KDB971168 D01	Power Meas License Digital Systems	v03r01

5. LABORATORY ENVIRONMENT

Shielded room did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 25 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 25 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.4 of this report

WCDMA Band II

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/KDB971168 D01	A.8	P

WCDMA Band V

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.8	P



7. STATEMENT

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

8. TEST EQUIPMENTS UTILIZED

NO.	Description	Type	Manufacture	Series Number	Cal Due Date
1	Test Receiver	ESR7	R&S	101676	2020-11-27
2	BiLog Antenna	3142E	ETS	00224831	2021-05-17
3	Horn Antenna	3117	ETS-lindgren	00066577	2022-04-02
4	Horn Antenna	QSH-SL-18 -26-S-20	Q-par	17013	2023-01-06
5	Antenna	BBHA 9120D	Schwarzbeck	1593	2022-12-05
6	Antenna	VUBA 9117	Schwarzbeck	207	2020-07-16
7	Antenna	QWH-SL-18 -40-K-SG	Q-par	15979	2023-01-06
8	preamplifier	83017A	Agilent	MY39501110	/
9	Signal Generator	SMB100A	R&S	179725	2020-11-27
10	Fully Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2021-07-19
11	Spectrum Analyzer	FSV40	R&S	101192	2021-01-14
12	Universal Radio Communication Tester	CMU200	R&S	114545	2021-01-14
13	Universal Radio Communication Tester	CMU200	R&S	123210	2020-12-13
14	Spectrum Analyzer	FSU	R&S	101506	2020-12-13
15	Temperature Chamber	SH-241	ESPECs	92007516	2020-10-15
16	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2020-11-13

Test software

Item	Name	Vesion
Radiated	EMC32	Version 10.01.00

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 2.1046, 22.913, 24.232.

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200 or CMW500) to ensure max power transmission and proper modulation.

This result contains max output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II and 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V(bottom, middle and top of operational frequency range).

WCDMA Band II

A.1.2.2 Measurement result

QPSK

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	22.54
	9400	1880.0	22.53
	9538	1907.6	22.62

16QAM

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	21.76
	9400	1880.0	21.72
	9538	1907.6	21.86

WCDMA Band V**Measurement result****QPSK**

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	22.83
	4183	836.6	22.43
	4233	846.6	22.73

16QAM

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	22.06
	4183	836.6	21.68
	4233	846.6	21.94

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

A.1.3 Radiated


A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.1.3.2 Method of Measurement

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

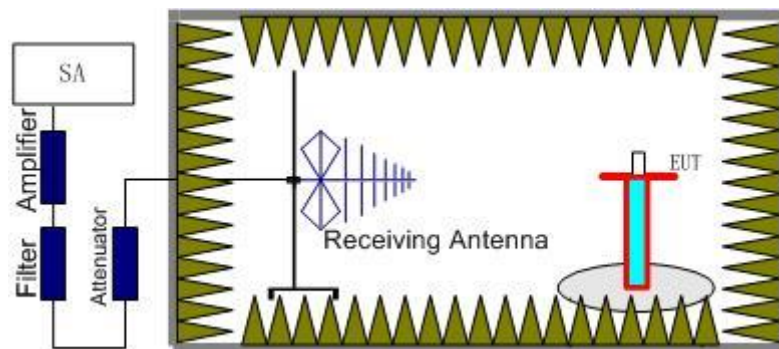

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

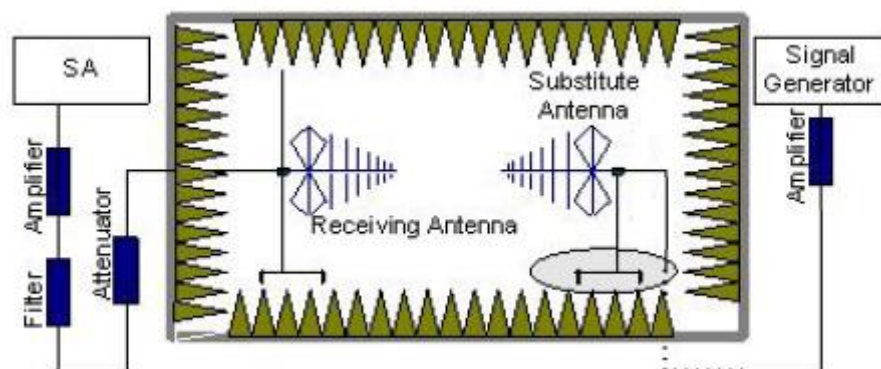

In the chamber, an substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain(dBi) (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

WCDMA Band II-EIRP
Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm (2W)

Measurement result
QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.40	-22.70	-29.30	9.80	16.40	33.00	H
1880.00	-21.74	-29.40	9.80	17.46	33.00	H
1907.60	-21.66	-29.30	9.80	17.44	33.00	H

16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.40	-22.99	-29.30	9.80	16.11	33.00	H
1880.00	-22.11	-29.40	9.80	17.09	33.00	H
1907.60	-21.90	-29.30	9.80	17.20	33.00	H

Frequency: 1880.00MHz

 Peak EIRP(dBm)= P_{Mea}(-21.74)-(P_{ci}+P_{Ag})(-29.40dB)+Ga (9.80dB) =17.46dBm

ANALYZER SETTINGS: RBW = VBW = 5MHz
WCDMA Band V-ERP
Limits

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

Measurement result
QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction(dB)	ERP(dBm)	Limit(dBm)	Polarization
826.40	-13.01	-33.60	-0.30	2.15	18.14	38.45	H
836.60	-13.75	-33.50	-0.30	2.15	17.30	38.45	H
846.60	-12.24	-33.50	-0.30	2.15	18.81	38.45	H

16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.40	-13.06	-33.60	-0.30	2.15	18.09	38.45	H
836.60	-13.70	-33.50	-0.30	2.15	17.35	38.45	H
846.60	-12.15	-33.50	-0.30	2.15	18.90	38.45	H

Frequency: 846.60MHz

 Peak ERP(dBm)= P_{Mea}(-12.15dBm)-(P_{ci}+P_{Ag})(-33.50dB)+Ga (-0.30dB)-2.15dB=18.90dBm

ANALYZER SETTINGS: RBW = VBW = 5MHz
Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

A.2 FIELD STRENGTH OF SPURIOUS RADIATION

Reference


FCC: CFR 2.1053, 22.917, 24.238.

A.2.1 Measurement Method


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238 and Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V .

The procedure of radiated spurious emissions is as follows:

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

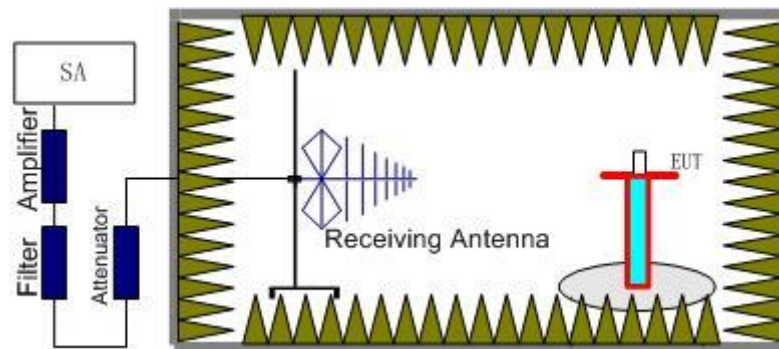

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

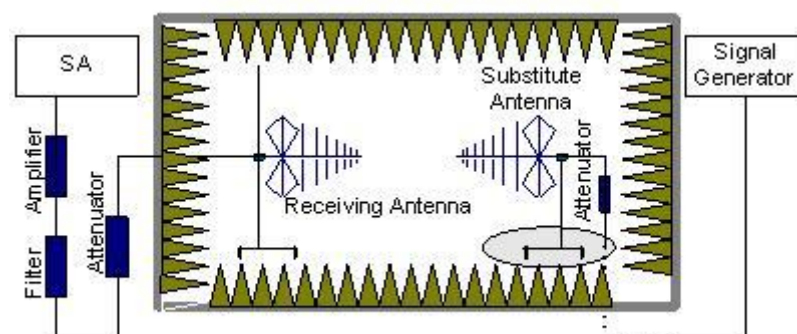

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dB$.

A.2.2 Measurement Limit

Part 24.238 , Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) and WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II and WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

WCDMA BAND II Mode Channel 9662/1932.4MHz (QPSK)

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2868.27	-56.54	1.00	10.70	-46.84	-13.00	V
3702.50	-54.21	1.10	12.20	-43.11	-13.00	H
7413.50	-53.29	1.90	11.30	-43.89	-13.00	V
11717.00	-53.65	2.50	11.00	-45.15	-13.00	V
14718.00	-52.58	2.50	11.20	-43.88	-13.00	H
16940.00	-52.47	2.90	14.50	-40.87	-13.00	V

WCDMA BAND II Mode Channel 9800/1960MHz (QPSK)

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2833.33	-57.07	1.00	10.70	-47.37	-13.00	V
3758.50	-55.78	1.10	12.20	-44.68	-13.00	H
10424.00	-55.18	2.30	10.80	-46.68	-13.00	V
12231.50	-54.65	2.60	12.60	-44.65	-13.00	H
14883.50	-52.14	2.70	11.20	-43.64	-13.00	V
16950.50	-52.13	2.90	14.50	-40.53	-13.00	V

WCDMA BAND II Mode Channel 9938/1987.6MHz (QPSK)

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2958.13	-58.01	1.00	11.50	-47.51	-13.00	H
3813.00	-49.67	1.20	12.40	-38.47	-13.00	H
7626.00	-54.36	1.80	11.30	-44.86	-13.00	V
11703.50	-53.58	2.50	11.00	-45.08	-13.00	V
14889.50	-52.08	2.70	11.20	-43.58	-13.00	V
17163.50	-50.41	3.30	12.80	-40.91	-13.00	V

WCDMA BAND II Mode Channel 9662/1932.4MHz (16QAM)

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2944.27	-58.08	1.00	11.50	-47.58	-13.00	V
3706.00	-54.05	1.10	12.20	-42.95	-13.00	H
5554.50	-61.03	1.40	13.10	-49.33	-13.00	V
7406.00	-54.23	1.90	11.30	-44.83	-13.00	V
14433.50	-53.43	2.50	11.90	-44.03	-13.00	H
16785.50	-54.66	2.90	16.50	-41.06	-13.00	V

WCDMA BAND II Mode Channel 9800/1960MHz (16QAM)

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2951.47	-57.98	1.00	11.50	-47.48	-13.00	V
3762.00	-57.74	1.10	12.20	-46.64	-13.00	V
9989.50	-55.50	2.20	11.20	-46.50	-13.00	H
12078.00	-55.11	2.60	12.60	-45.11	-13.00	V
14520.00	-52.06	2.60	11.90	-42.76	-13.00	V
17312.00	-54.35	2.90	16.50	-40.75	-13.00	V

WCDMA BAND II Mode Channel 9938/1987.6MHz (16QAM)

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2512.53	-55.93	0.90	10.70	-46.13	-13.00	H
3813.00	-49.96	1.20	12.20	-38.96	-13.00	H
7634.00	-54.56	1.80	11.30	-45.06	-13.00	V
12010.00	-55.51	2.60	12.60	-45.51	-13.00	V
14596.00	-53.16	2.50	11.90	-43.76	-13.00	H
16879.50	-54.48	2.90	16.50	-40.88	-13.00	V

WCDMA BAND V Mode Channel 4357/871.4 MHz (QPSK)

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2898.40	-56.46	1.00	10.70	-48.91	-13.00	H
3809.00	-63.15	1.20	12.20	-54.30	-13.00	H
5264.00	-62.36	1.60	12.50	-53.61	-13.00	V
5523.50	-61.99	1.40	13.10	-52.44	-13.00	V
6432.00	-59.99	1.60	12.40	-51.34	-13.00	H
8357.50	-57.88	1.80	11.30	-50.53	-13.00	V

WCDMA BAND V Mode Channel 4408/881.6MHz (QPSK)

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2885.33	-56.72	1.00	11.50	-48.37	-13.00	H
4357.50	-62.59	1.30	12.40	-53.64	-13.00	H
6422.50	-59.35	1.60	12.40	-50.70	-13.00	H
7218.00	-59.38	1.90	12.00	-51.43	-13.00	H
8317.00	-58.28	1.80	12.00	-50.23	-13.00	V
8976.00	-58.89	2.00	11.60	-51.44	-13.00	V

WCDMA BAND V Mode Channel 4458/891.6MHz (QPSK)

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2935.20	-56.67	1.00	11.50	-48.32	-13.00	V
4093.00	-62.89	1.30	12.40	-53.94	-13.00	V
4680.00	-63.11	1.30	12.50	-54.06	-13.00	H
5263.50	-61.66	1.60	12.50	-52.91	-13.00	H
6484.00	-59.43	1.70	12.40	-50.88	-13.00	V
8778.00	-58.64	1.90	12.00	-50.69	-13.00	V

WCDMA BAND V Mode Channel 4357/871.4 MHz (16QAM)

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2904.00	-56.97	1.00	11.50	-48.62	-13.00	H
3598.00	-62.58	1.10	12.20	-53.63	-13.00	H
4523.00	-62.94	1.30	12.50	-53.89	-13.00	H
6459.00	-61.64	1.60	12.40	-52.99	-13.00	V
7226.50	-58.95	1.90	12.00	-51.00	-13.00	V
8048.50	-57.47	1.80	11.30	-50.12	-13.00	V

WCDMA BAND V Mode Channel 4408/881.6MHz (16QAM)

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2509.87	-55.96	0.90	10.70	-48.31	-13.00	H
4069.00	-63.54	1.30	12.40	-54.59	-13.00	V
4577.50	-62.85	1.30	12.50	-53.80	-13.00	V
5268.50	-60.81	1.60	12.50	-52.06	-13.00	H
7297.50	-58.48	1.90	12.00	-50.53	-13.00	V
8378.00	-57.96	1.80	11.30	-50.61	-13.00	V

WCDMA BAND V Mode Channel 4458/891.6MHz (16QAM)

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2523.20	-55.48	0.90	10.70	-47.83	-13.00	H
4067.50	-62.62	1.30	12.40	-53.67	-13.00	H
4707.00	-62.44	1.30	12.50	-53.39	-13.00	V
5740.00	-62.79	1.50	13.10	-53.34	-13.00	V
6684.50	-59.58	1.70	12.40	-51.03	-13.00	H
8033.00	-57.51	1.80	11.30	-50.16	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 24.235

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II and WCDMA Band V, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

A.3.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec.

24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.3.3 Measurement results

WCDMA Band II

Frequency Error vs Voltage-QPSK

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	-19	0.010
3.7	-16	0.008
4.2	-21	0.011

Frequency Error vs Temperature-QPSK

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-11	0.006
0	-18	0.009
10	-22	0.012
20	-17	0.009
30	-24	0.013
40	-17	0.009
50	-15	0.008

Frequency Error vs Voltage-16QAM

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	-17	0.009
3.7	-20	0.011
4.2	-22	0.011

Frequency Error vs Temperature-16QAM

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-15	0.008
0	-12	0.006
10	-14	0.007
20	-13	0.007
30	-8	0.004
40	-13	0.007
50	-14	0.008

WCDMA Band V
Frequency Error vs Voltage-QPSK

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	-13	0.016
3.7	-14	0.016
4.2	-8	0.010

Frequency Error vs Temperature-QPSK

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-8	0.009
0	-8	0.010
10	-7	0.008
20	-9	0.011
30	-6	0.007
40	-8	0.009
50	-8	0.009

Frequency Error vs Voltage-16QAM

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	-15	0.018
3.7	-12	0.015
4.2	-9	0.011

Frequency Error vs Temperature-16QAM

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-13	0.016
0	-6	0.007
10	-12	0.015
20	-11	0.013
30	-14	0.016
40	-14	0.016
50	-4	0.005

Expanded measurement uncertainty is 10Hz, k = 2

A.4 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238.

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- e) Set the detection mode to peak, and the trace mode to max hold.
- d) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

WCDMA Band II (99% BW)-QPSK

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1852.4	4.17
1880.0	4.18
1907.6	4.18


WCDMA Band II

Channel 9262-Occupied Bandwidth (99% BW)-QPSK

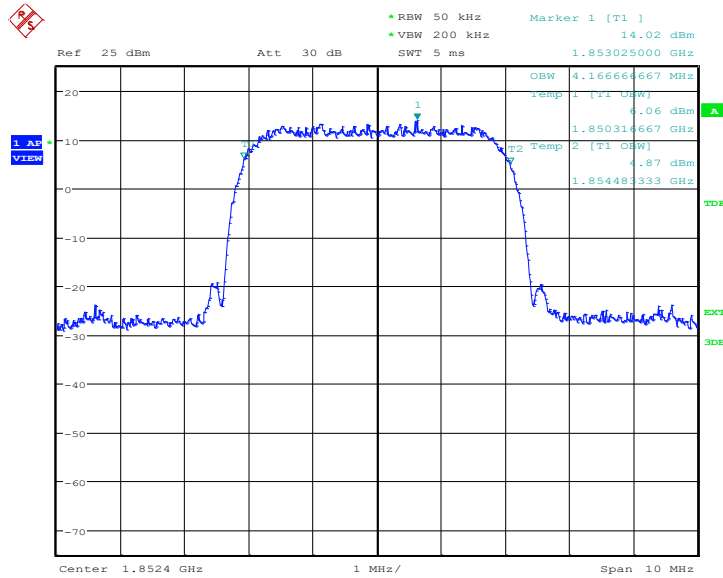


Date: 17.MAR.2020 17:29:55

Channel 9400-Occupied Bandwidth (99% BW)-QPSK

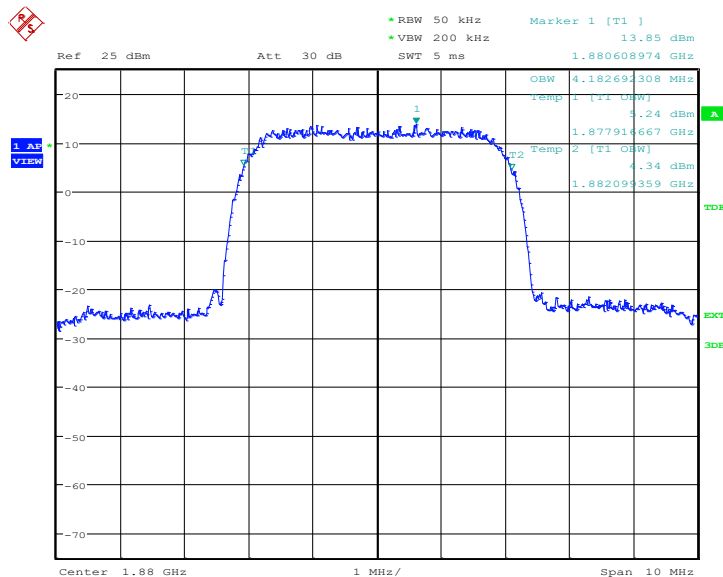

Date: 17.MAR.2020 17:30:29

Channel 9538-Occupied Bandwidth (99% BW)-QPSK

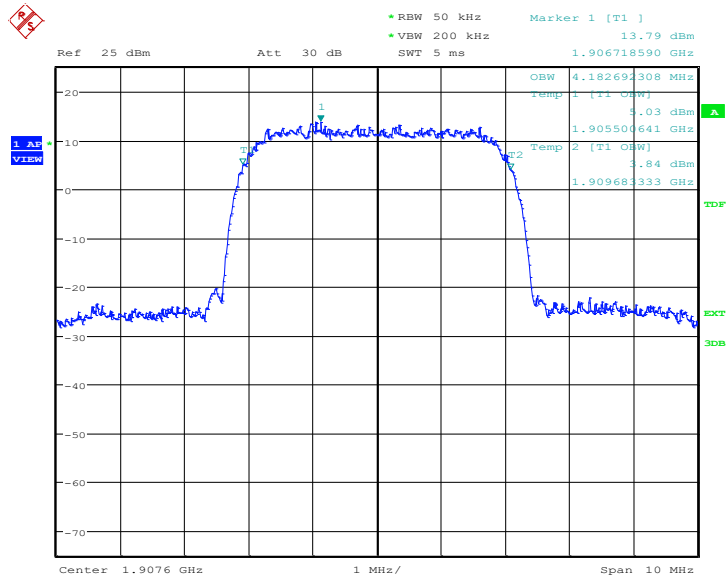


Date: 17.MAR.2020 17:31:03

WCDMA Band II (99% BW)-16QAM


Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1852.4	4.20
1880.0	4.18
1907.6	4.18

WCDMA Band II Channel 9262-Occupied Bandwidth (99% BW)-16QAM

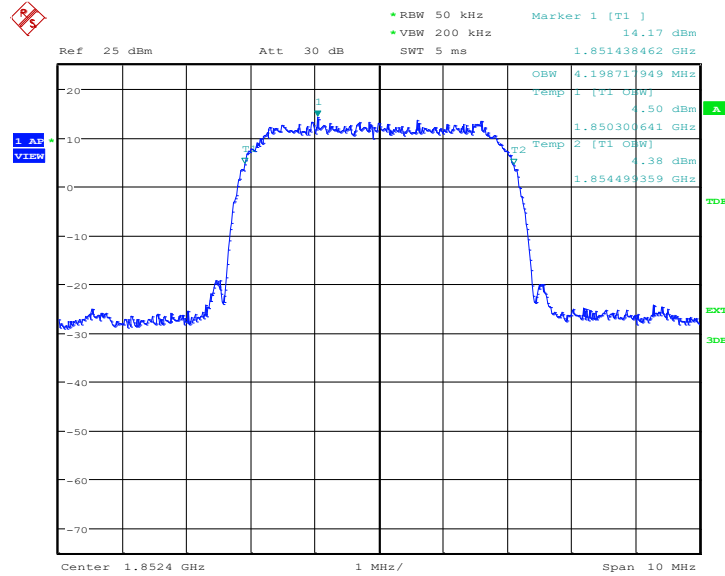


Date: 17.MAR.2020 18:15:37

Channel 9400-Occupied Bandwidth (99% BW)-16QAM

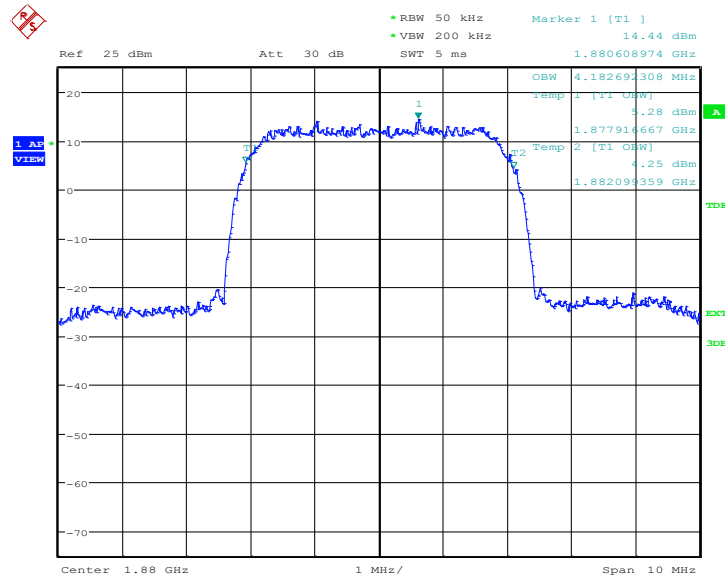

Date: 17.MAR.2020 18:16:11

Channel 9538-Occupied Bandwidth (99% BW)-16QAM

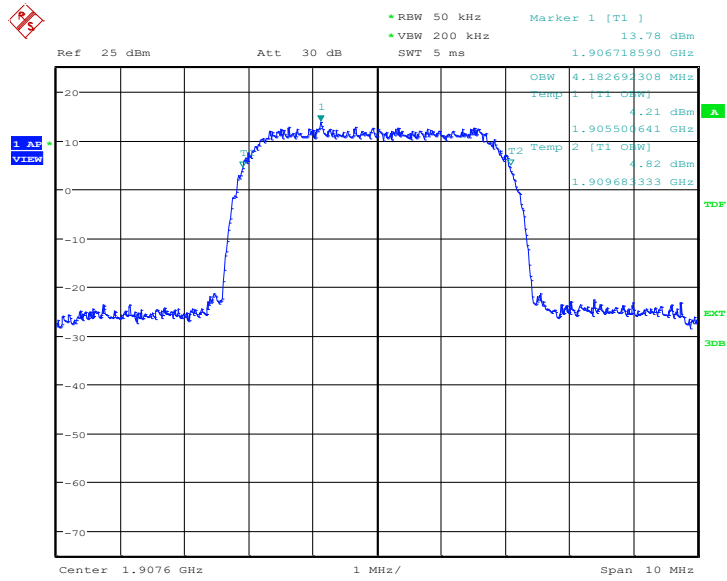


Date: 17.MAR.2020 18:16:45

WCDMA Band V(99% BW)-QPSK

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
826.4	4.20
836.6	4.18
846.6	4.17


WCDMA Band V

Channel 4132-Occupied Bandwidth (99% BW)-QPSK

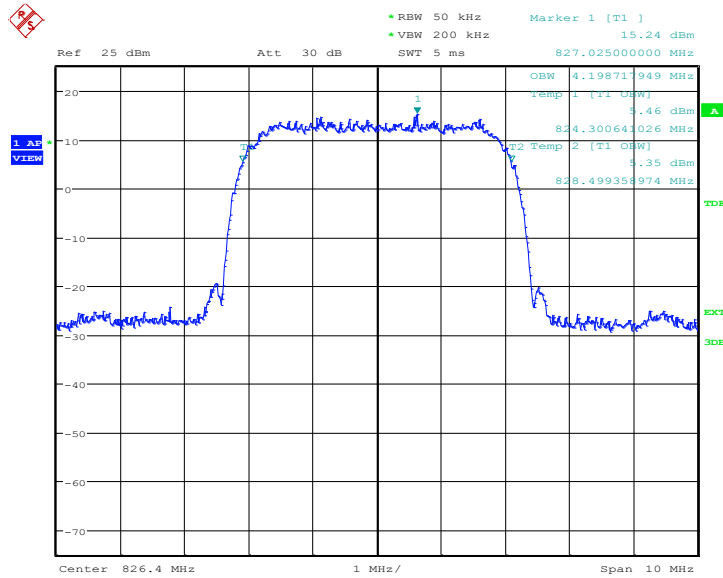


Date: 17.MAR.2020 17:49:36

Channel 4183-Occupied Bandwidth (99% BW)-QPSK

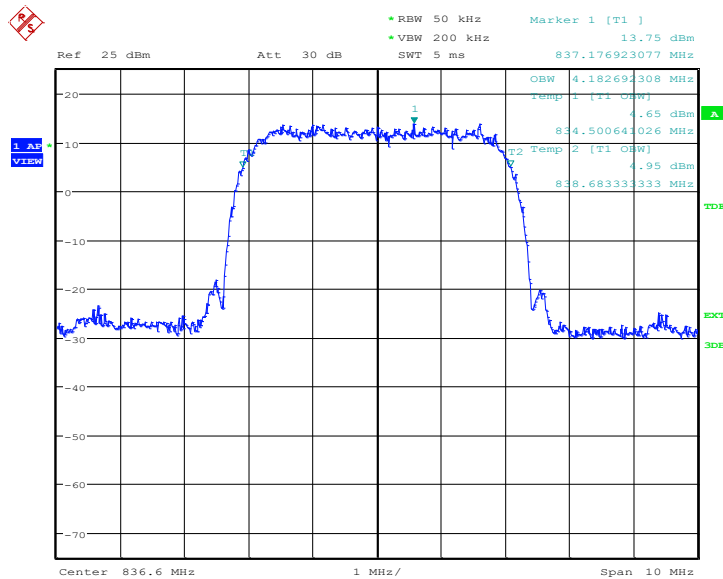

Date: 17.MAR.2020 17:50:10

Channel 4233-Occupied Bandwidth (99% BW)-QPSK

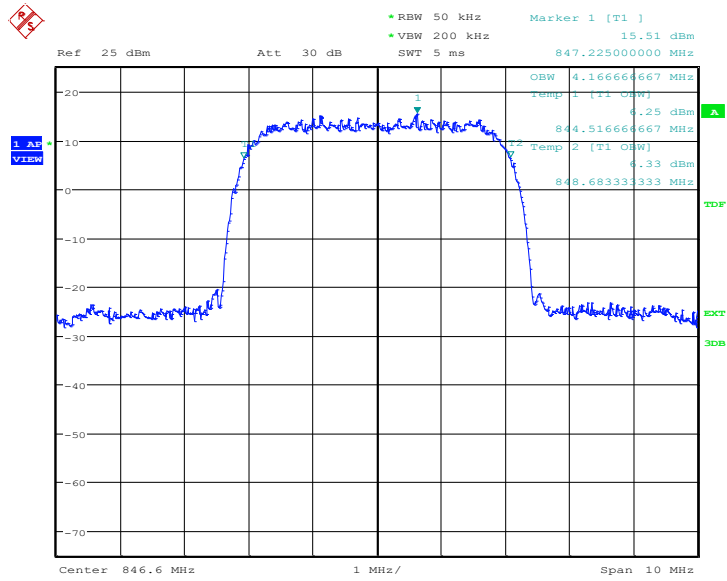


Date: 17.MAR.2020 17:50:43

WCDMA Band V(99% BW)-16QAM

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
826.4	4.20
836.6	4.17
846.6	4.18


WCDMA Band V

Channel 4132-Occupied Bandwidth (99% BW)-16QAM

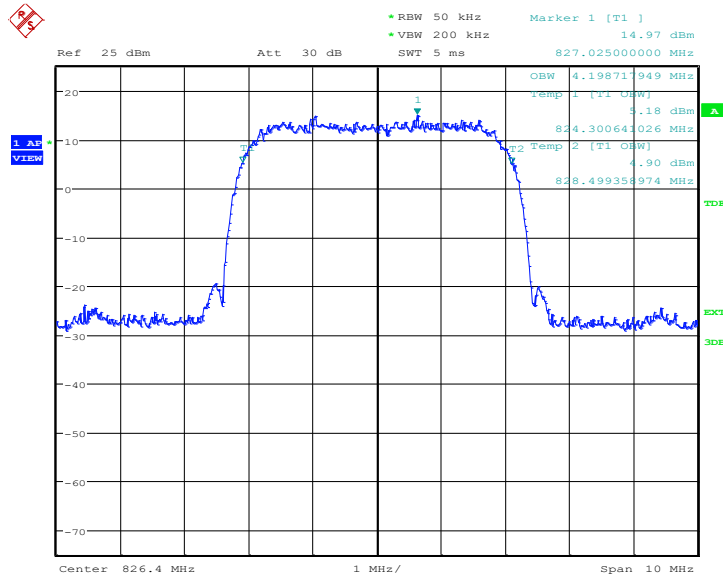


Date: 17.MAR.2020 18:06:18

Channel 4183-Occupied Bandwidth (99% BW)-16QAM

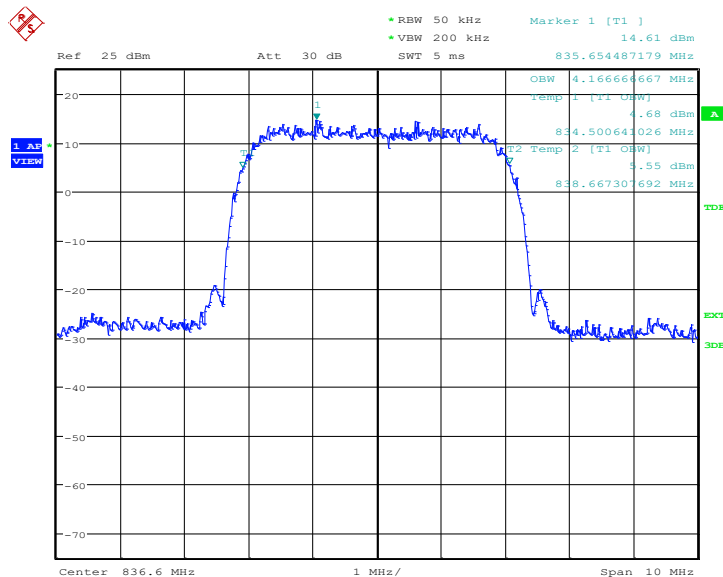

Date: 17.MAR.2020 18:06:51

Channel 4233-Occupied Bandwidth (99% BW)-16QAM

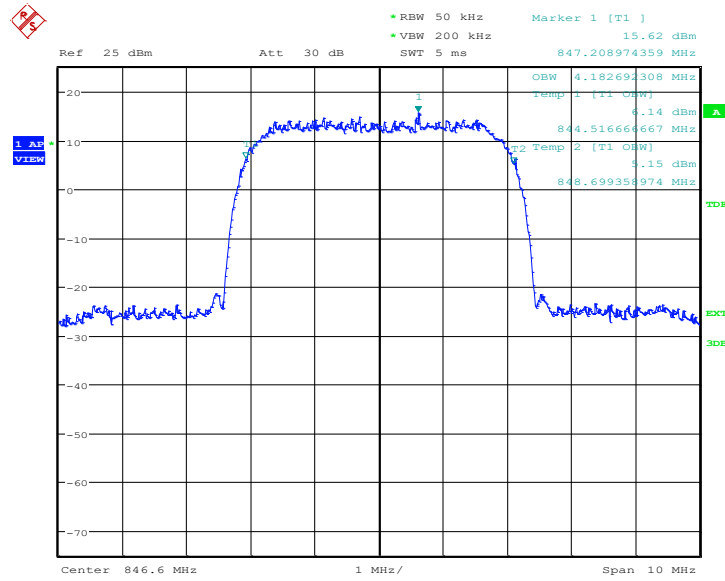

Date: 17.MAR.2020 18:07:25

Note: Expanded measurement uncertainty is $U = 3428\text{Hz}$, $k = 2$

A.5 EMISSION BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238.

A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies. Table below lists the measured -26dB BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band II (-26dB BW)-QPSK

Frequency(MHz)	Emission Bandwidth (-26dB BW)(MHz)
1852.4	4.74
1880.0	4.79
1907.6	4.78


WCDMA Band II

Channel 9262-Emission Bandwidth (-26dB BW)-QPSK

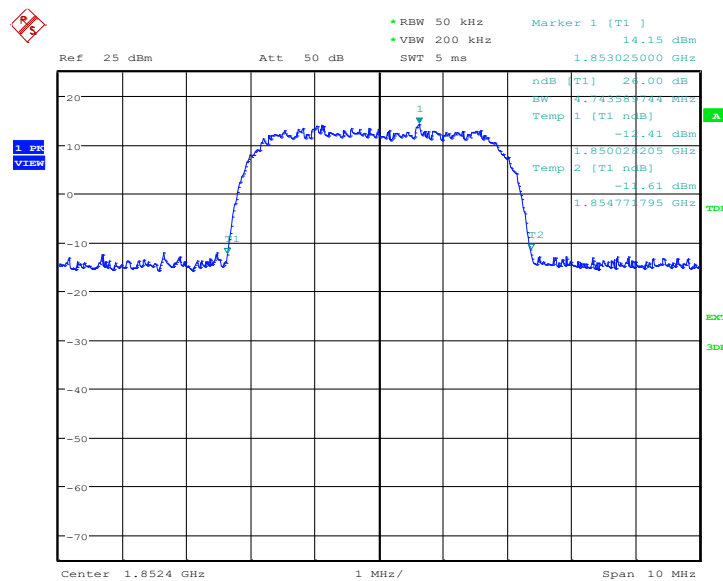


Date: 17.MAR.2020 17:32:12

Channel 9400-Emission Bandwidth (-26dBc BW)-QPSK

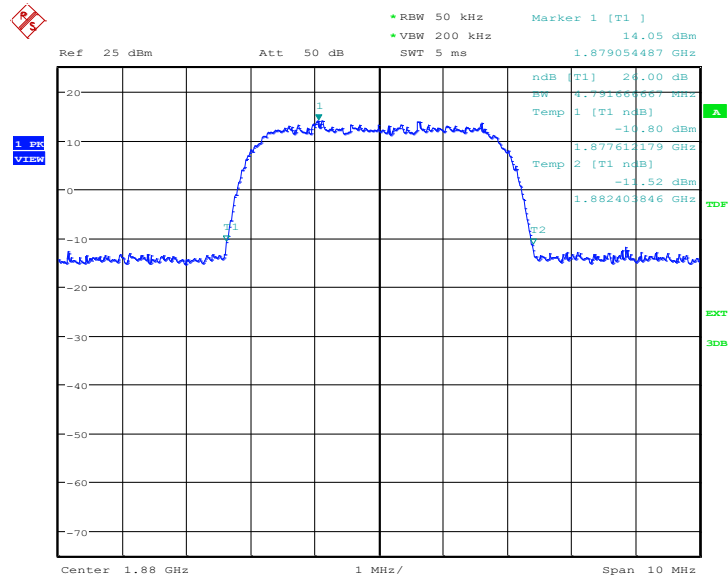

Date: 17.MAR.2020 17:33:21

Channel 9538-Emission Bandwidth (-26dBc BW)-QPSK

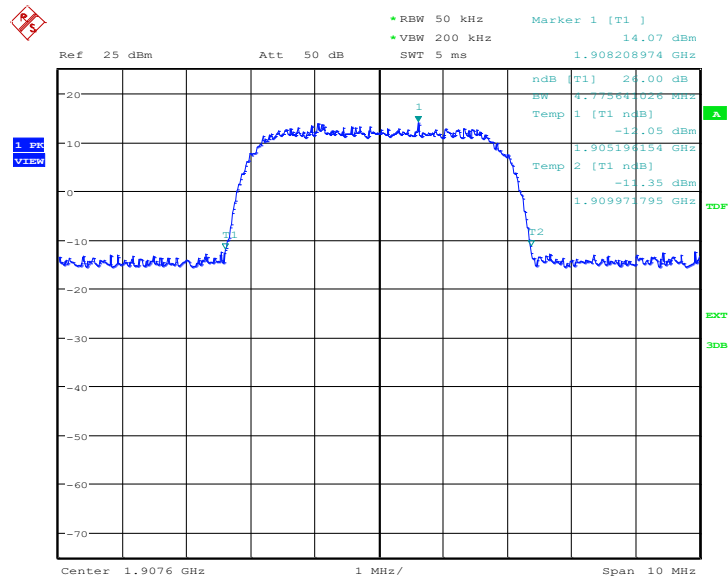


Date: 17.MAR.2020 17:34:30

WCDMA Band II (-26dBc BW)-16QAM

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
1852.4	4.76
1880.0	4.78
1907.6	4.76


WCDMA Band II

Channel 9262-Emission Bandwidth (-26dBc BW)-16QAM

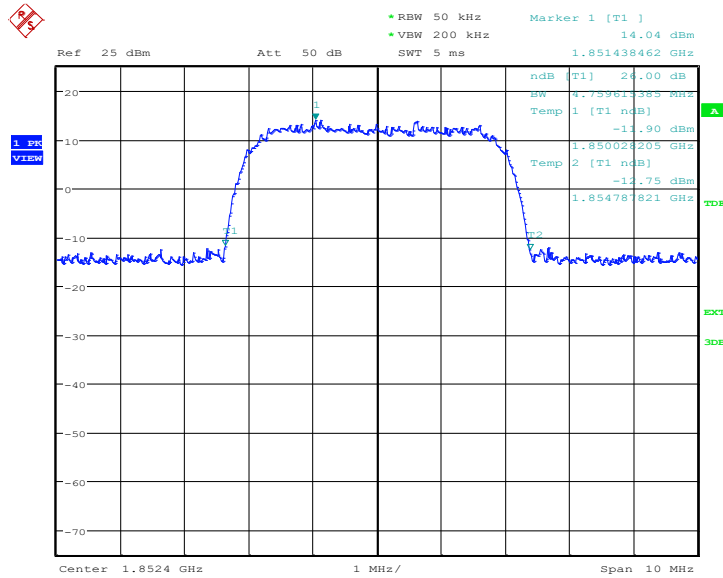


Date: 17.MAR.2020 18:17:54

Channel 9400-Emission Bandwidth (-26dBc BW)-16QAM

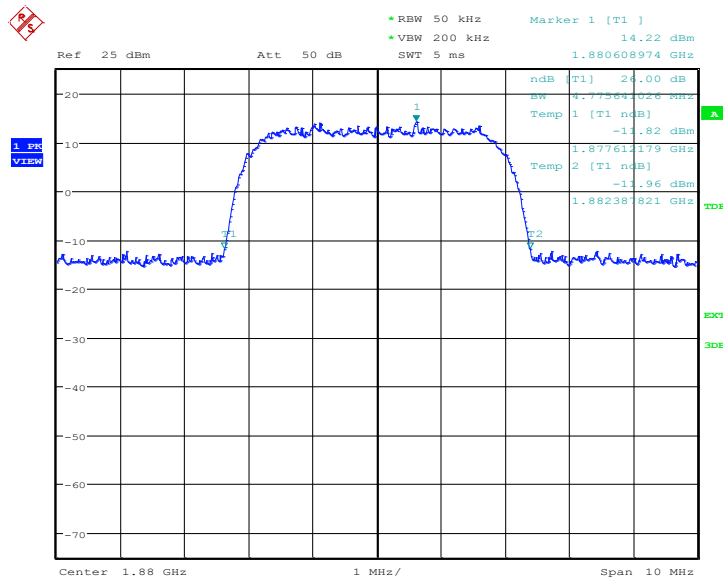

Date: 17.MAR.2020 18:19:04

Channel 9538-Emission Bandwidth (-26dBc BW)-16QAM

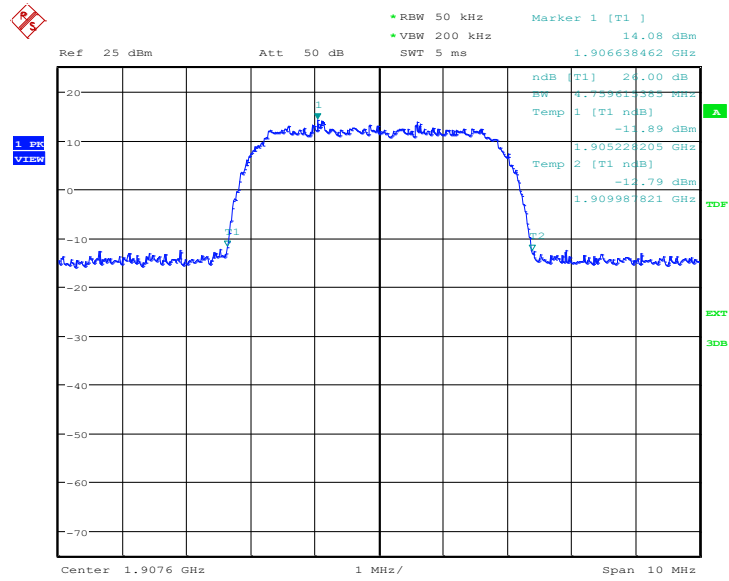


Date: 17.MAR.2020 18:20:13

WCDMA Band V(-26dBc BW)-QPSK

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
826.40	4.73
836.60	4.73
846.60	4.74


WCDMA Band V

Channel 4132-Emission Bandwidth (-26dBc BW)-QPSK

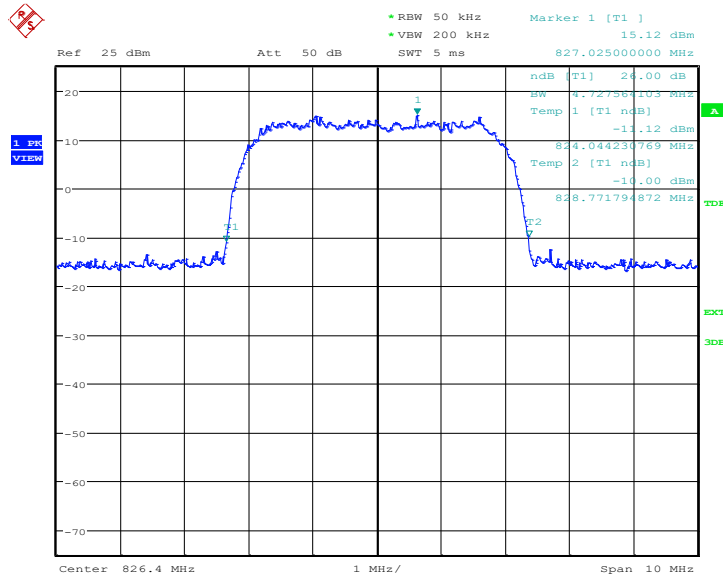


Date: 17.MAR.2020 17:51:54

Channel 4183-Emission Bandwidth (-26dBc BW)-QPSK

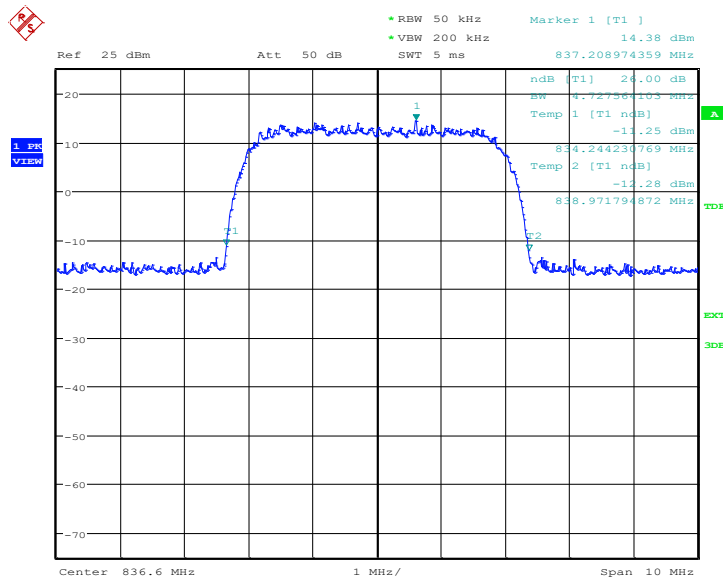

Date: 17.MAR.2020 17:53:03

Channel 4233-Emission Bandwidth (-26dBc BW)-QPSK

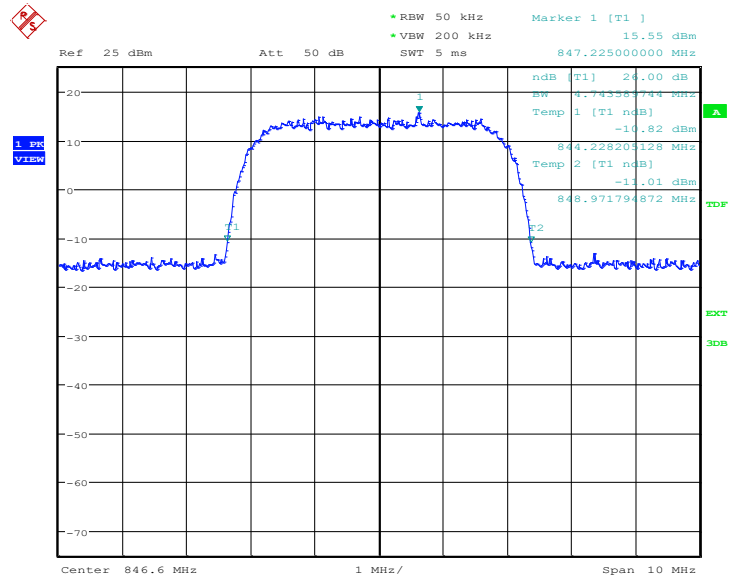


Date: 17.MAR.2020 17:54:12

WCDMA Band V(-26dBc BW)-16QAM

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
826.40	4.73
836.60	4.71
846.60	4.74


WCDMA Band V

Channel 4132-Emission Bandwidth (-26dBc BW)-16QAM

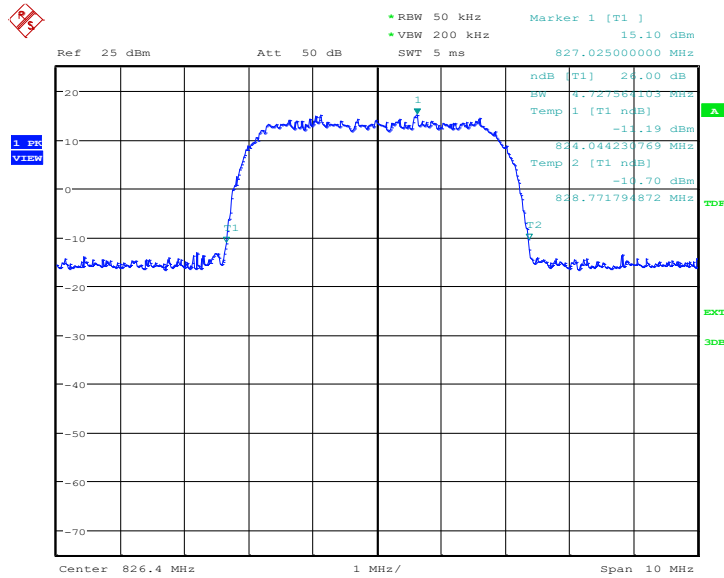


Date: 17.MAR.2020 18:08:35

Channel 4183-Emission Bandwidth (-26dBc BW)-16QAM

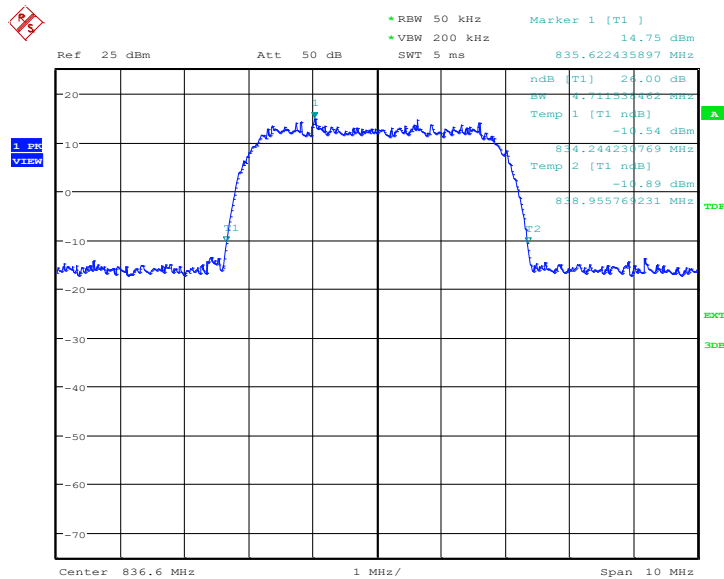

Date: 17.MAR.2020 18:09:44

Channel 4233-Emission Bandwidth (-26dBc BW)-16QAM

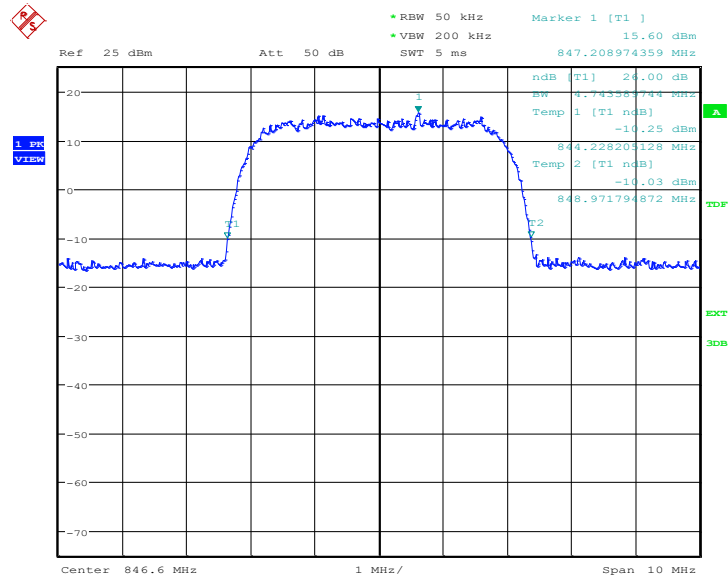

Date: 17.MAR.2020 18:10:53

Note: Expanded measurement uncertainty is $U = 3428\text{Hz}$, $k = 2$

A.6 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 2.1051, 22.917, 24.238.


A.6.1 Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm. A relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

A.6.2 Measurement result


Only worst case result is given below

WCDMA Band II LOW BAND EDGE BLOCK-A-Channel 9262

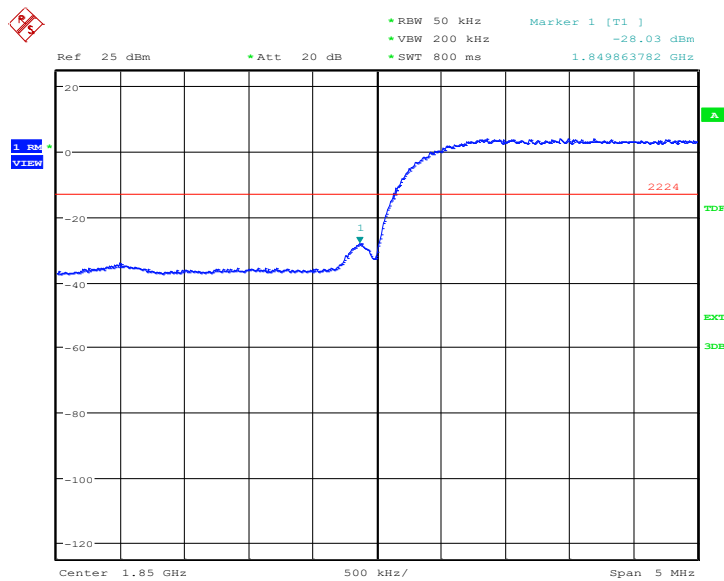


Date: 17.MAR.2020 17:34:40

HIGH BAND EDGE BLOCK-C-Channel 9538

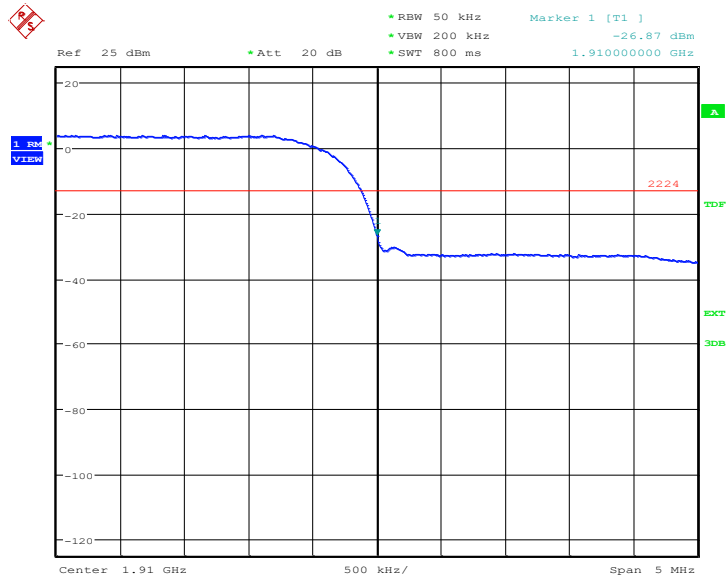


Date: 17.MAR.2020 17:36:45

**WCDMA Band V
LOW BAND EDGE BLOCK-A-Channel 4132**

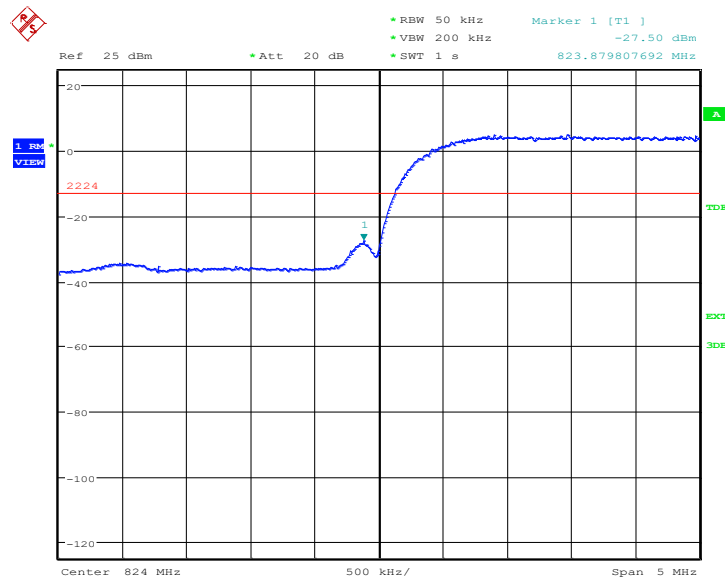

Date: 17.MAR.2020 17:54:22

HIGH BAND EDGE BLOCK-C (WCDMA Band V) –Channel 4233

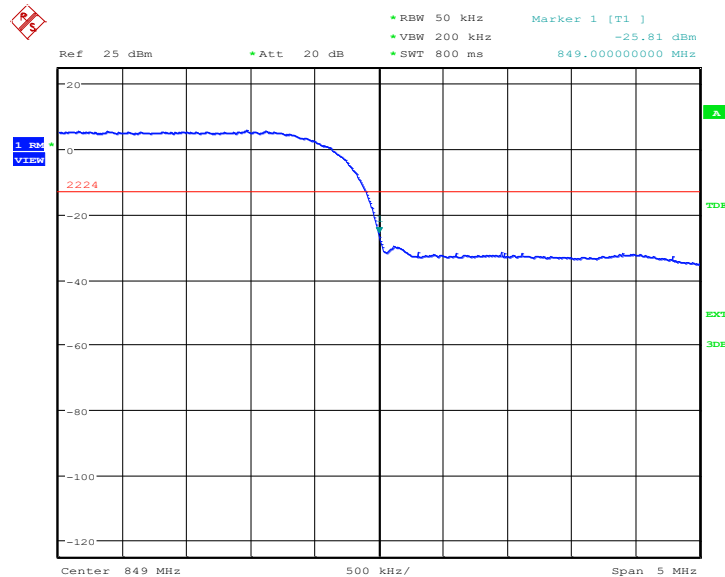

Date: 17.MAR.2020 17:56:26

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}(100\text{kHz}-2\text{GHz})/1.21 \text{ dB} (2\text{GHz}-26.5\text{GHz}), k = 1.96$

A.7 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1051, 22.917, 24.238.

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1051 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.4
9400	1880.0
9538	1907.6

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

A.7.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.7.3 Measurement result

Only worst case result is given below

WCDMA Band II
Channel 9262: 30MHz –1GHz

Spurious emission limit –13dBm.

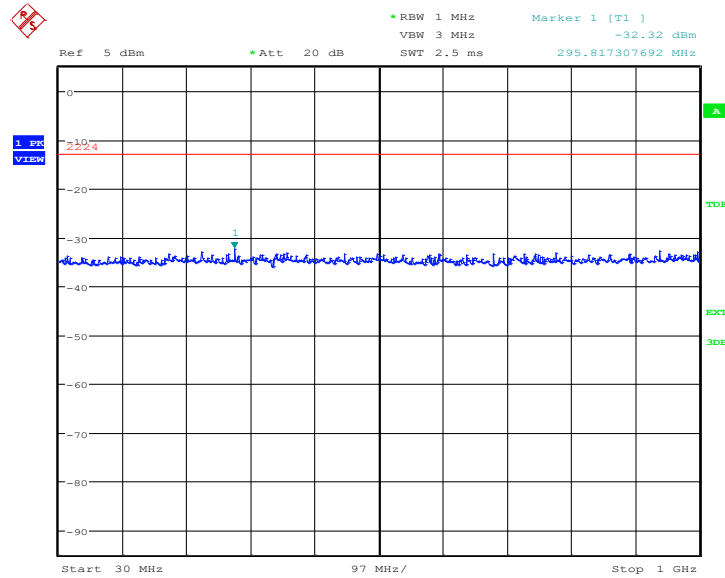


Date: 17.MAR.2020 17:37:37

Channel 9262: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

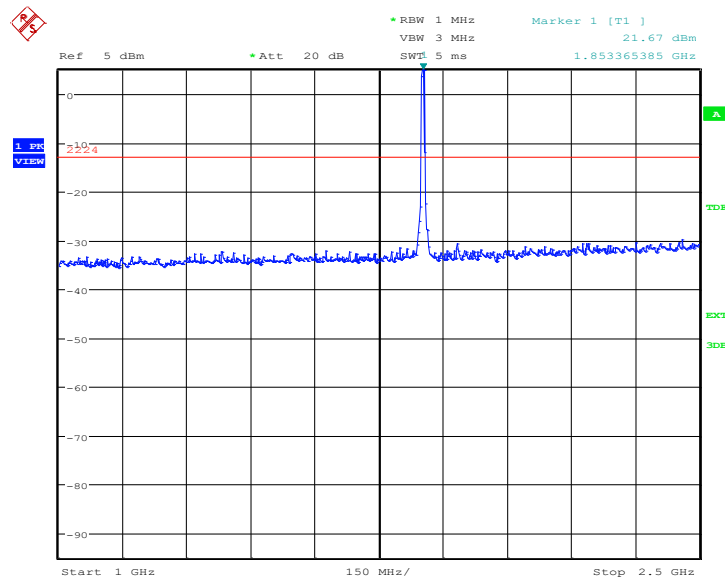

Date: 17.MAR.2020 17:38:04

Channel 9262: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

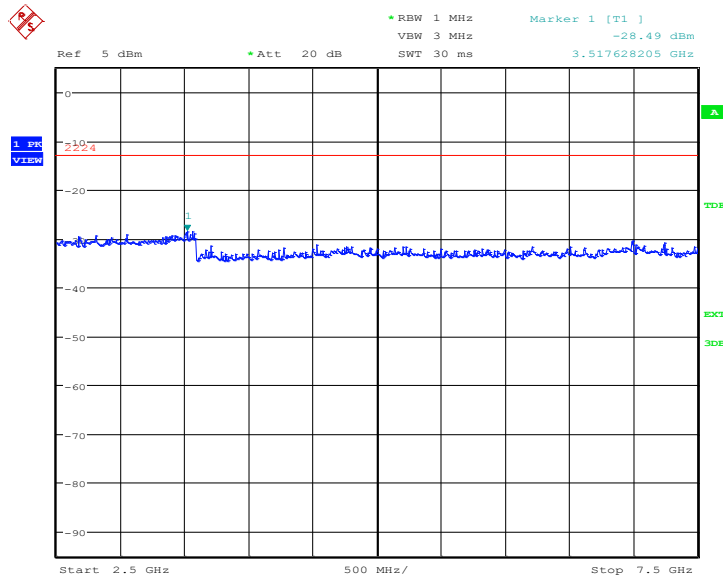

Date: 17.MAR.2020 17:38:30

Channel 9262: 7.5GHz –10GHz


Spurious emission limit –13dBm.

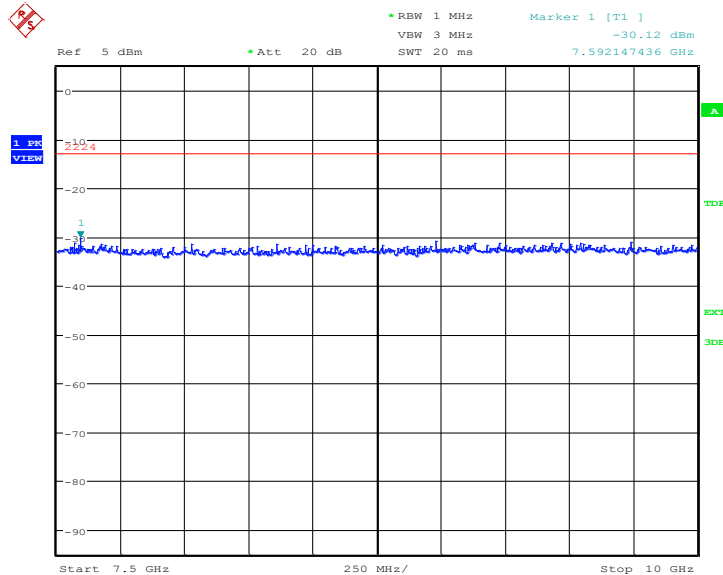

Date: 17.MAR.2020 17:38:57

Channel 9262: 10GHz –15GHz


Spurious emission limit –13dBm.

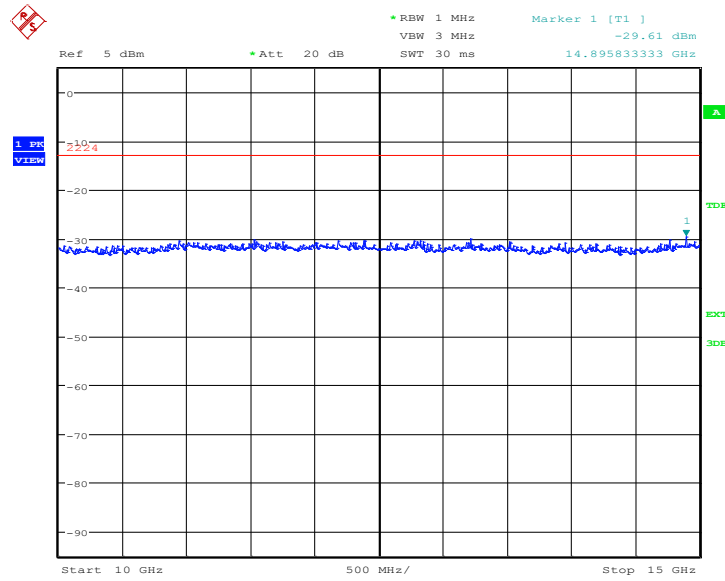

Date: 17.MAR.2020 17:39:24

Channel 9262: 15GHz –20GHz


Spurious emission limit –13dBm.

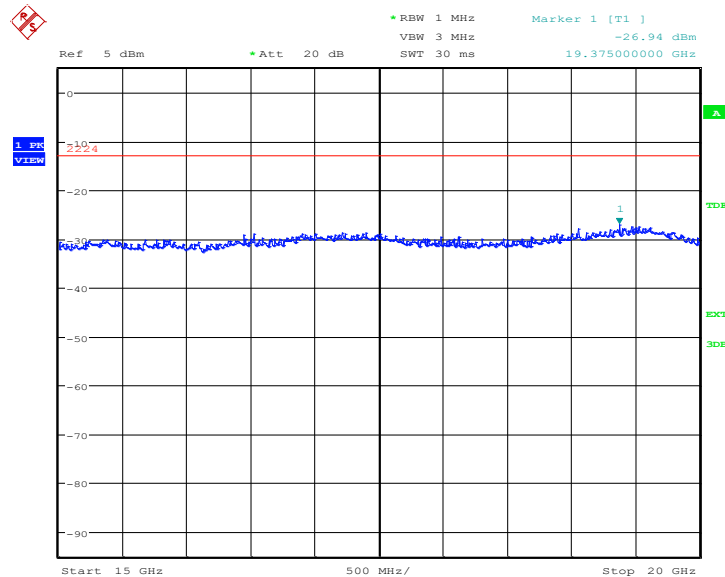

Date: 17.MAR.2020 17:39:51

Channel 9400: 30MHz –1GHz

Spurious emission limit –13dBm.

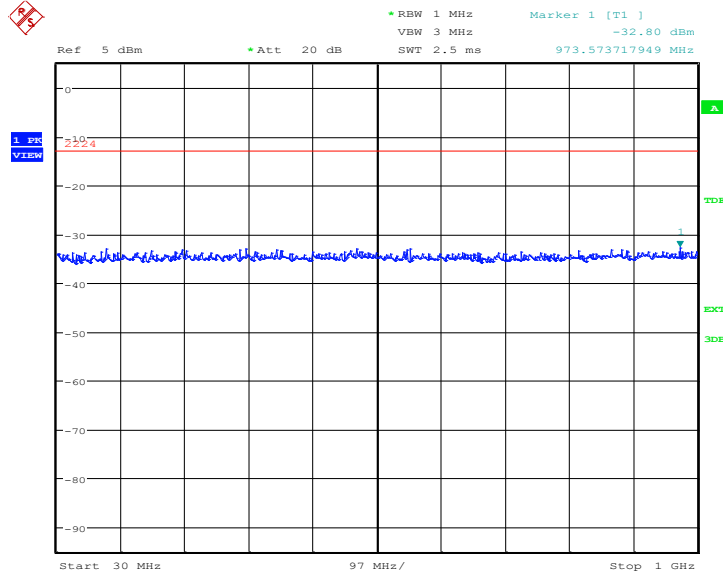


Date: 17.MAR.2020 17:40:21

Channel 9400: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

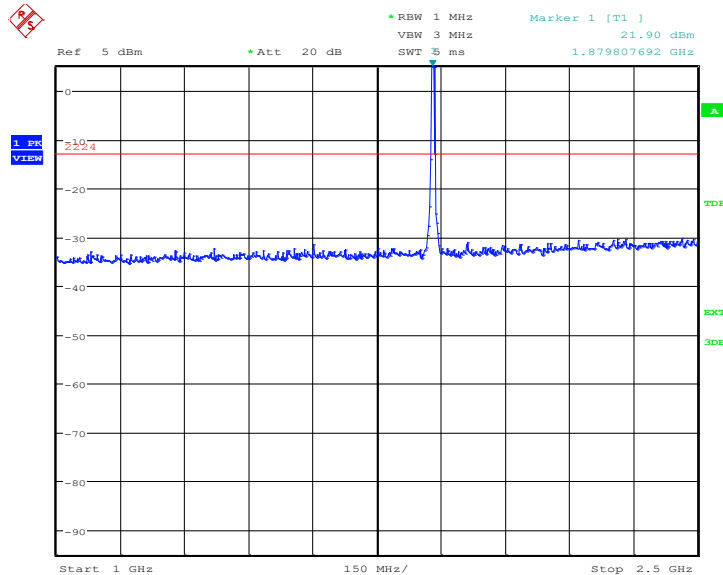

Date: 17.MAR.2020 17:40:47

Channel 9400: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

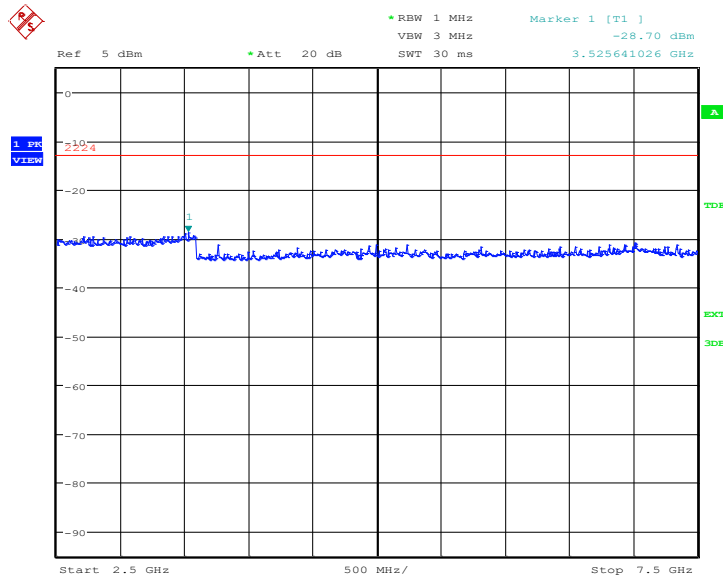

Date: 17.MAR.2020 17:41:14

Channel 9400: 7.5GHz –10GHz


Spurious emission limit –13dBm.

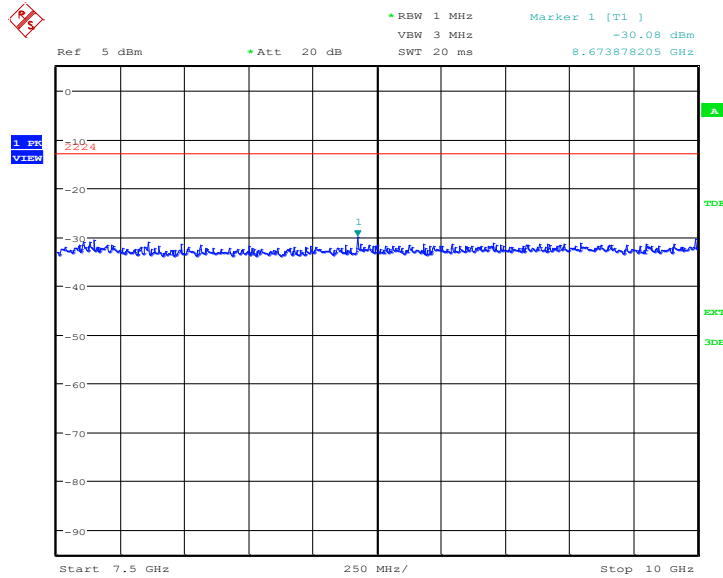

Date: 17.MAR.2020 17:41:41

Channel 9400: 10GHz –15GHz


Spurious emission limit –13dBm.

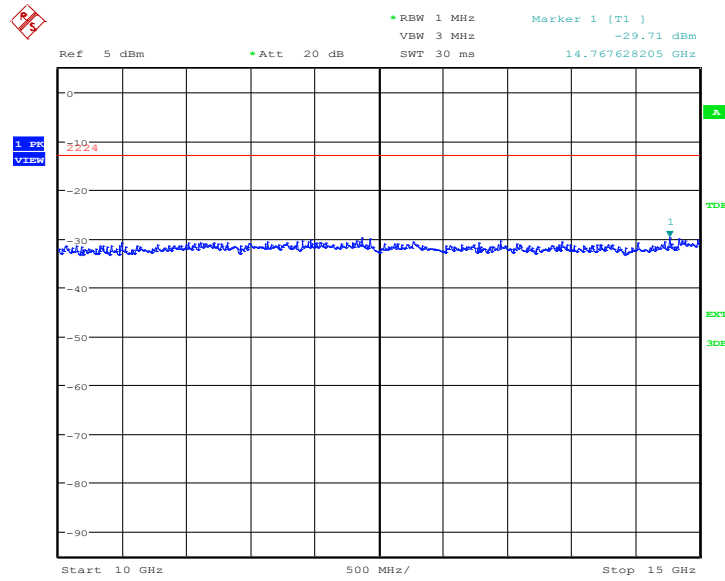

Date: 17.MAR.2020 17:42:08

Channel 9400: 15GHz –20GHz


Spurious emission limit –13dBm.

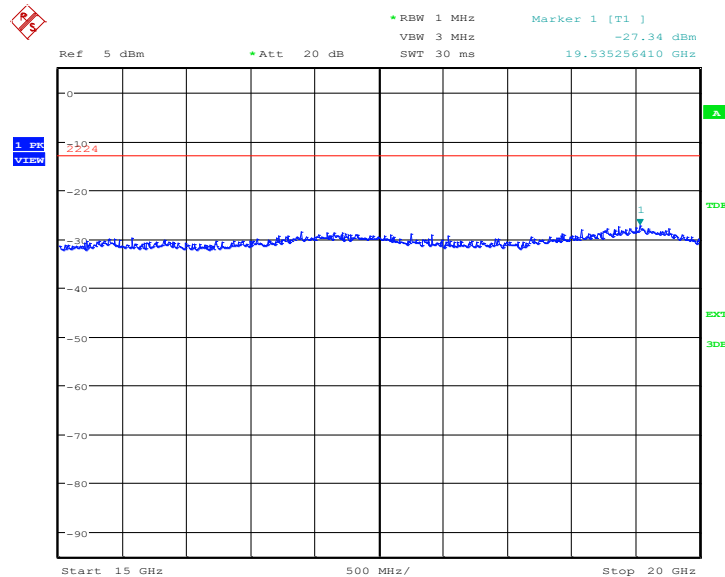

Date: 17.MAR.2020 17:42:35

Channel 9538: 30MHz –1GHz

Spurious emission limit –13dBm.

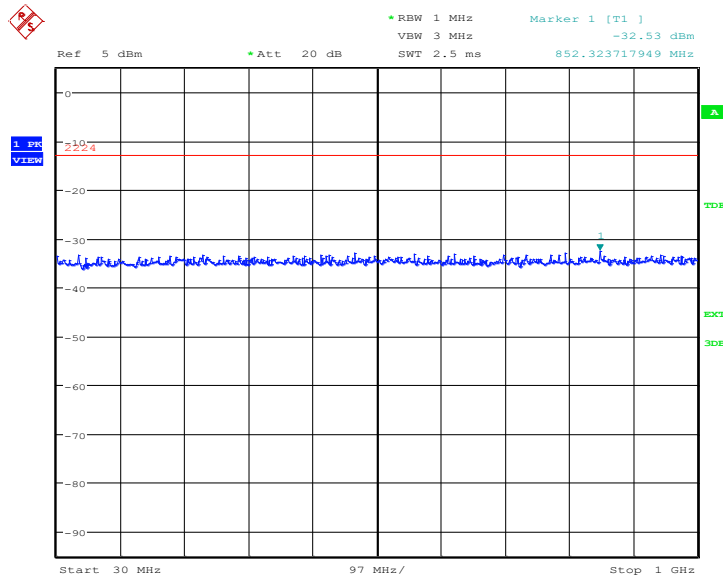


Date: 17.MAR.2020 17:43:04

Channel 9538: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

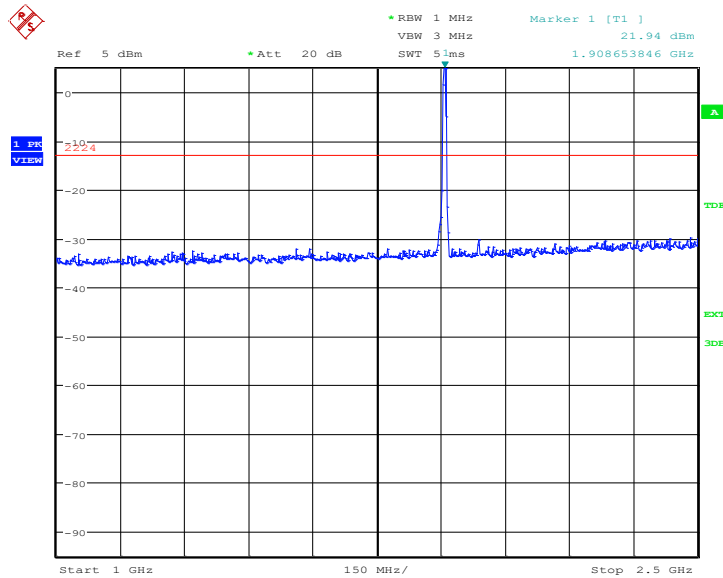

Date: 17.MAR.2020 17:43:31

Channel 9538: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

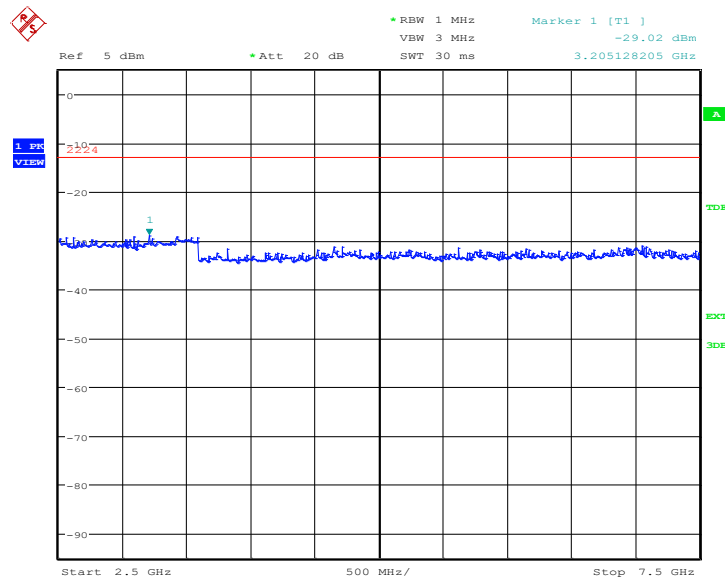

Date: 17.MAR.2020 17:43:58

Channel 9538: 7.5GHz –10GHz


Spurious emission limit –13dBm.

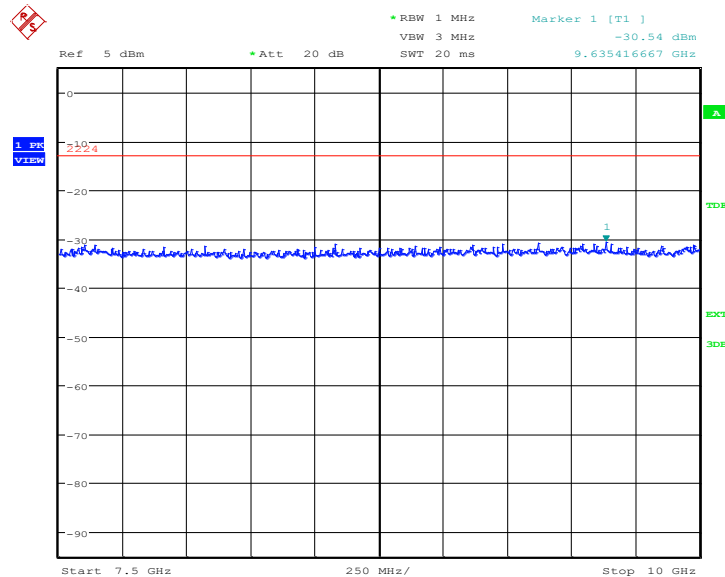

Date: 17.MAR.2020 17:44:25

Channel 9538: 10GHz –15GHz


Spurious emission limit –13dBm.

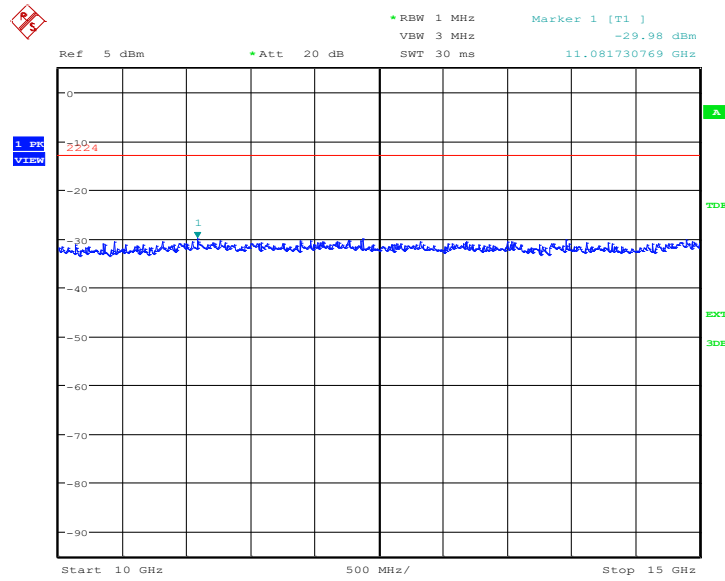

Date: 17.MAR.2020 17:44:52

Channel 9538: 15GHz –20GHz

Spurious emission limit –13dBm.

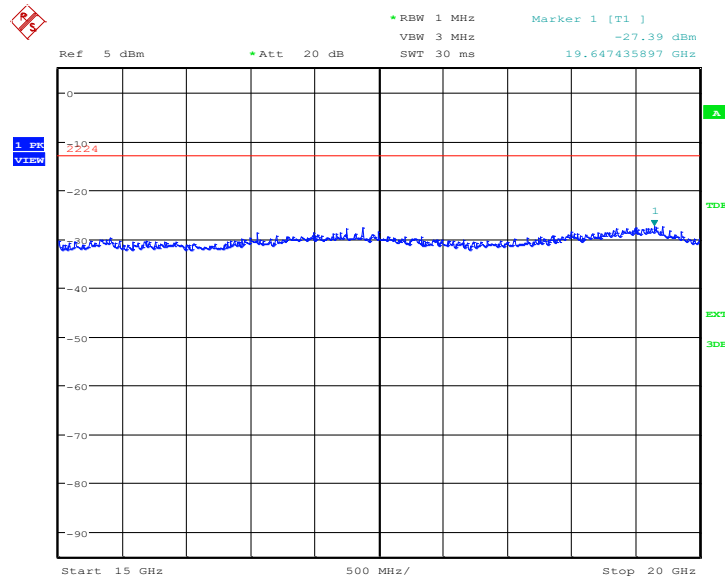


Date: 17.MAR.2020 17:45:19

**WCDMA Band V
Channel 4132: 30MHz –1GHz**

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

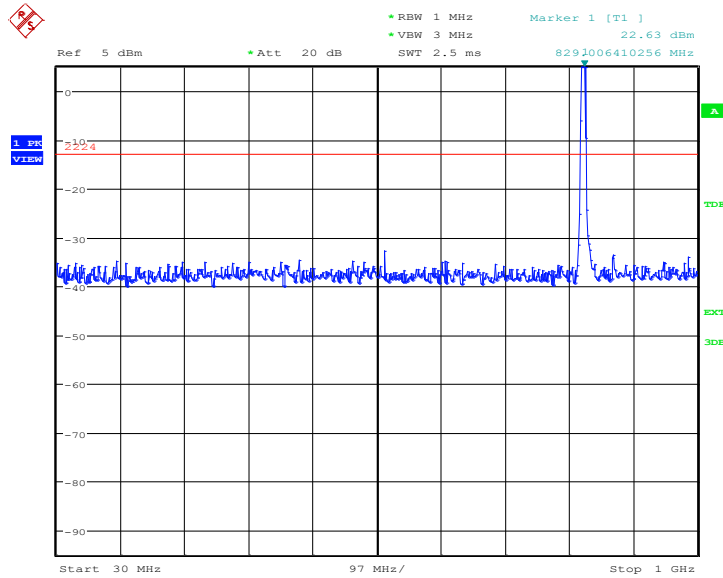

Date: 17.MAR.2020 18:28:15

Channel 4132: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

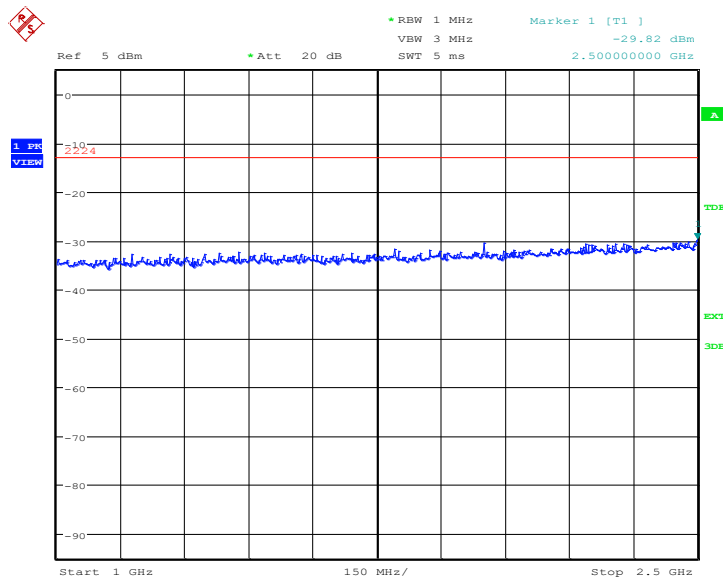

Date: 17.MAR.2020 17:57:45

Channel 4132: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

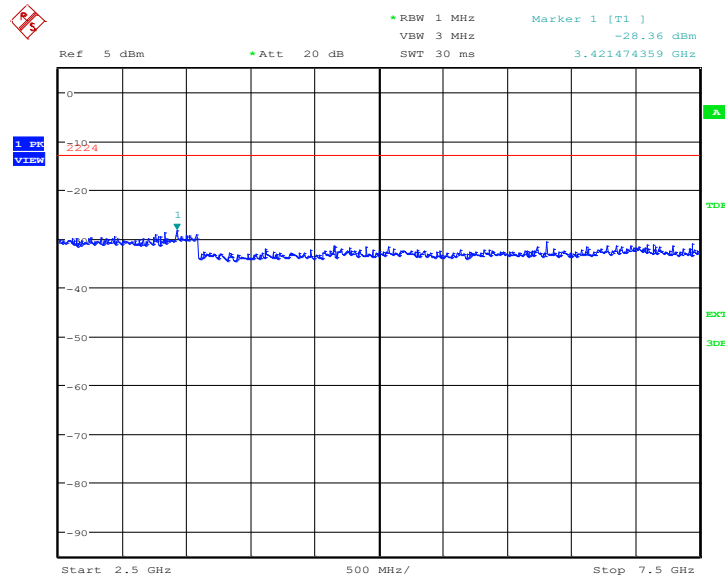

Date: 17.MAR.2020 17:58:11

Channel 4132: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

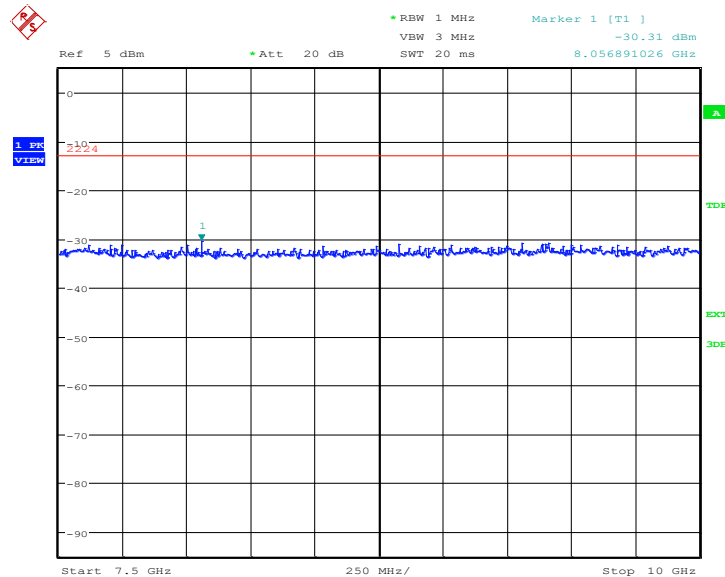


Date: 17.MAR.2020 17:58:38

Channel 4183: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

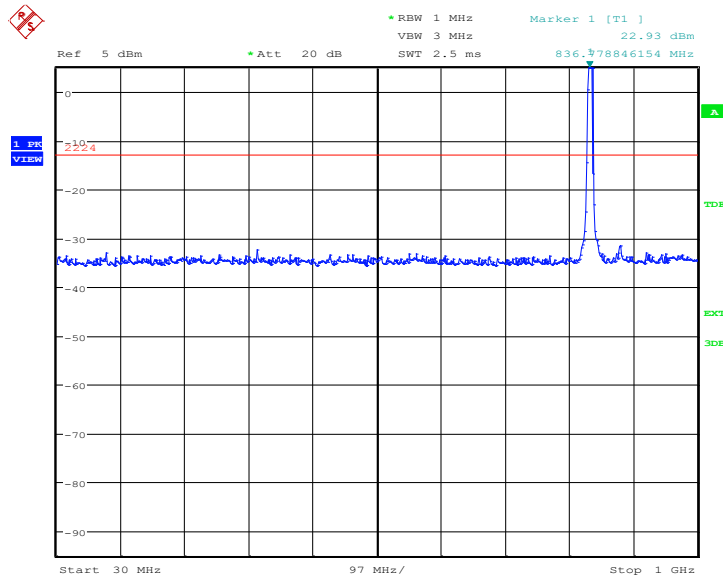

Date: 17.MAR.2020 17:59:08

Channel 4183: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

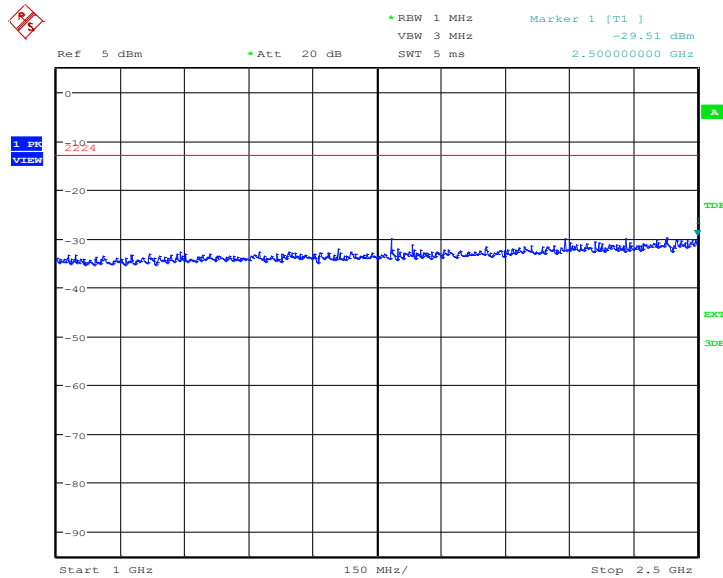

Date: 17.MAR.2020 17:59:35

Channel 4183: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

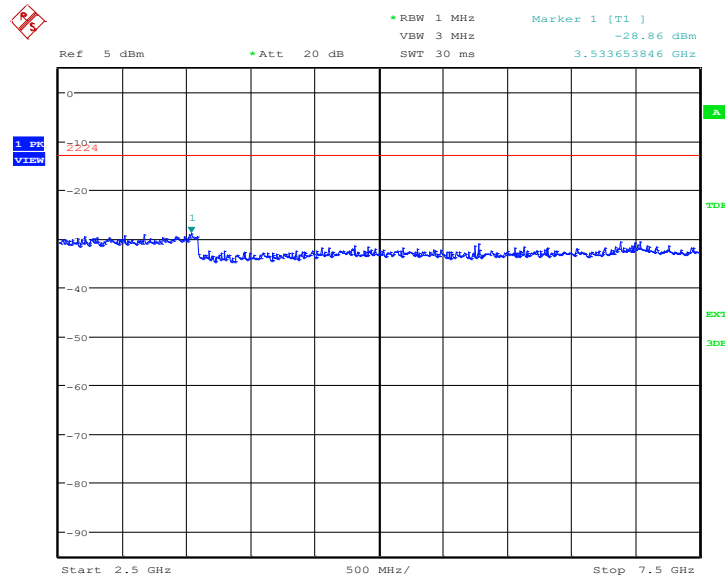

Date: 17.MAR.2020 18:00:02

Channel 4183: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

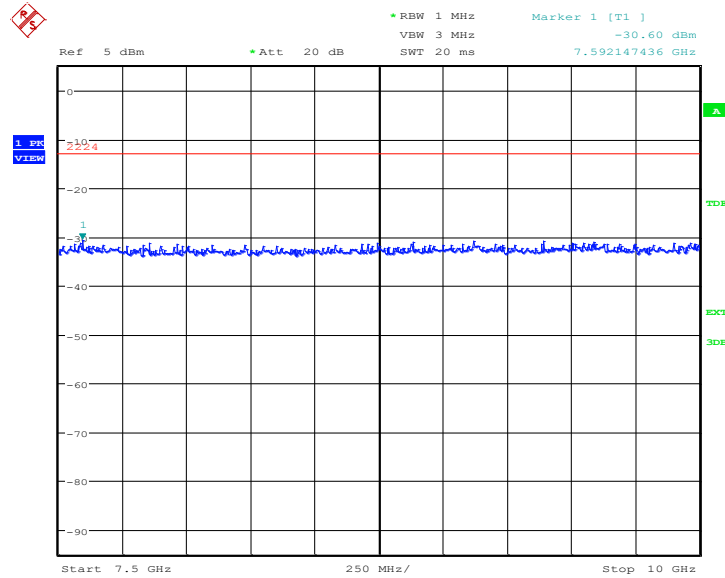


Date: 17.MAR.2020 18:00:28

Channel 4233: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

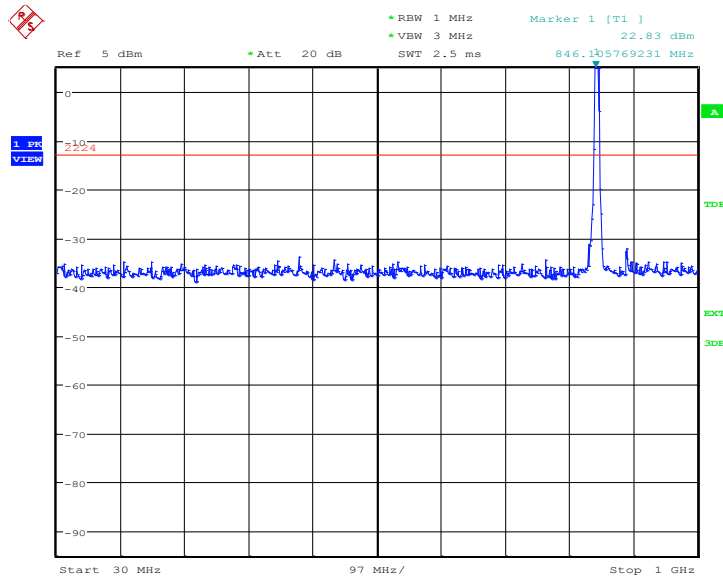

Date: 17.MAR.2020 18:30:33

Channel 4233: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

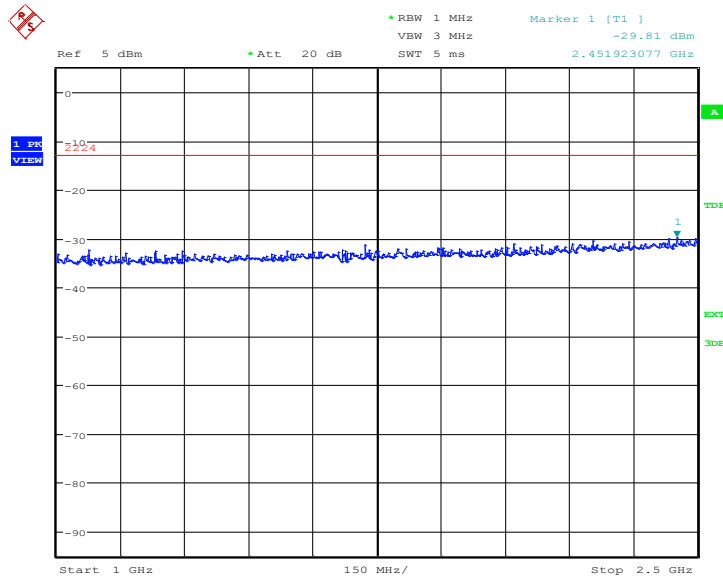

Date: 17.MAR.2020 18:01:25

Channel 4233: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

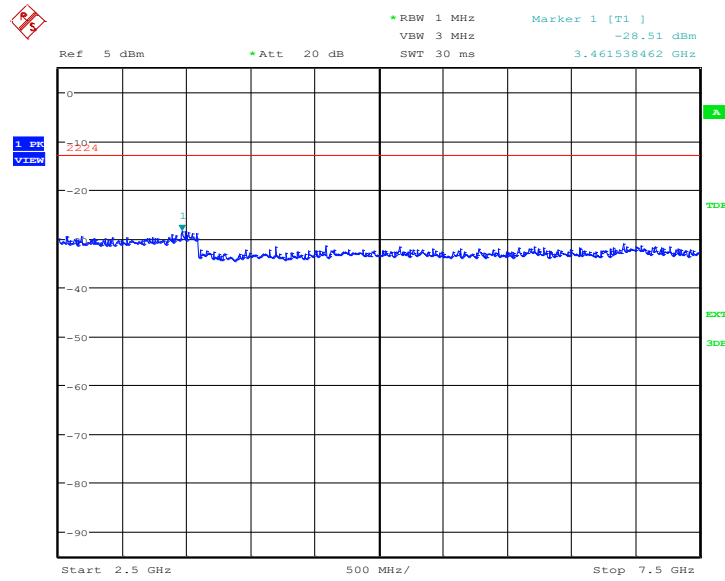

Date: 17.MAR.2020 18:01:52

Channel 4233: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

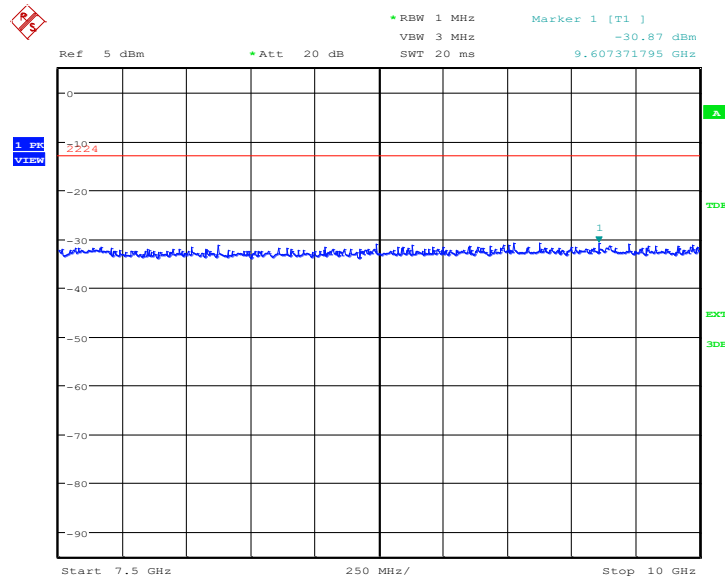

Date: 17.MAR.2020 18:02:19

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}(100\text{KHz}-2\text{GHz})/1.21 \text{ dB} (2\text{GHz}-26.5\text{GHz}), k = 1.96$

A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 24.232, KDB971168 D01.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results


Only worst case result is given below

WCDMA Band II (PAPR)-QPSK

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	4.46
1880.0	4.42
1907.6	4.46


WCDMA Band II

Channel 9262-Peak-To-Average Power Ratio(PAPR)-QPSK

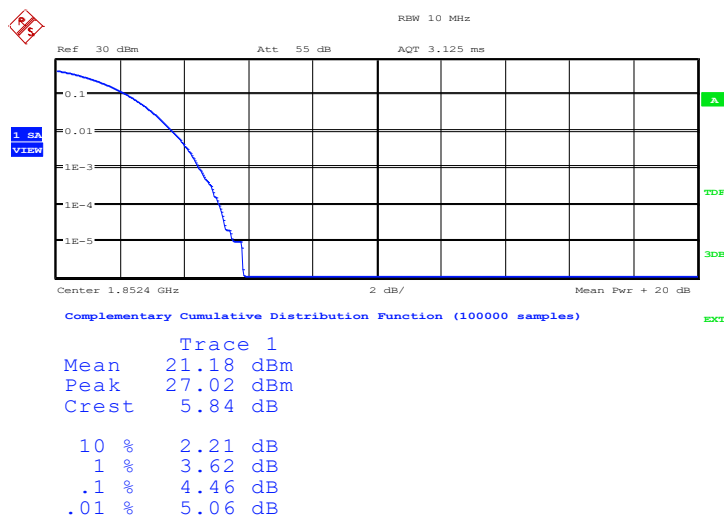


Date: 17.MAR.2020 17:36:52

Channel 9400- Peak-To-Average Power Ratio(PAPR)-QPSK

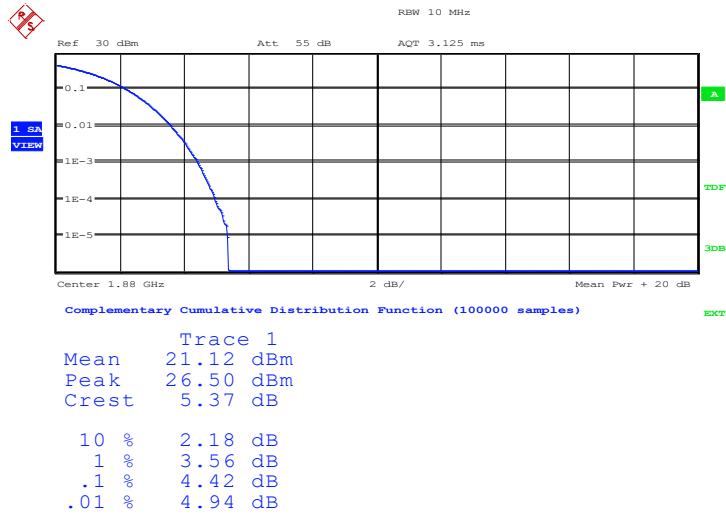

Date: 17.MAR.2020 17:37:00

Channel 9538- Peak-To-Average Power Ratio(PAPR)-QPSK

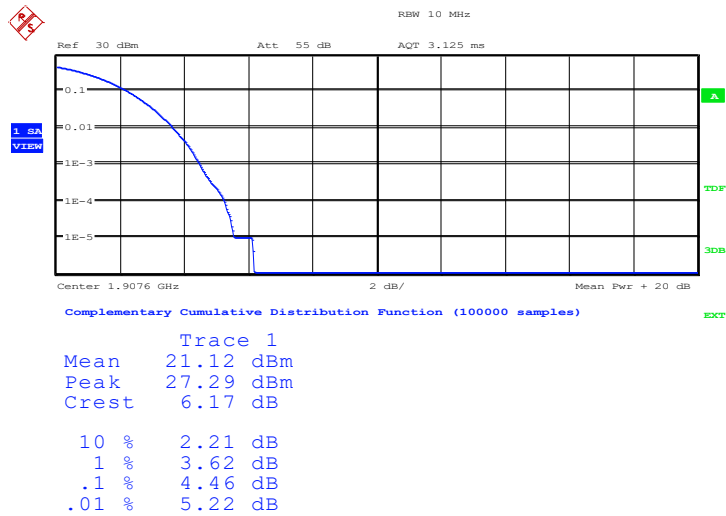


Date: 17.MAR.2020 17:37:07

WCDMA Band II (PAPR)-16QAM

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	4.49
1880.0	4.33
1907.6	4.39


WCDMA Band II

Channel 9262- Peak-To-Average Power Ratio(PAPR)-16QAM

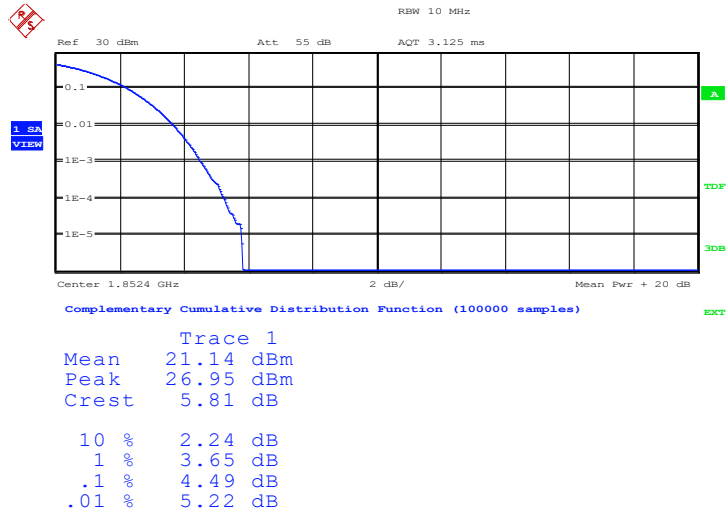


Date: 17.MAR.2020 18:20:20

Channel 9400- Peak-To-Average Power Ratio(PAPR)-16QAM

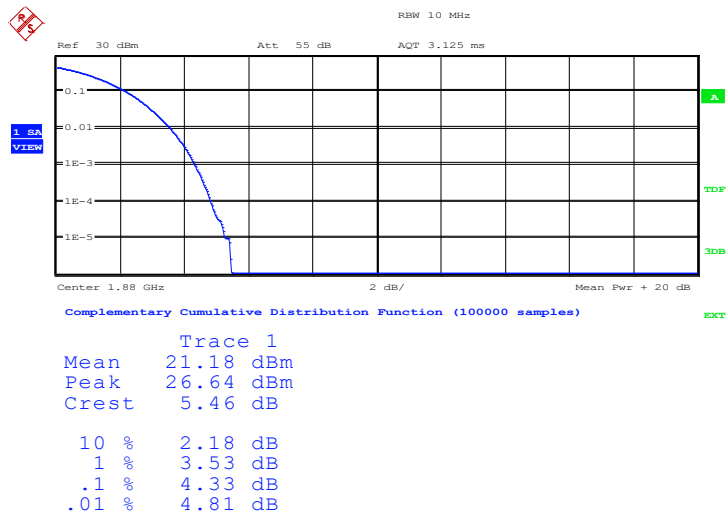

Date: 17.MAR.2020 18:20:27

Channel 9538- Peak-To-Average Power Ratio(PAPR)-16QAM

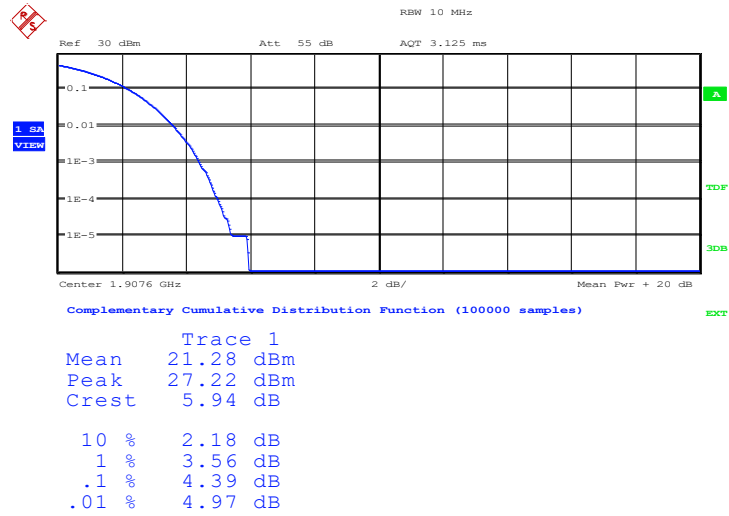


Date: 17.MAR.2020 18:20:35

WCDMA Band V (PAPR)-QPSK

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
826.4	4.01
836.6	4.07
846.6	3.81


WCDMA Band V

Channel 4132- Peak-To-Average Power Ratio(PAPR)-QPSK

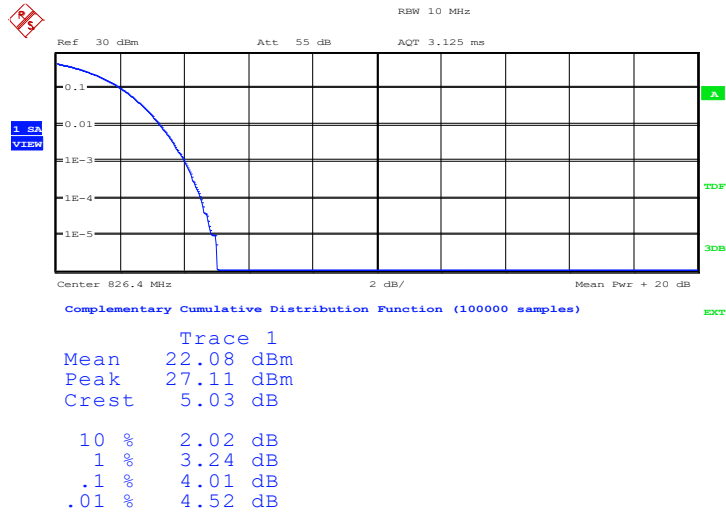


Date: 17.MAR.2020 17:56:33

Channel 4183- Peak-To-Average Power Ratio(PAPR)-QPSK

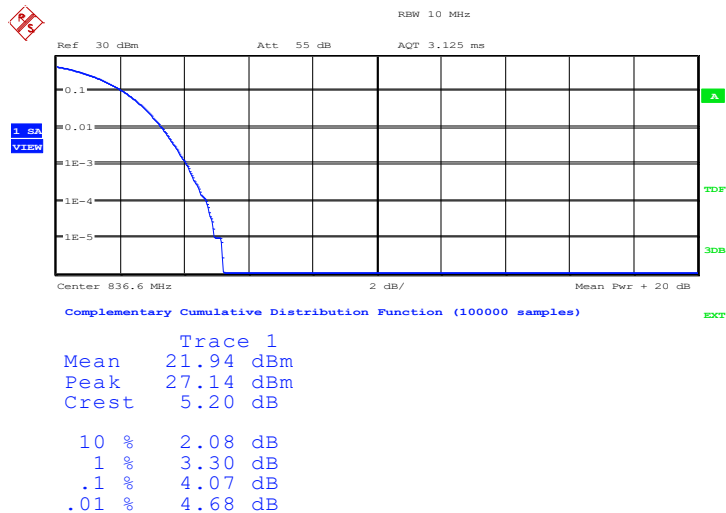

Date: 17.MAR.2020 17:56:41

Channel 4233- Peak-To-Average Power Ratio(PAPR)-QPSK

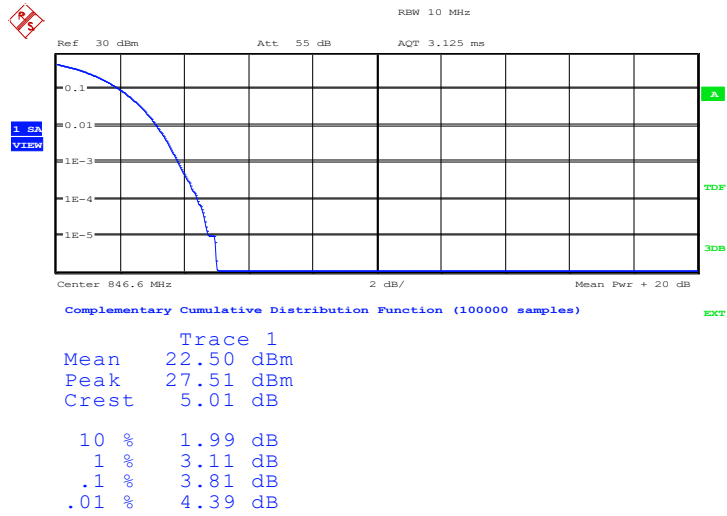


Date: 17.MAR.2020 17:56:48

WCDMA Band V (PAPR)-16QAM

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
826.4	3.97
836.6	4.07
846.6	3.81


WCDMA Band V

Channel 4132- Peak-To-Average Power Ratio(PAPR)-16QAM

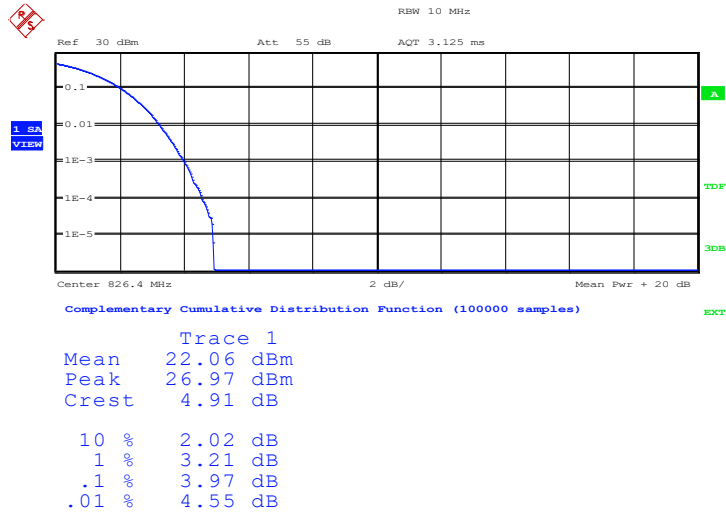


Date: 17.MAR.2020 18:11:00

Channel 4183- Peak-To-Average Power Ratio(PAPR)-16QAM

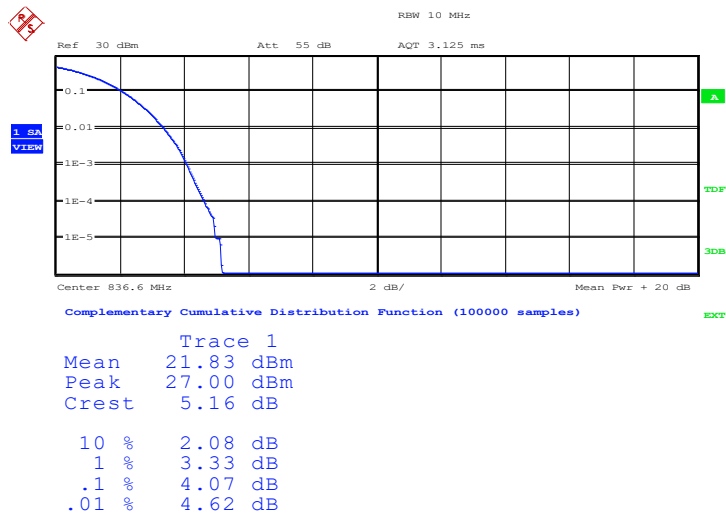

Date: 17.MAR.2020 18:11:07

Channel 4233- Peak-To-Average Power Ratio(PAPR)-16QAM

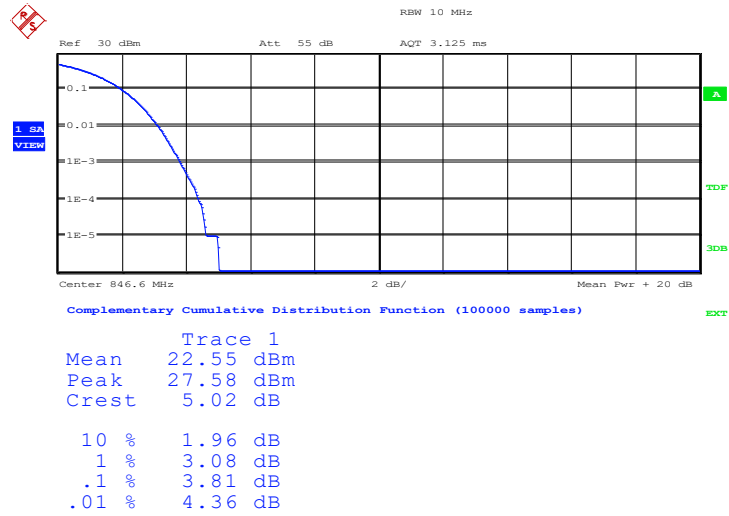

Date: 17.MAR.2020 18:11:15

Note: Expanded measurement uncertainty is $U = 0.48$ dB, $k = 2$

*****END OF REPORT*****