



# Radio Test Report

## FCC ID: QQXRED1

This report concerns (check one) :  Original Grant  Class II Change

**Issued Date** : Jul. 22, 2013  
**Project No.** : 1301247  
**Equipment** : Smart Robot  
**Model Name** : RED1

**Applicant** : Compal Communications, Inc  
**Address** : No.385, Yangguang St., NeiHu ,Taipei  
City 11491, Taiwan

**Tested by:** Neutron Engineering Inc. EMC Laboratory  
**Date of Receipt:** Jan. 28, 2013  
**Date of Test:** Jan. 28, 2013 ~ Feb. 04, 2013

**Testing Engineer:** Gary Chou  
(Gary Chou)

**Technical Manager:** Jeff Yang  
(Jeff Yang)

**Authorized Signatory:** Andy Chiu  
(Andy Chiu)

**Neutron Engineering Inc.**  
B1, No. 37, Lane 365, YangGuang St.,  
NeiHu District 114, Taipei, Taiwan.  
TEL: +886-2-2657-3299  
FAX: +886-2-2657-3331





### **Declaration**

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

**Neutron's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



## Table of Contents

REPORT ISSUED HISTORY	6
1 CERTIFICATION	7
2 SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	10
3 GENERAL INFORMATION	11
3.1 GENERAL DESCRIPTION OF EUT	11
3.2 DESCRIPTION OF TEST MODES	13
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	14
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
3.5 DESCRIPTION OF SUPPORT UNITS	16
4 CONDUCTED EMISSION	17
4.1 LIMIT	17
4.2 MEASUREMENT INSTRUMENTS LIST	17
4.3 TEST PROCEDURES	18
4.4 TEST SETUP LAYOUT	18
4.5 DEVIATION FROM TEST STANDARD	18
4.6 EUT OPERATING CONDITIONS	19
4.7 TEST RESULTS	20
5 ANTENNA CONDUCTED SPURIOUS EMISSION	22
5.1 LIMIT	22
5.2 MEASUREMENT INSTRUMENTS LIST	22
5.3 TEST PROCEDURES	22
5.4 TEST SETUP LAYOUT	22
5.5 DEVIATION FROM TEST STANDARD	22
5.6 EUT OPERATING CONDITIONS	22
5.7 TEST RESULTS	23
6 HOPPING CHANNEL SEPARATION	31
6.1 LIMIT	31
6.2 MEASUREMENT INSTRUMENTS LIST	31
6.3 MEASURING INSTRUMENTS SETTING	31
6.4 TEST PROCEDURES	31
6.5 TEST SETUP LAYOUT	31
6.6 DEVIATION FROM TEST STANDARD	31
6.7 EUT OPERATING CONDITIONS	31
6.8 TEST RESULTS	32
7 MAXIMUM PEAK CONDUCTED OUTPUT POWER	40
7.1 LIMIT	40



## Table of Contents

7.2	MEASUREMENT INSTRUMENTS LIST	40
7.3	TEST PROCEDURES	40
7.4	TEST SETUP LAYOUT	40
7.5	DEVIATION FROM TEST STANDARD	40
7.6	EUT OPERATING CONDITIONS	40
7.7	TEST RESULTS	41
8	RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	45
8.1	LIMIT	45
8.2	MEASUREMENT INSTRUMENTS LIST	46
8.3	MEASURING INSTRUMENTS SETTING	46
8.4	TEST PROCEDURES	47
8.5	DEVIATION FROM TEST STANDARD	47
8.6	TEST SETUP LAYOUT	47
8.7	EUT OPERATING CONDITIONS	48
8.8	TEST RESULTS	49
9	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	51
9.1	LIMIT	51
9.2	MEASUREMENT INSTRUMENTS LIST	52
9.3	MEASURING INSTRUMENTS SETTING	52
9.4	TEST PROCEDURES	53
9.5	DEVIATION FROM TEST STANDARD	53
9.6	TEST SETUP LAYOUT	53
9.7	EUT OPERATING CONDITIONS	54
9.8	TEST RESULTS	55
9.9	TEST RESULTS (RESTRICTED BANDS)	79
10	NUMBER OF HOPPING FREQUENCY	87
10.1	LIMIT	87
10.2	MEASUREMENT INSTRUMENTS LIST	87
10.3	MEASURING INSTRUMENTS SETTING	87
10.4	TEST PROCEDURES	87
10.5	TEST SETUP LAYOUT	87
10.6	DEVIATION FROM TEST STANDARD	87
10.7	EUT OPERATING CONDITIONS	87
10.8	TEST RESULTS	88
11	AVERAGE TIME OF OCCUPANCY	90
11.1	LIMIT	90
11.2	MEASUREMENT INSTRUMENTS LIST	90
11.3	TEST PROCEDURES	90



## Table of Contents

11.4	TEST SETUP LAYOUT	90
11.5	DEVIATION FROM TEST STANDARD	90
11.6	EUT OPERATING CONDITIONS	91
11.7	TEST RESULTS	92
12	RF EXPOSURE COMPLIANCE	104
12.1	LIMIT	104
12.2	MEASUREMENT INSTRUMENTS LIST	104
12.3	MPE CALCULATION METHOD	104
12.4	TEST SETUP LAYOUT	105
12.5	DEVIATION FROM TEST STANDARD	105
12.6	EUT OPERATING CONDITIONS	105
12.7	TEST RESULTS	105
13	EUT TEST PHOTO	106



**REPORT ISSUED HISTORY**

Revised Version No.	Description	Issued Date
-	Initial Issue.	Jul. 22, 2013



## **1 CERTIFICATION**

Equipment : Smart Robot  
Brand Name : Compalcomm  
Model Name : RED1  
Applicant : Compal Communications, Inc  
Date of Test : Jan. 28, 2013 ~ Feb. 04, 2013  
Standards : FCC Part 15, Subpart C: 2012  
ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.  
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1301247) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



## 2. SUMMARY OF TEST RESULTS

Standard Clause	Test Item	Result
15.207	Conducted Emission	<b>PASS</b>
15.247 (c)	Antenna conducted Spurious Emission	<b>PASS</b>
15.247 (a)(1)	Hopping Channel Separation	<b>PASS</b>
15.247 (b)	Maximum Peak Conducted Output Power	<b>PASS</b>
15.247 (c)	Radiated Spurious Emission	<b>PASS</b>
15.247 (b)(1)	Number of Hopping Frequency	<b>PASS</b>
15.247 (a)(1)	Average time of occupancy	<b>PASS</b>
15.205	Restricted Bands	<b>PASS</b>
15.203	Antenna Requirement	<b>PASS</b>
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	<b>PASS</b>

NOTE:

1. **N/A**: denotes test is not applicable in this Test Report
2. Portable device; SAR report is required.





## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

### Conducted emission Test:

**C01:** (VCCI RN: C-2918; FCC RN: 95335; FCC DN: TW1010)  
No.132-1, Ln. 329, Sec. 2, Balian Rd., Xizhi Dist., New Taipei City 221, Taiwan  
(R.O.C.)

### Radiated emission Test (Below 1 GHz):

**CB08:** (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)  
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

### Radiated emission Test (Above 1 GHz):

**CB08:** (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)  
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)



**2.2 MEASUREMENT UNCERTAINTY**

The measurement uncertainty is not specified by FCC/Industry Canada rules and for reference only.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

**A. Conducted emission test:**

Test Site	Measurement Frequency Range	U , (dB)	NOTE
C03	150 kHz ~ 30 MHz	1.94	

**B. Radiated emission test:**

Test Site	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS01	30 MHz ~ 200 MHz	V	2.86	
	30 MHz ~ 200 MHz	H	2.56	
	200 MHz ~ 1, 000 MHz	V	2.88	
	200 MHz ~ 1, 000 MHz	H	2.98	

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE	
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB	
			200 - 1000MHz	3.11 dB	
			1 - 18GHz	3.97 dB	
			18 - 40GHz	4.01 dB	
		Vertical Polarization	30 - 200MHz	3.22 dB	
			200 - 1000MHz	3.24 dB	
			1 - 18GHz	4.05 dB	
			18 - 40GHz	4.04 dB	

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our  $U_{lab}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called  $U_{CISPR}$ , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our  $U_{lab}$  values are smaller than  $U_{CISPR}$ .



**3 GENERAL INFORMATION**

**3.1 GENERAL DESCRIPTION OF EUT**

Equipment	Smart Robot	
Brand Name	Compalcomm	
Model Name	RED1	
OEM Brand/Model Name	N/A	
Model Difference	The EUT has three colors: Yellow/Black - Blue/Red and White/Gray. All are identical in electrically schematic the only difference is the color and construction.	
Product Description	The EUT is a Smart Robot.	
	Operation Frequency	2402 MHz ~ 2480 MHz
	Modulation Type	FHSS(GFSK, $\pi$ /4DPSK, 8DPSK)
	Bit Rate of Transmitter	1/2/3 Mbps
	Number Of Channel	Please refer to the Note 2.
	Antenna Designation	Please refer to the Note 3.
	Antenna Gain(Peak)	Please refer to the Note 3.
	Maximum Peak Conducted Output Power:	1 Mbps: 1.42dBm 3 Mbps: 1.32dBm
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Power Source	1. Battery supplied. 2. Supplied from PC USB port.	
Power Rating	1. Battery: DC 3.7V 2550 mAh or DC 3.6V 2600 mAh 2. I/P: DC 5V	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	N/A	
EUT Modification(s)	N/A	

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	-3.82



**3.2 DESCRIPTION OF TEST MODES**

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Tested Channel/Mode
Conducted Emission	FHSS(GFSK)	1 Mbps	2441 MHz
Antenna conducted Spurious Emission	FHSS(GFSK)	1 Mbps 3 Mbps	2402 MHz, 2441 MHz, 2480 MHz
Hopping Channel Separation	FHSS(GFSK)	1 Mbps 3 Mbps	2402 MHz, 2441 MHz, 2480 MHz
Maximum Peak Conducted Output Power	FHSS(GFSK)	1 Mbps 3 Mbps	2402 MHz, 2441 MHz, 2480 MHz
Radiated Spurious Emission (30 MHz to 1 GHz)	FHSS(GFSK)	1 Mbps	2441 MHz
Radiated Spurious Emission (above 1 GHz)	FHSS(GFSK)	1 Mbps 3 Mbps	2402 MHz, 2441 MHz, 2480 MHz
Number of Hopping Frequency	FHSS(GFSK)	1 Mbps 3 Mbps	2402 MHz, 2441 MHz, 2480 MHz
Average time of occupancy	FHSS(GFSK)	1 Mbps 3 Mbps	2402 MHz, 2441 MHz, 2480 MHz
Restricted Bands	FHSS(GFSK)	1 Mbps 3 Mbps	2402 MHz, 2441 MHz, 2480 MHz
Antenna Requirement	FHSS(GFSK)	---	---
RF Exposure Compliance	FHSS(GFSK)	---	---

NOTE: The measurements are performed at the highest, middle, lowest available channels.



**3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING**


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Data Rate	1 Mbps		
Test software Version	UTF-8 TeraTerm Pro		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameter	15	15	15


Data Rate	3 Mbps		
Test software Version	UTF-8 TeraTerm Pro		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameter	15	15	15



**3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

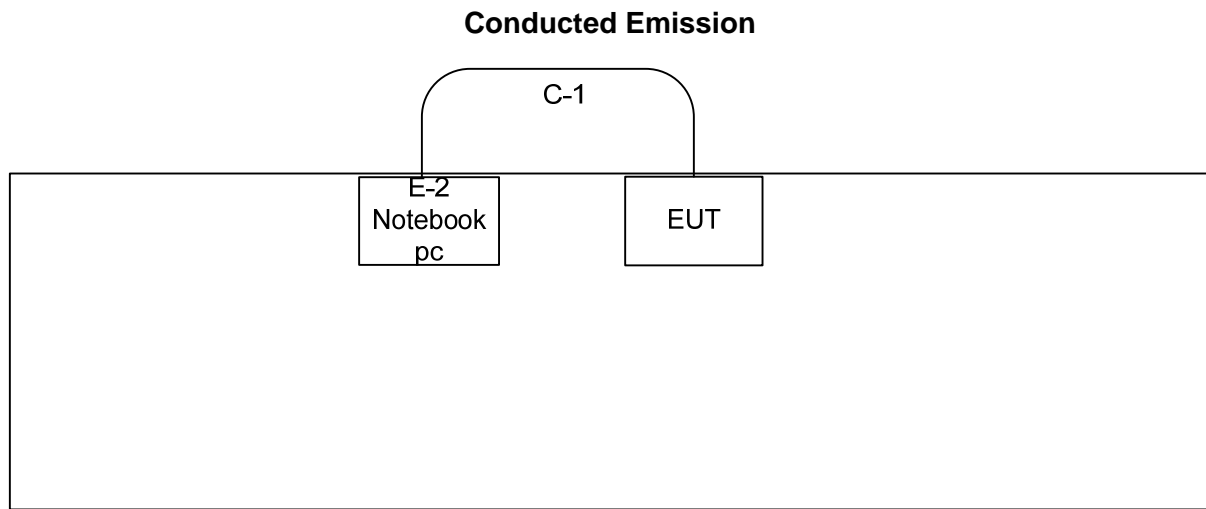

**Radiated Spurious Emission**

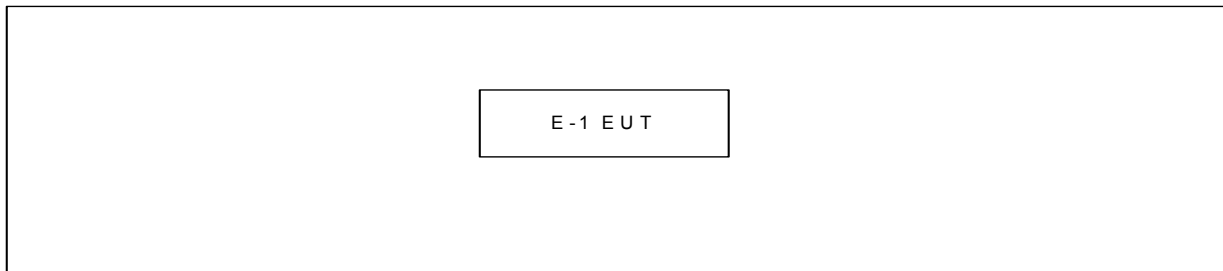



### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Smart Robot	Compalcomm	RED1	QQXRED1	N/A	EUT
E-2	Notebook PC	DELL	D620	DOC	7T390 A03	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	0.7M	USB CABLE

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).





**4 CONDUCTED EMISSION**

**4.1 LIMIT**

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

**NOTE:**

1. The tighter limit applies at the band edges.
2. The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
3. The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value – Limit Value

**4.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Apr. 24, 2013
2	Test Cable	TIMES	LMR-400	C01	Jun. 14, 2013
3	EMI Test Receiver	R&S	ESCI	100082	Mar. 05, 2013
4	50Ω BNC TYPE Terminator	N/A	N/A	01	Jun. 02, 2013
5	50Ω BNC TYPE Terminator	N/A	N/A	03	Jun. 02, 2013
6	Measurement Software	EZ	EZ_EMG (Version NB-02A)	N/A	N/A

NOTE: **N/A:** denotes No Model Name, No Serial No. or No Calibration specified.


**4.3 TEST PROCEDURES**

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**NOTE:**

- a. Reading in which marked as Peak, QP or AVG means measurements by using are Quasi-Peak or Average Mode with Detector BW=9 kHz (6 dB Bandwidth).
- b. All readings are Peak Mode value unless otherwise stated QP or AVG in column of Note. If the Peak or QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only Peak or QP Mode was measured, but AVG Mode didn't perform.

**4.4 TEST SETUP LAYOUT**

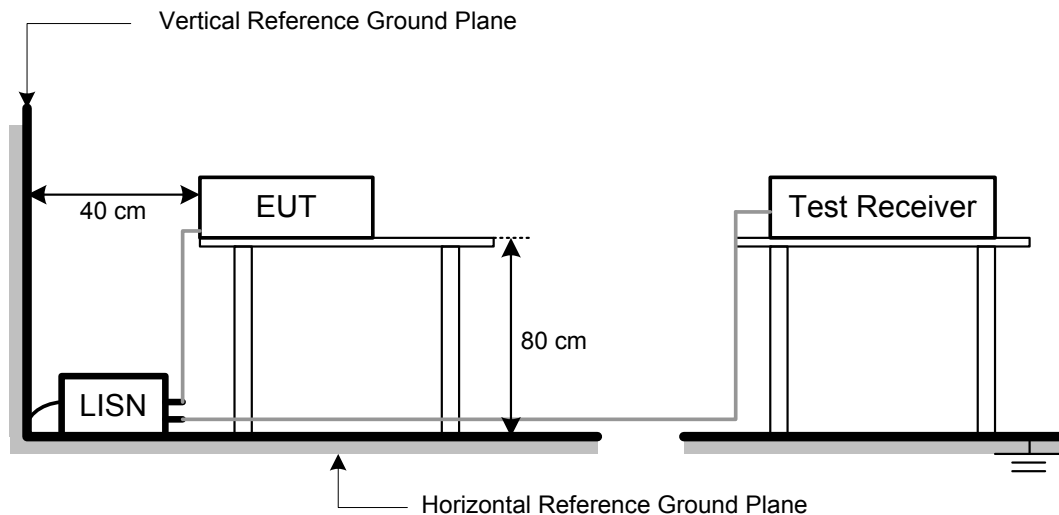

**4.5 DEVIATION FROM TEST STANDARD**

No deviation



#### **4.6 EUT OPERATING CONDITIONS**


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data..



**4.7 TEST RESULTS**

E.U.T	Smart Robot	Model Name	RED1
Temperature	16°C	Relative Humidity	69%
Test Voltage	AC 120V/60Hz		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Phase: Line**

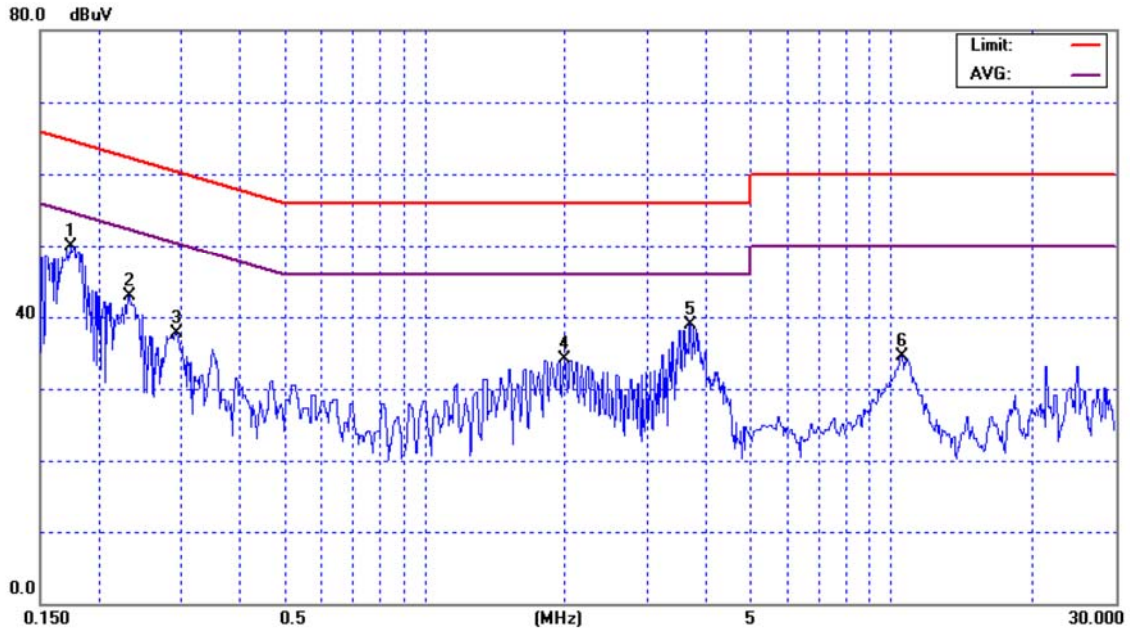


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1 *	0.1738	40.16	9.66	49.82	64.78	-14.96	peak	
2	0.2319	33.26	9.68	42.94	62.38	-19.44	peak	
3	0.2928	28.04	9.67	37.71	60.44	-22.73	peak	
4	1.9940	24.26	9.78	34.04	56.00	-21.96	peak	
5	3.7040	29.01	9.82	38.83	56.00	-17.17	peak	
6	10.5500	24.38	10.13	34.51	60.00	-25.49	peak	



E.U.T	Smart Robot	Model Name	RED1
Temperature	16°C	Relative Humidity	69%
Test Voltage	AC 120V/60Hz		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Phase: Neutral**

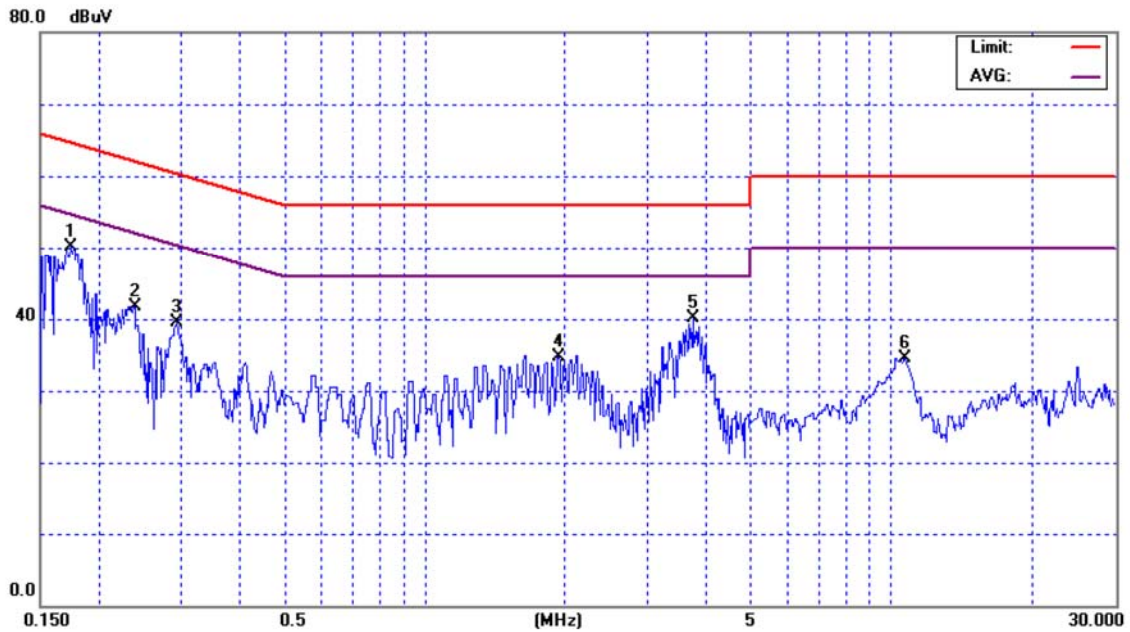

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1745	40.53	9.66	50.19	64.74	-14.55	peak	
2		0.2382	32.00	9.67	41.67	62.16	-20.49	peak	
3		0.2935	29.93	9.66	39.59	60.42	-20.83	peak	
4		1.9310	24.87	9.76	34.63	56.00	-21.37	peak	
5		3.7580	30.39	9.80	40.19	56.00	-15.81	peak	
6		10.7000	24.40	10.14	34.54	60.00	-25.46	peak	



## 5 ANTENNA CONDUCTED SPURIOUS EMISSION

### 5.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-25000	20 dB less than the peak value of fundamental frequency

### 5.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 5.3 TEST PROCEDURES

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

### 5.4 TEST SETUP LAYOUT

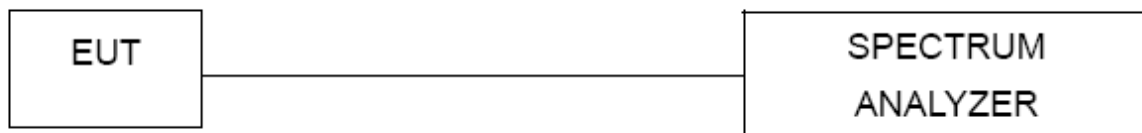

### 5.5 DEVIATION FROM TEST STANDARD

No deviation

### 5.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



**5.7 TEST RESULTS**

E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps		

Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2399.60	-55.65	2486.40	-58.75
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			




Bluetooth/1 Mbps/The max. radio frequency power in any 100kHz bandwidth outside the frequency band



\*RBW 100 kHz Marker 3 [T1] -55.65 dBm
\*VBW 100 kHz
SWT 10 ms 2.399600000 GHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

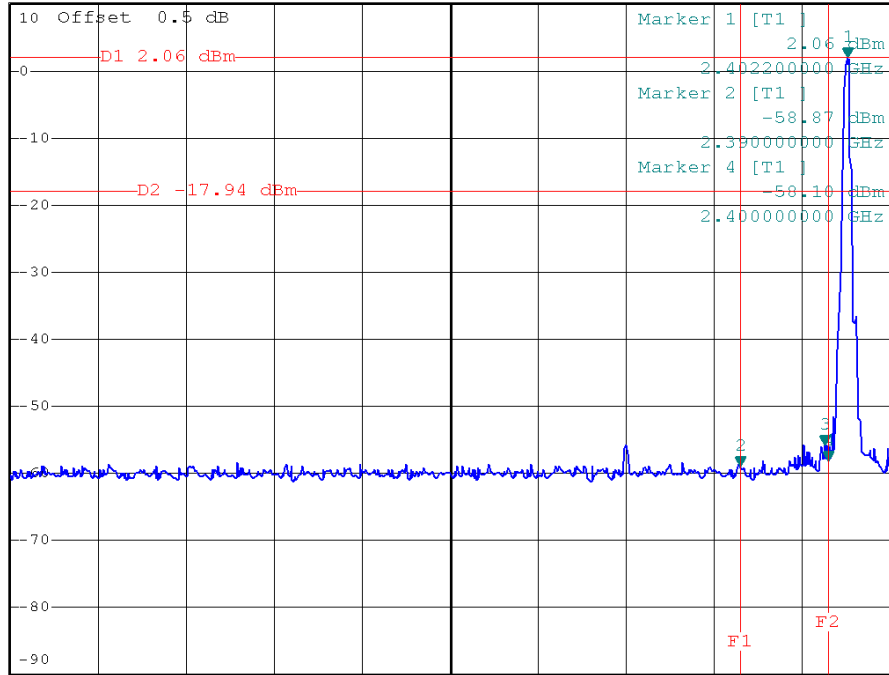

Start 2.307 GHz 10 MHz/ Stop 2.407 GHz


Bluetooth/1 Mbps/The max. radio frequency power in any 100 kHz bandwidth within the frequency band



\*RBW 100 kHz Marker 3 [T1] -58.75 dBm
\*VBW 100 kHz
SWT 10 ms 2.486400000 GHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

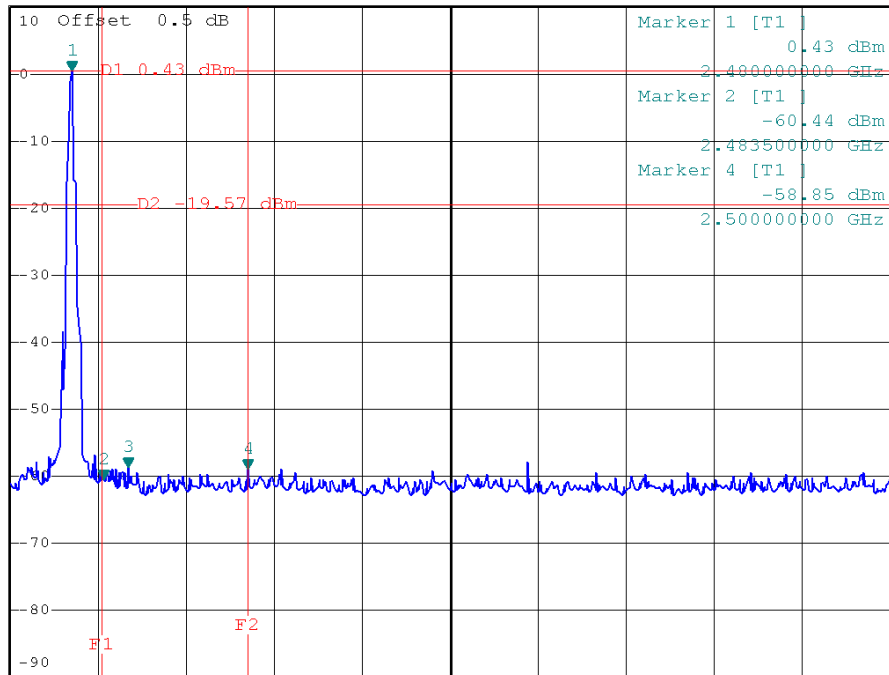

Start 2.473 GHz 10 MHz/ Stop 2.573 GHz






### Bluetooth/1 Mbps/2402 MHz/10 Harmonic of the frequency




\*RBW 100 kHz Marker 2 [T1 ]  
\*VBW 100 kHz -48.37 dBm  
SWT 2.5 s 14.412720000 GHz

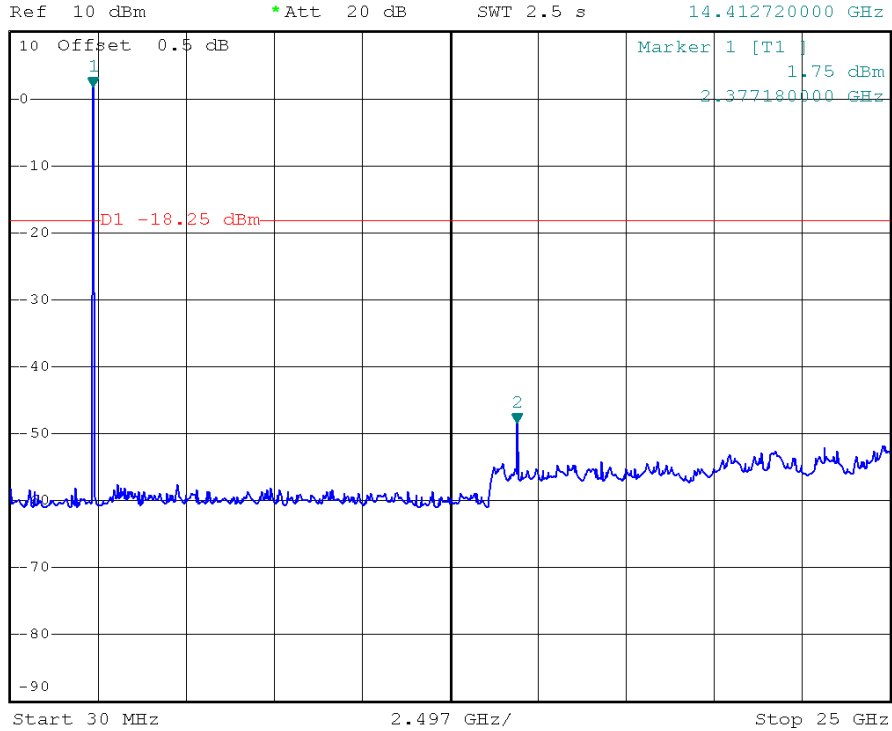

### Bluetooth/1 Mbps/2441 MHz/10 Harmonic of the frequency



\*RBW 100 kHz Marker 2 [T1 ]  
\*VBW 100 kHz -49.68 dBm  
SWT 2.5 s 14.662420000 GHz

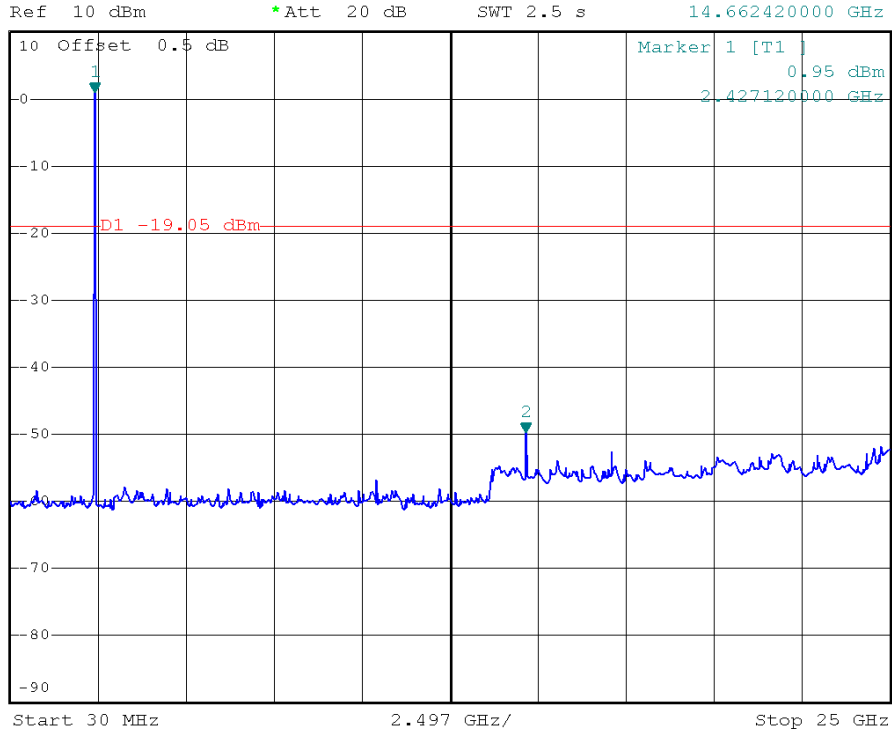



### Bluetooth/1 Mbps/2480 MHz/10 Harmonic of the frequency




\*RBW 100 kHz Marker 2 [T1 ]  
\*VBW 100 kHz -48.78 dBm  
SWT 2.5 s 14.862180000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

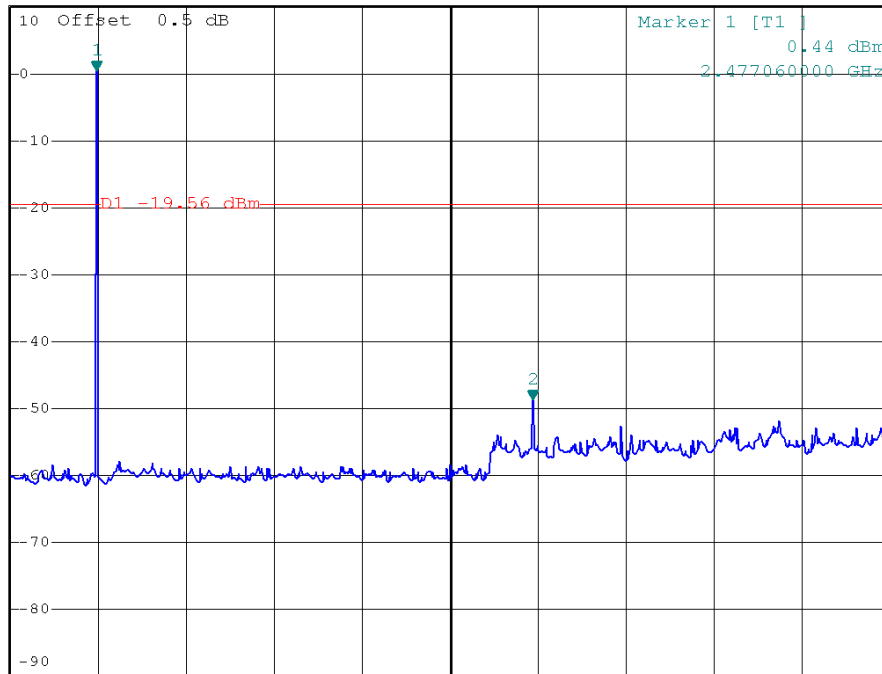




E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2400.00	-50.53	2491.80	-51.53
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



**Bluetooth/3 Mbps/The max. radio frequency power in any 100kHz bandwidth outside the frequency band**

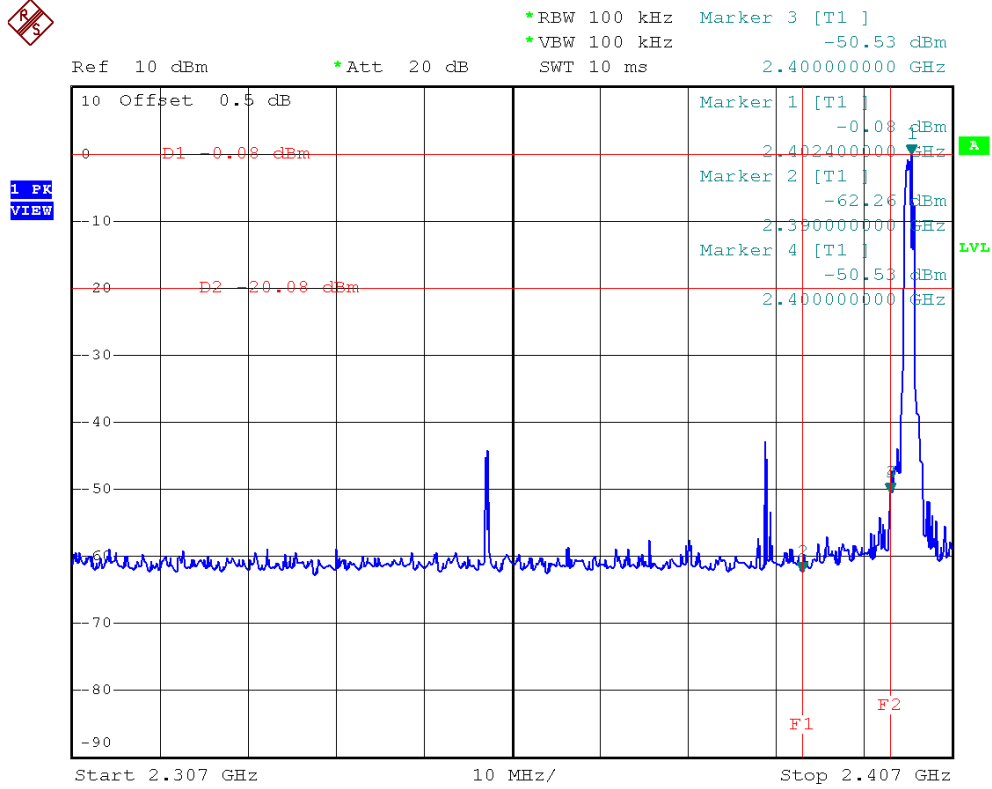

**Bluetooth/3 Mbps/The max. radio frequency power in any 100 kHz bandwidth within the frequency band**

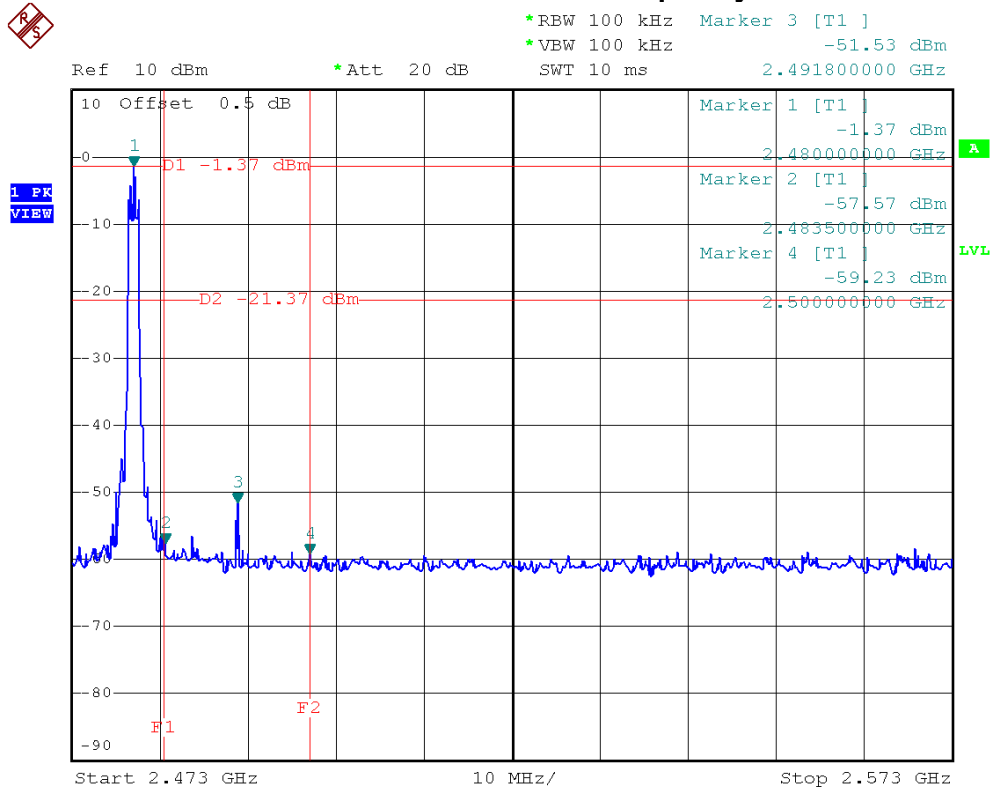




### Bluetooth/3 Mbps/2402 MHz/10 Harmonic of the frequency




\*RBW 100 kHz Marker 2 [T1 ]  
\*VBW 100 kHz -44.73 dBm  
SWT 2.5 s 14.412720000 GHz

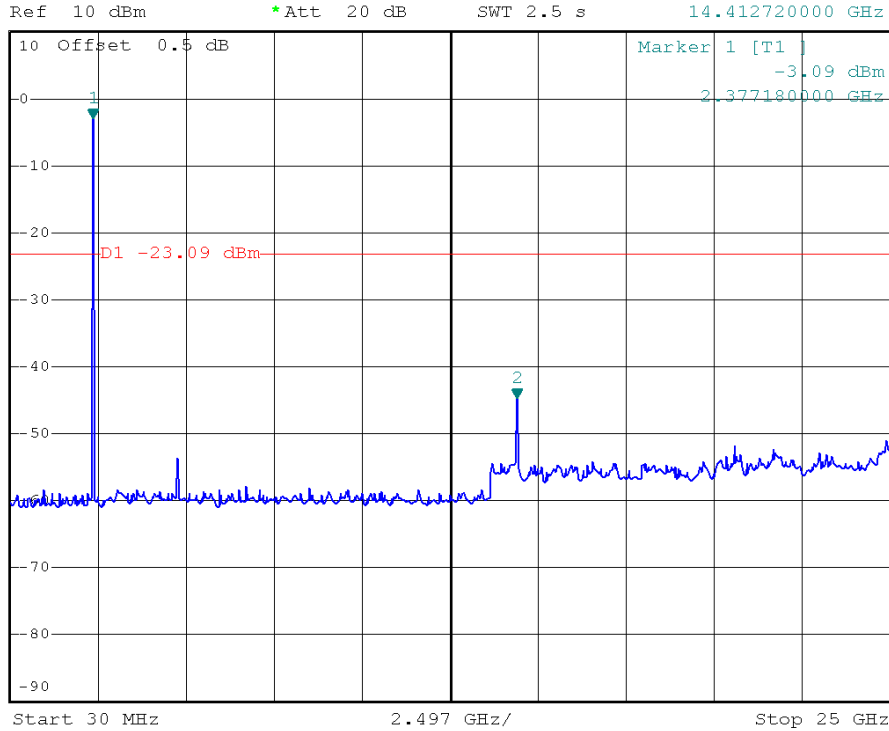

### Bluetooth/3 Mbps/2441 MHz/10 Harmonic of the frequency



\*RBW 100 kHz Marker 2 [T1 ]  
\*VBW 100 kHz -44.03 dBm  
SWT 2.5 s 14.412720000 GHz

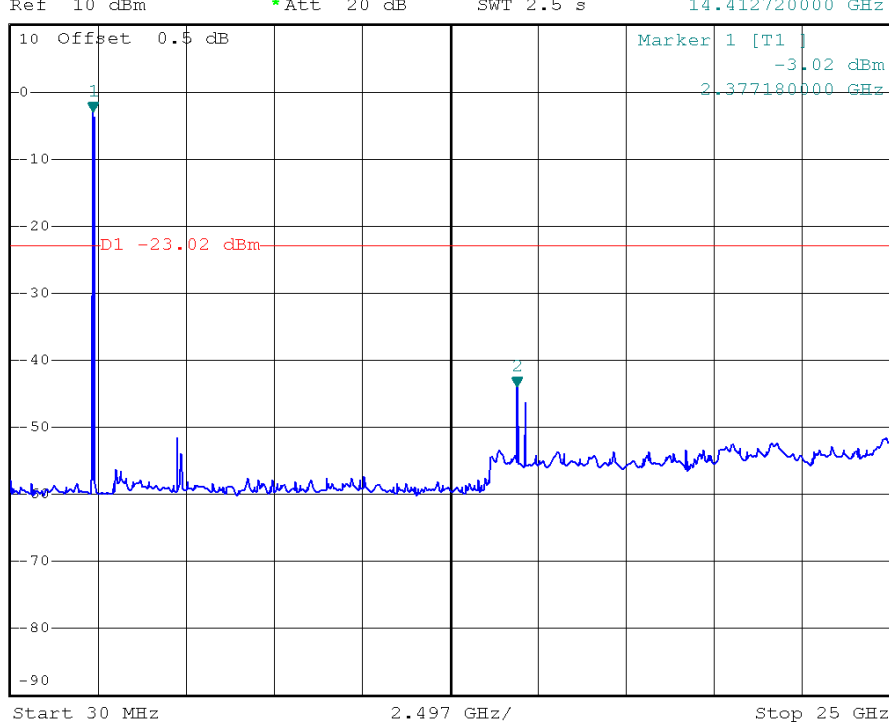



### Bluetooth/3 Mbps/2480 MHz/10 Harmonic of the frequency




\*RBW 100 kHz Marker 2 [T1 ]  
\*VBW 100 kHz -47.02 dBm  
SWT 2.5 s 14.862180000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

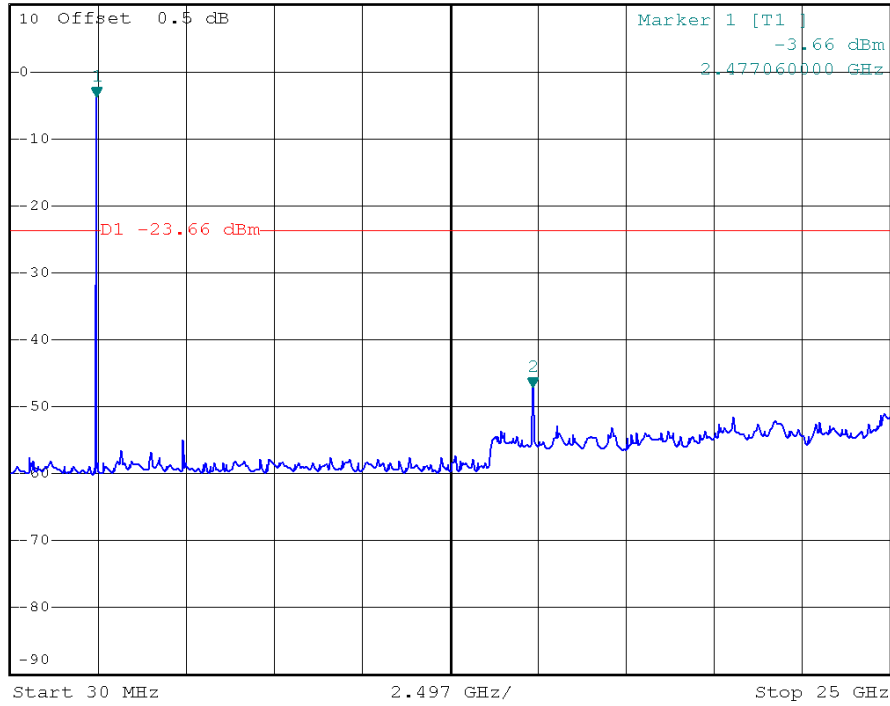



## 6 HOPPING CHANNEL SEPARATION

### 6.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 6.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 6.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 6.4 TEST PROCEDURES

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

### 6.5 TEST SETUP LAYOUT



### 6.6 DEVIATION FROM TEST STANDARD

No deviation

### 6.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



**6.8 TEST RESULTS**

E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz, 2441 MHz, 2480 MHz		

Frequency	Channel Separation (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Two-thirds of the 20 dB Bandwidth	Result
2402 MHz	1.00	1.034	0.996	0.689	PASS
2441 MHz	1.00	1.034	0.996	0.689	PASS
2480 MHz	1.00	1.026	1.004	0.684	PASS

NOTE: Ch. Separation Limits: >25 KHz or >2/3 of 20dB bandwidth






### Bluetooth/1 Mbps/2402 MHz/Channel Separation




\*RBW 30 kHz Delta 1 [T2 ]  
 \*VBW 100 kHz -0.02 dB  
 \*SWT 20 ms 1.002000000 MHz

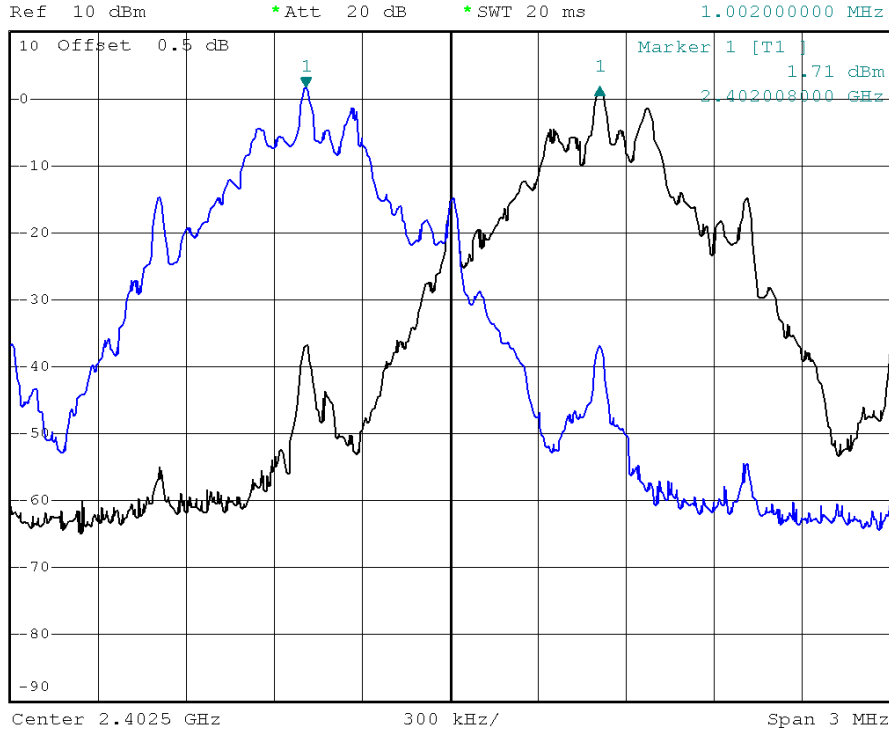

### Bluetooth/1 Mbps/2402 MHz/20dB Bandwidth



\*RBW 30 kHz Delta 1 [T1 ]  
 \*VBW 300 kHz -0.15 dB  
 SWT 2.5 ms 1.033932136 MHz

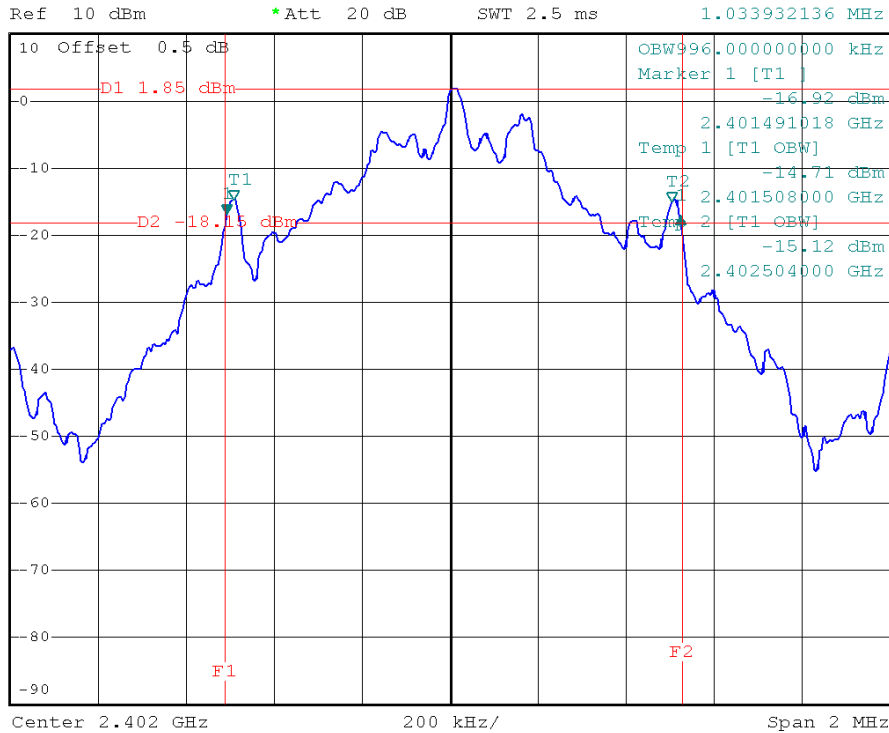



### Bluetooth/1 Mbps/2441 MHz/Channel Separation




\*RBW 30 kHz Delta 1 [T2]  
 \*VBW 100 kHz -0.03 dB  
 \*SWT 20 ms 1.002000000 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

2 PK VIEW

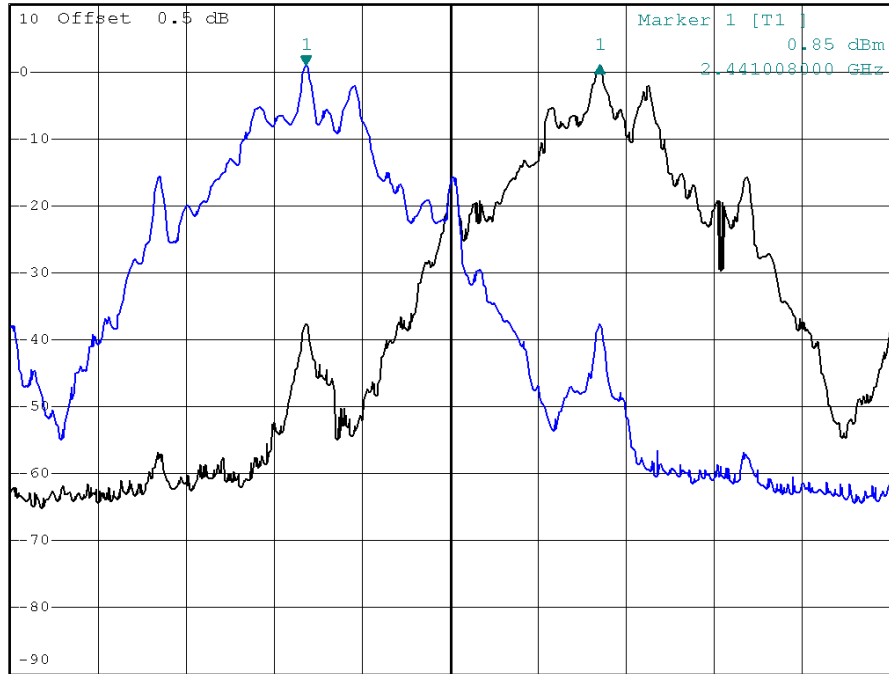

Center 2.4415 GHz 300 kHz/ Span 3 MHz


### Bluetooth/1 Mbps/2441 MHz/20dB Bandwidth



\*RBW 30 kHz Delta 1 [T1]  
 \*VBW 300 kHz 0.17 dB  
 SWT 2.5 ms 1.033932136 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

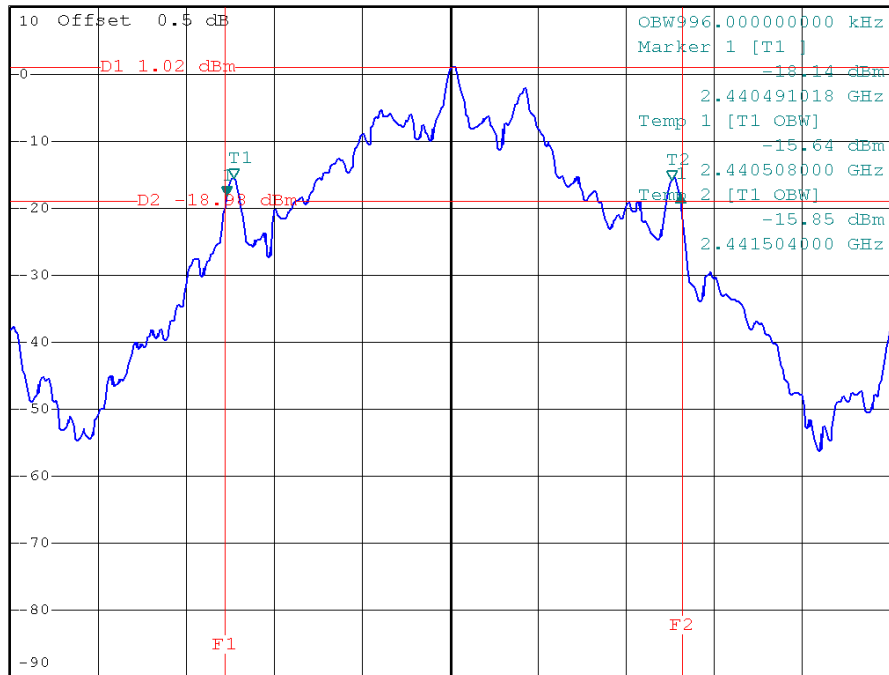

Center 2.441 GHz 200 kHz/ Span 2 MHz



### Bluetooth/1 Mbps/2480 MHz/Channel Separation




\*RBW 30 kHz Delta 1 [T2 ]  
 \*VBW 100 kHz -0.00 dB  
 \*SWT 20 ms 1.002000000 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

2 PK VIEW

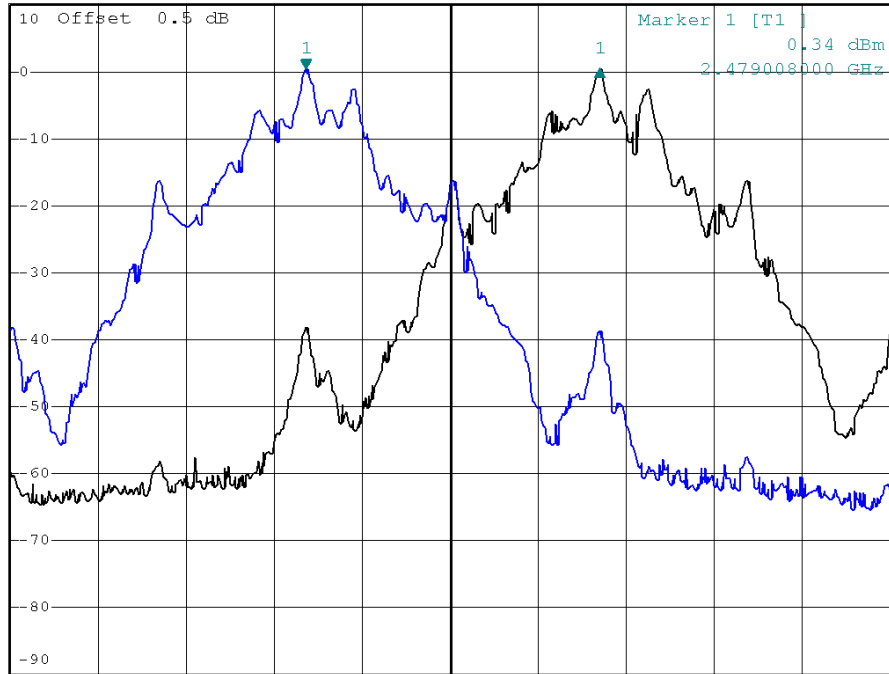


### Bluetooth/1 Mbps/2480 MHz/20dB Bandwidth



\*RBW 30 kHz Delta 1 [T1 ]  
 \*VBW 300 kHz 0.14 dB  
 SWT 2.5 ms 1.025948104 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

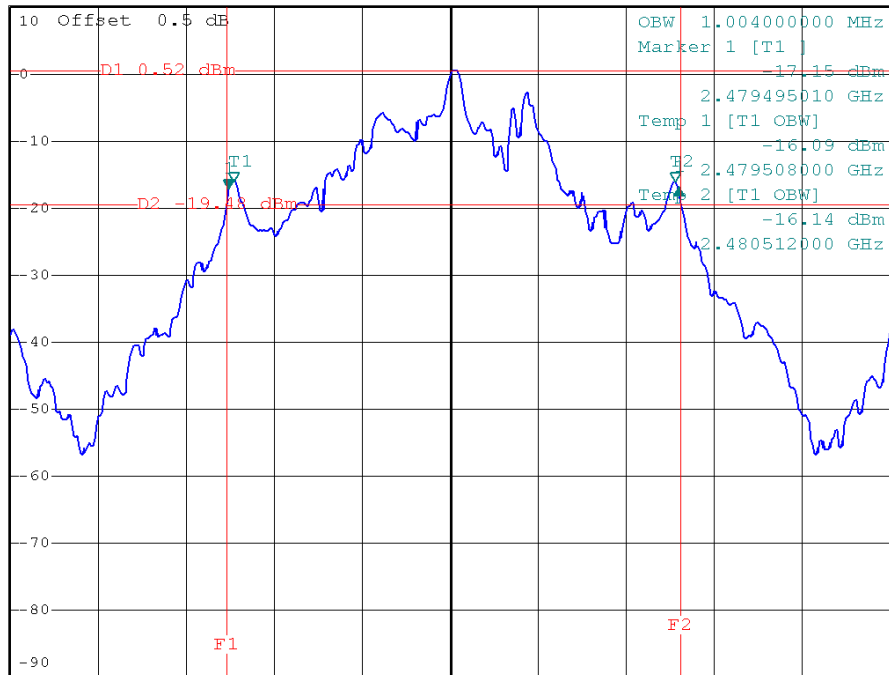



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz, 2441 MHz, 2480 MHz		

Frequency	Channel Separation (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Two-thirds of the 20 dB Bandwidth	Result
2402 MHz	1.00	1.190	1.132	0.793	PASS
2441 MHz	1.01	1.186	1.128	0.790	PASS
2480 MHz	1.00	1.182	1.128	0.788	PASS

NOTE: Ch. Separation Limits: >25 KHz or >2/3 of 20dB bandwidth




### Bluetooth/3 Mbps/2402 MHz/Channel Separation



\*RBW 30 kHz Delta 1 [T2 ]  
 \*VBW 100 kHz -0.02 dB  
 \*SWT 20 ms 1.002000000 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW  
 2 PK VIEW

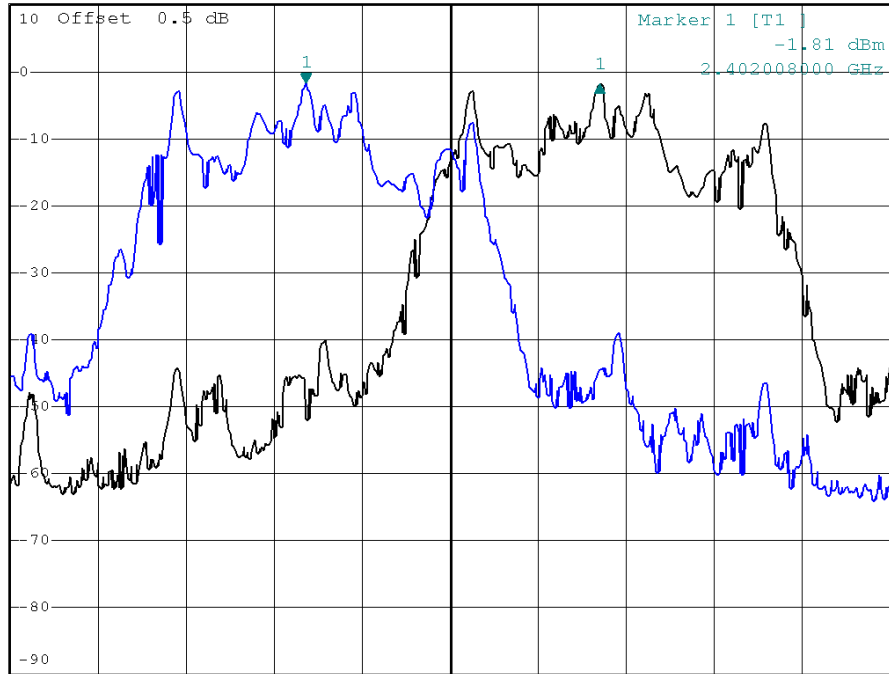


### Bluetooth/3 Mbps/2402 MHz/20dB Bandwidth



\*RBW 30 kHz Delta 1 [T1 ]  
 \*VBW 300 kHz 0.10 dB  
 SWT 2.5 ms 1.189620759 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

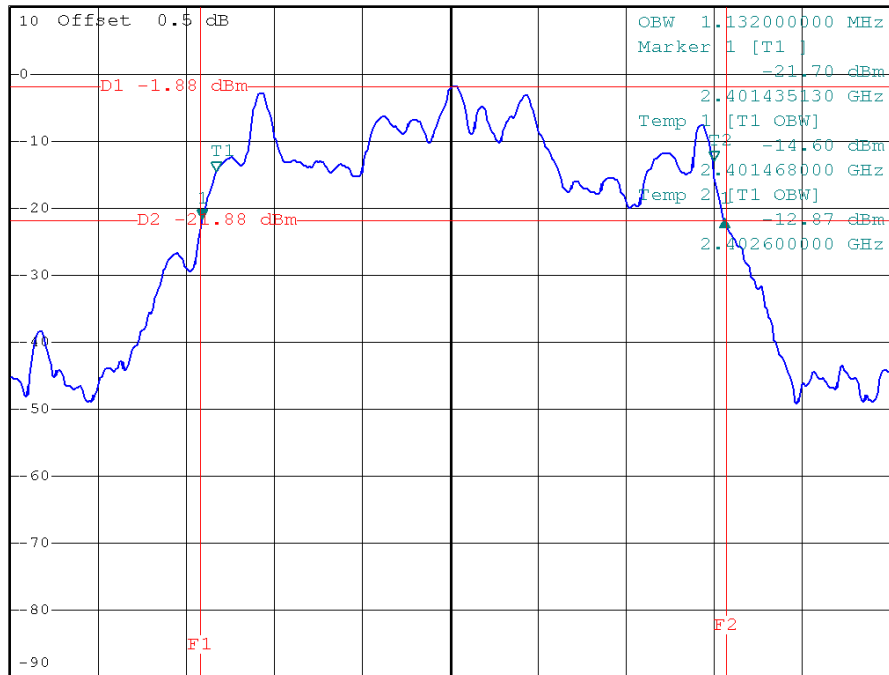




### Bluetooth/3 Mbps/2441 MHz/Channel Separation



\*RBW 30 kHz Delta 1 [T2 ]  
 \*VBW 100 kHz -0.12 dB  
 \*SWT 20 ms 1.008000000 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW  
 2 PK VIEW

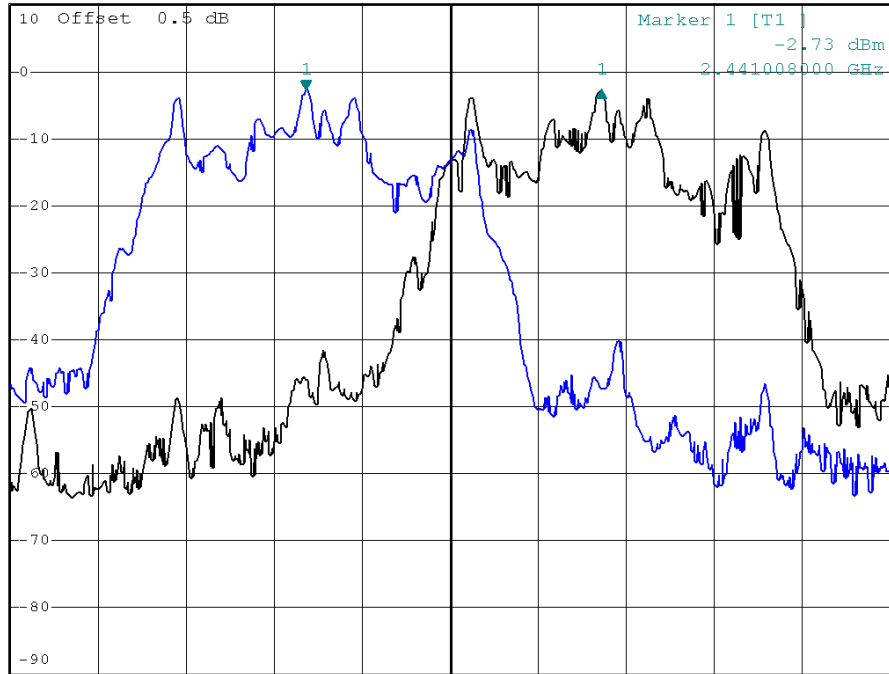

Center 2.4415 GHz 300 kHz/ Span 3 MHz


### Bluetooth/3 Mbps/2441 MHz/20dB Bandwidth



\*RBW 30 kHz Delta 1 [T1 ]  
 \*VBW 300 kHz 0.30 dB  
 SWT 2.5 ms 1.185628743 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

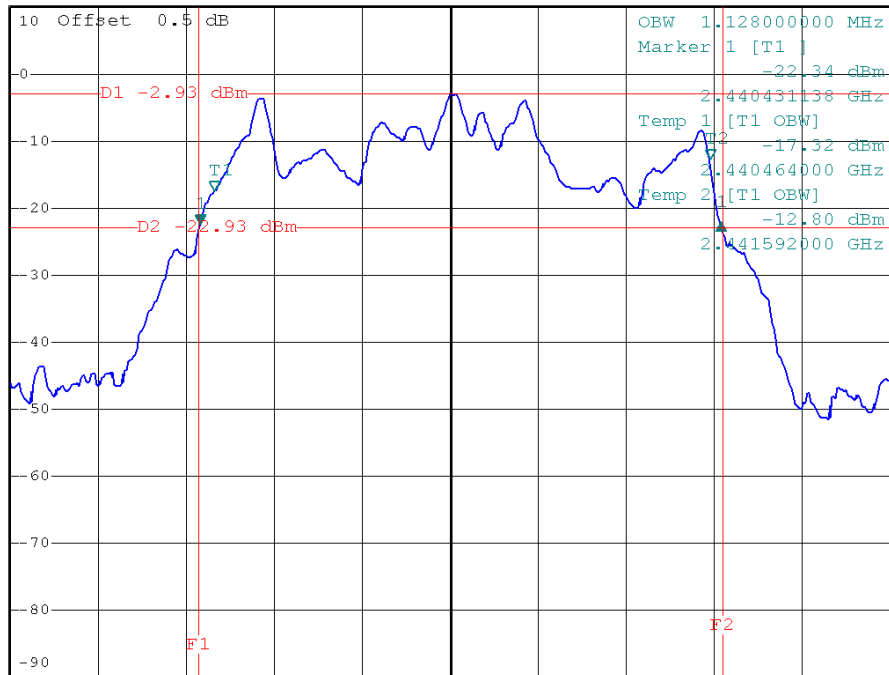

Center 2.441 GHz 200 kHz/ Span 2 MHz




**Bluetooth/3 Mbps/2480 MHz/Channel Separation**



\*RBW 30 kHz Delta 1 [T2 ]  
 \*VBW 100 kHz 0.02 dB  
 \*SWT 20 ms 1.002000000 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW  
 2 PK VIEW

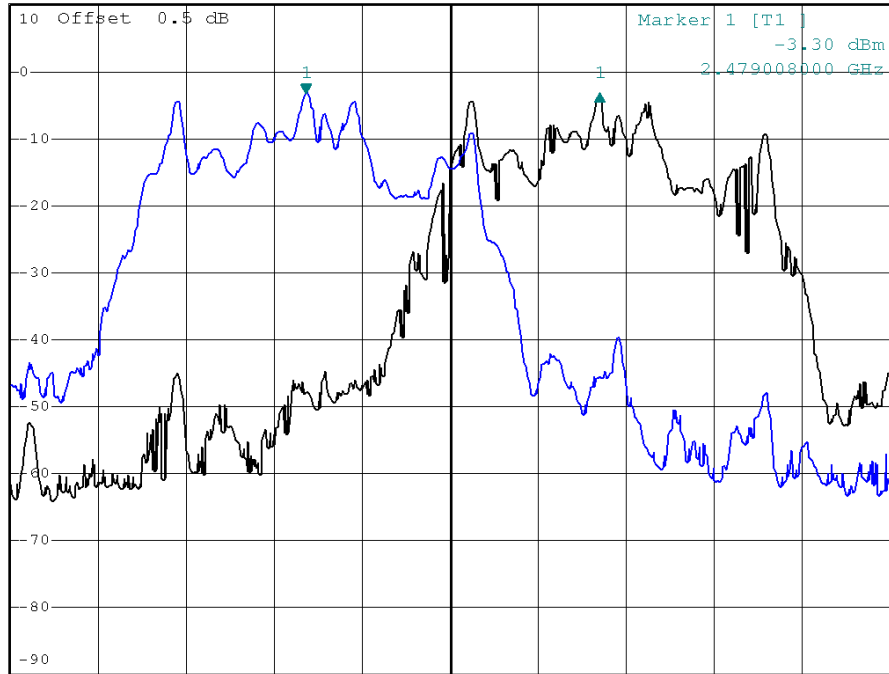


**Bluetooth/3 Mbps/2480 MHz/20dB Bandwidth**



\*RBW 30 kHz Delta 1 [T1 ]  
 \*VBW 300 kHz 0.19 dB  
 SWT 2.5 ms 1.181636727 MHz

Ref 10 dBm \*Att 20 dB

1 PK VIEW

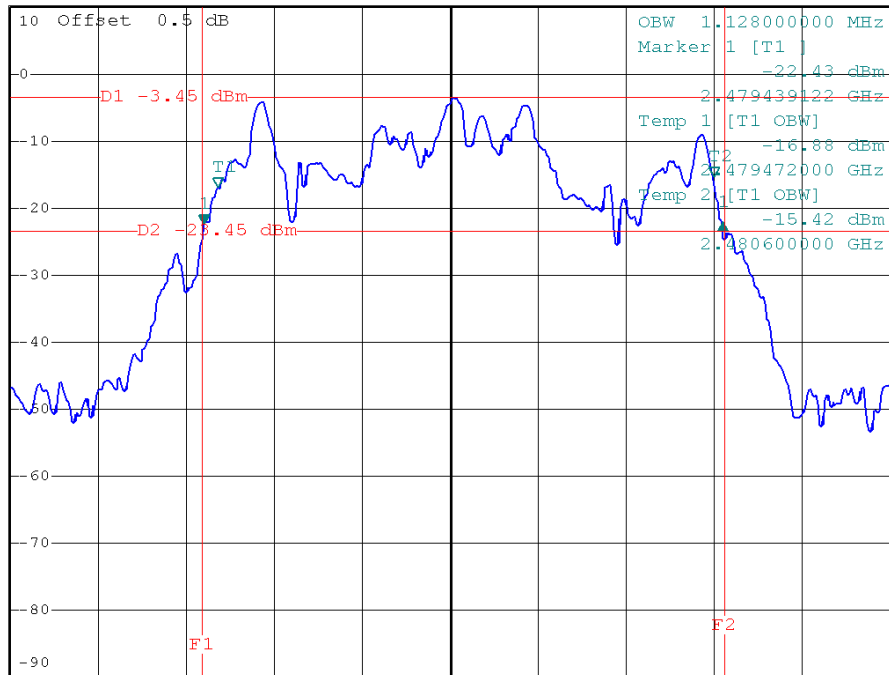



**7 MAXIMUM PEAK CONDUCTED OUTPUT POWER**

**7.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	2400-2483.5	1 watt or 30 dBm

**7.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

**7.3 TEST PROCEDURES**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 3 MHz, VBW= 3 MHz, Sweep time = Auto.

**7.4 TEST SETUP LAYOUT**



**7.5 DEVIATION FROM TEST STANDARD**

No deviation

**7.6 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.






**7.7 TEST RESULTS**

E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz, 2441 MHz, 2480 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2402 MHz	1.42	30	PASS
2441 MHz	0.58	30	PASS
2480 MHz	0.05	30	PASS

**Bluetooth/1 Mbps/2402 MHz/Peak Output Power**

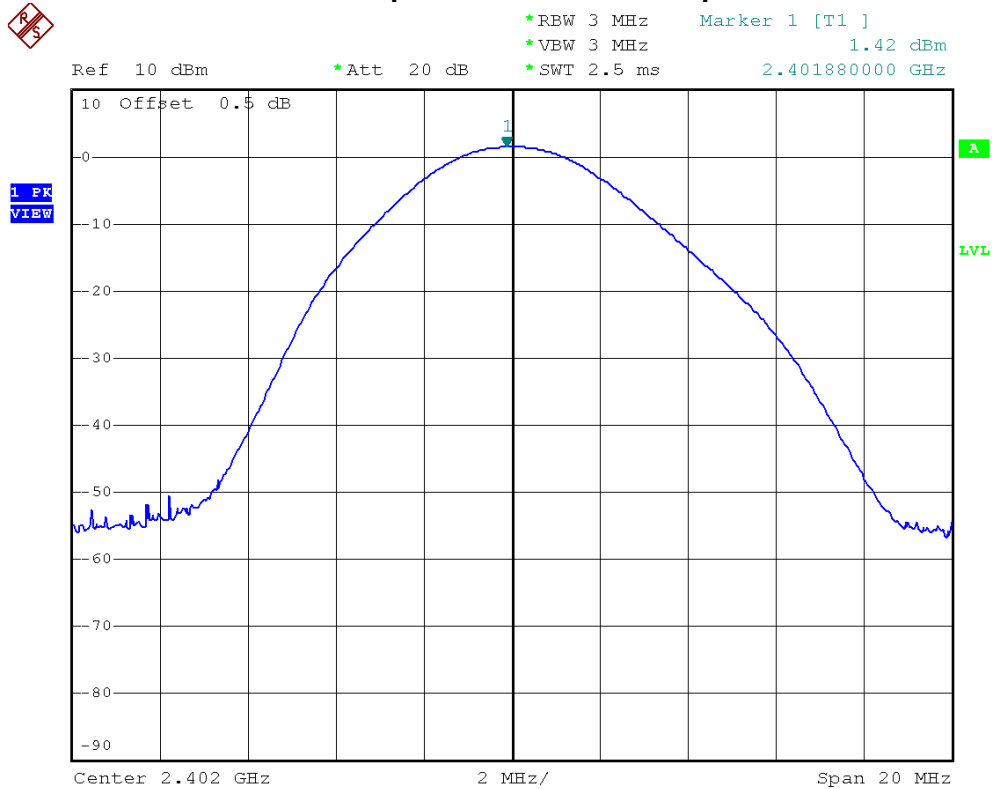




### Bluetooth/1 Mbps/2441 MHz/Peak Output Power



\*RBW 3 MHz    Marker 1 [T1 ]  
\*VBW 3 MHz    0.58 dBm  
\*Att 20 dB    \*SWT 2.5 ms    2.441000000 GHz

Ref 10 dBm

1 PK  
VIEW

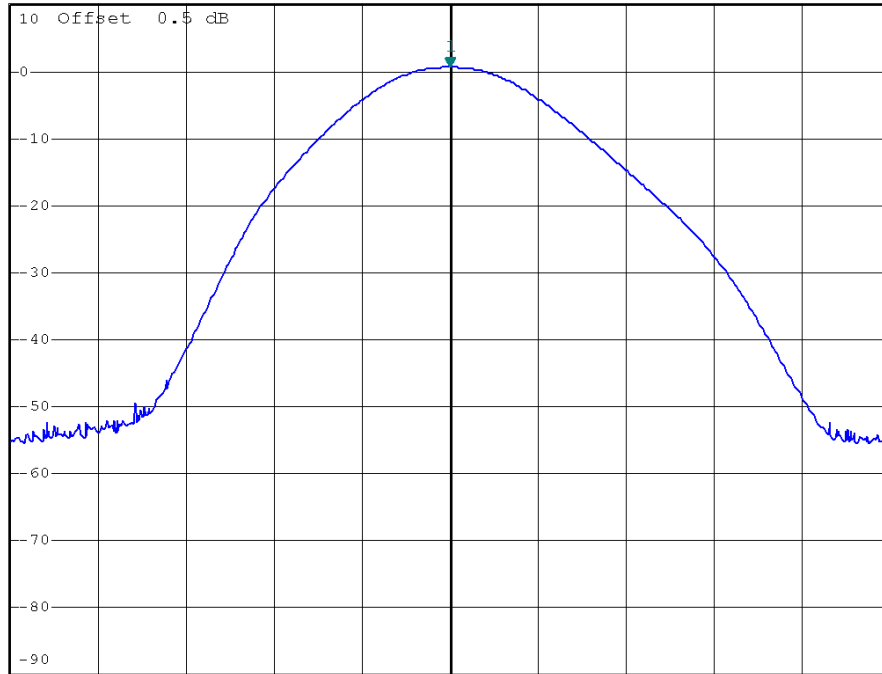

Center 2.441 GHz    2 MHz/    Span 20 MHz


### Bluetooth/1 Mbps/2480 MHz/Peak Output Power



\*RBW 3 MHz    Marker 1 [T1 ]  
\*VBW 3 MHz    0.05 dBm  
\*Att 20 dB    \*SWT 2.5 ms    2.479800000 GHz

Ref 10 dBm

1 PK  
VIEW

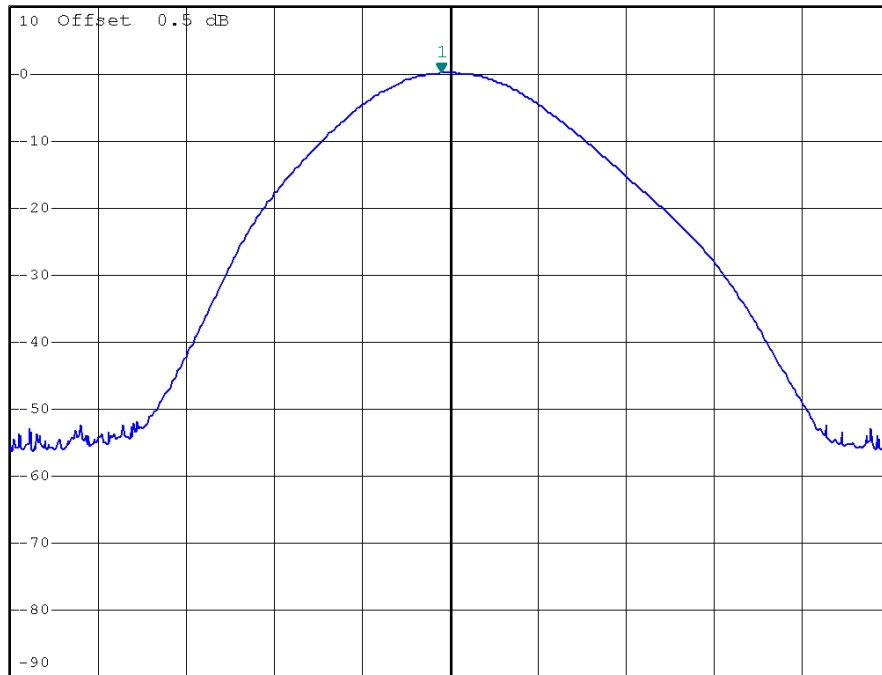


Center 2.48 GHz    2 MHz/    Span 20 MHz



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz, 2441 MHz, 2480 MHz		


Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2402 MHz	1.32	30	PASS
2441 MHz	0.53	30	PASS
2480 MHz	0.66	30	PASS

**Bluetooth/3 Mbps/2402 MHz/Peak Output Power**

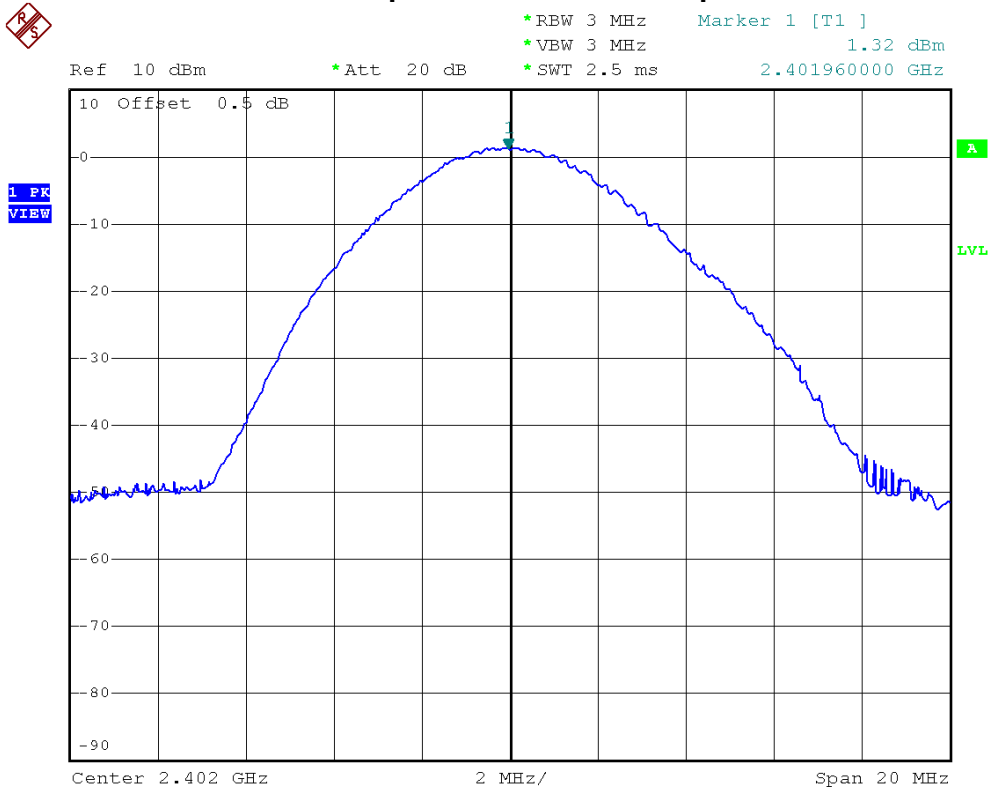




### Bluetooth/3 Mbps/2441 MHz/Peak Output Power

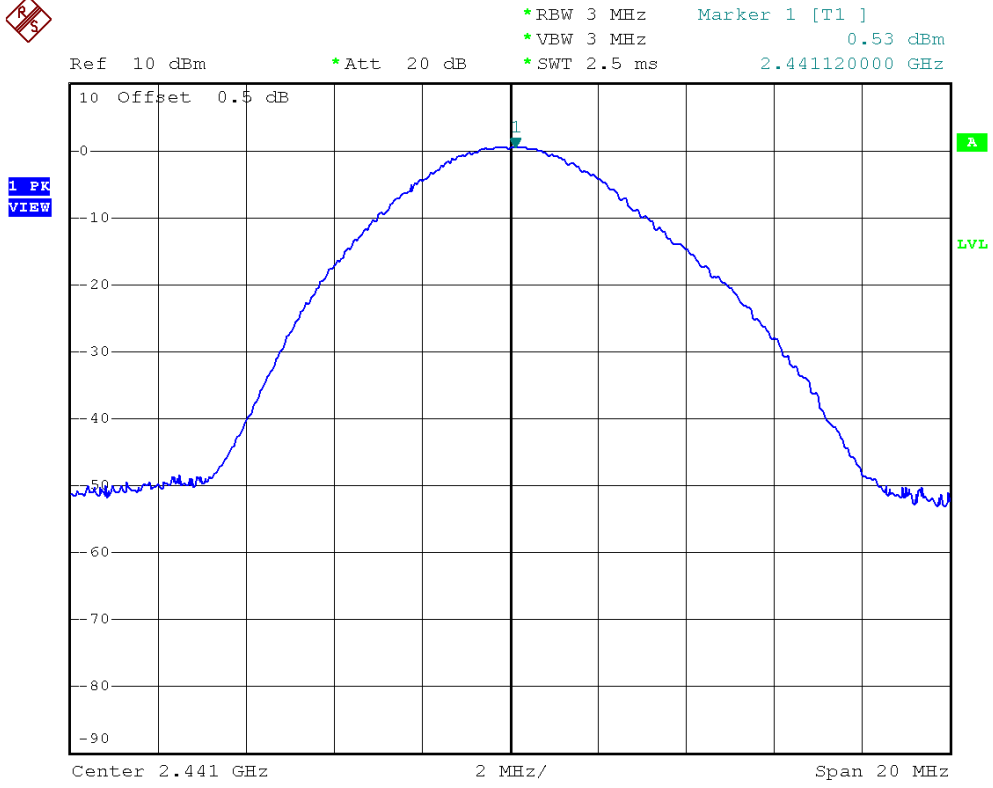

### Bluetooth/3 Mbps/2480 MHz/Peak Output Power

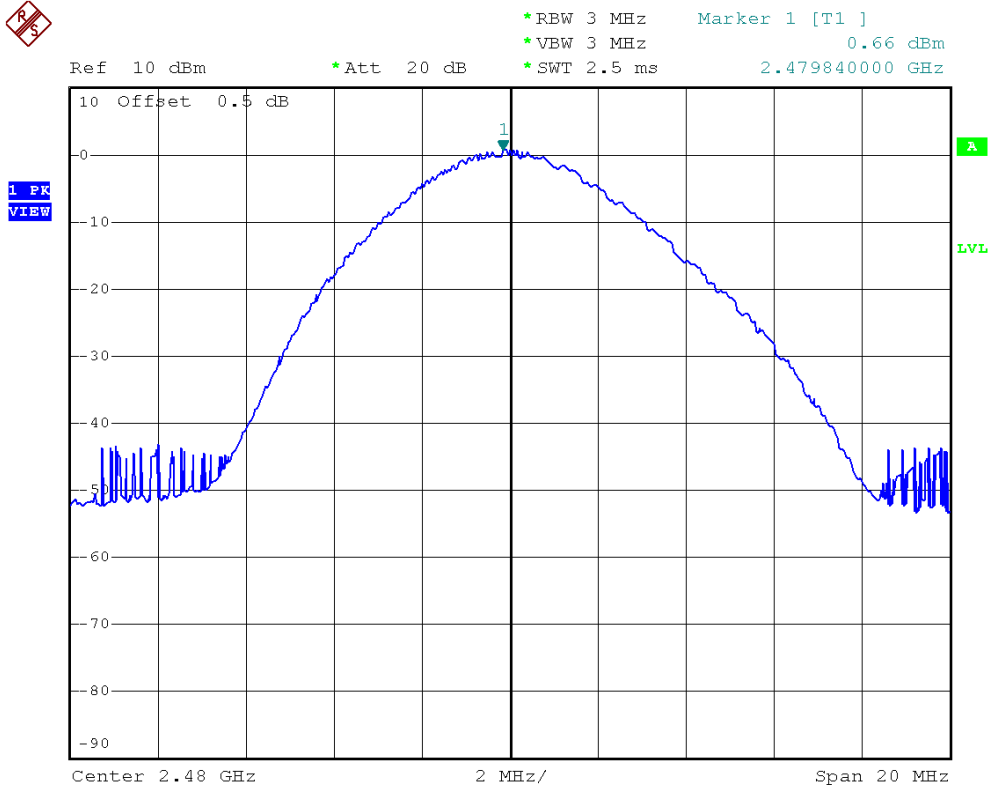



**8 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)**

**8.1 LIMIT**

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

**NOTE:**

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)  
 Margin Level = Measurement Value – Limit Value



**8.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 16, 2013
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 17, 2013
4	Microflex Cable	N/A	N/A	1m	Apr. 14, 2013
5	Microflex Cable	AISI	S104-SMAP-1	10m	Apr. 14, 2013
6	Microflex Cable	N/A	N/A	3m	Apr. 14, 2013
7	Test Cable	N/A	LMR-400	966_12m	May. 15, 2013
8	Test Cable	N/A	LMR-400	966_3m	May. 15, 2013
9	Pre-Amplifier	EMC	EMC-330	980001	May. 31, 2013
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 12, 2013
11	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 19, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

**8.3 MEASURING INSTRUMENTS SETTING**

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



### 8.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


**NOTE:**

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

### 8.5 DEVIATION FROM TEST STANDARD

No deviation

### 8.6 TEST SETUP LAYOUT

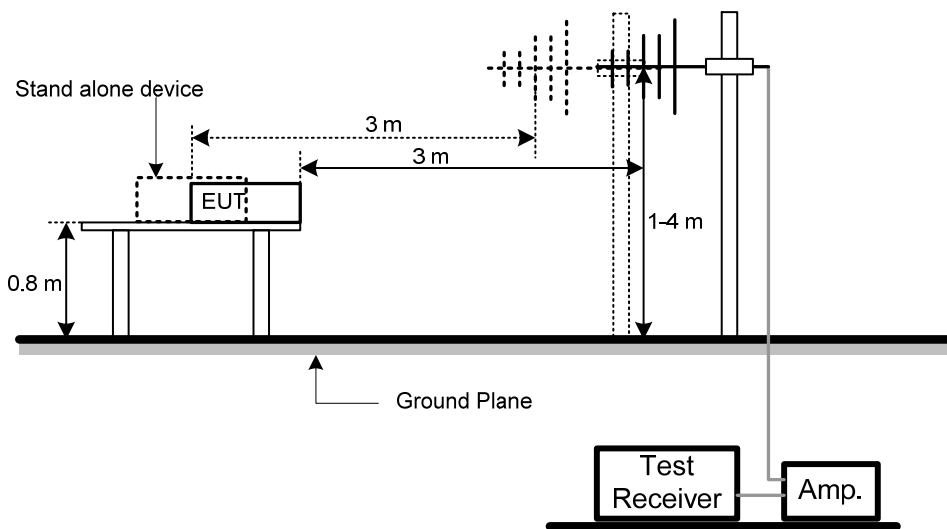



## **8.7 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.






**8.8 TEST RESULTS**

E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Vertical**

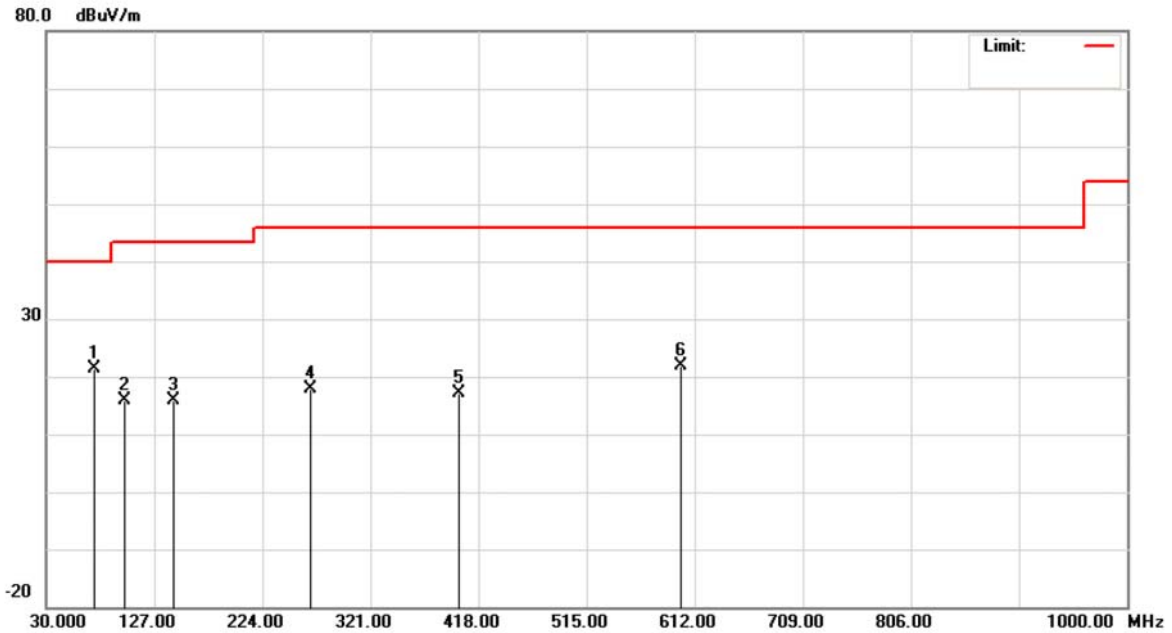


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	73.6500	42.91	-21.54	21.37	40.00	-18.63	peak	
2		100.3250	40.10	-24.27	15.83	43.50	-27.67	peak	
3		143.9750	34.72	-18.86	15.86	43.50	-27.64	peak	
4		267.6500	37.01	-19.22	17.79	46.00	-28.21	peak	
5		401.0250	32.76	-15.68	17.08	46.00	-28.92	peak	
6		599.8750	32.84	-10.97	21.87	46.00	-24.13	peak	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Horizontal**

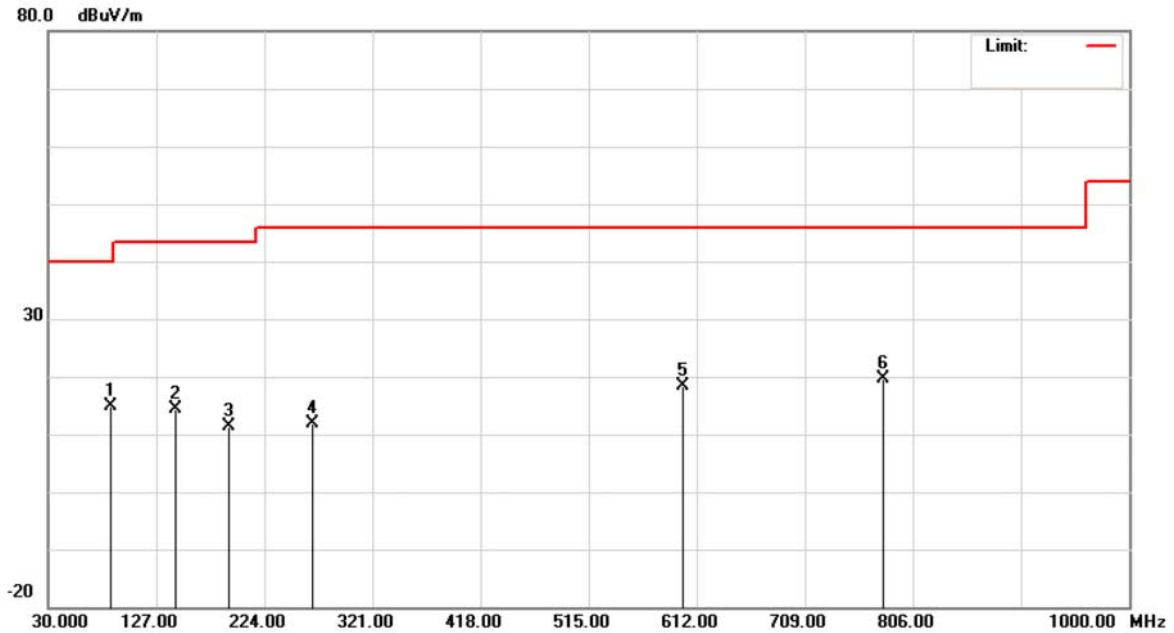

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	85.7750	39.46	-24.46	15.00	40.00	-25.00	peak	
2		143.9750	33.20	-18.86	14.34	43.50	-29.16	peak	
3		192.4750	33.07	-21.75	11.32	43.50	-32.18	peak	
4		267.6499	31.09	-19.22	11.87	46.00	-34.13	peak	
5		599.8750	29.31	-10.97	18.34	46.00	-27.66	peak	
6		779.3250	28.07	-8.55	19.52	46.00	-26.48	peak	



**9 RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)**

**9.1 LIMIT**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

**NOTE:**

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)  
 Margin Level = Measurement Value – Limit Value



**9.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 16, 2013
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 17, 2013
4	Microflex Cable	N/A	N/A	1m	Apr. 14, 2013
5	Microflex Cable	AISI	S104-SMAP-1	10m	Apr. 14, 2013
6	Microflex Cable	N/A	N/A	3m	Apr. 14, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

**9.3 MEASURING INSTRUMENTS SETTING**

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average



### 9.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


**NOTE:**

- a. Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.  
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- b. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

### 9.5 DEVIATION FROM TEST STANDARD

No deviation

### 9.6 TEST SETUP LAYOUT

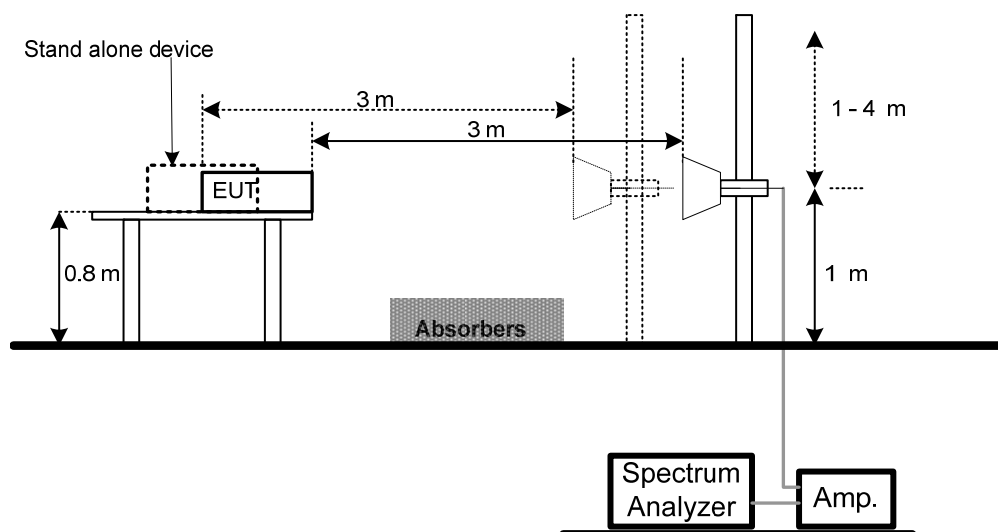



### **9.7 EUT OPERATING CONDITIONS**


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



**9.8 TEST RESULTS**

E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

**Polarization: Vertical**

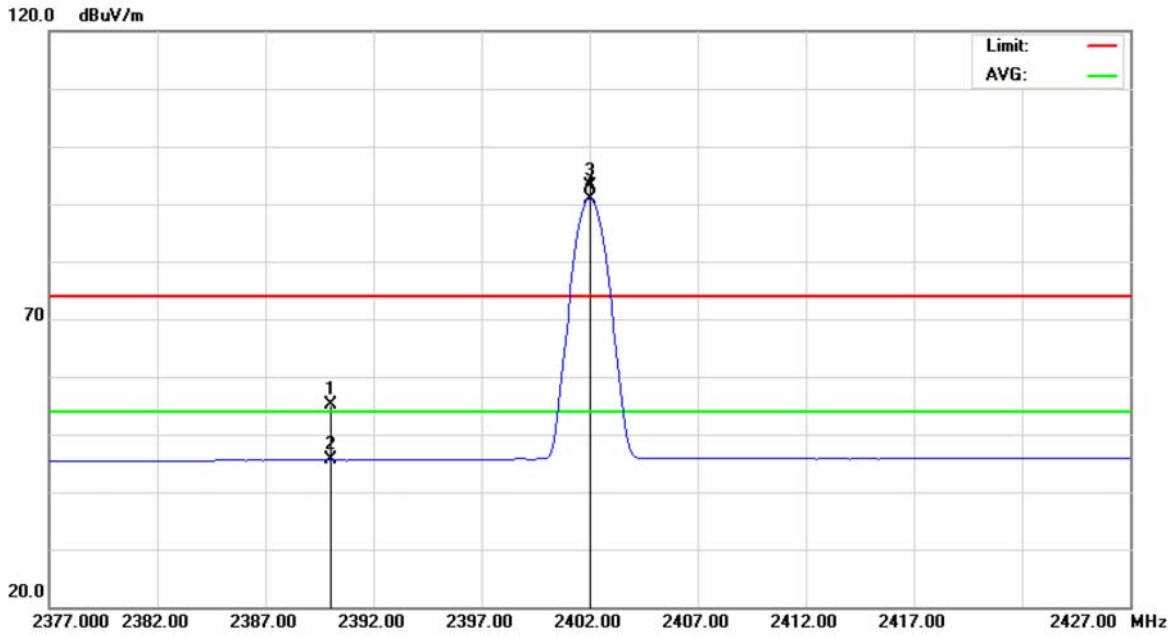


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	22.33	32.80	55.13	74.00	-18.87	peak	
2		2390.000	12.74	32.80	45.54	54.00	-8.46	AVG	
3	X	2402.000	60.31	32.85	93.16	74.00	19.16	peak	
4	*	2402.000	58.11	32.85	90.96	54.00	36.96	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

**Polarization: Vertical**

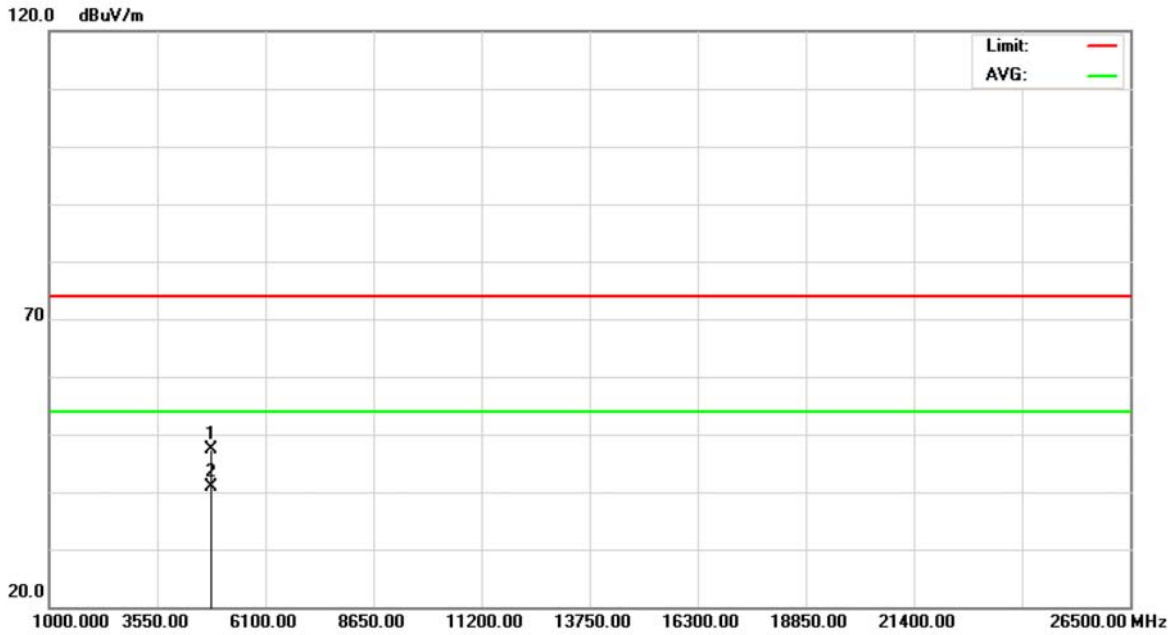


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.025	39.91	7.48	47.39	74.00	-26.61	peak	
2	*	4804.025	33.34	7.48	40.82	54.00	-13.18	AVG	





E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

**Polarization: Horizontal**

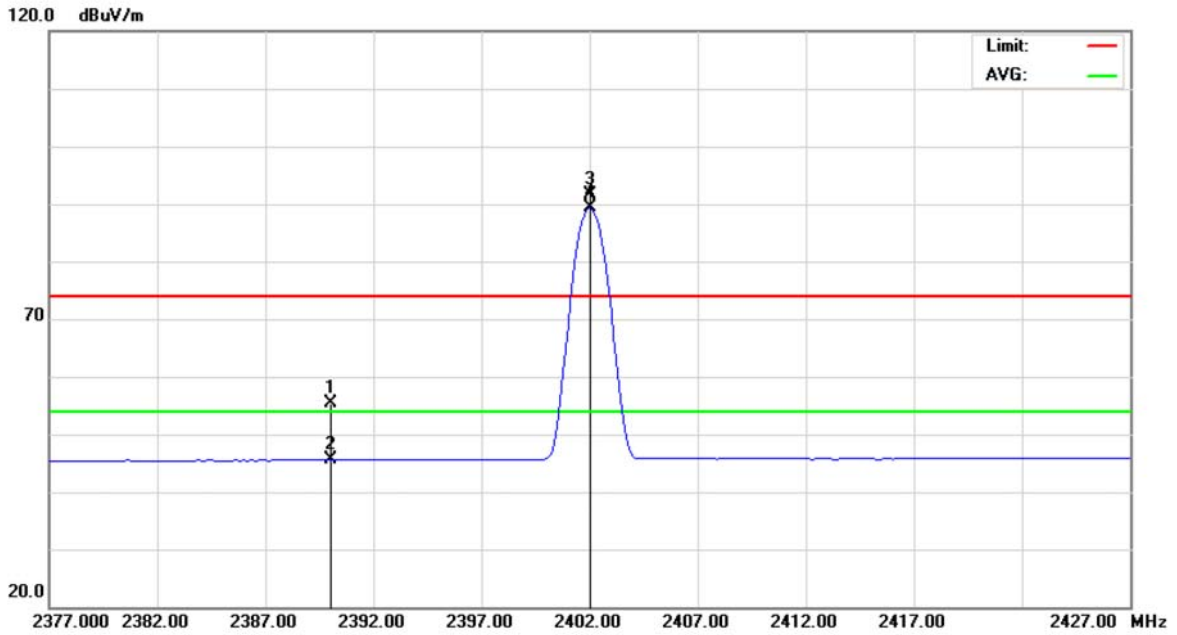


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	22.46	32.80	55.26	74.00	-18.74	peak	
2		2390.000	12.73	32.80	45.53	54.00	-8.47	AVG	
3	X	2402.000	58.72	32.85	91.57	74.00	17.57	peak	
4	*	2402.000	56.49	32.85	89.34	54.00	35.34	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

**Polarization: Horizontal**

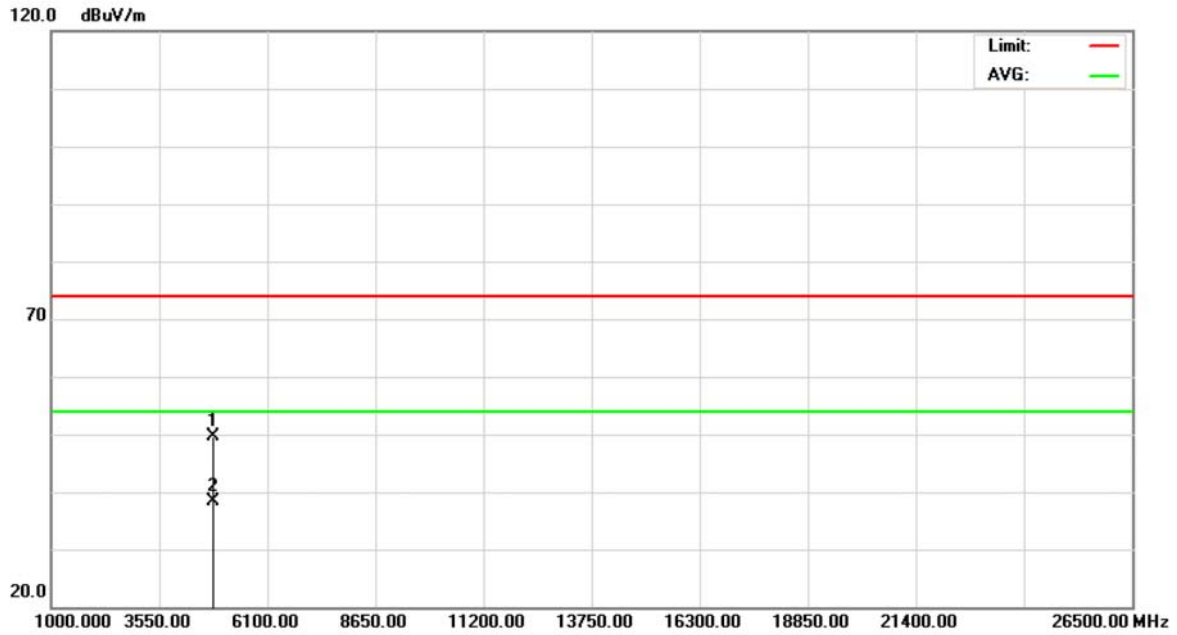


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.025	42.05	7.48	49.53	74.00	-24.47	peak	
2	*	4804.025	30.88	7.48	38.36	54.00	-15.64	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Vertical**

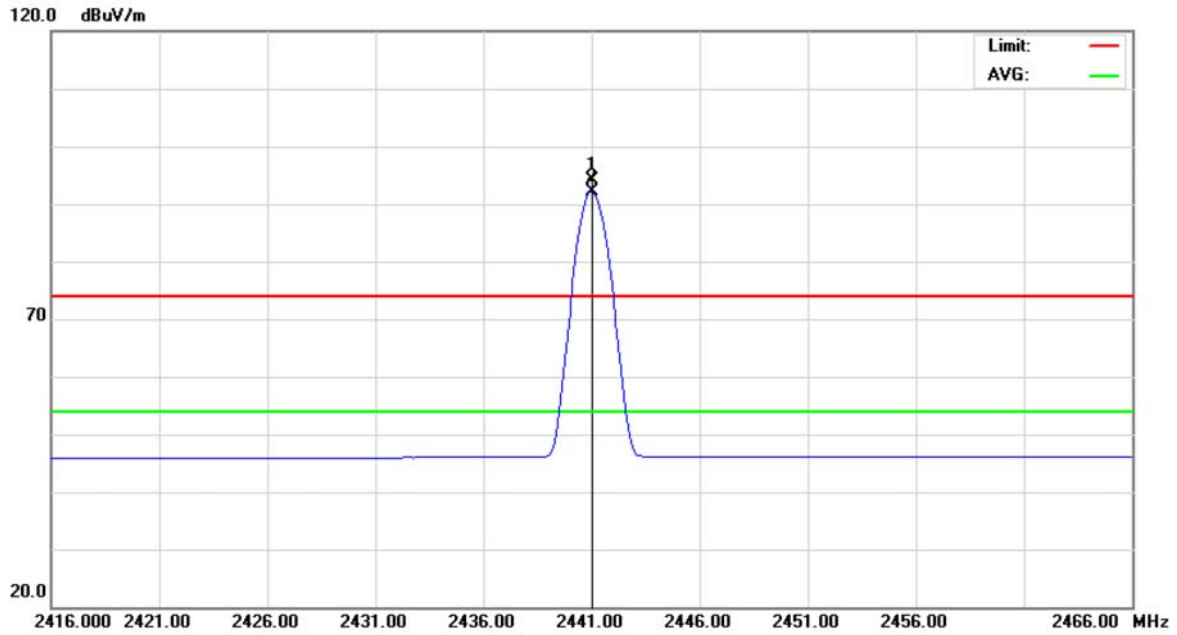


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2441.000	61.15	33.03	94.18	74.00	20.18	peak	
2	*	2441.000	59.13	33.03	92.16	54.00	38.16	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Vertical**

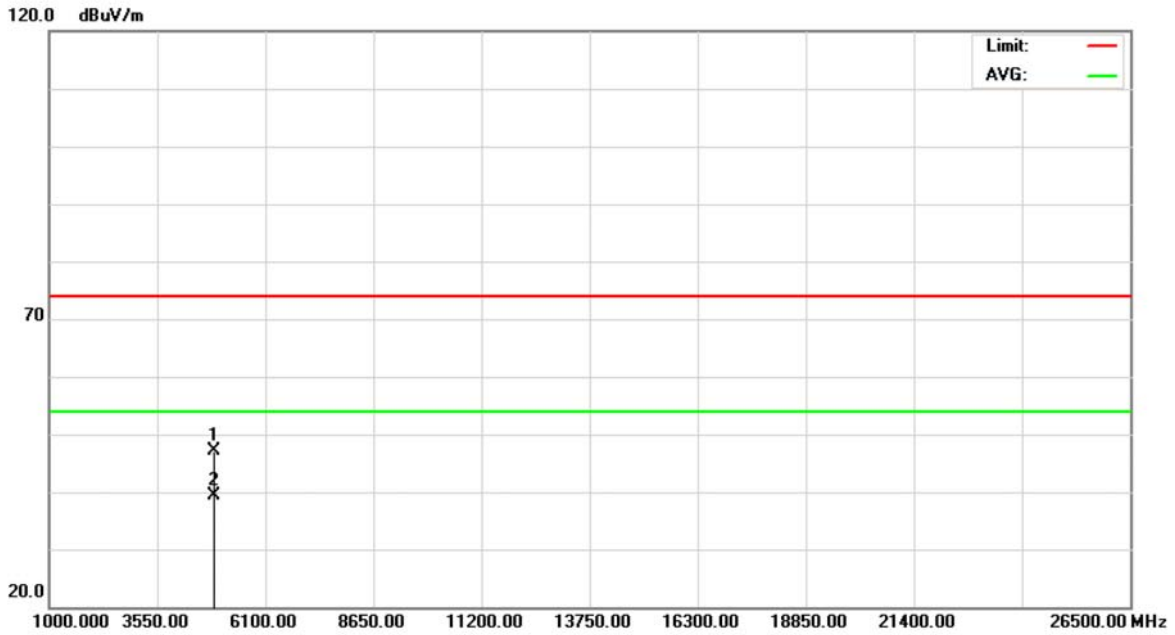


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4882.050	39.37	7.77	47.14	74.00	-26.86	peak	
2	*	4882.050	31.71	7.77	39.48	54.00	-14.52	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Horizontal**

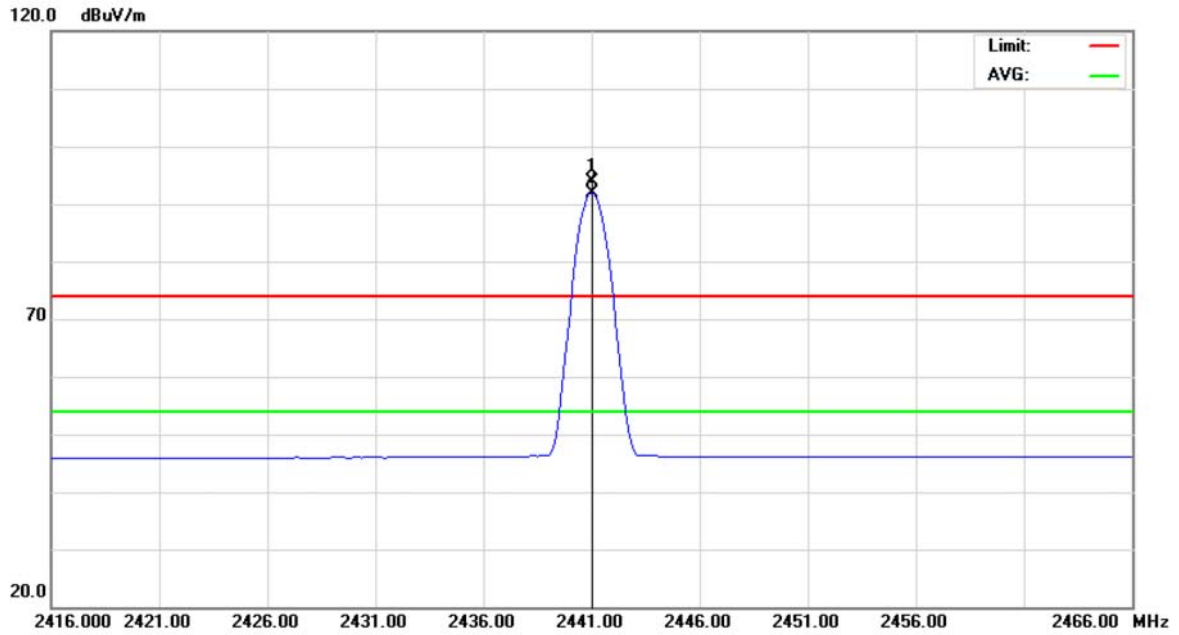


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2441.000	60.96	33.03	93.99	74.00	19.99	peak	
2	*	2441.000	58.92	33.03	91.95	54.00	37.95	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Horizontal**

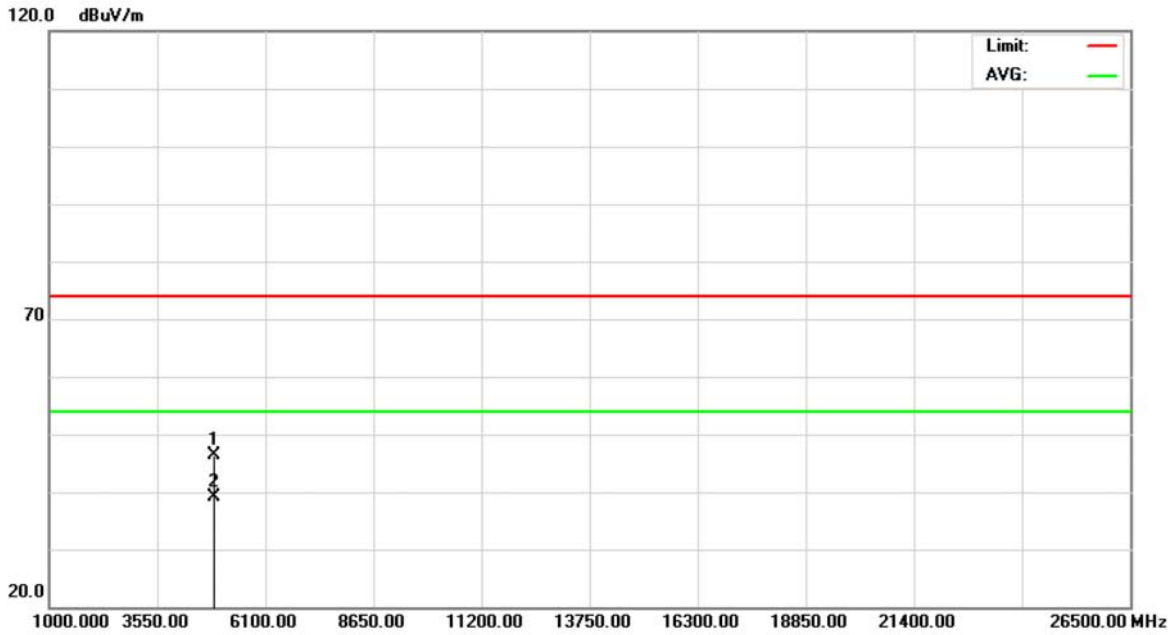


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4882.000	38.64	7.77	46.41	74.00	-27.59	peak	
2	*	4882.000	31.38	7.77	39.15	54.00	-14.85	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

**Polarization: Vertical**

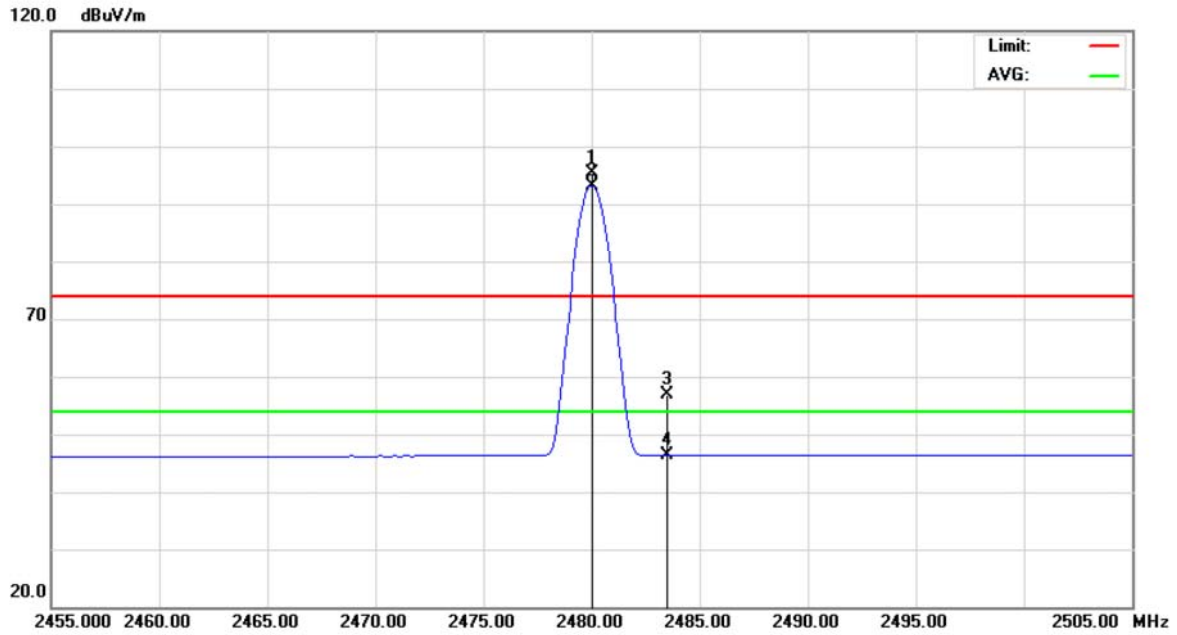


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2480.000	62.15	33.20	95.35	74.00	21.35	peak	
2	*	2480.000	60.03	33.20	93.23	54.00	39.23	AVG	
3		2483.500	23.76	33.22	56.98	74.00	-17.02	peak	
4		2483.500	13.18	33.22	46.40	54.00	-7.60	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

**Polarization: Vertical**

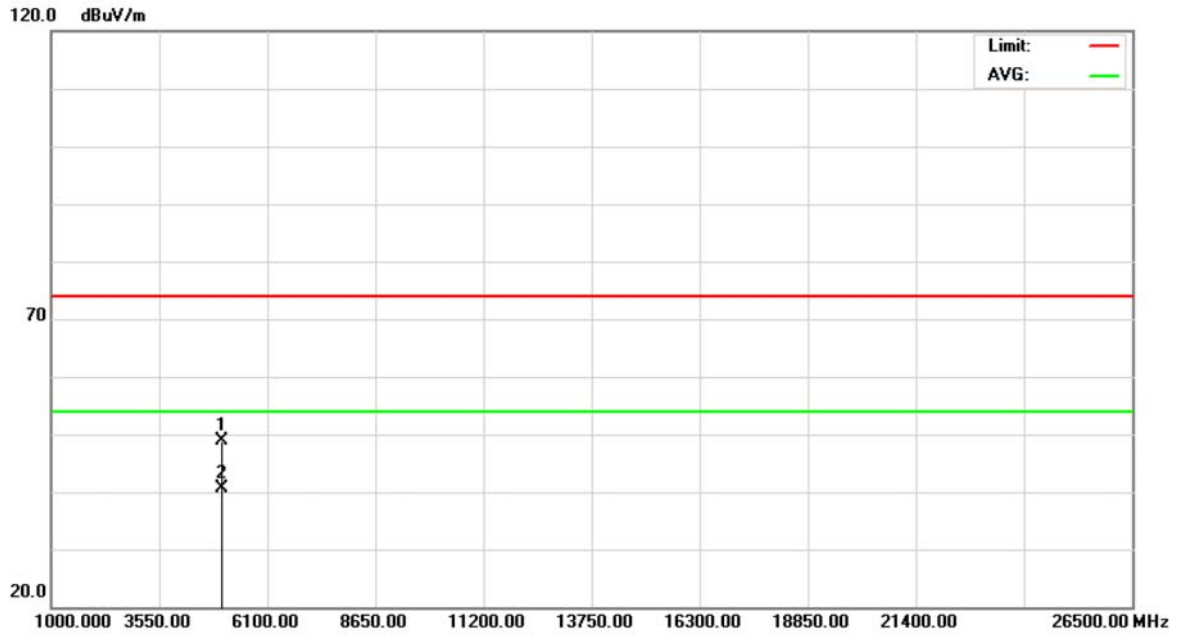


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.075	40.74	8.07	48.81	74.00	-25.19	peak	
2	*	4960.075	32.63	8.07	40.70	54.00	-13.30	AVG	





E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

**Polarization: Horizontal**

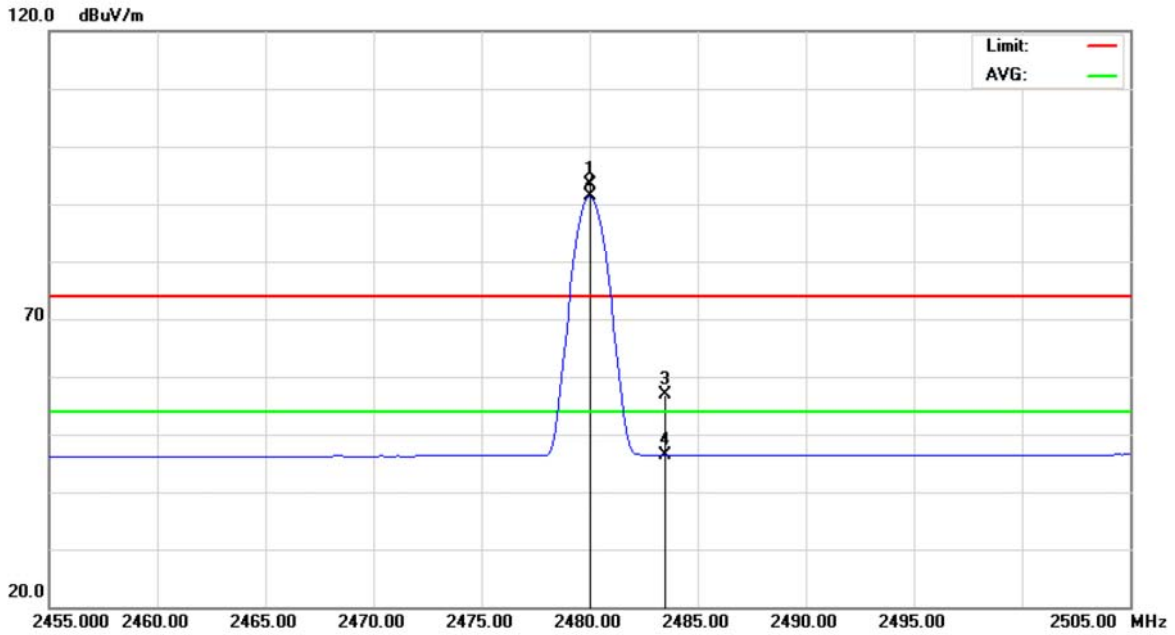


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2480.000	60.25	33.20	93.45	74.00	19.45	peak	
2	*	2480.000	58.07	33.20	91.27	54.00	37.27	AVG	
3		2483.500	23.55	33.22	56.77	74.00	-17.23	peak	
4		2483.500	13.19	33.22	46.41	54.00	-7.59	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

**Polarization: Horizontal**

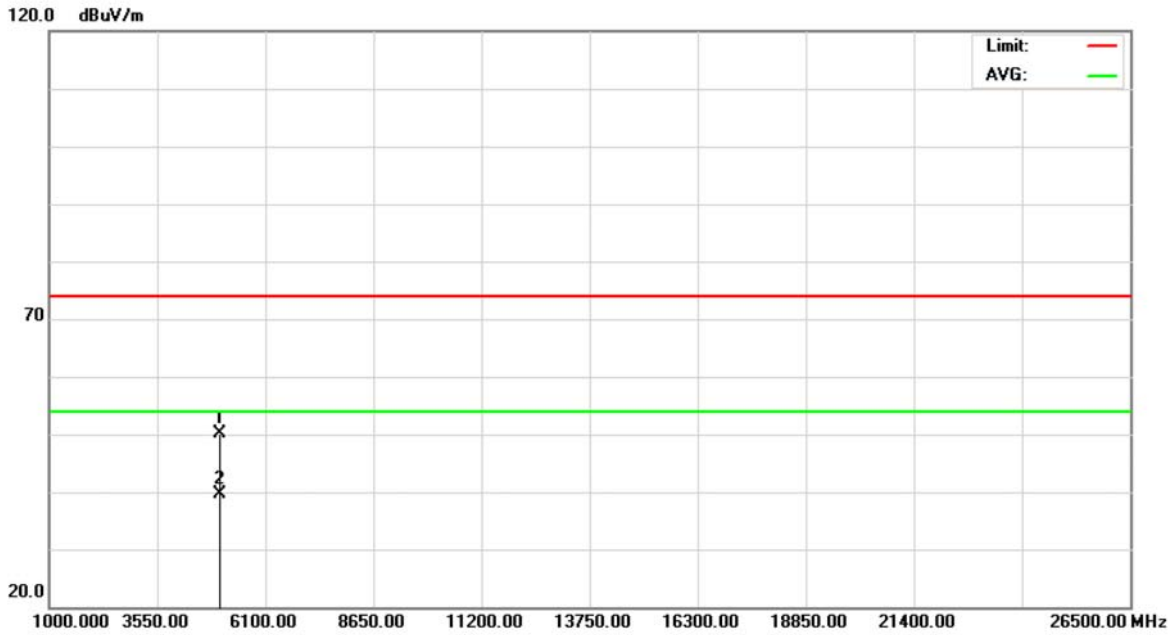


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.015	41.96	8.07	50.03	74.00	-23.97	peak	
2	*	4960.015	31.63	8.07	39.70	54.00	-14.30	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

**Polarization: Vertical**

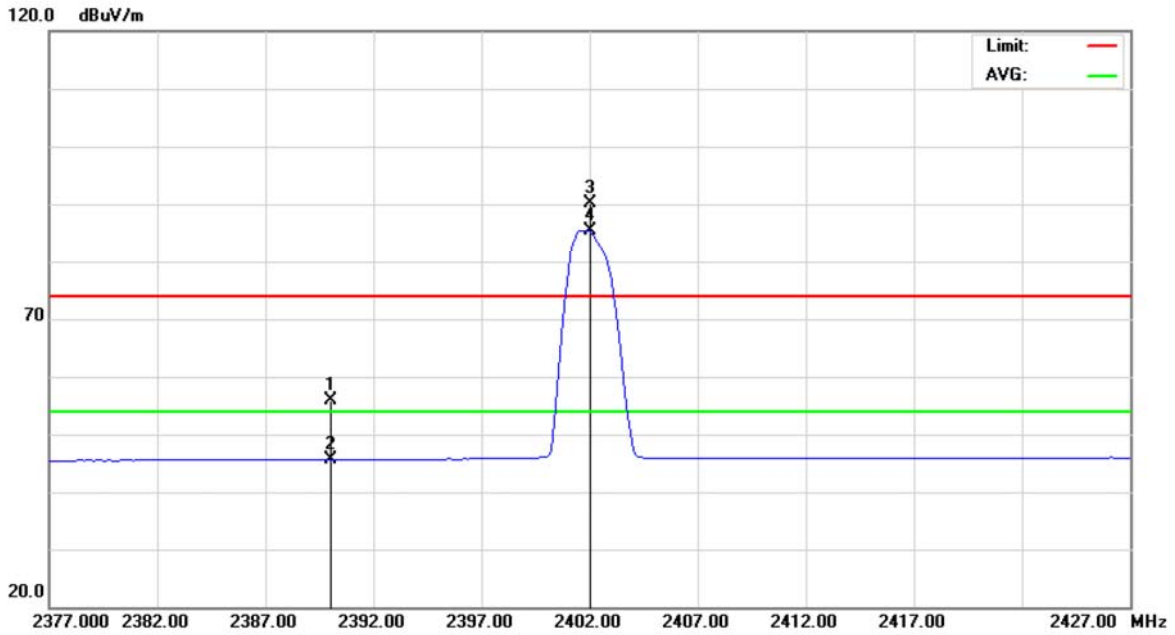


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	23.03	32.80	55.83	74.00	-18.17	peak	
2		2390.000	12.79	32.80	45.59	54.00	-8.41	AVG	
3	X	2402.000	57.27	32.85	90.12	74.00	16.12	peak	
4	*	2402.000	52.61	32.85	85.46	54.00	31.46	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

**Polarization: Vertical**

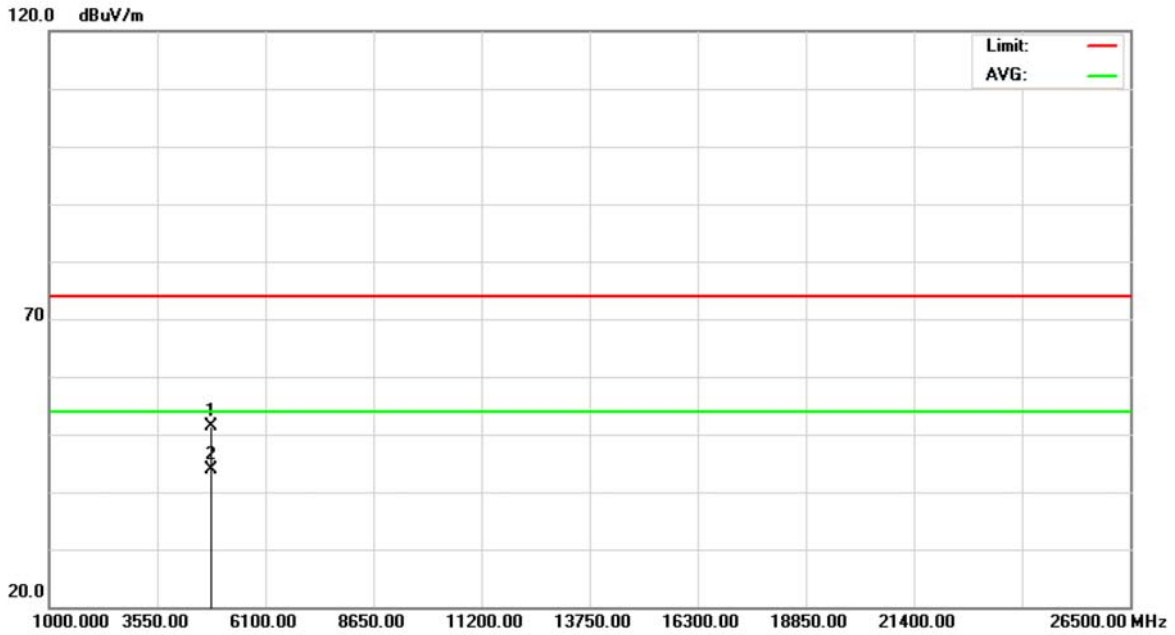


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4803.638	43.95	7.47	51.42	74.00	-22.58	peak	
2	*	4803.638	36.42	7.47	43.89	54.00	-10.11	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

**Polarization: Horizontal**

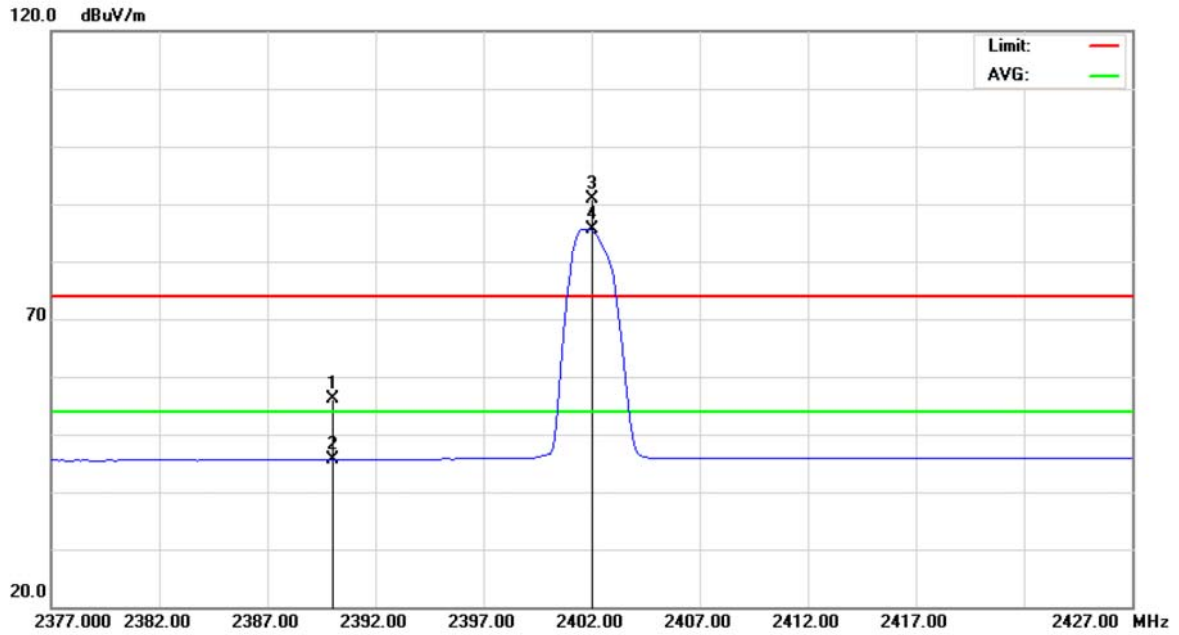


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	23.23	32.80	56.03	74.00	-17.97	peak	
2		2390.000	12.85	32.80	45.65	54.00	-8.35	AVG	
3	X	2402.000	57.99	32.85	90.84	74.00	16.84	peak	
4	*	2402.000	52.88	32.85	85.73	54.00	31.73	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

**Polarization: Horizontal**

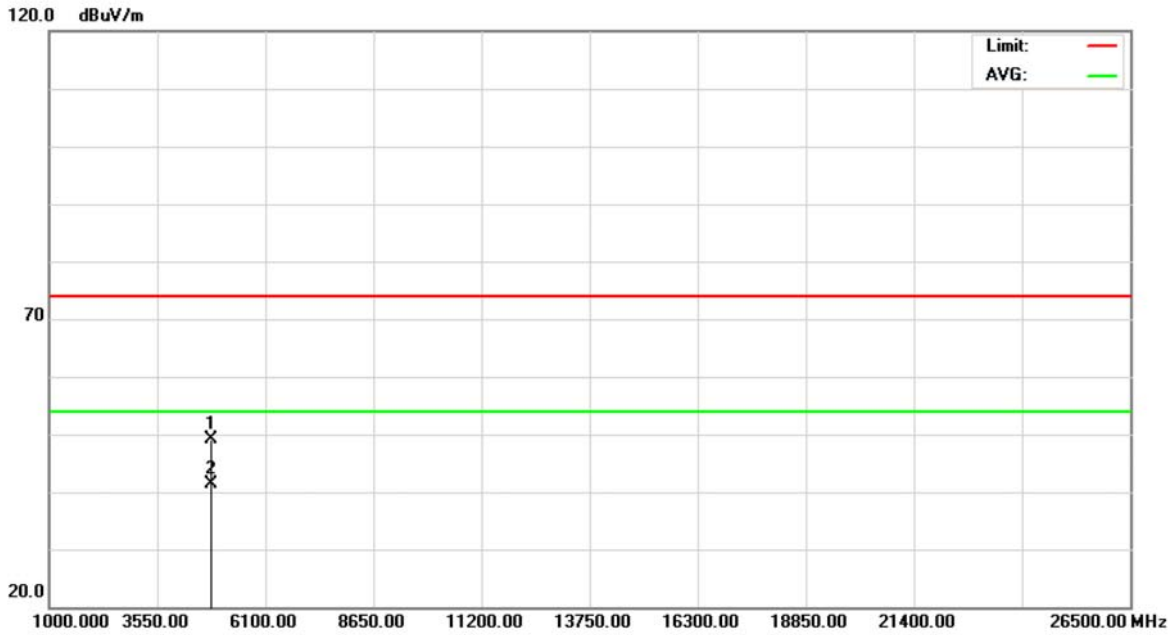


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4803.625	41.77	7.47	49.24	74.00	-24.76	peak	
2	*	4803.625	34.00	7.47	41.47	54.00	-12.53	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

**Polarization: Vertical**

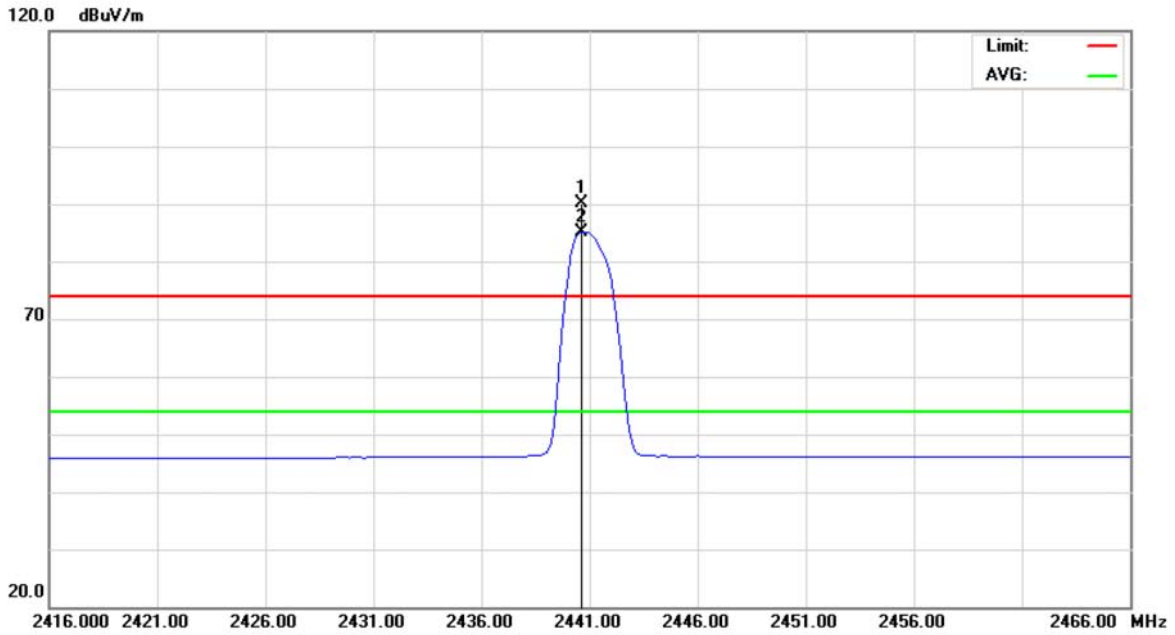


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2440.625	57.11	33.03	90.14	74.00	16.14	peak	
2	*	2440.625	52.11	33.03	85.14	54.00	31.14	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

**Polarization: Vertical**

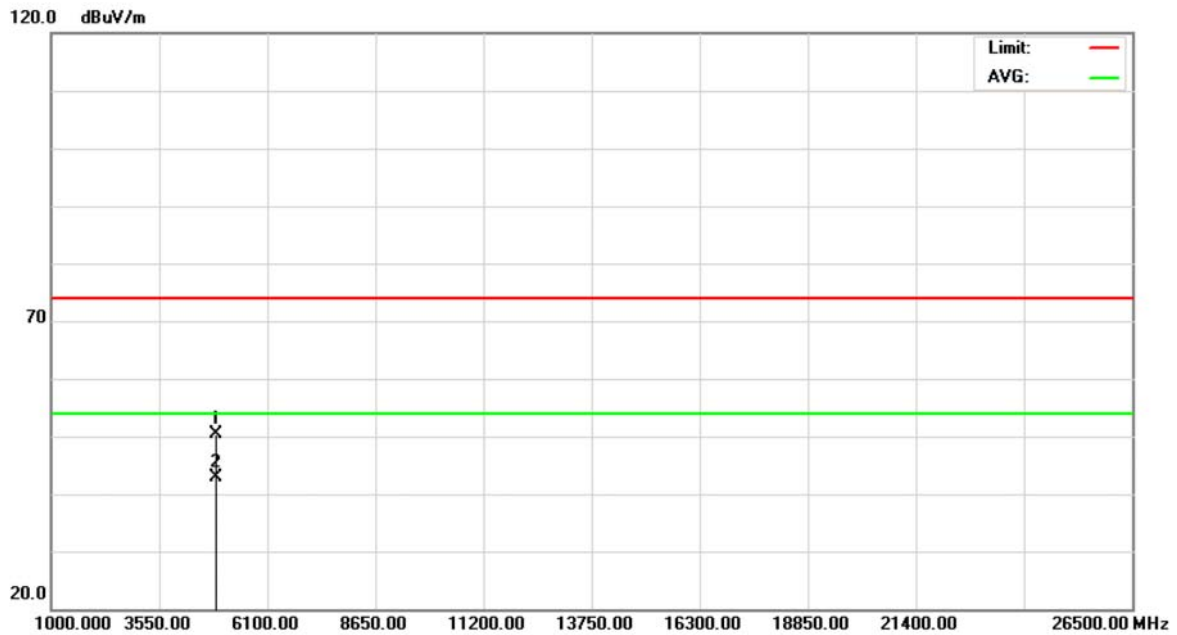


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4881.675	42.51	7.77	50.28	74.00	-23.72	peak	
2	*	4881.675	35.12	7.77	42.89	54.00	-11.11	AVG	





E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

**Polarization: Horizontal**

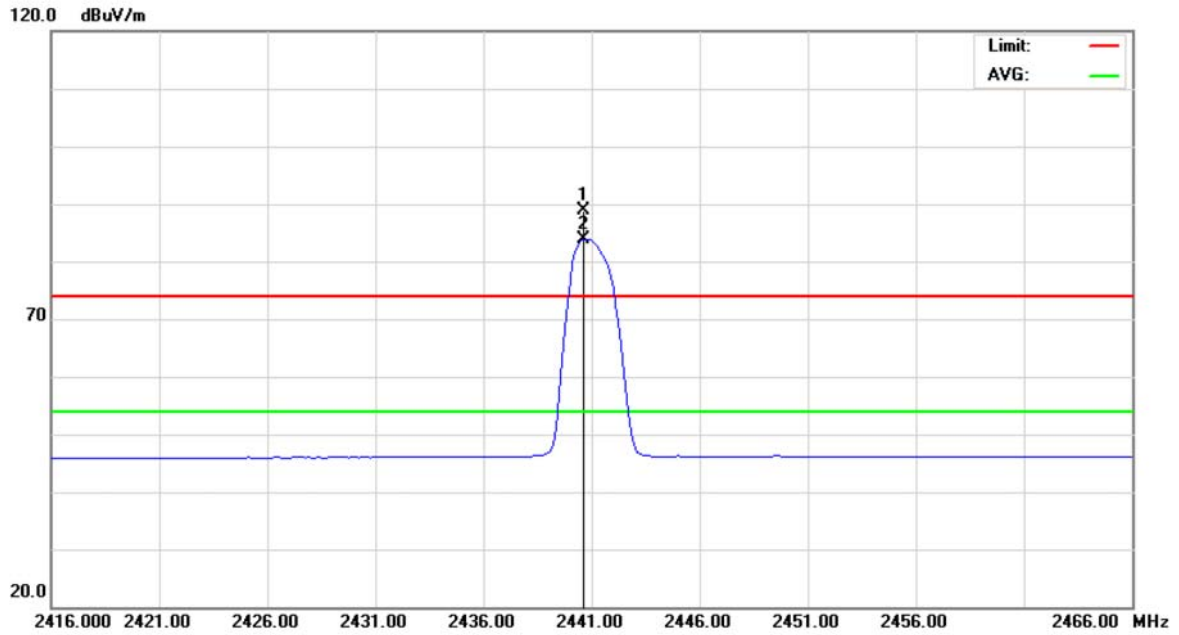


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2440.625	55.95	33.03	88.98	74.00	14.98	peak	
2	*	2440.625	50.90	33.03	83.93	54.00	29.93	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

**Polarization: Horizontal**

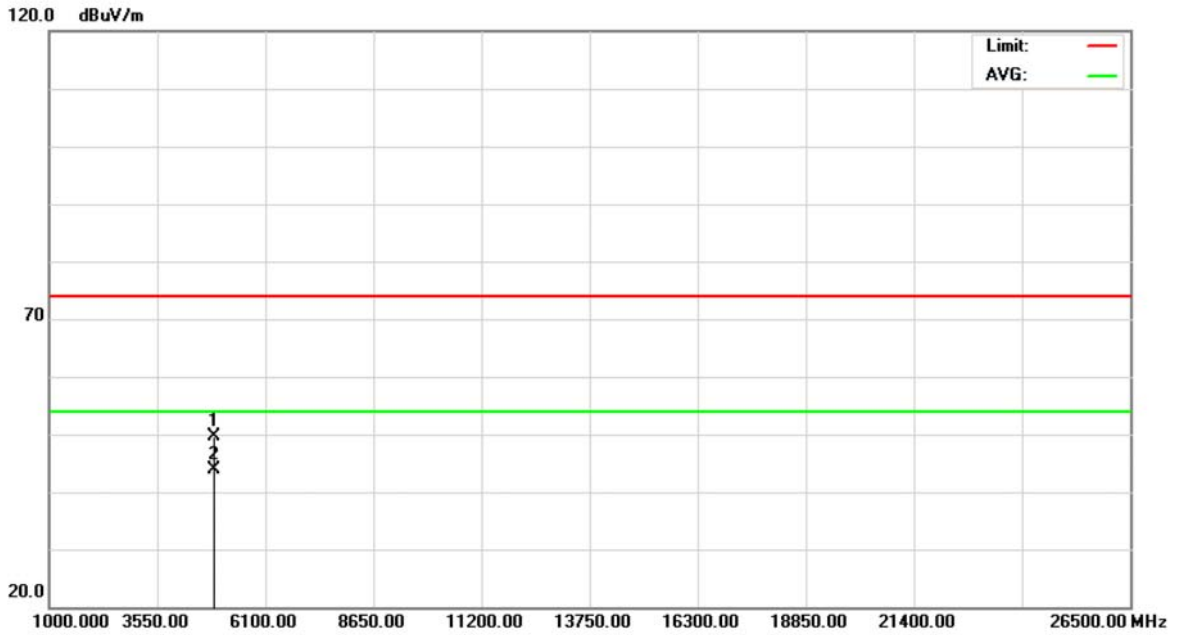


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4881.600	41.83	7.77	49.60	74.00	-24.40	peak	
2	*	4881.600	36.22	7.77	43.99	54.00	-10.01	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

**Polarization: Vertical**

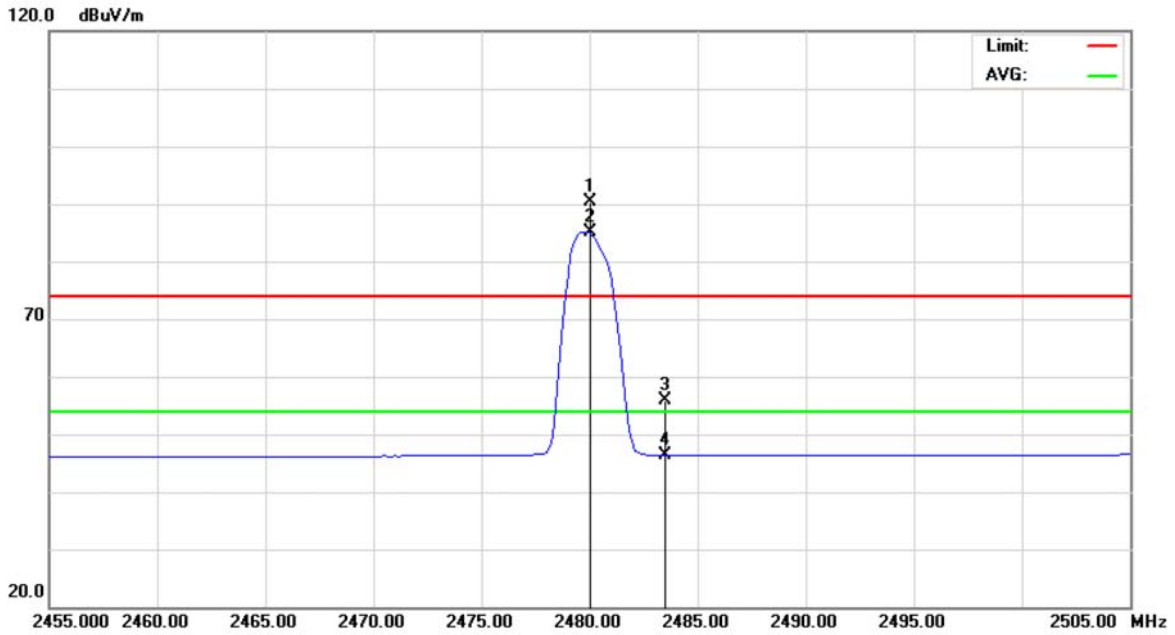


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2480.000	57.10	33.20	90.30	74.00	16.30	peak	
2	*	2480.000	51.94	33.20	85.14	54.00	31.14	AVG	
3		2483.500	22.78	33.22	56.00	74.00	-18.00	peak	
4		2483.500	13.20	33.22	46.42	54.00	-7.58	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

**Polarization: Vertical**

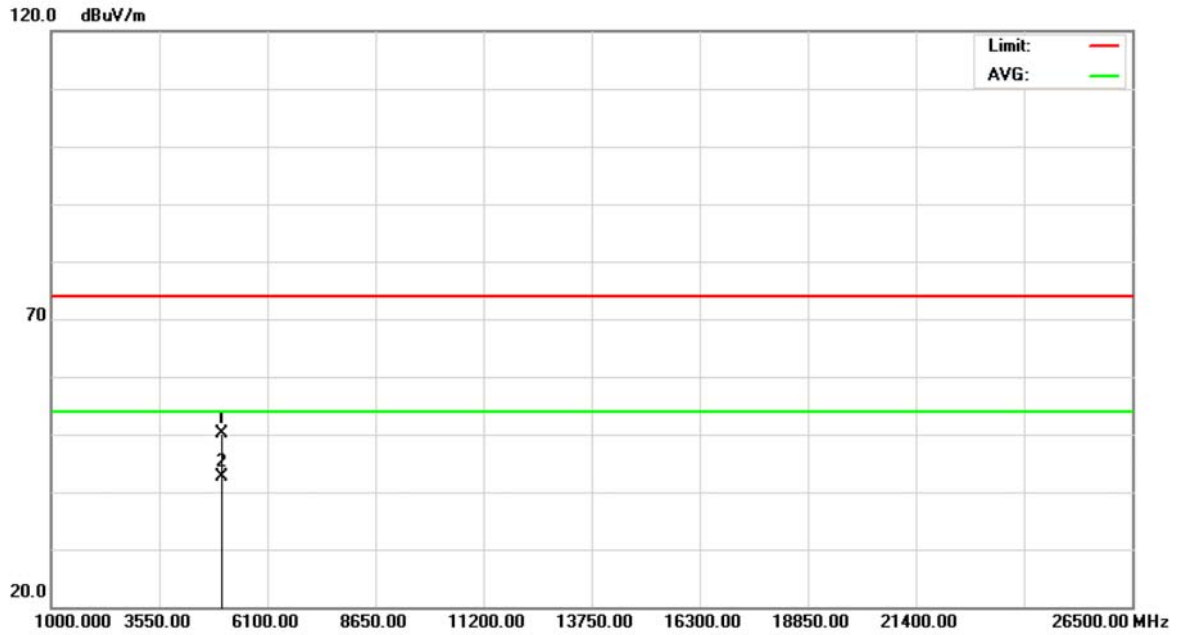


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4959.600	42.03	8.07	50.10	74.00	-23.90	peak	
2	*	4959.600	34.56	8.07	42.63	54.00	-11.37	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

**Polarization: Horizontal**

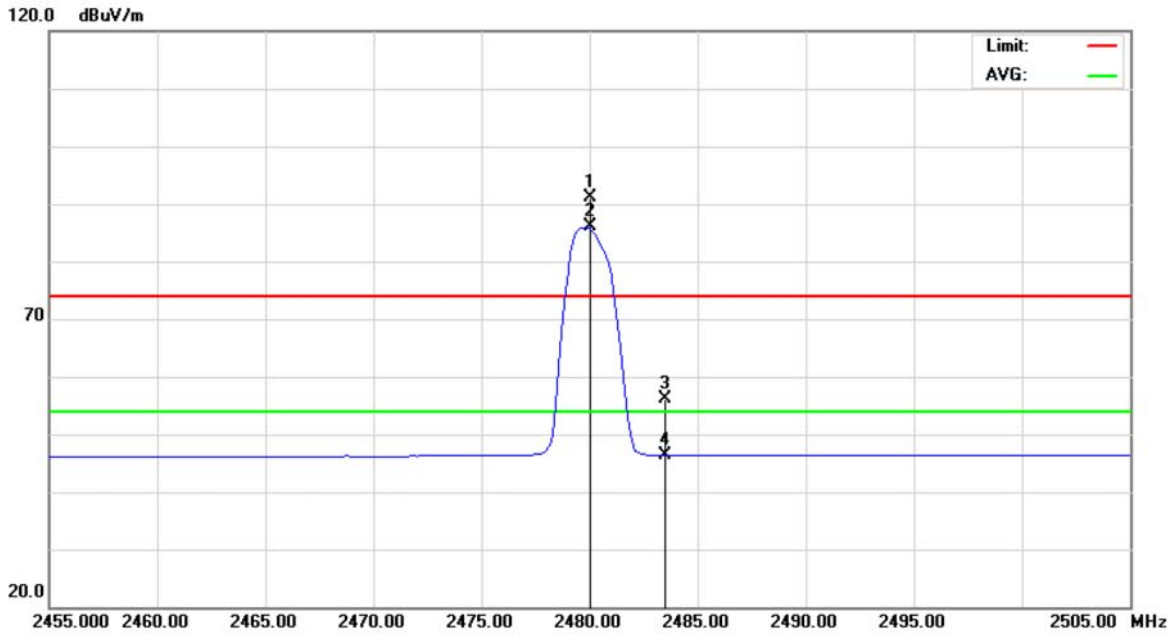


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2480.000	57.95	33.20	91.15	74.00	17.15	peak	
2	*	2480.000	52.81	33.20	86.01	54.00	32.01	AVG	
3		2483.500	22.92	33.22	56.14	74.00	-17.86	peak	
4		2483.500	13.19	33.22	46.41	54.00	-7.59	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

**Polarization: Horizontal**

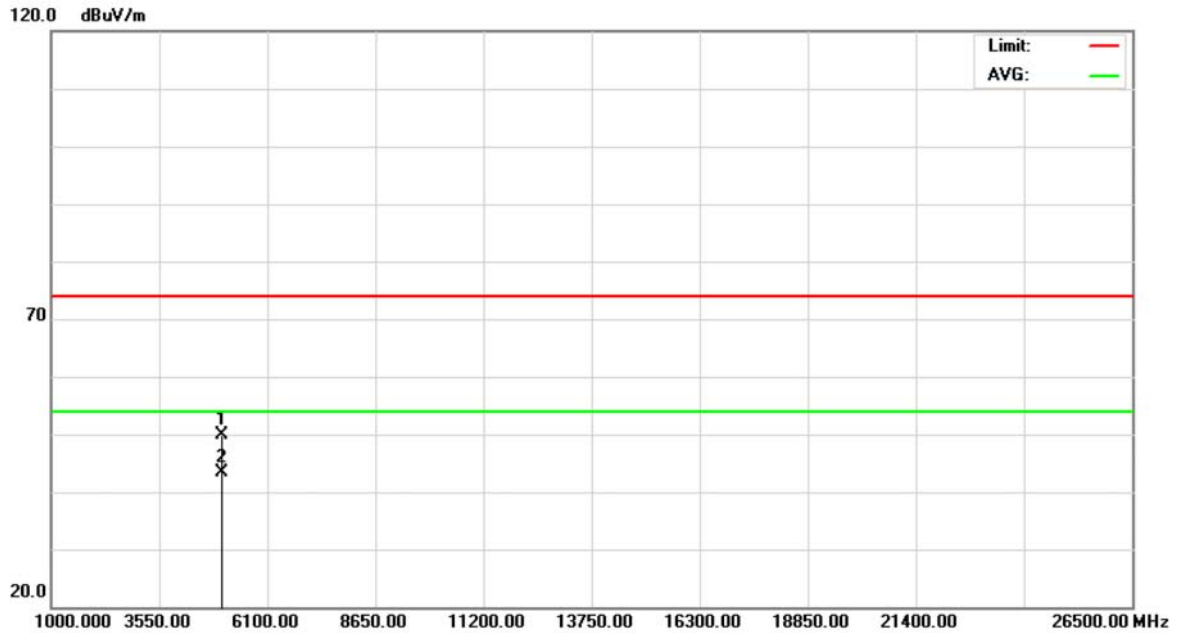


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4959.625	41.93	8.07	50.00	74.00	-24.00	peak	
2	*	4959.625	35.20	8.07	43.27	54.00	-10.73	AVG	



**9.9 TEST RESULTS (RESTRICTED BANDS)**

E.U.T	Smart Robot	Model Name	RED1
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

**Polarization: Vertical**

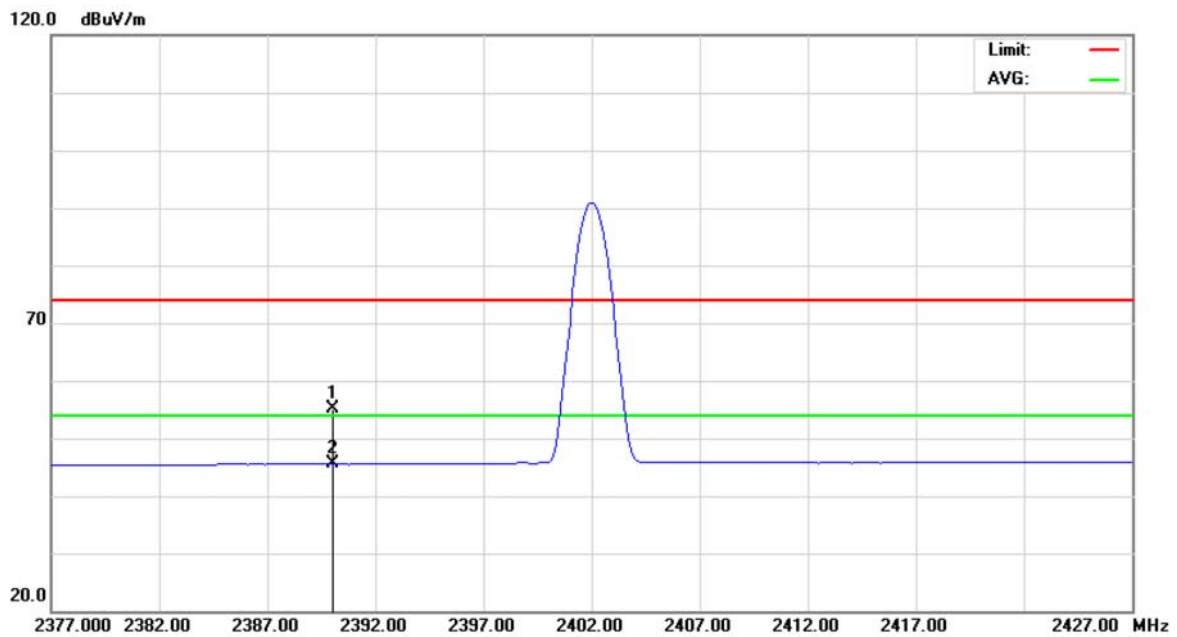


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	22.33	32.80	55.13	74.00	-18.87	peak	
2	*	2390.000	12.74	32.80	45.54	54.00	-8.46	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Vertical**

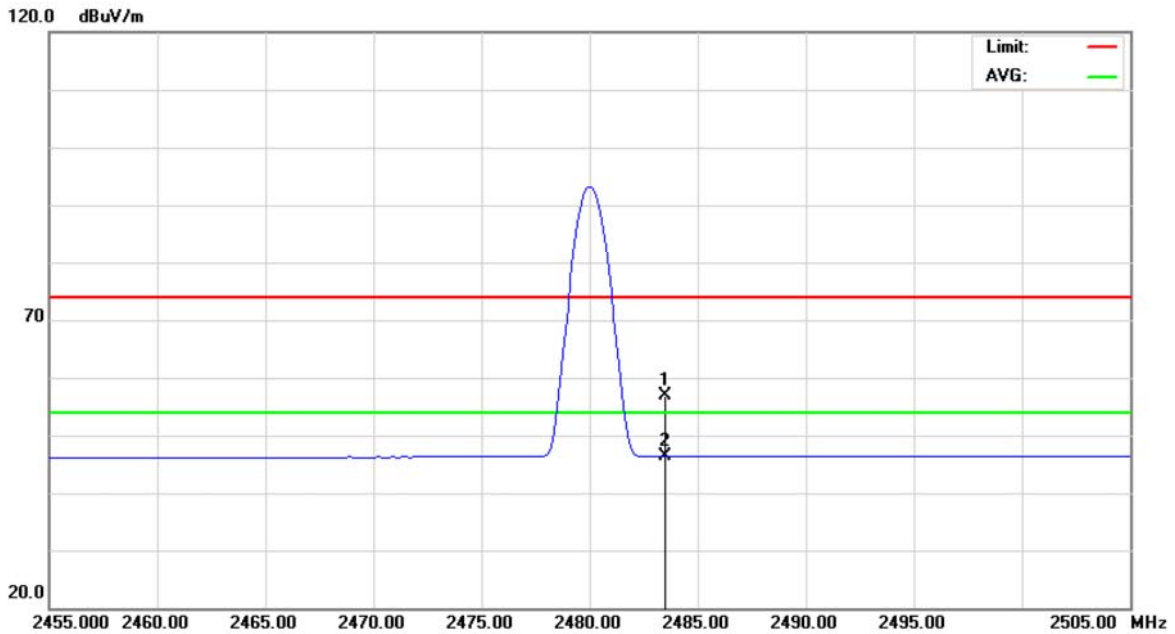


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	23.76	33.22	56.98	74.00	-17.02	peak	
2	*	2483.500	13.18	33.22	46.40	54.00	-7.60	AVG	





E.U.T	Smart Robot	Model Name	RED1
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

**Polarization: Horizontal**

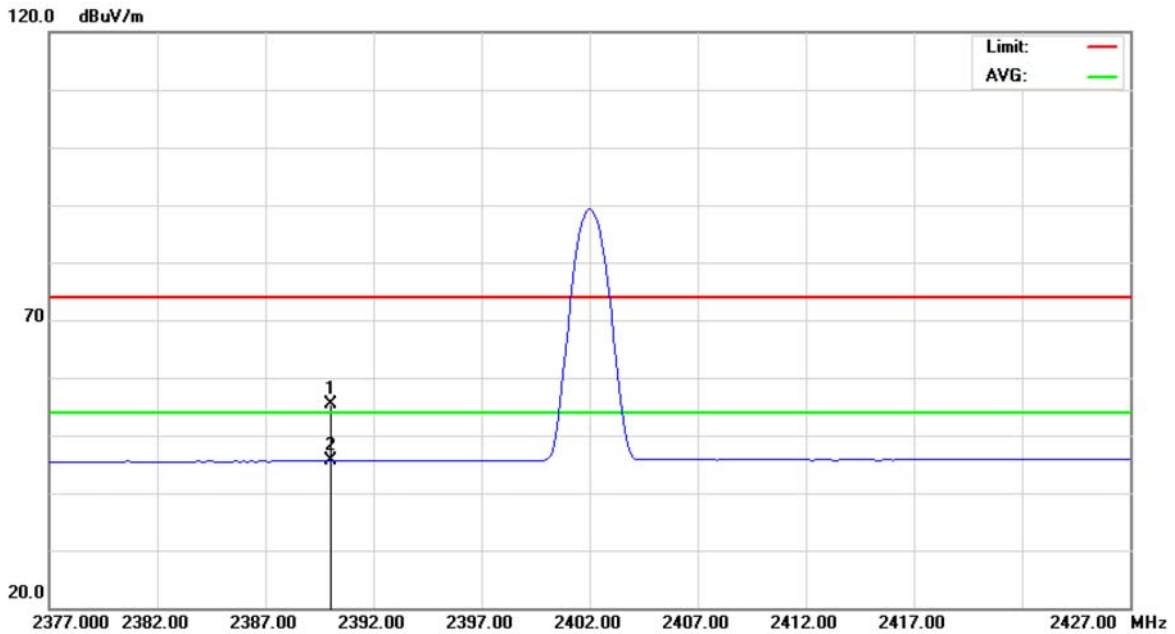


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	22.46	32.80	55.26	74.00	-18.74	peak	
2	*	2390.000	12.73	32.80	45.53	54.00	-8.47	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Horizontal**

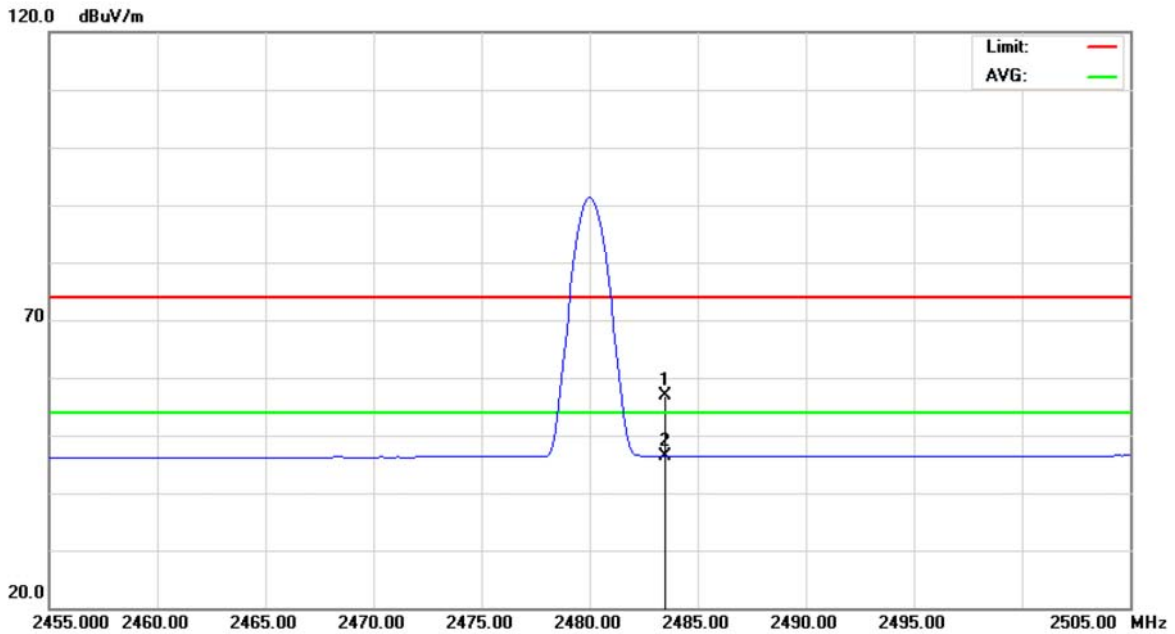


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	23.55	33.22	56.77	74.00	-17.23	peak	
2	*	2483.500	13.19	33.22	46.41	54.00	-7.59	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

**Polarization: Vertical**

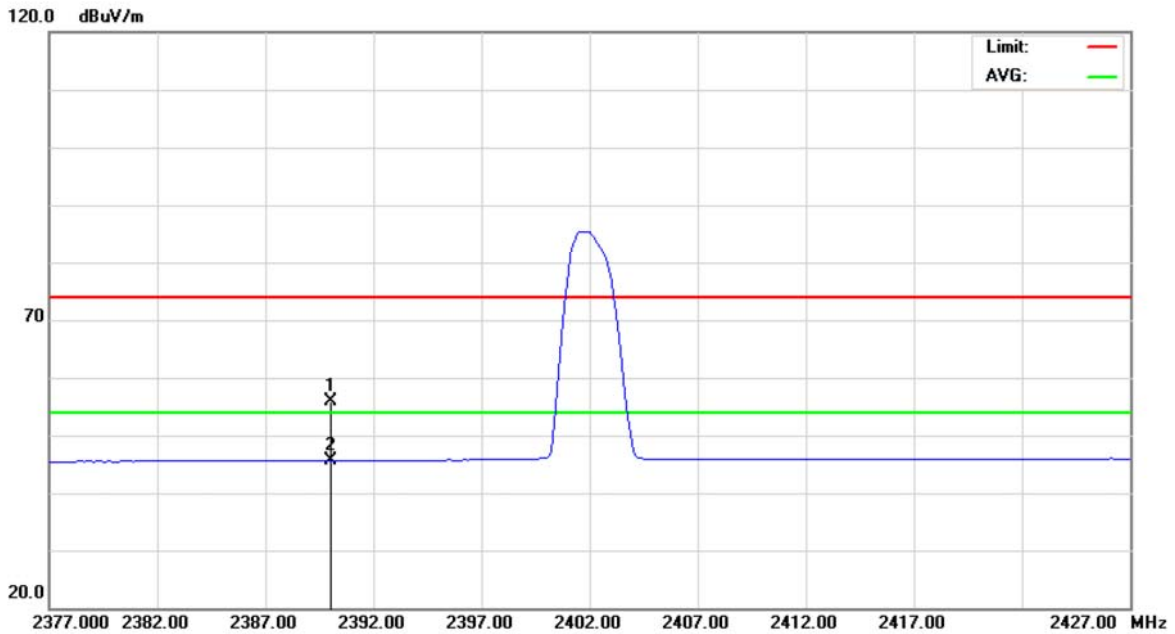


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	23.03	32.80	55.83	74.00	-18.17	peak	
2	*	2390.000	12.79	32.80	45.59	54.00	-8.41	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Vertical**

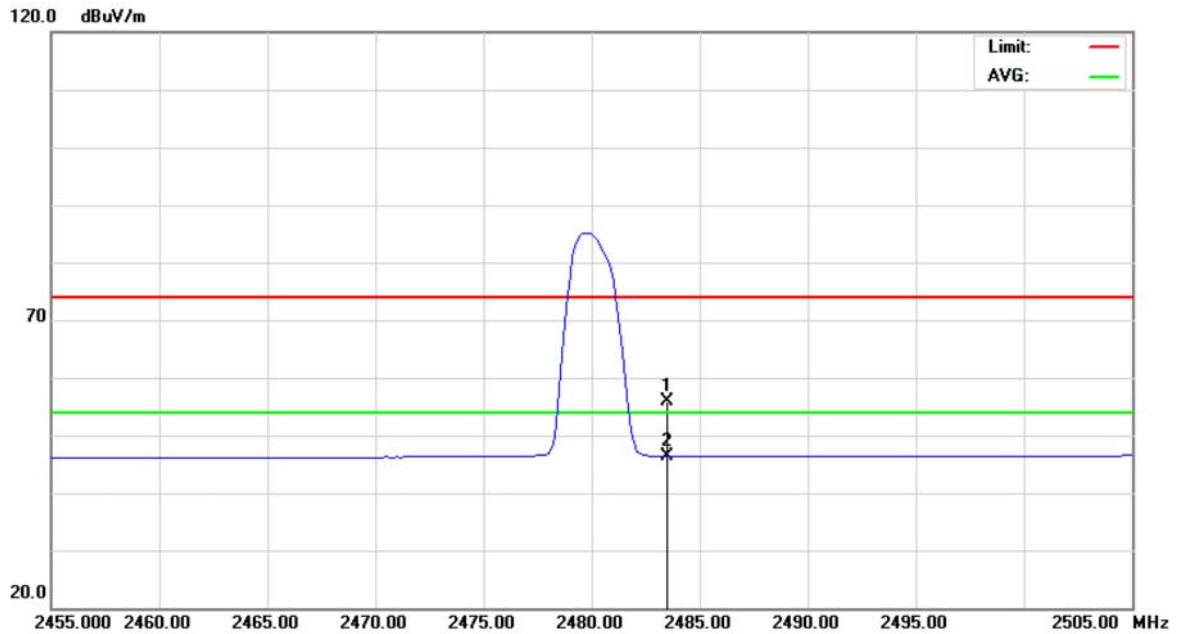


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	22.78	33.22	56.00	74.00	-18.00	peak	
2	*	2483.500	13.20	33.22	46.42	54.00	-7.58	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

**Polarization: Horizontal**

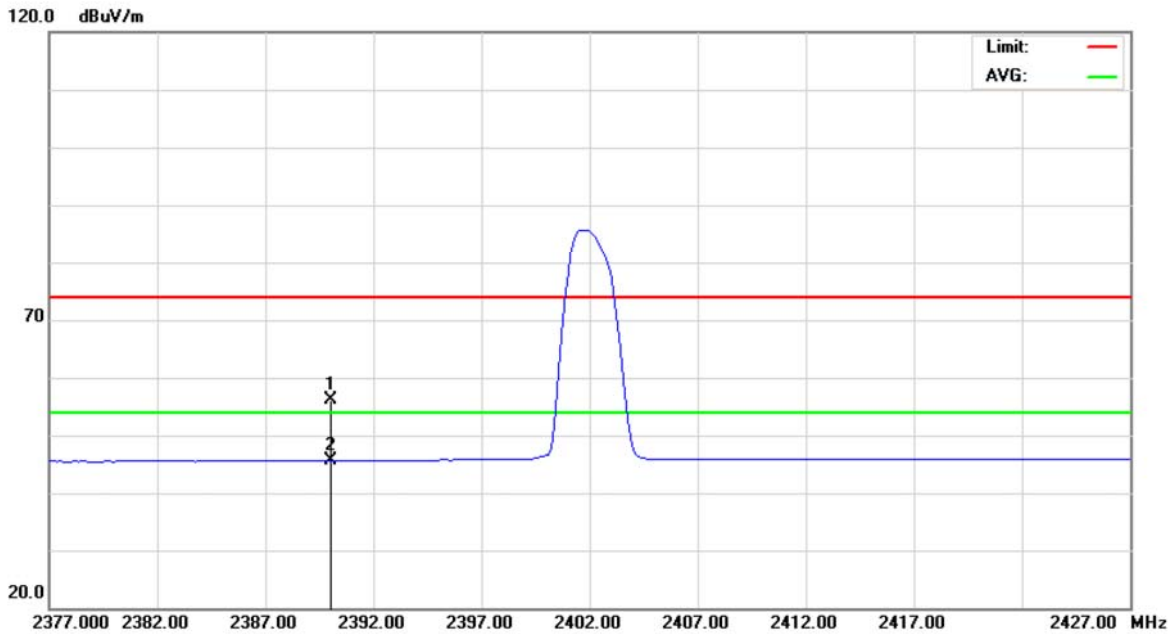


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	23.23	32.80	56.03	74.00	-17.97	peak	
2	*	2390.000	12.85	32.80	45.65	54.00	-8.35	AVG	



E.U.T	Smart Robot	Model Name	RED1
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Horizontal**

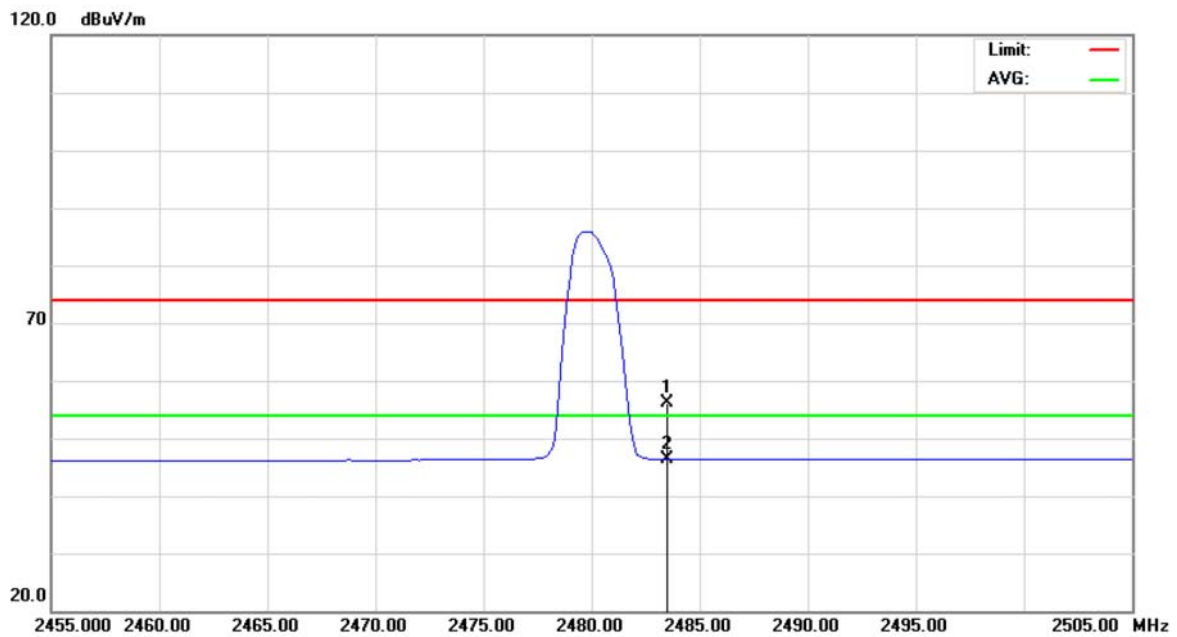

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	22.92	33.22	56.14	74.00	-17.86	peak	
2	*	2483.500	13.19	33.22	46.41	54.00	-7.59	AVG	



**10 NUMBER OF HOPPING FREQUENCY**

**10.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Number of Hopping Channel	2400-2483.5	shall use at least 15 channels

**10.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

**10.3 MEASURING INSTRUMENTS SETTING**

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**10.4 TEST PROCEDURES**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=100 kHz, Sweep time = Auto.

**10.5 TEST SETUP LAYOUT**



**10.6 DEVIATION FROM TEST STANDARD**

No deviation

**10.7 EUT OPERATING CONDITIONS**


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



**10.8 TEST RESULTS**

E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps		

Number of Hopping Channel	Limit	Result
79	15	Pass

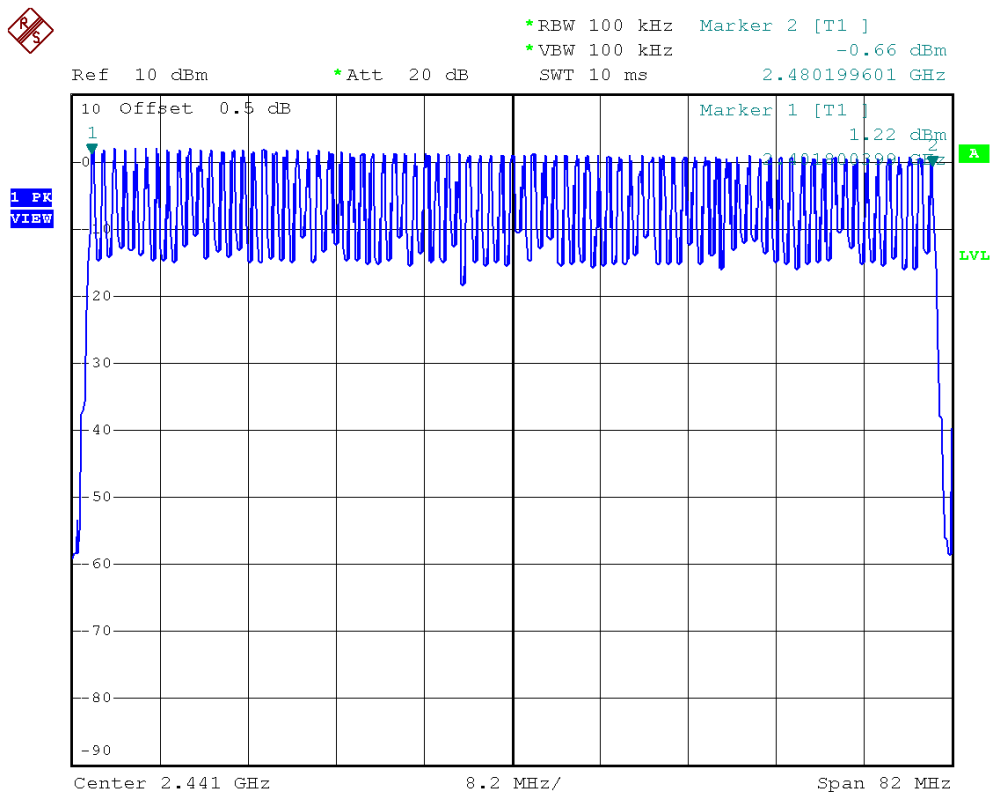






E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps		

Number of Hopping Channel	Limit	Result
79	15	Pass

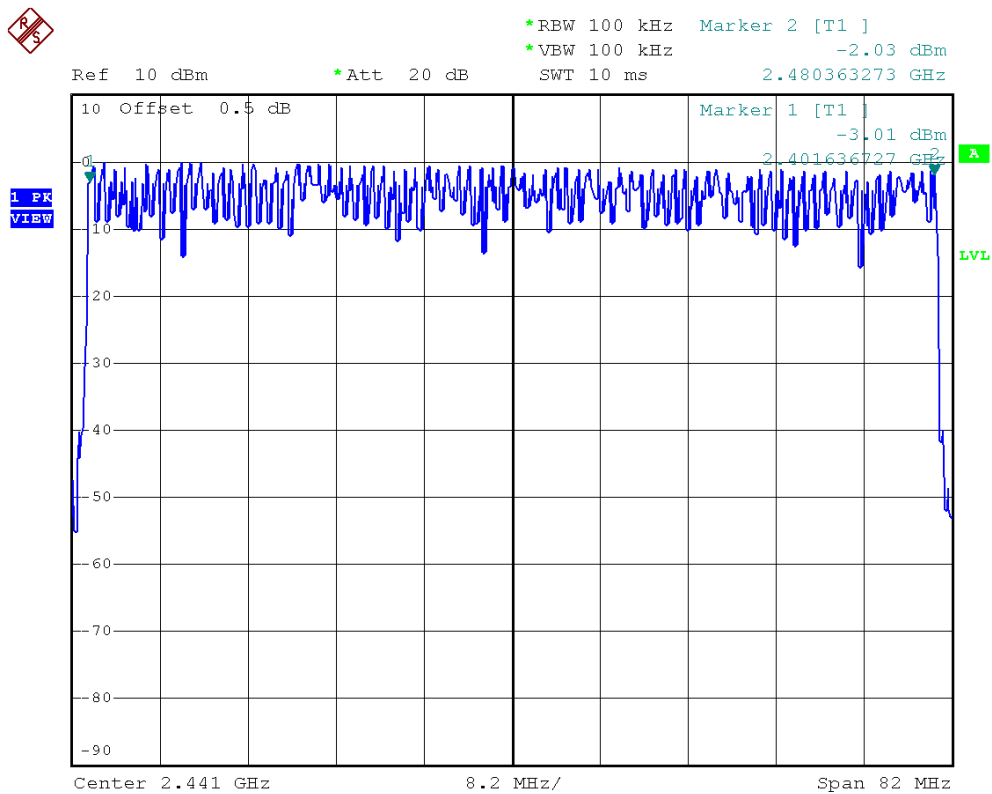



**11 AVERAGE TIME OF OCCUPANCY**

**11.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Average time of occupancy	2400-2483.5	shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**11.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

**11.3 TEST PROCEDURES**

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 100 kHz and VBW to 100 kHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

**11.4 TEST SETUP LAYOUT**



**11.5 DEVIATION FROM TEST STANDARD**

No deviation



### **11.6 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.




**11.7 TEST RESULTS**

E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2402 MHz	3.0411	0.3244	0.4	PASS
DH3	2402 MHz	1.8043	0.2887	0.4	PASS
DH1	2402 MHz	0.5612	0.1796	0.4	PASS

**Bluetooth/1 Mbps/2402 MHz/DH5**

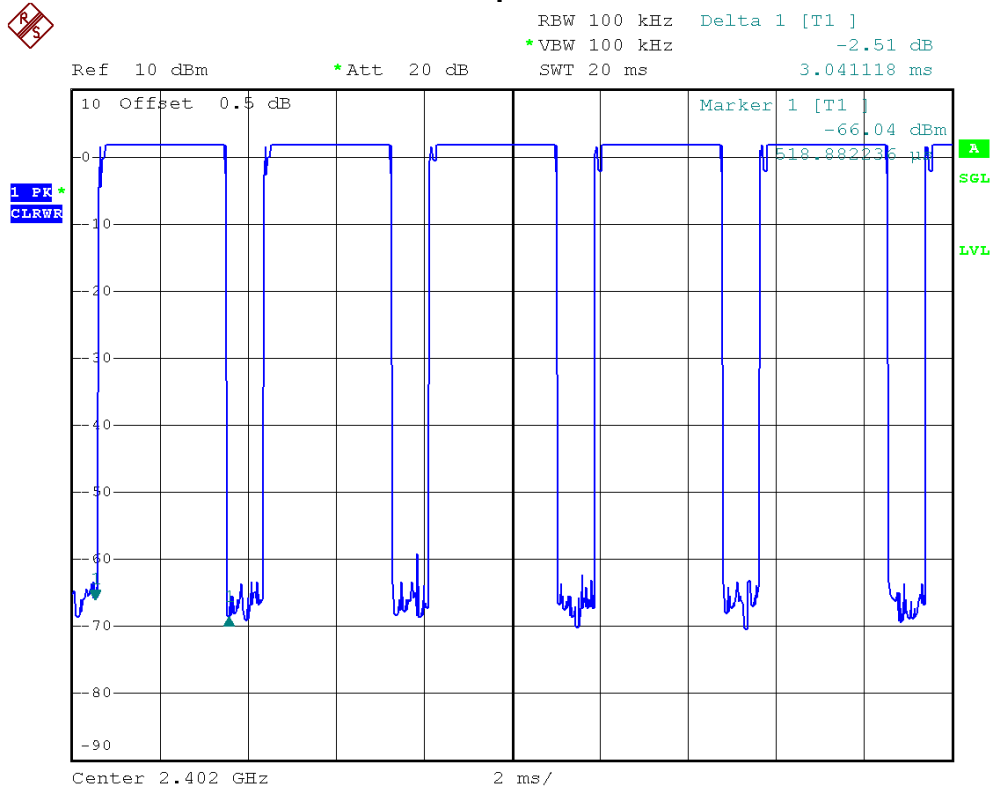




### Bluetooth/1 Mbps/2402 MHz/DH3




RBW 100 kHz Delta 1 [T1 ]  
\*VBW 100 kHz 1.14 dB  
SWT 20 ms 1.804311 ms  
Ref 10 dBm \*Att 20 dB

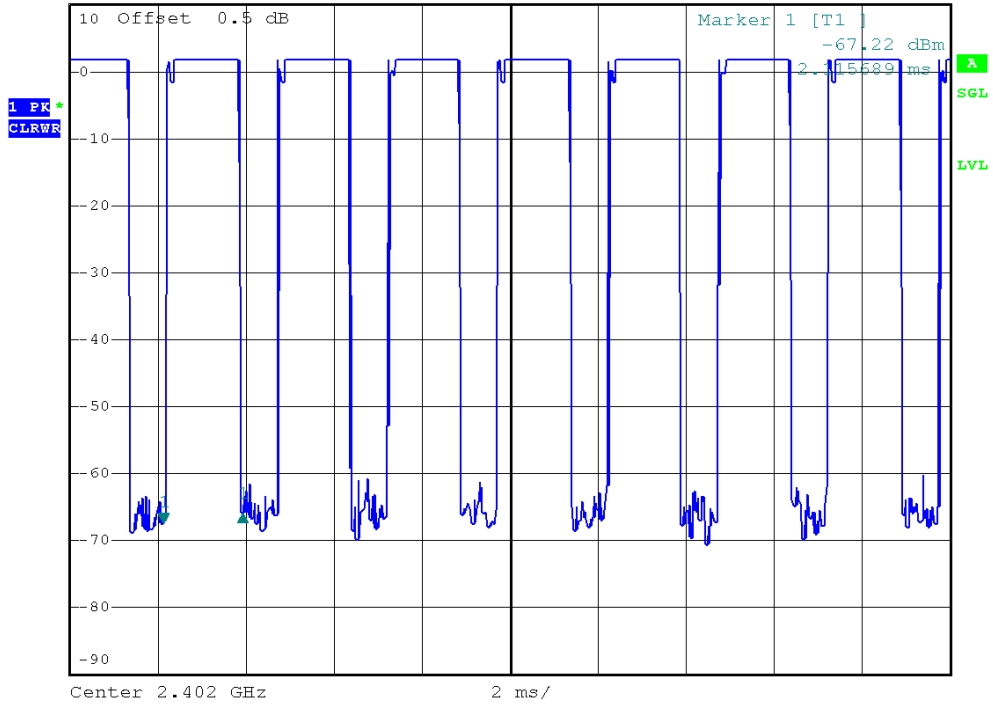

### Bluetooth/1 Mbps/2402 MHz/DH1



RBW 100 kHz Delta 1 [T1 ]  
\*VBW 100 kHz -2.30 dB  
SWT 20 ms 521.197605  $\mu$ s  
Ref 10 dBm \*Att 20 dB

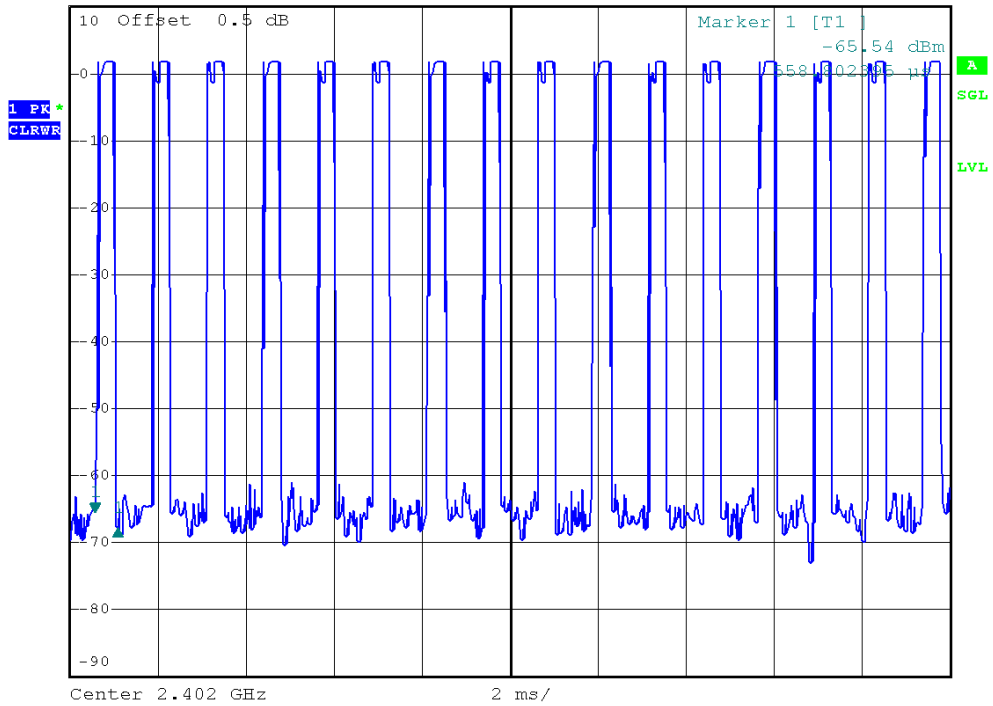




E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2441 MHz	3.0006	0.3201	0.4	PASS
DH3	2441 MHz	1.8421	0.2947	0.4	PASS
DH1	2441 MHz	0.5522	0.1767	0.4	PASS

**Bluetooth/1 Mbps/2441 MHz/DH5**

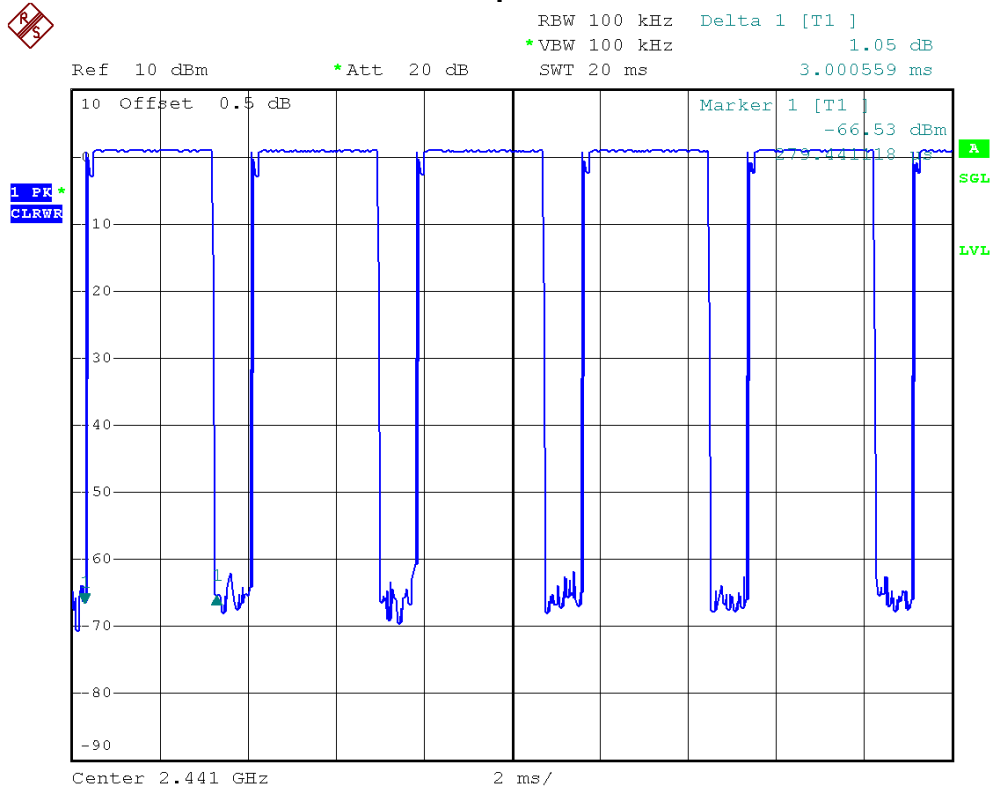




### Bluetooth/1 Mbps/2441 MHz/DH3




Ref 10 dBm      \*Att 20 dB  
 RBW 100 kHz    Delta 1 [T1]  
 \*VBW 100 kHz    1.29 dB  
 SWT 20 ms        1.842076 ms

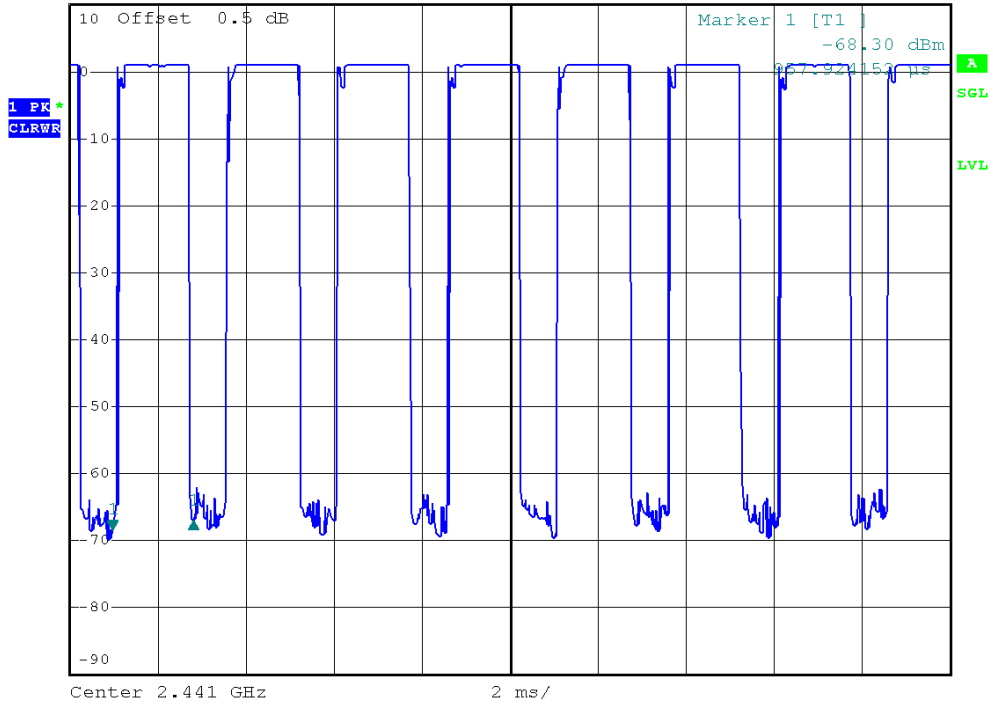

### Bluetooth/1 Mbps/2441 MHz/DH1



Ref 10 dBm      \*Att 20 dB  
 RBW 100 kHz    Delta 1 [T1]  
 \*VBW 100 kHz    0.77 dB  
 SWT 20 ms        522.155689 μs

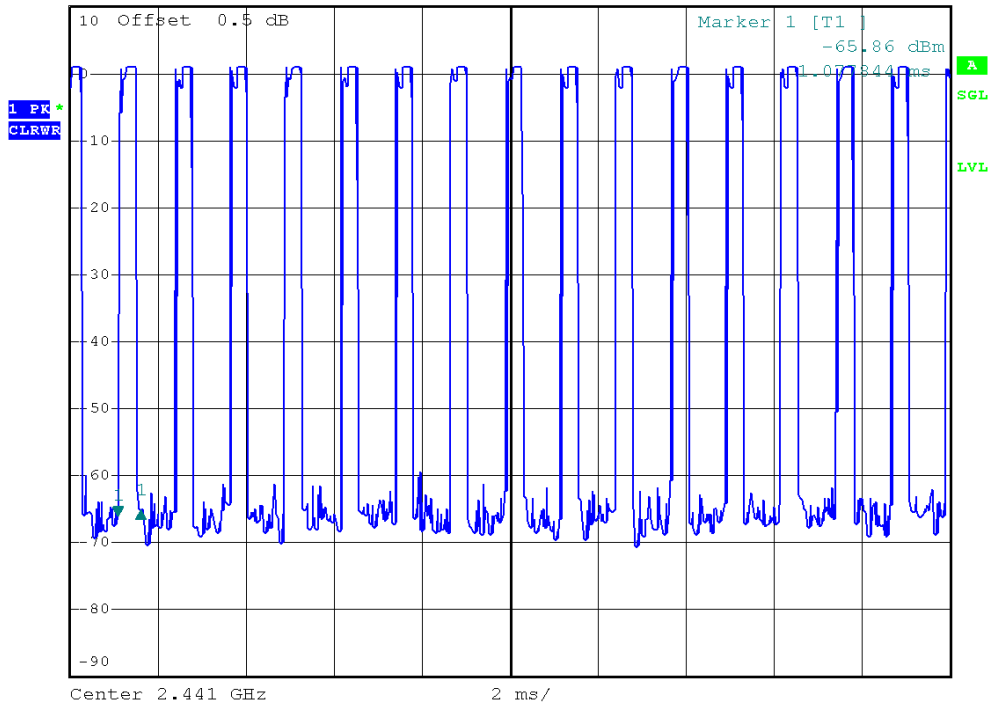




E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2480 MHz	3.1608	0.3372	0.4	PASS
DH3	2480 MHz	1.7649	0.2824	0.4	PASS
DH1	2480 MHz	0.4801	0.1536	0.4	PASS

**Bluetooth/1 Mbps/2480 MHz/DH5**

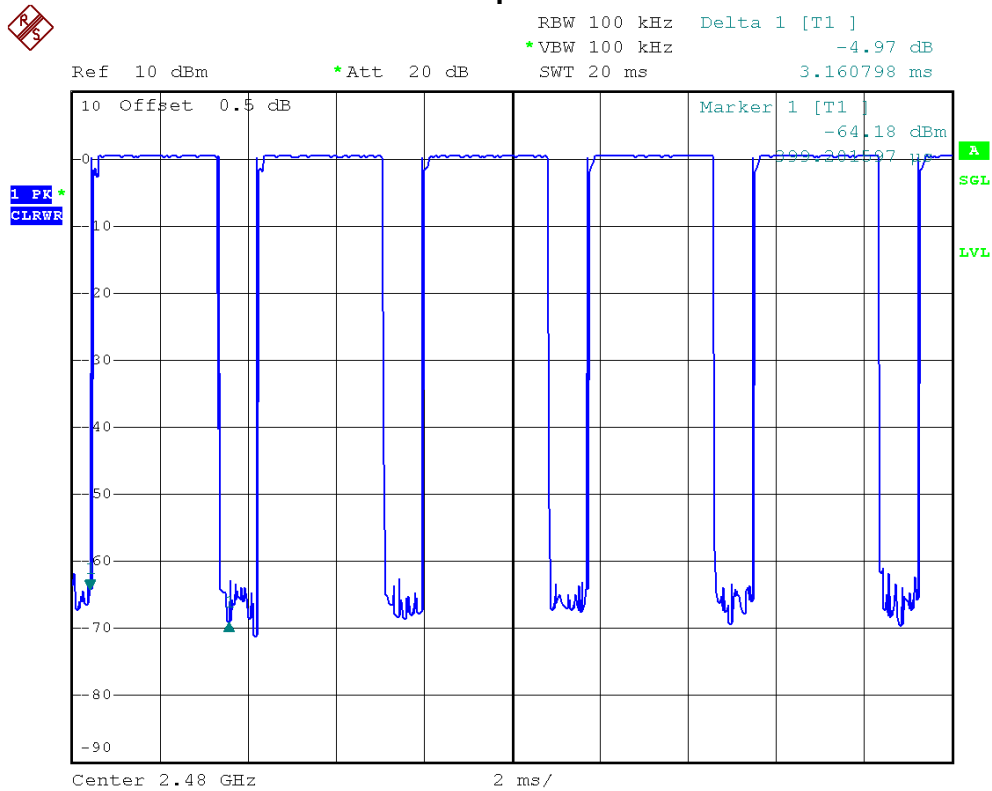






### Bluetooth/1 Mbps/2480 MHz/DH3




Ref 10 dBm      \*Att 20 dB      RBW 100 kHz      Delta 1 [T1]      -2.81 dB  
\*VBW 100 kHz      SWT 20 ms      1.764870 ms

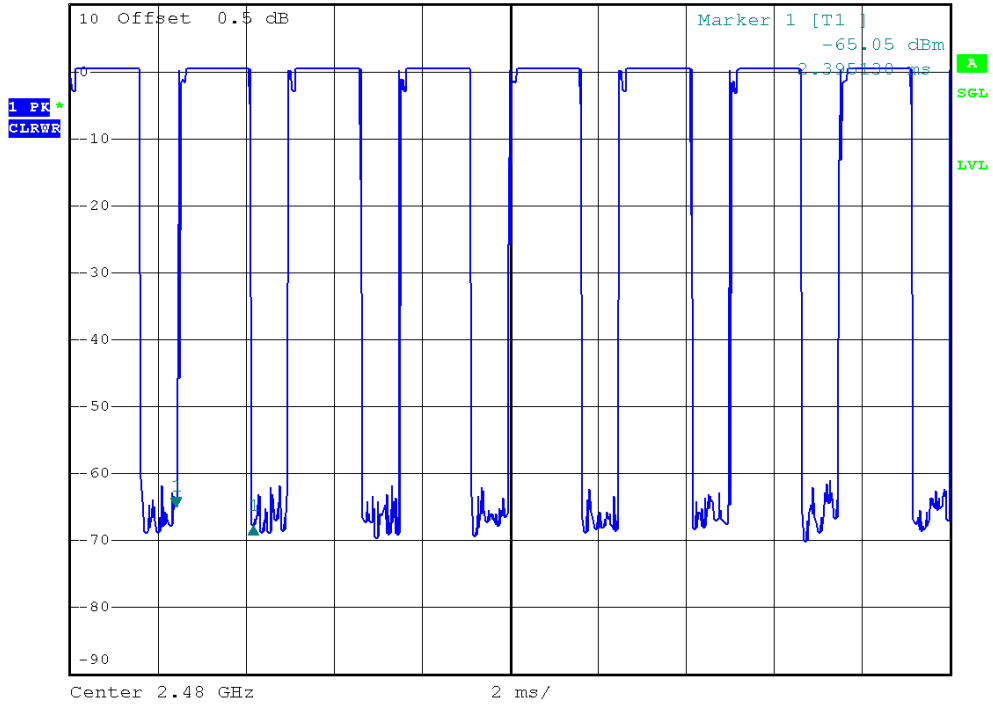

### Bluetooth/1 Mbps/2480 MHz/DH1



Ref 10 dBm      \*Att 20 dB      RBW 100 kHz      Delta 1 [T1]      -0.51 dB  
\*VBW 100 kHz      SWT 20 ms      480.079840  $\mu$ s

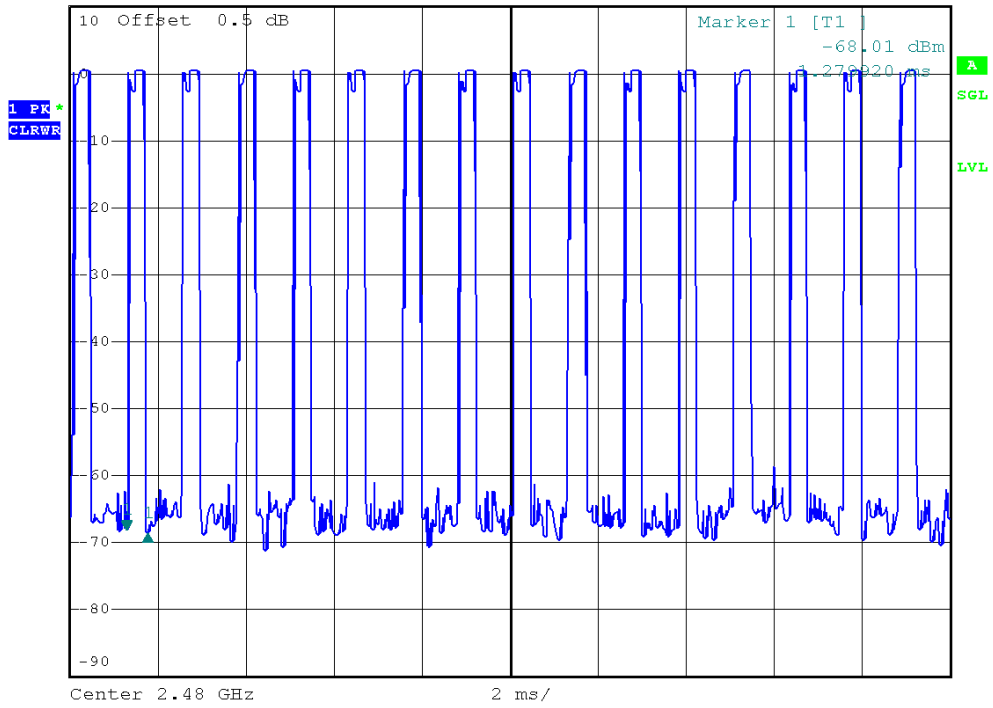




E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2402 MHz		0.3227	0.4	PASS
DH3	2402 MHz	1.9244	0.3079	0.4	PASS
DH1	2402 MHz	0.5210	0.1667	0.4	PASS

**Bluetooth/3 Mbps/2402 MHz/DH5**

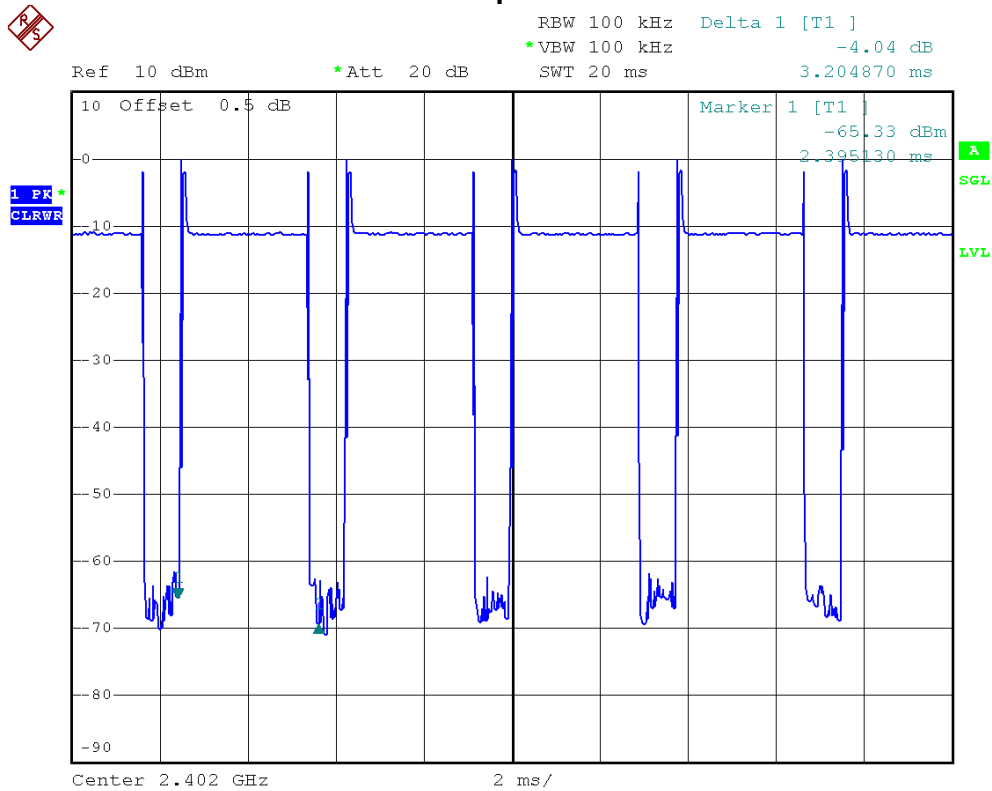




### Bluetooth/3 Mbps/2402 MHz/DH3




RBW 100 kHz Delta 1 [T1 ]  
\*Att 20 dB -5.61 dB  
\*VBW 100 kHz  
SWT 20 ms 1.924391 ms

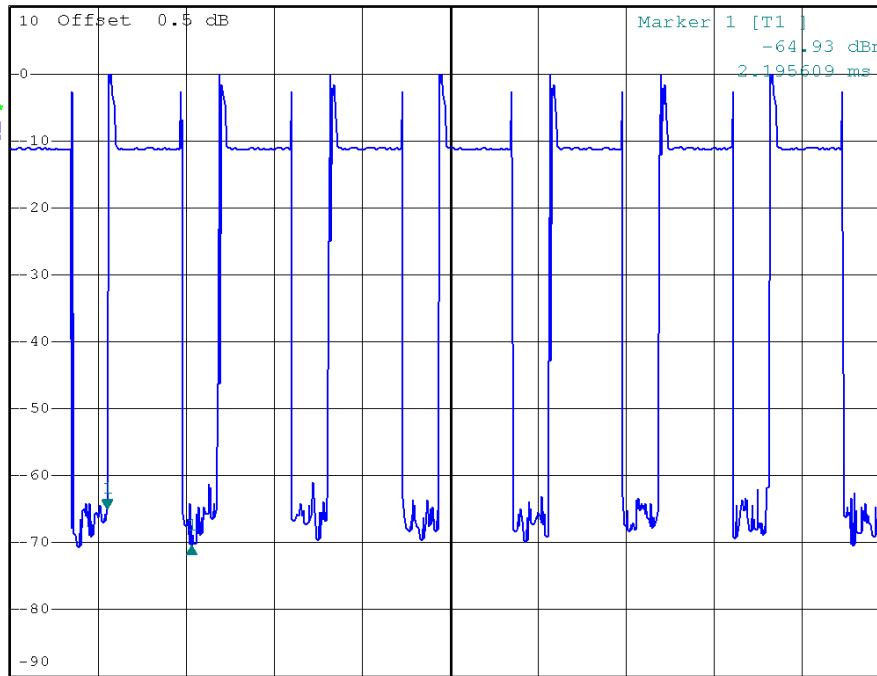

### Bluetooth/3 Mbps/2402 MHz/DH1



RBW 100 kHz Delta 1 [T1 ]  
\*Att 20 dB -3.94 dB  
\*VBW 100 kHz  
SWT 20 ms 521.037924  $\mu$ s

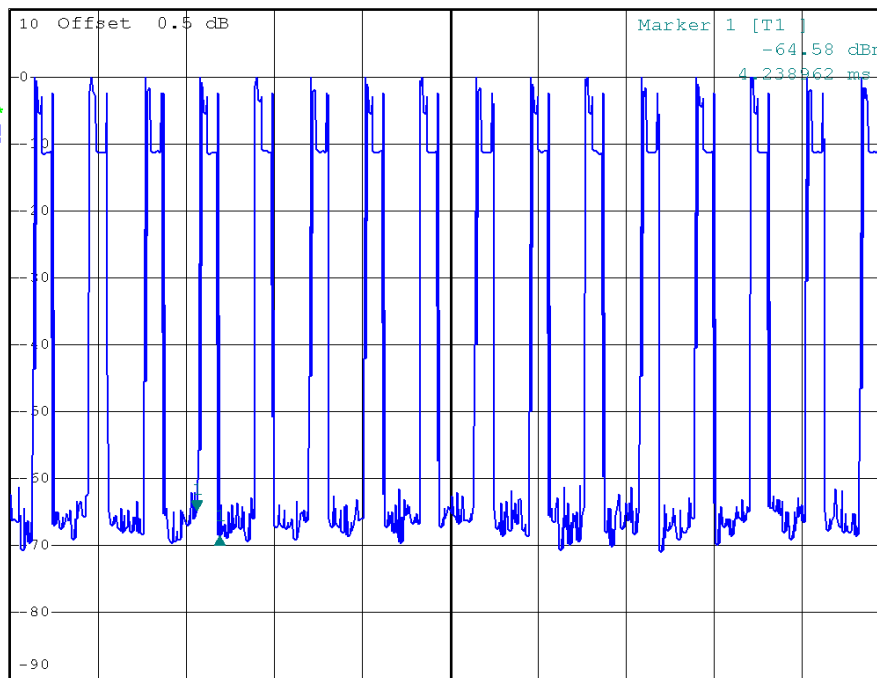




E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2441 MHz	3.2437	0.3460	0.4	PASS
DH3	2441 MHz	1.8845	0.3015	0.4	PASS
DH1	2441 MHz	0.4807	0.1538	0.4	PASS

**Bluetooth/3 Mbps/2441 MHz/DH5**

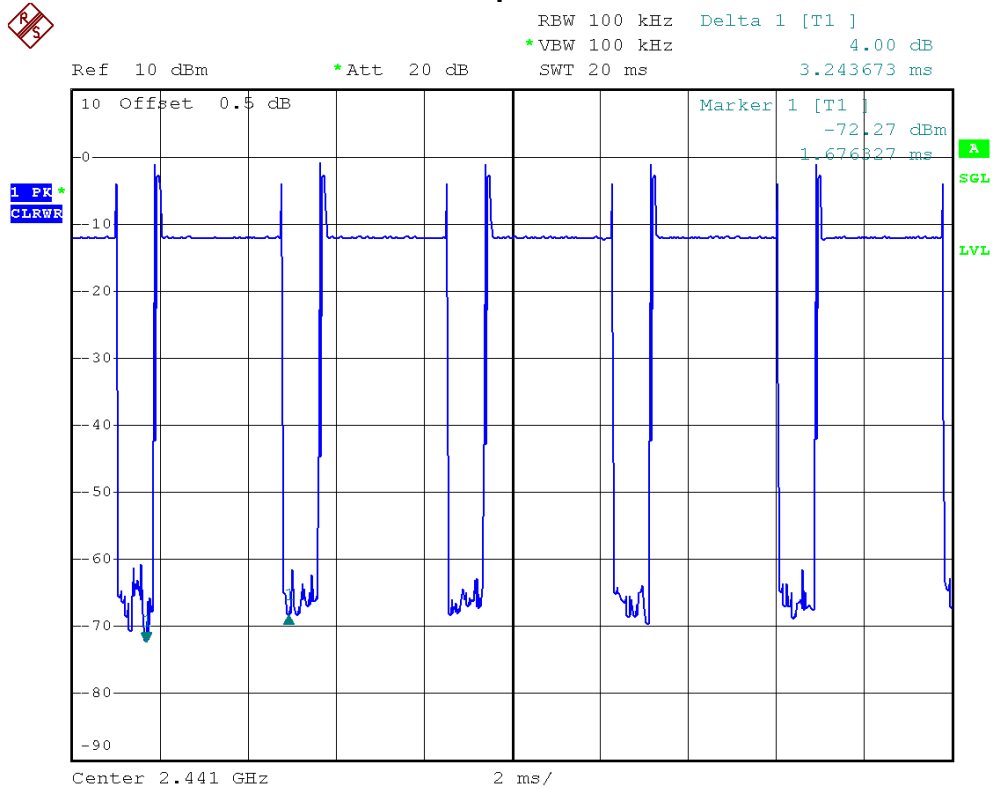




### Bluetooth/3 Mbps/2441 MHz/DH3




RBW 100 kHz Delta 1 [T1 ]  
\*VBW 100 kHz 0.94 dB  
SWT 20 ms 1.884471 ms  
Ref 10 dBm \*Att 20 dB

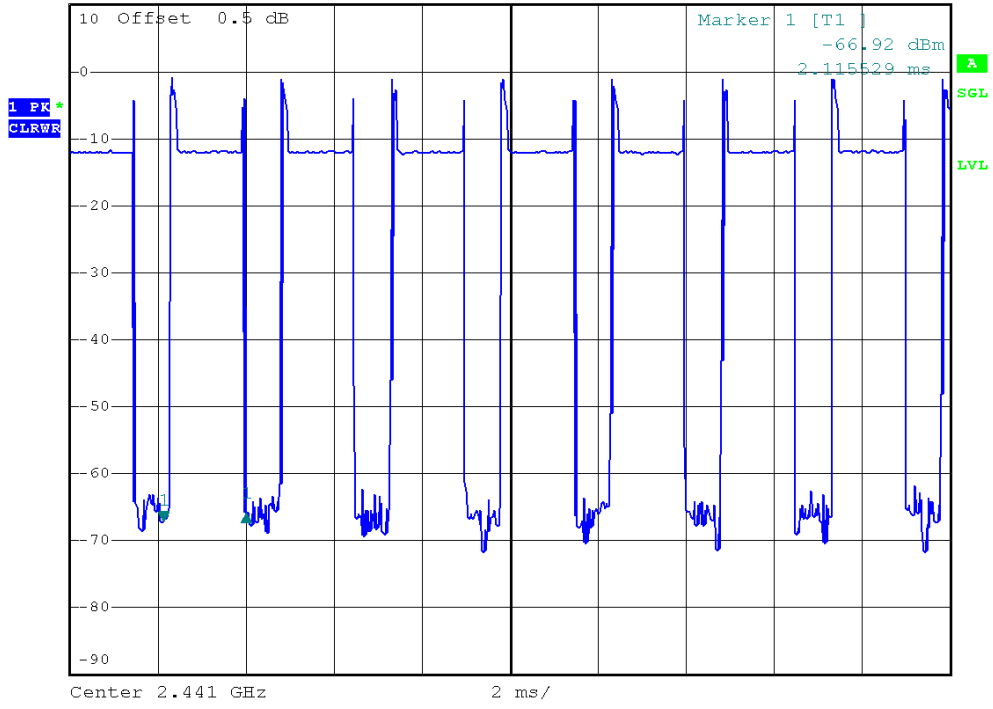

### Bluetooth/3 Mbps/2441 MHz/DH1



RBW 100 kHz Delta 1 [T1 ]  
\*VBW 100 kHz 3.44 dB  
SWT 20 ms 480.718563  $\mu$ s  
Ref 10 dBm \*Att 20 dB

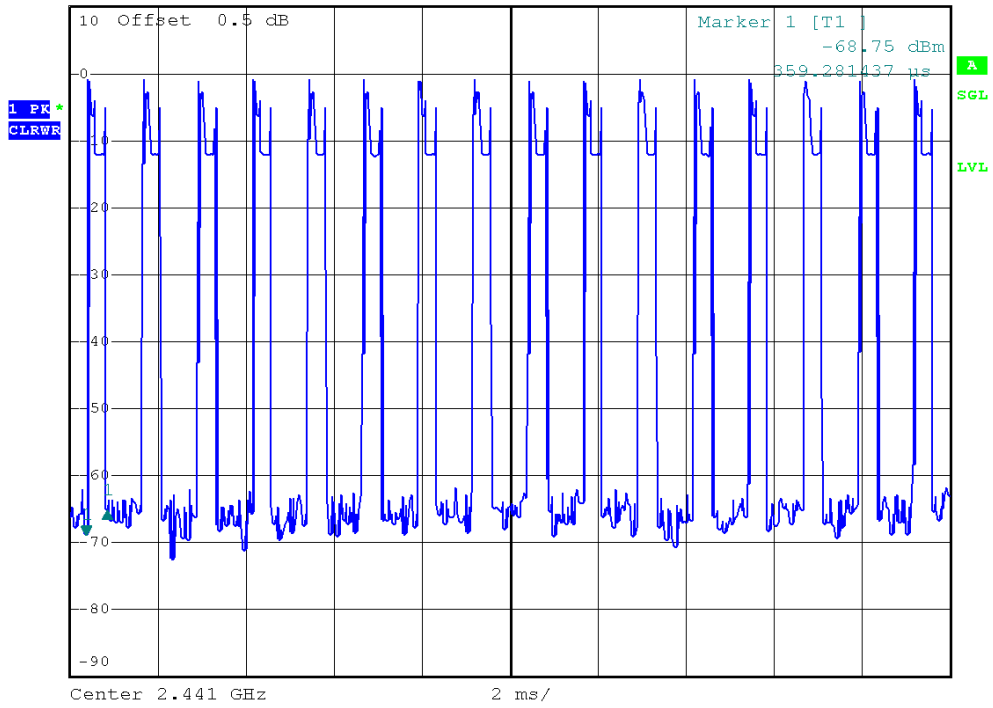




E.U.T	Smart Robot	Model Name	RED1
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 3.7V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2480 MHz	3.1245	0.3333	0.4	PASS
DH3	2480 MHz	1.8003	0.2881	0.4	PASS
DH1	2480 MHz	0.4809	0.1539	0.4	PASS

**Bluetooth/3 Mbps/2480 MHz/DH5**

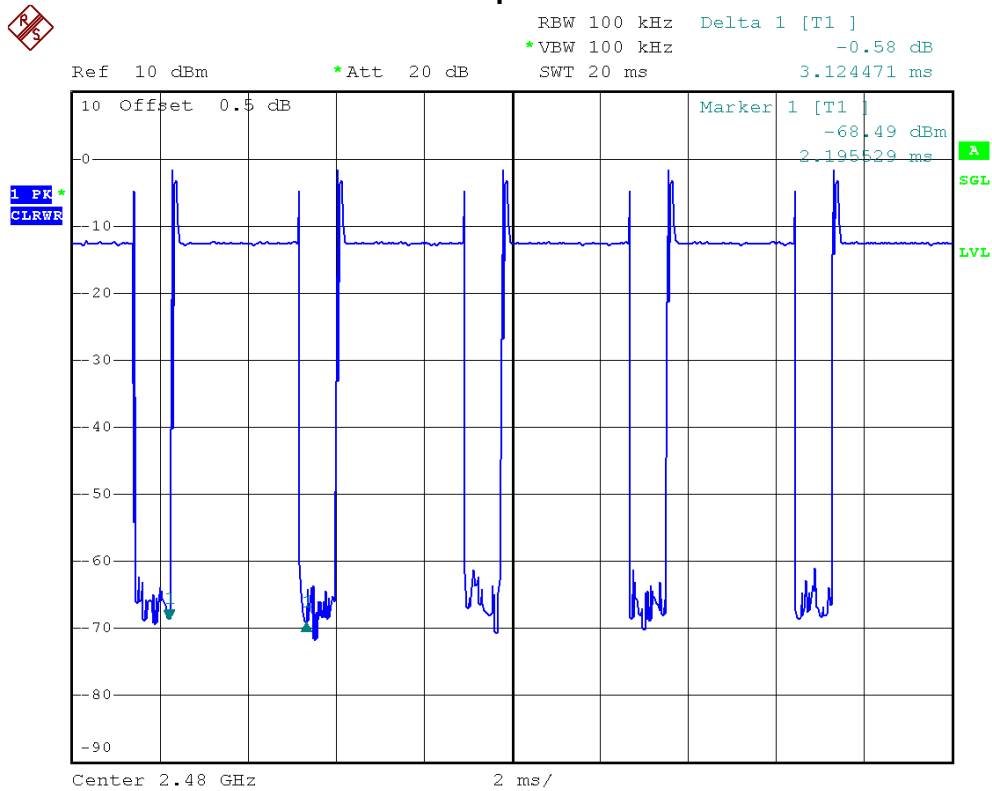




### Bluetooth/3 Mbps/2480 MHz/DH3




RBW 100 kHz Delta 1 [T1 ]  
 \*Att 20 dB -4.72 dB  
 \*VBW 100 kHz  
 Ref 10 dBm SWT 20 ms 1.800319 ms

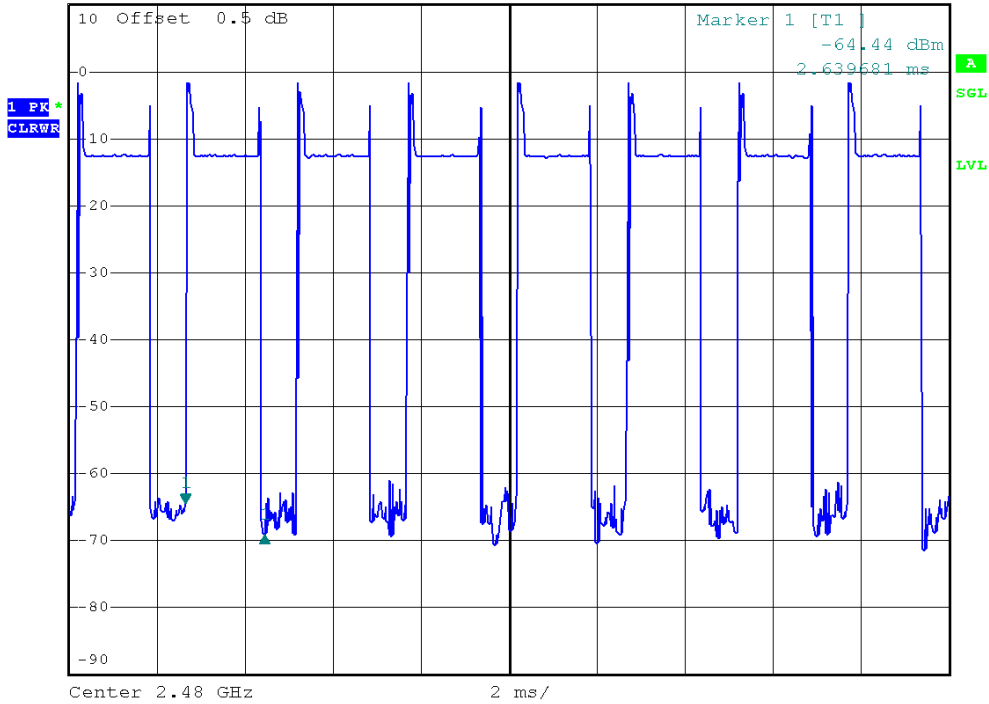

### Bluetooth/3 Mbps/2480 MHz/DH1



RBW 100 kHz Delta 1 [T1 ]  
 \*Att 20 dB 2.20 dB  
 \*VBW 100 kHz  
 Ref 10 dBm SWT 20 ms 480.878244  $\mu$ s

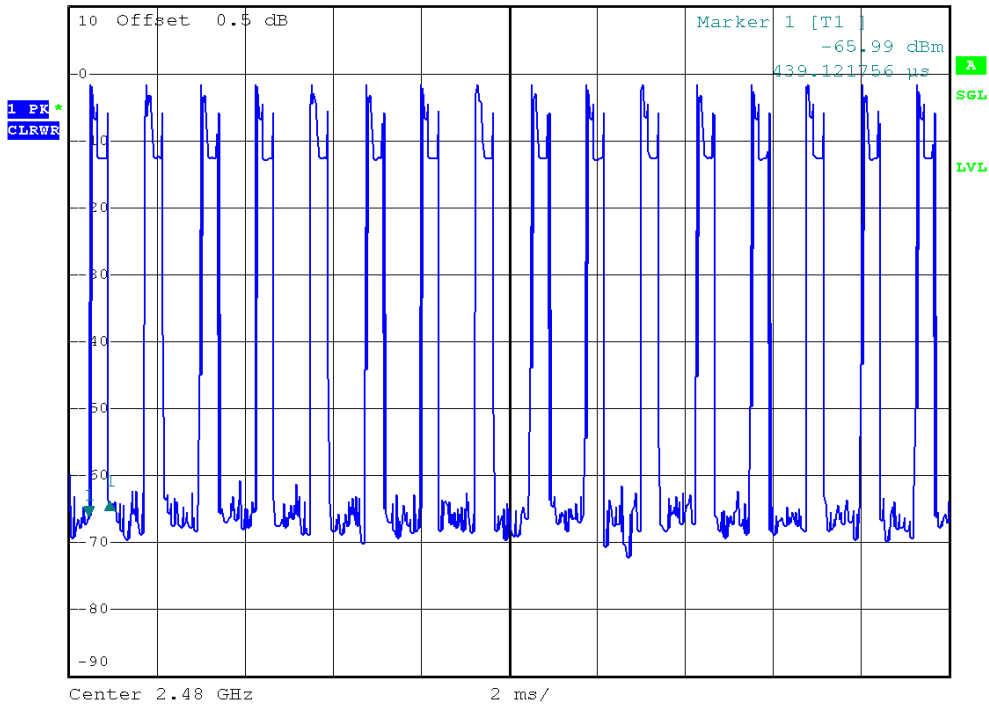



**12 RF EXPOSURE COMPLIANCE**

**12.1 LIMIT**

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

**(A) Limits for Occupational / Controlled Exposure**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

**(B) Limits for General Population / Uncontrolled Exposure**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

NOTE: f = frequency in MHz ; \*Plane-wave equivalent power density.

**12.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Jul. 22, 2013
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Jul. 22, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

**12.3 MPE CALCULATION METHOD**

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to


$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained





**12.4 TEST SETUP LAYOUT**



**12.5 DEVIATION FROM TEST STANDARD**

No deviation

**12.6 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**12.7 TEST RESULTS**

The power is so low so there is no need for RF calculations.