

TEST REPORT

Report No.: BCTC2011000939-2E

Applicant: ZAGG Inc.

Product Name: HALO Wireless Charging Dock Power Bank 10K

Model/Type Ref.: HWCDPB-10K

Tested Date: Nov. 13, 2020 to Nov. 19, 2020

Issued Date: Nov. 19, 2020

Shenzhen BCTC Testing Co., Ltd.

FCC ID: QTG-HWCDPB10K

Product Name: HALO Wireless Charging Dock Power Bank 10K
Trademark: HALO
Model/Type Ref.: HWCDPB-10K
Prepared For: ZAGG Inc.
Address: 910 West Legacy Center Way, Midvale Utah 84047, United States
Manufacturer: ZAGG Inc.
Address: 910 West Legacy Center Way, Midvale Utah 84047, United States
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Sample Received Date: Nov. 13, 2020
Sample tested Date: Nov. 13, 2020 to Nov. 19, 2020
Issue Date: Nov. 19, 2020
Report No.: BCTC2011000939-2E
Test Standards FCC CFR 47 part1, 1.1307(b), 1.1310
Test Results PASS

Tested by:

Willem Wang

Willem Wang/Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT


Test Report Declaration	Page
1. VERSION	4
2. PRODUCT INFORMATION	5
2.1 Product Information	5
2.2 Support Equipment	5
2.3 Test Mode	5
2.4 Copy of marking plate	6
3. TEST FACILITY AND TEST INSTRUMENT USED	7
3.1 Test Facility	7
3.2 Test Instrument Used	7
4. METHOD OF MEASUREMENT	8
4.1 Applicable Standard	8
4.2 Block Diagram Of Test Setup	8
4.3 Limit	9
4.4 Test procedure	9
4.5 Equipment Approval Considerations	10
4.6 E and H field Strength	11
5. PHOTOGRAPHS OF TEST SET-UP	13

(Note: N/A means not applicable)

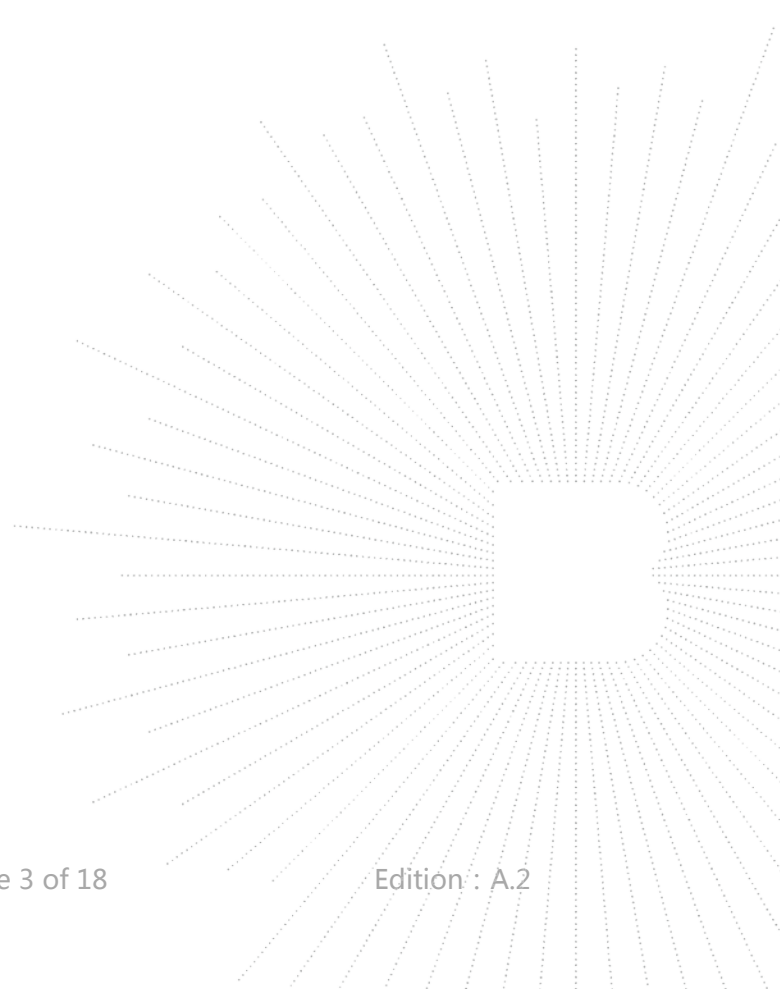

1. VERSION

Report No.	Issue Date	Description	Approved
BCTC2011000939-2E	Nov. 19, 2020	Original	Valid

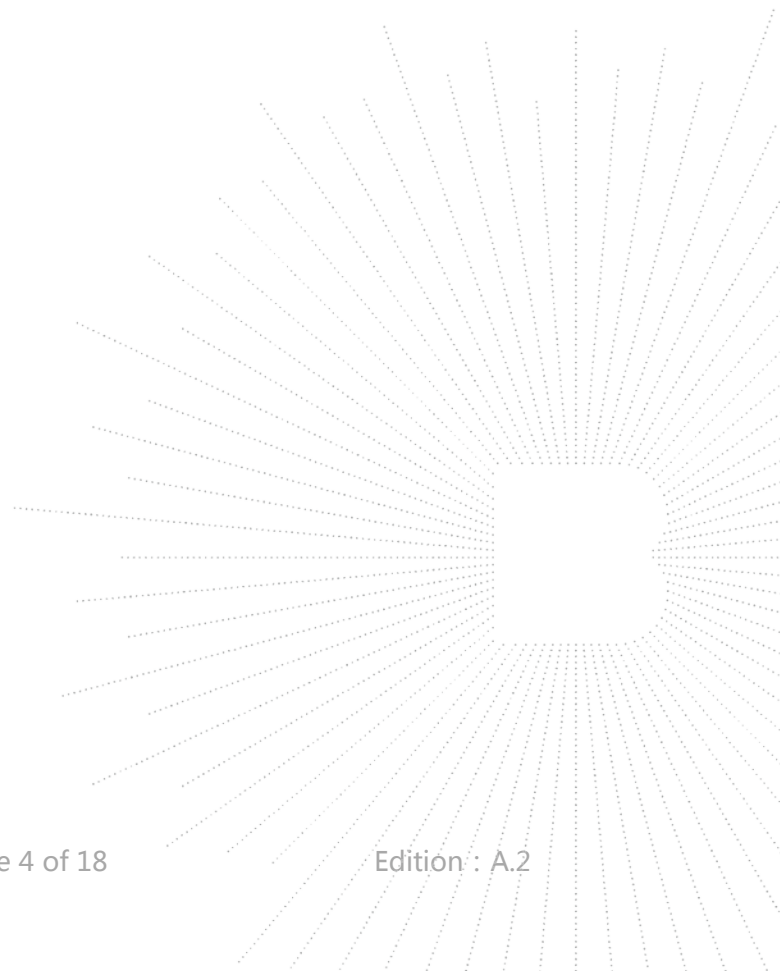

2. PRODUCT INFORMATION

2.1 Product Information

Model/Type Ref.:	HWCDPB-10K
Model differences:	N/A
Product Description:	HALO Wireless Charging Dock Power Bank 10K
Operation Frequency:	115kHz-205kHz
Antenna installation:	Inductive loop coil antenna
Ratings:	Battery: DC 3.7V 10000mAh 37Wh Pogo Pin Input: DC 9V 2A Type-C PD Input: DC 5V 3A, DC 9V 2A, DC 12V 1.5A Wireless Output: 5W, 7.5W, 10W(Max) USB-A Output: DC 5V 3A, DC 9V 2A, DC 12V 1.5A Type-C Output: DC 5V 3A, DC 9V 2A, DC 12V 1.5A
Hardware Version:	S04
Software Version:	V1.4

2.2 Support Equipment

Device Type	Brand	Model	Series No.	Data Cable	Remark
Mobile phone	iphone	iphone8P	N/A	N/A	Auxiliary

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

2.3 Test Mode

Test Modes 1	Wireless 5W
Test Modes 2	Wireless 7.5W
Test Modes 3	Wireless 10W

Remark: All the test mode are test, the worst mode is test mode 3, the data recording in the report.

2.4 Copy of marking plate


HALO

HALO Wireless Charging Dock Power Bank 10K

M/N: HWCDPB-10K

Battery: 3.7V 10000mAh 37Wh

USB-C Input: 5V \equiv 3A, 9V \equiv 2A, 12V \equiv 1.5A

Pogo pin Input: 9V \equiv 2A

USB-C Output: 5V \equiv 3A, 9V \equiv 2A, 12V \equiv 1.5A

USB-A Output: 5V \equiv 3A, 9V \equiv 2A, 12V \equiv 1.5A

Wireless Output: 10W max

Multi Output: 5V \equiv 3A max FCC ID: QTG-HWCDPB10K

Follow Manufacturer's Instructions.

Made In China. 2021QU 110-07848-A



3. TEST FACILITY AND TEST INSTRUMENT USED

3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

3.2 Test Instrument Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Exposure Level Tester	Narda	ELT-400	N-0231	Jul. 15, 2020	Jul. 14, 2021
Electric and Magnetic Field Analyzer	Narda	EHP-200A	170WX910 06	Jul. 15, 2020	Jul. 14, 2021
Magnetic field probe 100cm ²	Narda	B-Field Probe 100cm ²	M0675	Jul. 15, 2020	Jul. 14, 2021
843 Chamber	ETS	843	84301	Aug. 27, 2020	Aug. 26, 2023


4. METHOD OF MEASUREMENT

4.1 Applicable Standard


According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

4.2 Block Diagram Of Test Setup

For mobile configuration

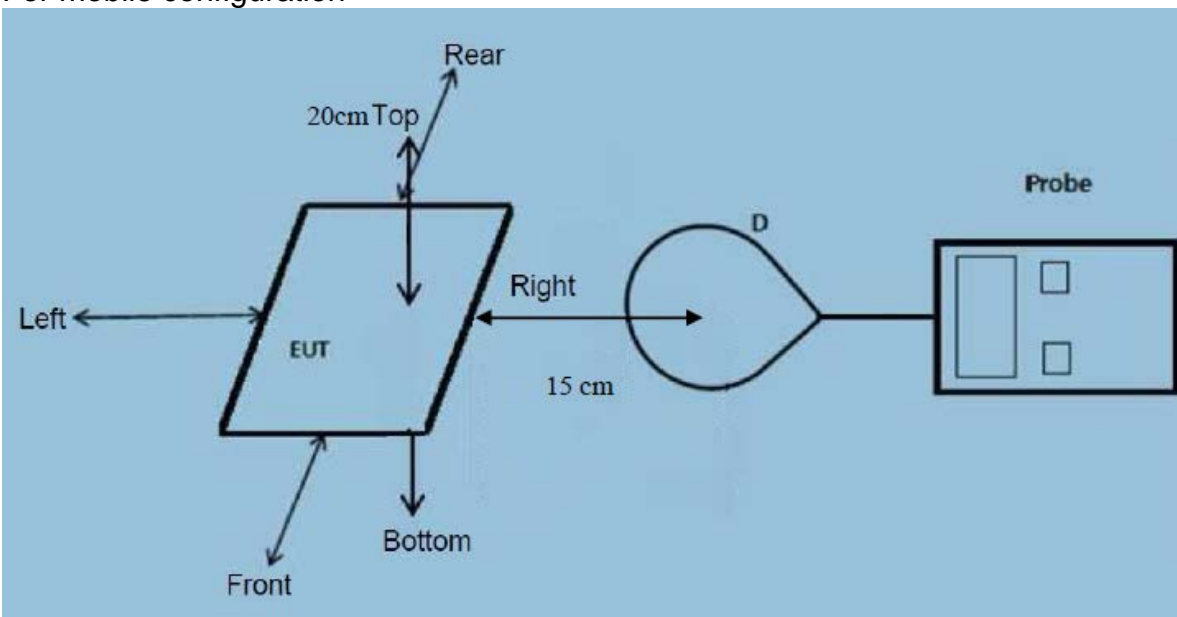

For portable configuration

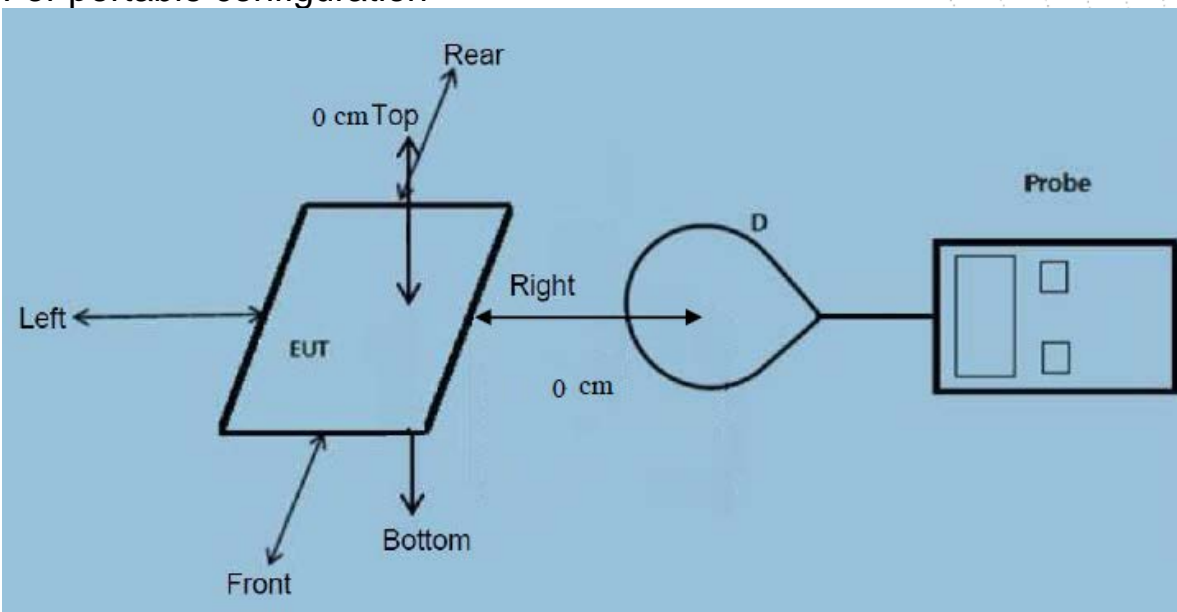

4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

4.4 Test procedure

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.
- c) The turn table was rotated 360d degree to search of highest strength.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- e) The EUT were measured according to the dictates of KDB 680106D01v03.

4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v03

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 115kHz-205kHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 10W.

3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.

Yes, the transfer system includes only single primary and secondary coils.

4) Client device is inserted in or placed directly in contact with the transmitter.


Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

No, the EUT is a HALO Wireless Charging Dock Power Bank 10K. wireless charger can be used in a portable exposure condition.

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 10% x MPE limit.

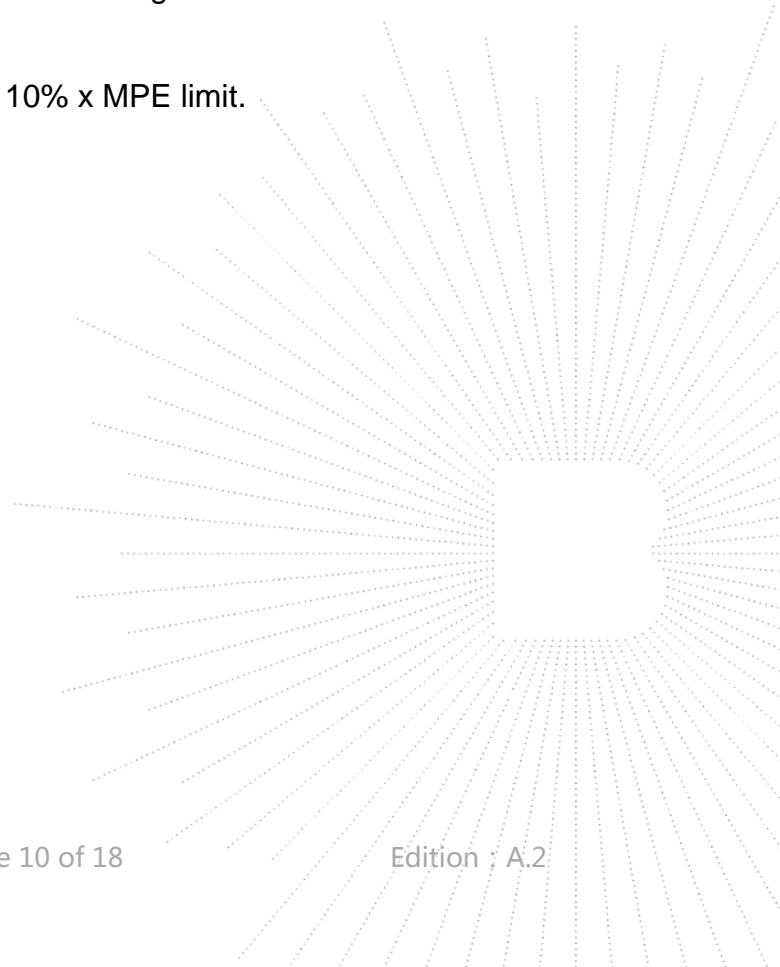

4.6 E and H field Strength


(The worst data is test mode 3)

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (V/m)	Limits Test (V/m)
1%	0.115-0.205	0.74	0.76	0.72	0.59	0.55	61.4	614
50%	0.115-0.205	0.63	0.67	0.68	0.57	0.53	61.4	614
99%	0.115-0.205	0.65	0.64	0.65	0.53	0.79	61.4	614

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
1%	0.115-0.205	0.064	0.106	0.076	0.066	0.097	0.163	1.63
50%	0.115-0.205	0.057	0.058	0.079	0.082	0.084	0.163	1.63
99%	0.115-0.205	0.033	0.062	0.054	0.066	0.059	0.163	1.63

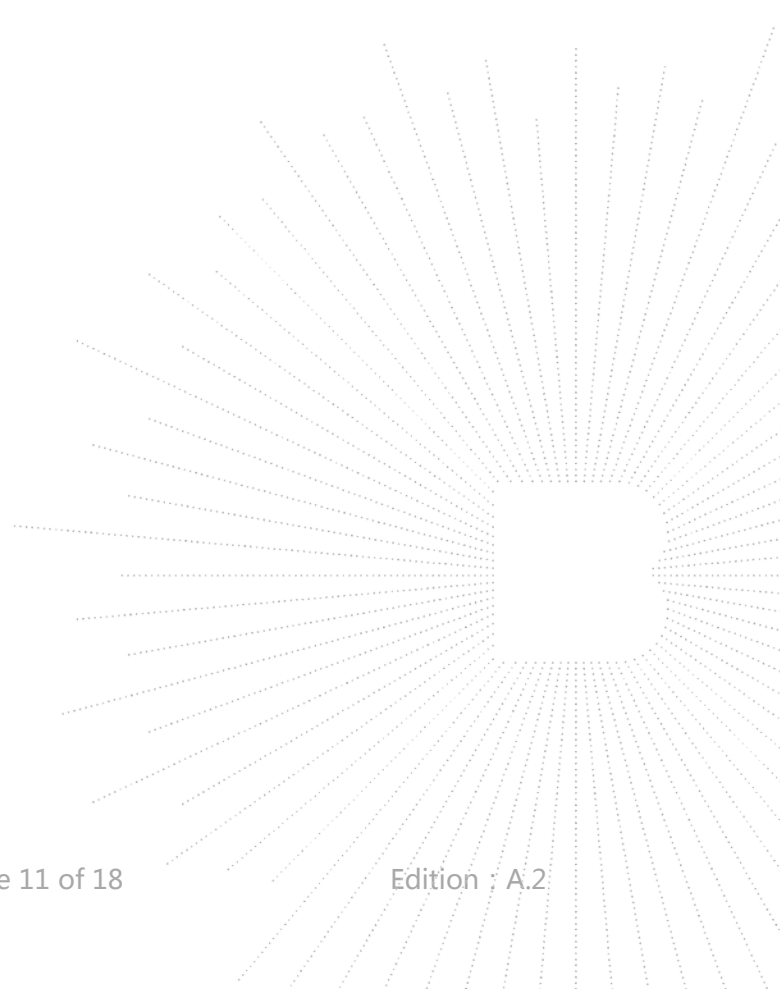


(The worst data is test mode 3)

E-Field Strength at 0 cm surrounding the EUT and 0cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (V/m)	Limits Test (V/m)
1%	0.115-0.205	0.75	0.68	0.63	0.65	0.67	61.4	614
50%	0.115-0.205	0.67	0.53	0.55	0.64	0.64	61.4	614
99%	0.115-0.205	0.43	0.57	0.47	0.48	0.38	61.4	614

H-Field Strength at 0 cm surrounding the EUT and 0cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
1%	0.115-0.205	0.096	0.103	0.095	0.083	0.096	0.163	1.63
50%	0.115-0.205	0.095	0.105	0.085	0.096	0.083	0.163	1.63
99%	0.115-0.205	0.099	0.078	0.078	0.078	0.087	0.163	1.63

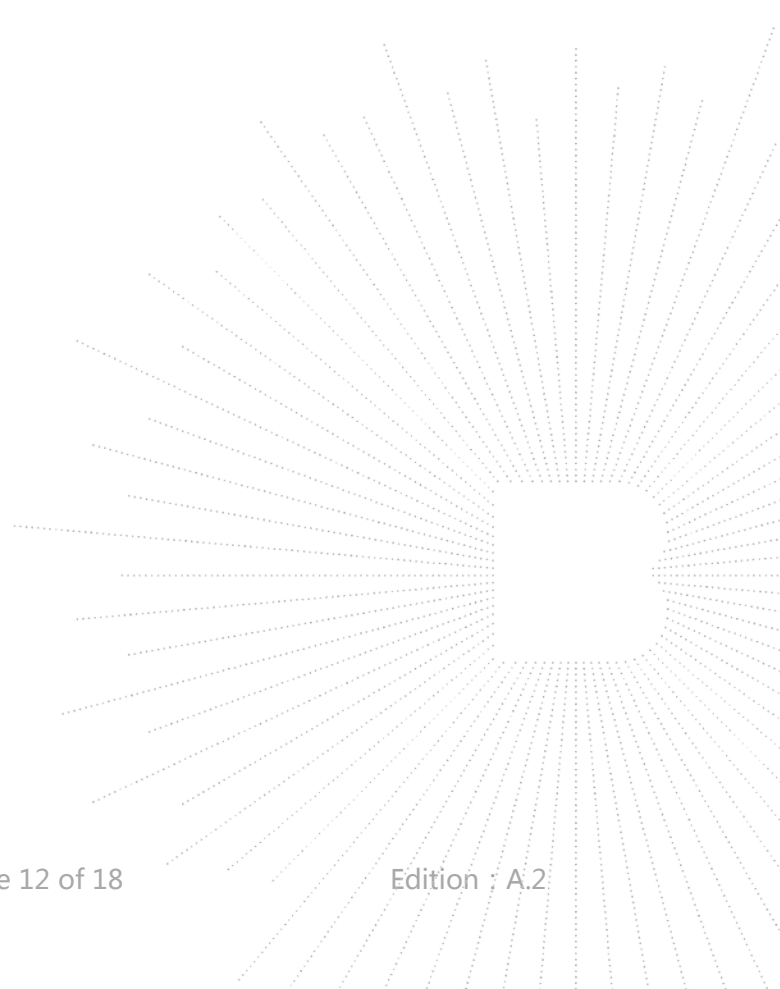

5. PHOTOGRAPHS OF TEST SET-UP


15cm



15cm



15cm

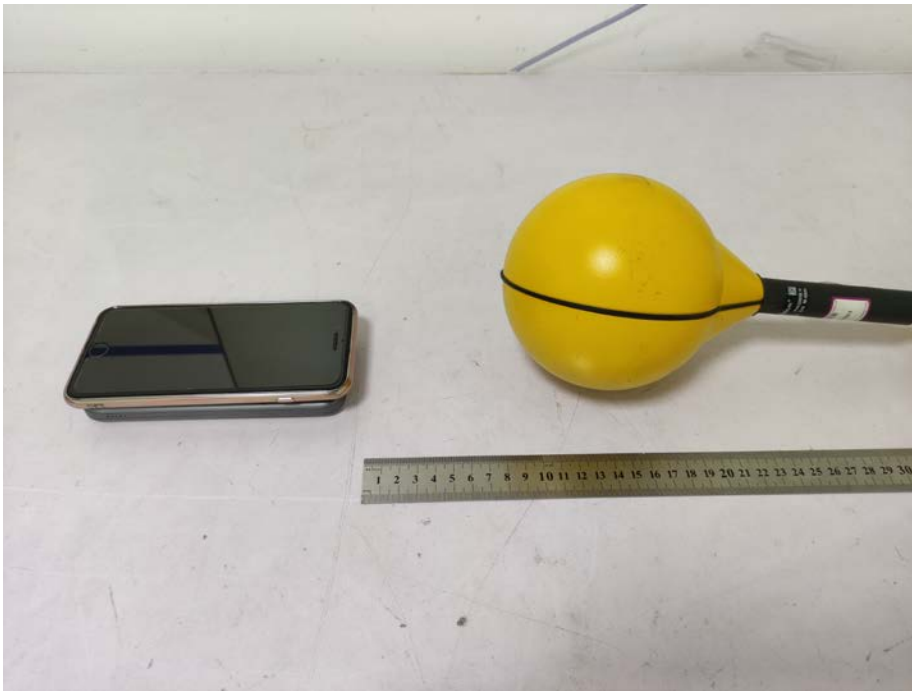

15cm






20cm




0cm

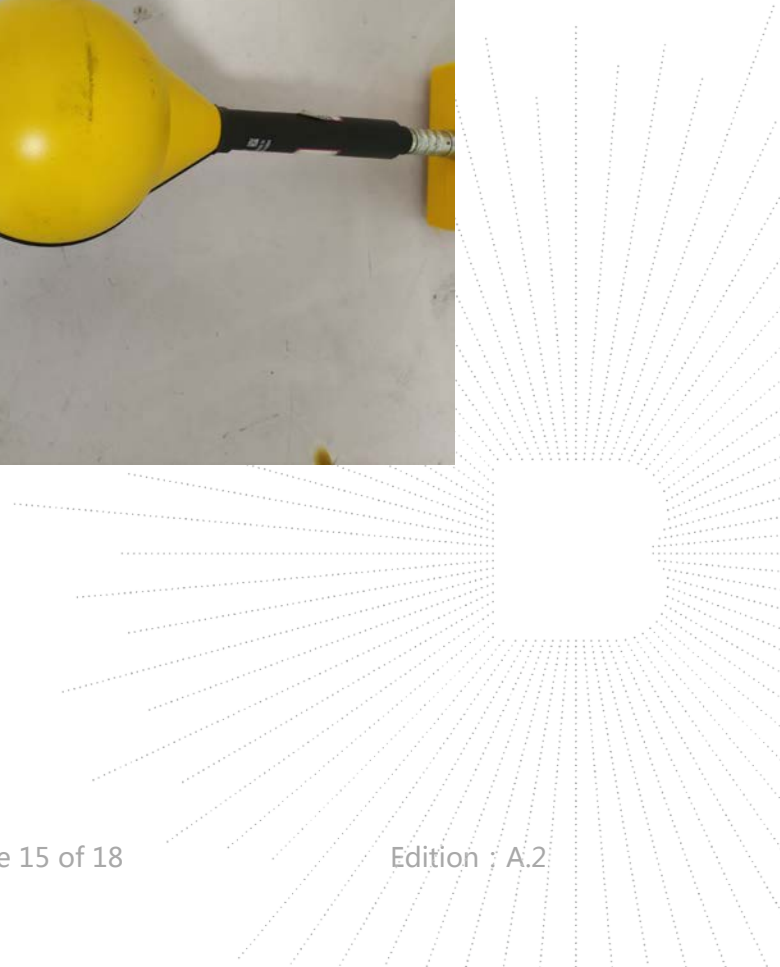

0cm




0cm

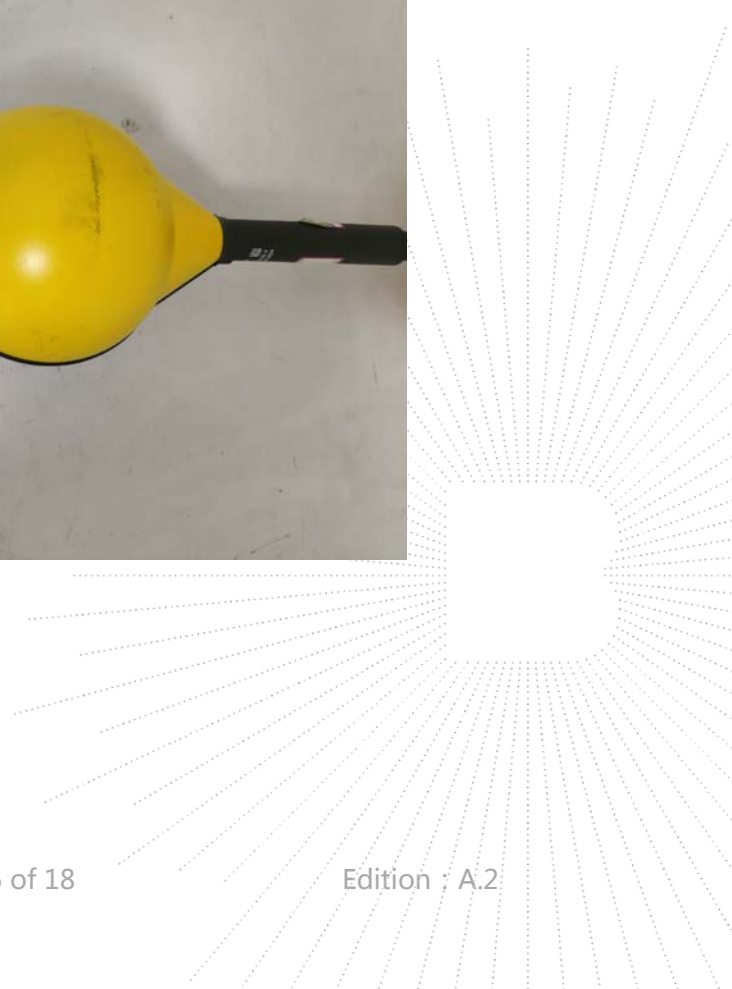

0cm



0cm

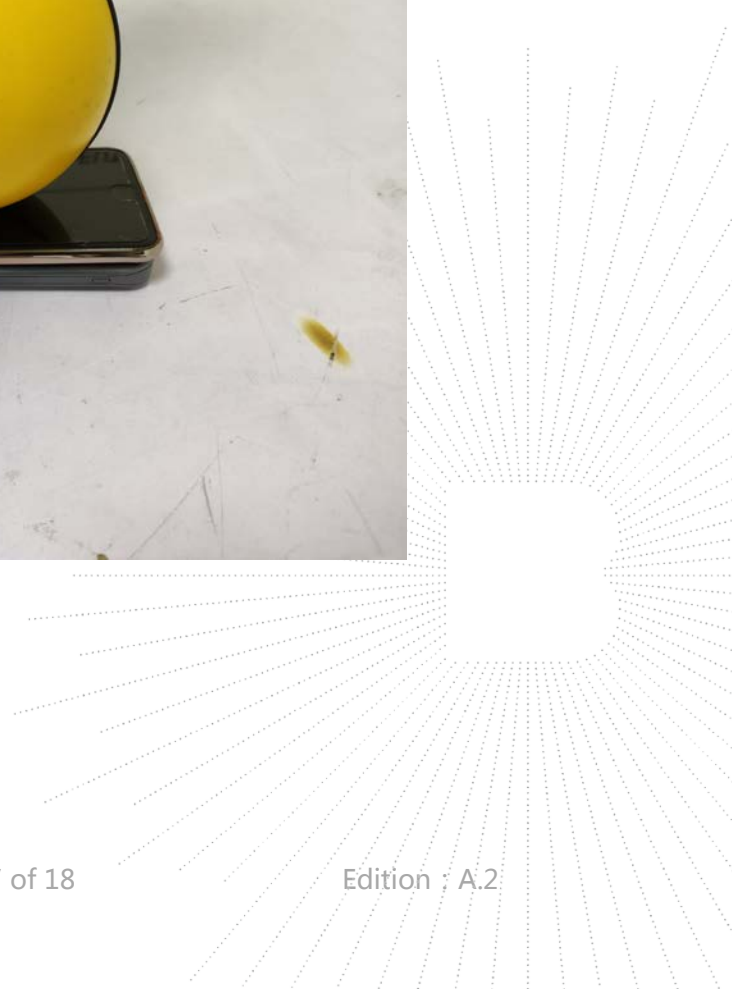

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2F, East of B Building, Pengzhou Industrial Park, Fuyuan 1st Road, Qiaotou, Fuyong Street, Ba o'an District,Shenzhen,Guangdong,China

TEL : 400-788-9558

P. C.: 518103

FAX : 0755-33229357

Website : <http://www.bctc-lab.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****

