

FCC Test Report

Equipment : Keyboard
Brand Name : ZAGG
Model No. : Folio for Galaxy Tab 4 10.1
(refer to item 1.1.1 for more details)
FCC ID : QTG-ZFS
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DSS
Applicant : ZAGG Inc.
3855 South 500 West, Ste Q Salt Lake City, UT 84115,
U.S.A.

The product sample received on Apr. 15, 2014 and completely tested on Apr. 29, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



James Fan / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	8
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration.....	9
2.4	Test Setup Diagram	10
3	TRANSMITTER TEST RESULT	11
3.1	AC Power-line Conducted Emissions	11
3.2	20dB Bandwidth and Carrier Frequency Separation.....	16
3.3	Number of Hopping Frequencies	18
3.4	Time of Occupancy (Dwell Time)	20
3.5	RF Output Power.....	22
3.6	Emissions in Non-restricted Frequency Bands	24
3.7	Transmitter Radiated Unwanted Emissions	27
4	TEST EQUIPMENT AND CALIBRATION DATA	46

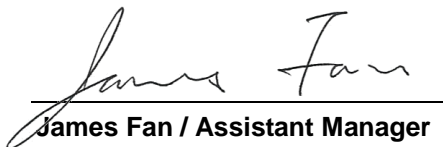

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.3	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]:0.153MHz 46.99 (Margin 8.83dB) - AV 52.56 (Margin 13.26dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	20dB Bandwidth	1.0261 MHz	N/A	Complied
3.2	15.247(a)	Carrier Frequency Separation (ChS)	1.0029 MHz	ChS \geq BW _{20dB} x2/3.	Complied
3.3	15.247(a)	Number of Hopping Frequencies (N)	79	N \geq 15	Complied
3.4	15.247(a)	Time of Occupancy (Dwell Time)	0.319 sec	0.4 s within 0.4 x N	Complied
3.5	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] 0.21	Power [dBm] 21	Complied
3.6	15.247(c)	Emissions in non-restricted frequency bands	Out-of -band emissions are 20dB below the highest power	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.7	15.247(c)	Transmitter Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 69.77MHz 33.77 (Margin 6.23dB) - QP	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

Revision History

Report No.	Version	Description	Issued Date
FR441131	Rev. 01	Initial issue of report	May 12, 2014

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

No.	Brand Name	Model Name	Product Name	Description
1	ZAGG	Folio for Galaxy Tab 4 10.1	Keyboard	for Samsung Tablet
2	ZAGG	Rugged Folio for iPad Air	Keyboard	for iPad Air
3	ZAGG	Folio for Galaxy Tab 4 8.0	Keyboard	for Samsung Tablet
4	ZAGG	Rugged Folio for iPad Mini	Keyboard	for iPad Mini

✦ Different model names are for marketing purpose.
 ✦ PCBA is same for each model but firmware, appearance and battery is different as below
 No.1 / No.2 : Appearance and battery is same but firmware is different.
 No.3 / No.4 : Appearance and battery is same but firmware is different.

1.1.2 RF General Information

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)
2400-2483.5	BR (V3.0)	2402-2480	0-78 [79]	0.21

Note 1: Bluetooth BR uses a GFSK (1Mbps) modulation and EDR mode is not supported.
 Note 2: RF output power specifies that Maximum Peak Conducted Output Power.

1.1.3 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	RF connector provided
<input type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)



Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	Printed	2.78

1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

1.1.5 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 79.69% - test mode single channel - BR-1Mbps	0.99
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.	

1.1.6 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC (2.8V)	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Battery

1.2 Accessories and Support Equipment

Accessories					
No.	Equipment	Brand Name	Model Name	Remarks	Used for
1	Battery 1	HUAXIN ENERGY	HX 352070	Li-ion, lithium-ion rechargeable polymer battery pack Rating: 3.7Vdc, 450mAh	Folio for Galaxy Tab 4 10.1 Rugged Folio for iPad Air Folio for Galaxy Tab 4 8.0 Rugged Folio for iPad Mini
2	Battery 2	HYB BATTERY CO., LTD	J391/ICP293351P	Li-ion, lithium-ion rechargeable polymer battery pack Rating: 3.7Vdc, 500mAh	Folio for Galaxy Tab 4 10.1 Rugged Folio for iPad Air
3	Battery 3	Shenzhen HuaxinEnergy Technology Co.,Ltd	HX-3234100	Li-ion, lithium-ion rechargeable polymer battery pack Rating: 3.7Vdc, 1100mAh	Folio for Galaxy Tab 4 10.1 Rugged Folio for iPad Air

✦ Tested battery for Folio for Galaxy Tab 4 10.1 / Rugged Folio for iPad Air

Battery 1 & 2 & 3 had been pretested and found that Battery 3 was the worst case and was selected for final testing.

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E6430	---

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC Public Notice DA 00-705
- ◆ FCC KDB 412172

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	Sporton Lab	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	ICC Lab	ADD : No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsein 333, Taiwan (R.O.C.)	TEL : 886-3-271-8666	FAX : 886-3-318-0155
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Mark Liao	21°C / 60%	Apr. 15, 2014
AC Conduction*	CO01-WS	Skys Huang	20°C / 62%	Apr. 18 ~ Apr. 29, 2014
Radiated Emission*	03CH02-WS	Skys Huang	20°C / 66-68%	Apr. 16 ~ Apr. 29, 2014

Note: * Sporton Lab subcontracts this test item to ICC lab (TAF:2732).

ICC lab is a TAF accreditation test firm and also is an approved provider of Sporton Lab.

- FCC site registration No.: 657002
- IC site registration No.: 10807A-2

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
All emissions, radiated	30 – 1000 MHz	±3.90 dB	N/A
	1 – 25 GHz	±4.20 dB	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Bluetooth Mode	Transmit Chains (N _{TX})	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode
BR	1	1 Mbps	BR-1Mbps	0.21	BR-1Mbps




2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	Brocom Bluetool		
Modulation Mode	2402 MHz	2440 MHz	2480 MHz
BR,1Mbps	0	0	0


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Radio link (BT), for model Folio for Galaxy Tab 4 10.1, with Battery HX-3234100
2	Radio link (BT), for model Folio for Galaxy Tab 4 8.0, with Battery HX 352070

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
Test Condition	Conducted measurement at transmit chains
Modulation Mode	BR-1Mbps
Operating Mode	Operating Mode Description
1	Radio link (BT), for model Folio for Galaxy Tab 4 10.1, with Battery HX-3234100

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Z.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.		
Modulation Mode	BR-1Mbps		
Operating Mode	<input checked="" type="checkbox"/> 1. Radio link (BT), for model Folio for Galaxy Tab 4 10.1, with Battery HX-3234100		
	<input checked="" type="checkbox"/> 2. Radio link (BT), for model Folio for Galaxy Tab 4 8.0, with Battery HX 352070		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.4 Test Setup Diagram

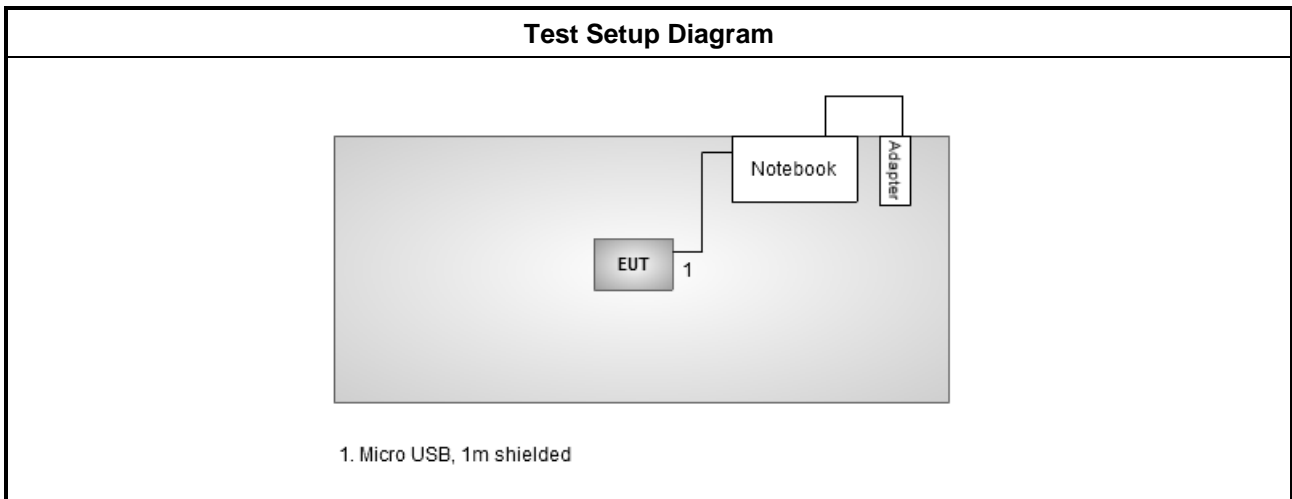

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

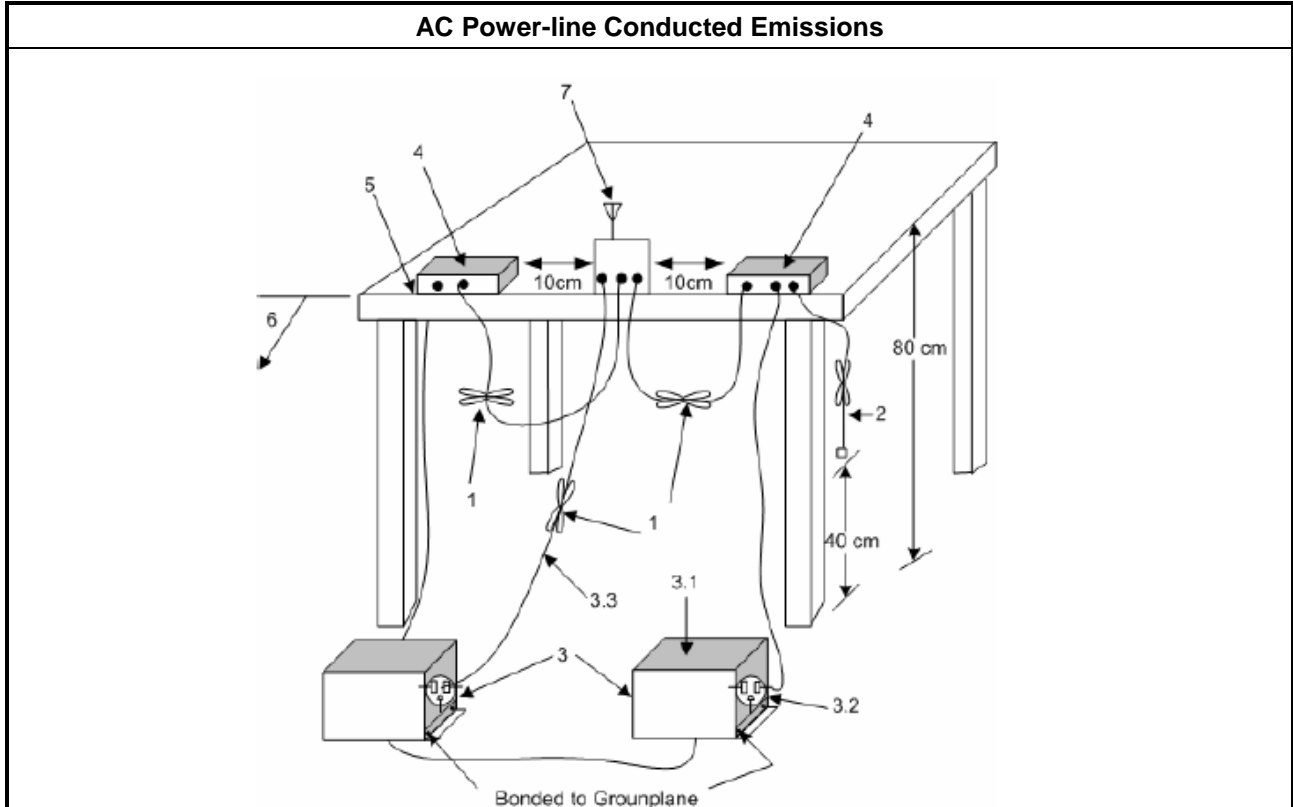


3.1.5 Test Result of AC Power-line Conducted Emissions

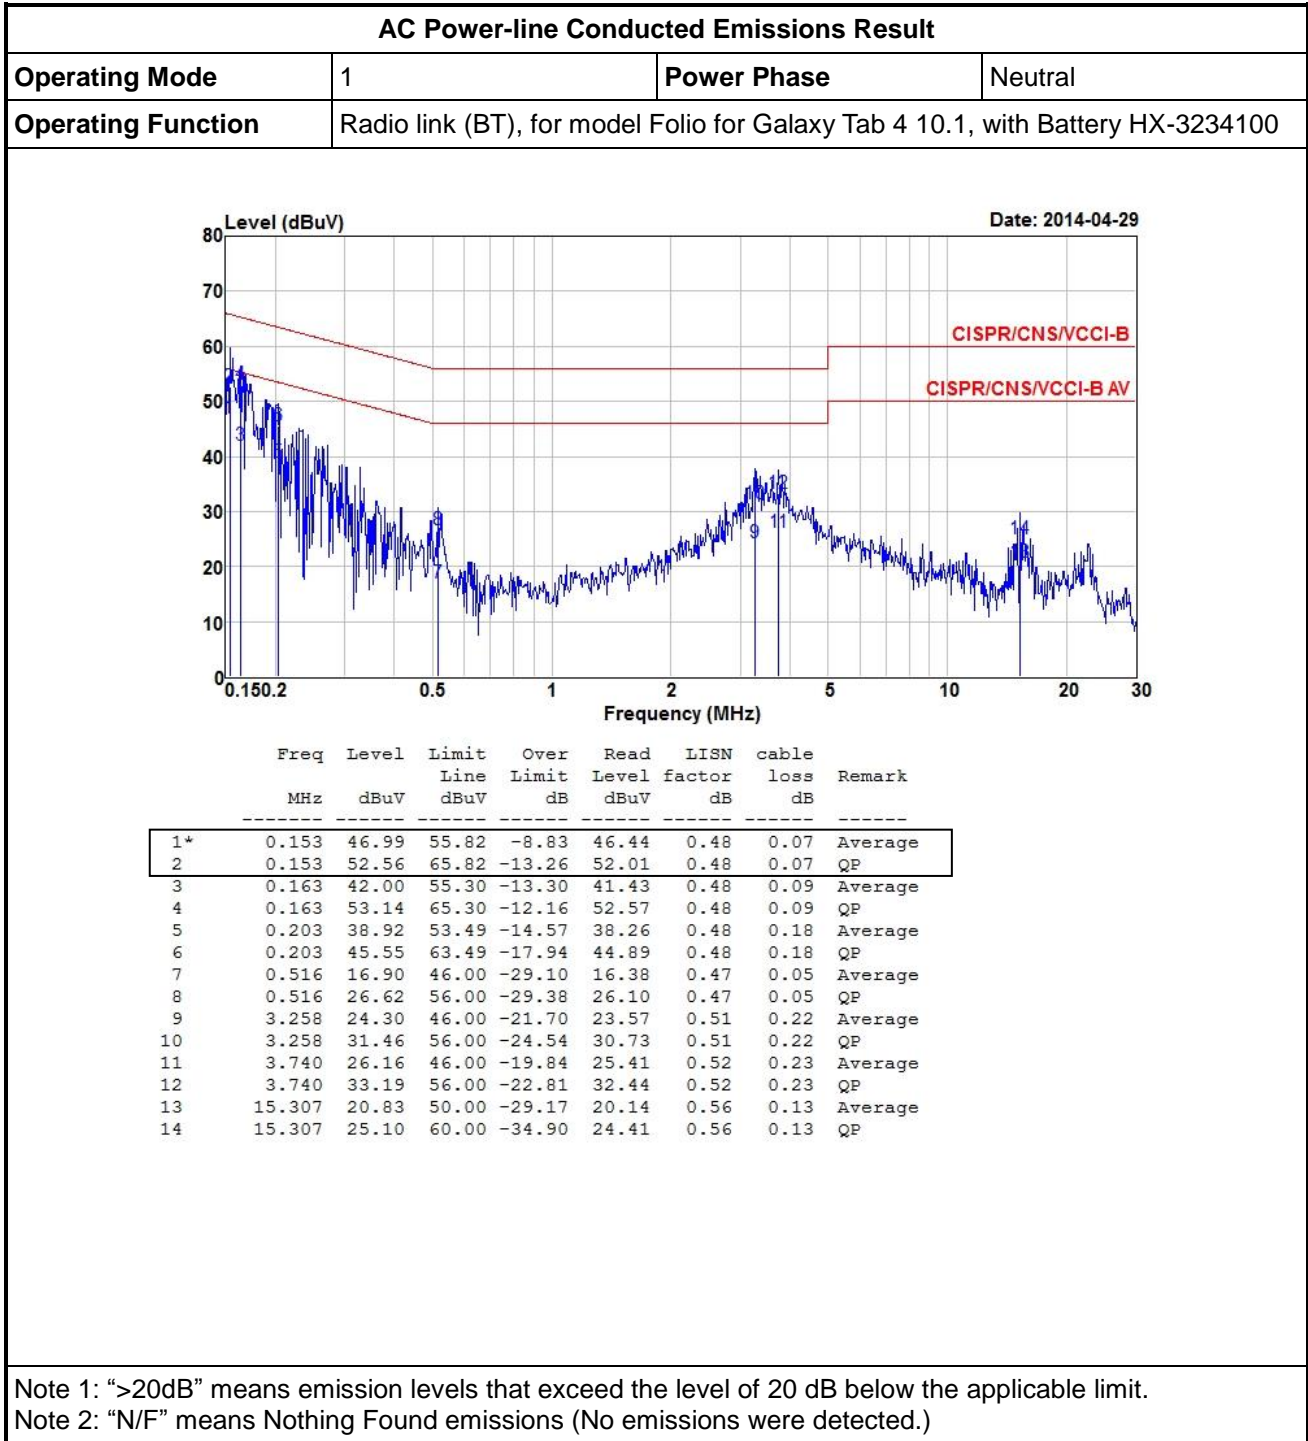



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Radio link (BT), for model Folio for Galaxy Tab 4 10.1, with Battery HX-3234100		

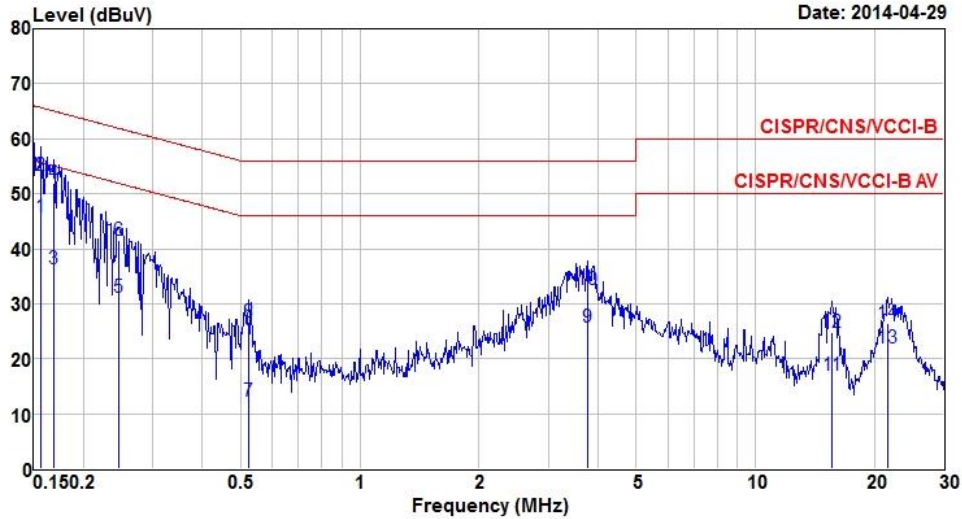


	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1*	0.156	45.71	55.69	-9.98	45.24	0.40	0.07	Average
2	0.156	53.23	65.69	-12.46	52.76	0.40	0.07	QP
3	0.169	36.27	55.03	-18.76	35.76	0.40	0.11	Average
4	0.169	51.93	65.03	-13.10	51.42	0.40	0.11	QP
5	0.246	31.24	51.91	-20.67	30.71	0.39	0.14	Average
6	0.246	41.51	61.91	-20.40	40.98	0.39	0.14	QP
7	0.524	12.32	46.00	-33.68	11.87	0.40	0.05	Average
8	0.524	26.78	56.00	-29.22	26.33	0.40	0.05	QP
9	3.759	25.64	46.00	-20.36	24.95	0.46	0.23	Average
10	3.759	32.67	56.00	-23.33	31.98	0.46	0.23	QP
11	15.635	17.05	50.00	-32.95	16.36	0.55	0.14	Average
12	15.635	24.86	60.00	-35.14	24.17	0.55	0.14	QP
13	21.600	22.07	50.00	-27.93	21.22	0.55	0.30	Average
14	21.600	26.43	60.00	-33.57	25.58	0.55	0.30	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Neutral
Operating Function	Radio link (BT), for model Folio for Galaxy Tab 4 8.0, with Battery HX 352070		

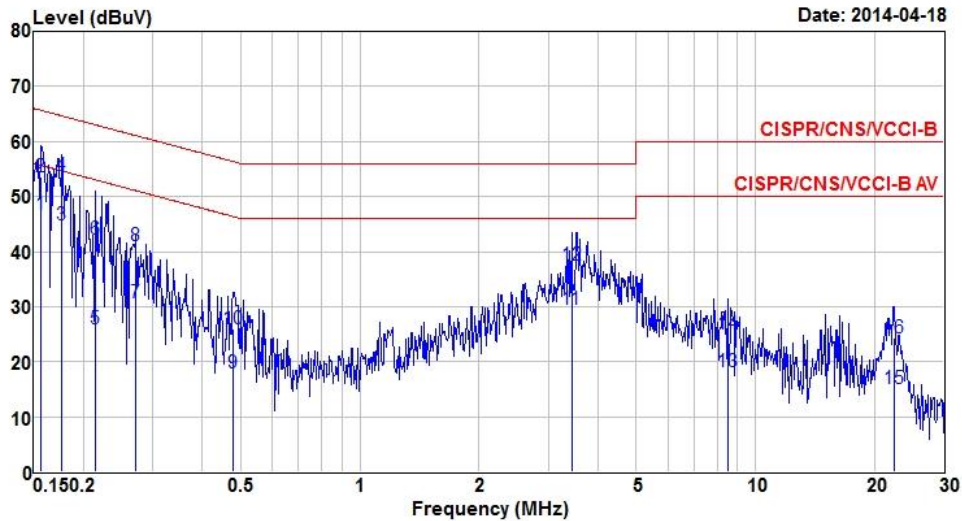


	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1*	0.156	46.70	55.69	-8.99	46.15	0.48	0.07	Average
2	0.156	53.59	65.69	-12.10	53.04	0.48	0.07	QP
3	0.177	44.80	54.64	-9.84	44.19	0.48	0.13	Average
4	0.177	53.88	64.64	-10.76	53.27	0.48	0.13	QP
5	0.214	25.91	53.05	-27.14	25.26	0.48	0.17	Average
6	0.214	42.18	63.05	-20.87	41.53	0.48	0.17	QP
7	0.272	30.76	51.07	-20.31	30.16	0.48	0.12	Average
8	0.272	41.09	61.07	-19.98	40.49	0.48	0.12	QP
9	0.479	17.95	46.36	-28.41	17.43	0.47	0.05	Average
10	0.479	25.94	56.36	-30.42	25.42	0.47	0.05	QP
11	3.436	29.57	46.00	-16.43	28.83	0.52	0.22	Average
12	3.436	37.53	56.00	-18.47	36.79	0.52	0.22	QP
13	8.501	18.22	50.00	-31.78	17.54	0.55	0.13	Average
14	8.501	25.01	60.00	-34.99	24.33	0.55	0.13	QP
15	22.416	15.20	50.00	-34.80	14.31	0.55	0.34	Average
16	22.416	24.27	60.00	-35.73	23.38	0.55	0.34	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Line
Operating Function	Radio link (BT), for model Folio for Galaxy Tab 4 8.0, with Battery HX 352070		

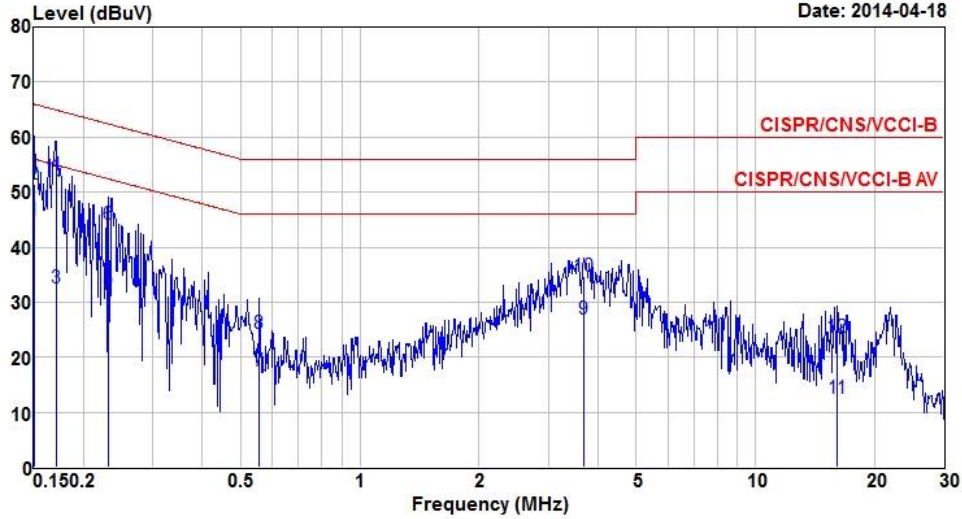

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1*	0.151	44.77	55.96	-11.19	44.31	0.40	0.06	Average
2	0.151	51.50	65.96	-14.46	51.04	0.40	0.06	QP
3	0.170	32.48	54.94	-22.46	31.97	0.40	0.11	Average
4	0.170	53.18	64.94	-11.76	52.67	0.40	0.11	QP
5	0.232	32.38	52.39	-20.01	31.84	0.39	0.15	Average
6	0.232	44.15	62.39	-18.24	43.61	0.39	0.15	QP
7	0.558	17.53	46.00	-28.47	17.08	0.40	0.05	Average
8	0.558	24.31	56.00	-31.69	23.86	0.40	0.05	QP
9	3.681	26.80	46.00	-19.20	26.11	0.46	0.23	Average
10	3.681	34.67	56.00	-21.33	33.98	0.46	0.23	QP
11	16.140	12.50	50.00	-37.50	11.80	0.55	0.15	Average
12	16.140	23.52	60.00	-36.48	22.82	0.55	0.15	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 20dB Bandwidth and Carrier Frequency Separation

3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/>	N ≥ 75 and ChS ≥ MAX (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	N ≥ 15 and ChS ≥ MAX (20 dB bandwidth x 2/3, 25 kHz).
N: Number of Hopping Frequencies; ChS: Hopping Channel Separation	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


3.2.4 Test Setup

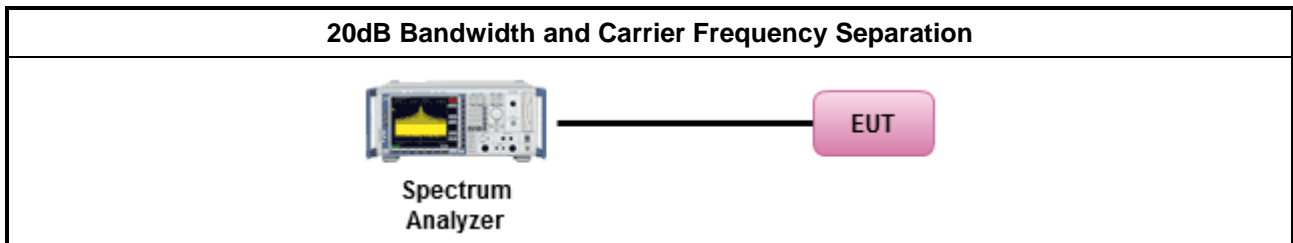



3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
BR,1Mbps	2402	1.0261	0.9465	1.0000	0.684
BR,1Mbps	2441	1.0261	0.9421	1.0029	0.684
BR,1Mbps	2480	1.0217	0.9291	1.0029	0.681
Result		Complied			

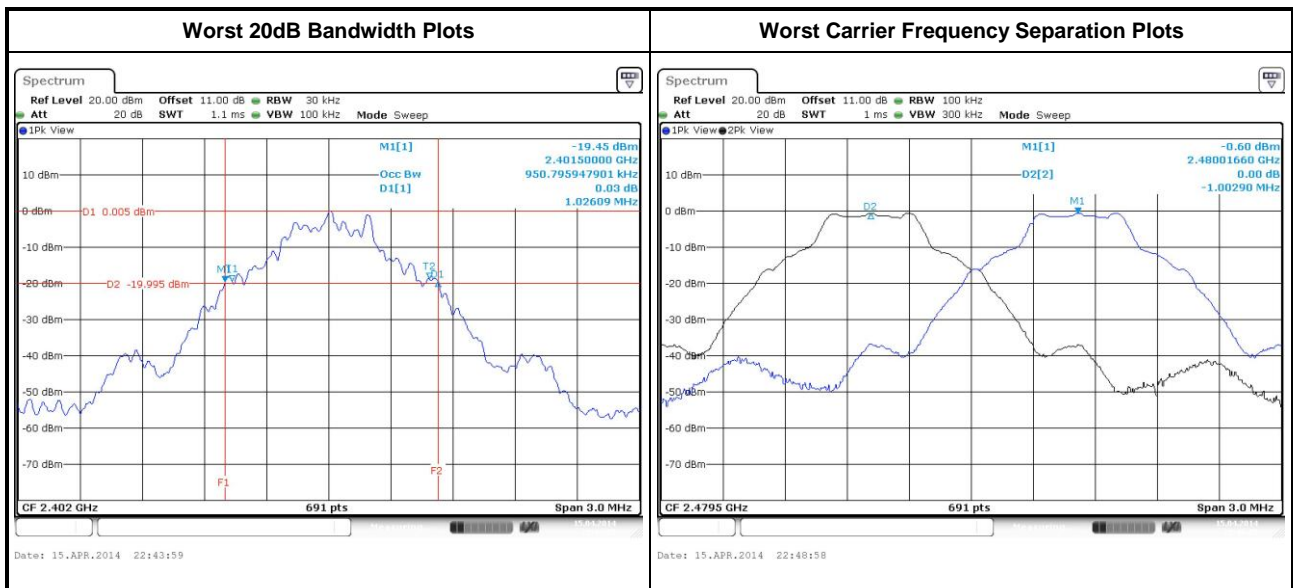

3.3 Number of Hopping Frequencies

3.3.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band:
<input type="checkbox"/>	$N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	$N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth x 2/3, 25 kHz).
N: Number of Hopping Frequencies; ChS: Hopping Channel Separation	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.3.4 Test Setup

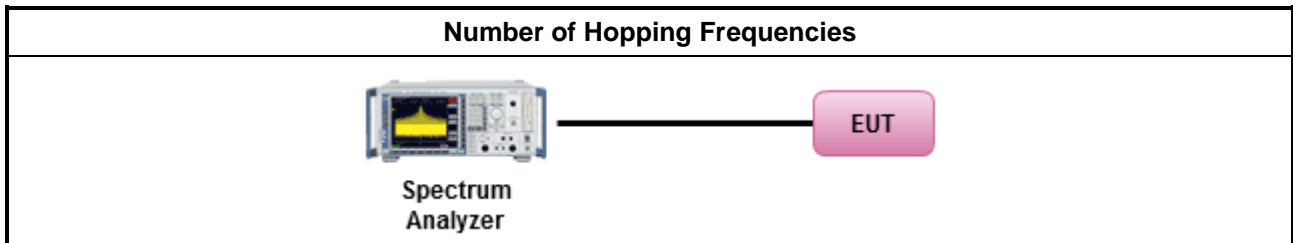

3.3.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result			
Modulation Mode	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
BT-1Mbps	2402-2480	79	15
Result	Complied		

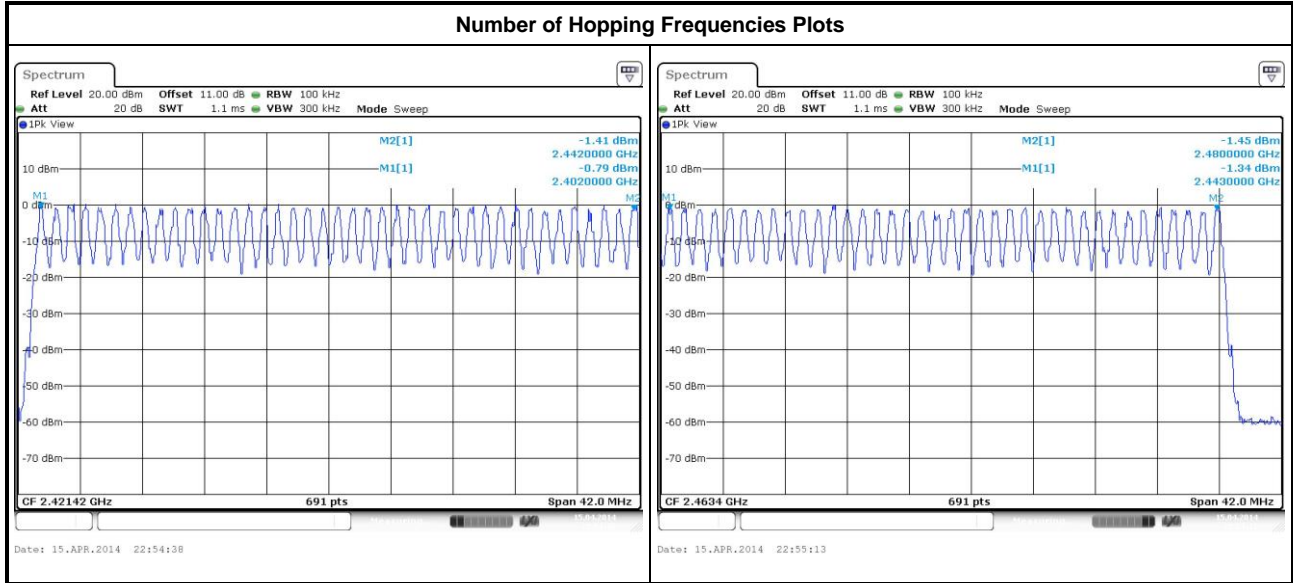

3.4 Time of Occupancy (Dwell Time)

3.4.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band: Dwell time ≤ 0.4 second within $0.4 \times N$
N: Number of Hopping Frequencies


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.
<input checked="" type="checkbox"/> Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.
<input checked="" type="checkbox"/> The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $1/1600$ seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
<input checked="" type="checkbox"/> The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
<input checked="" type="checkbox"/> The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


3.4.4 Test Setup

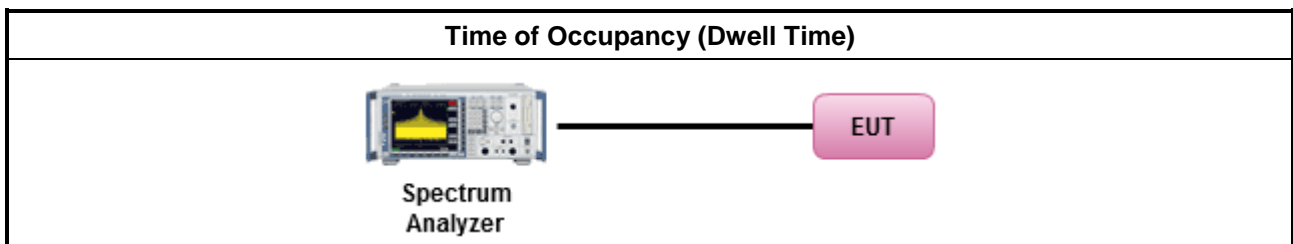

3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
BR-1Mbps	2402	2.99	106.7	0.319	0.4
Result		Complied			

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

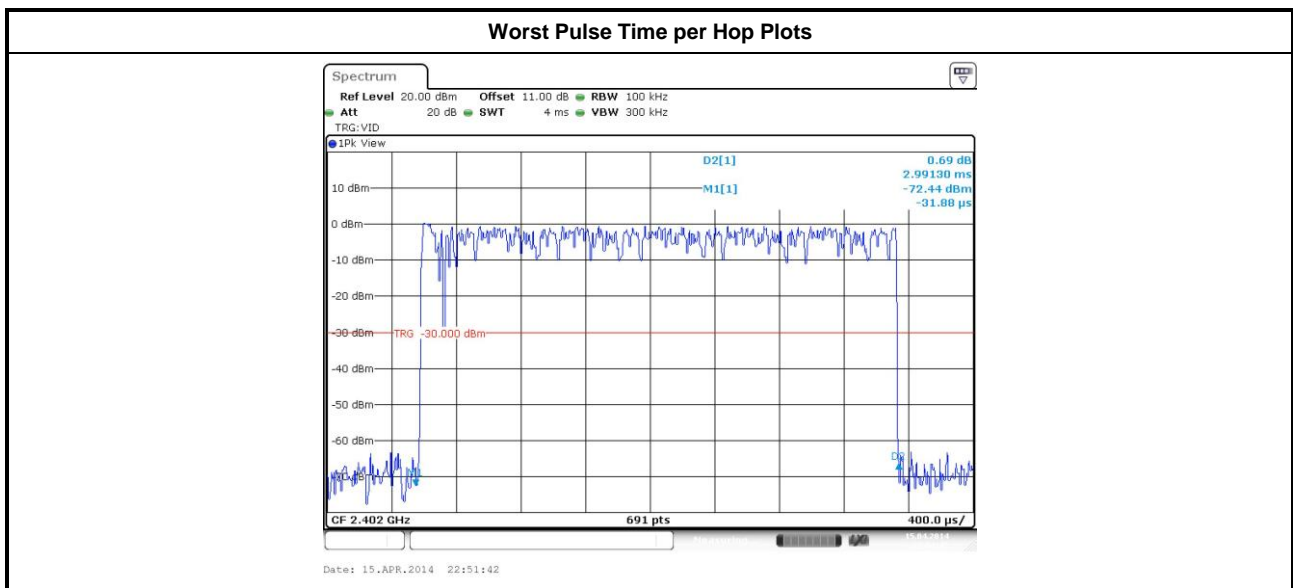

3.5 RF Output Power

3.5.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems	
Maximum Peak Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/>	For Hopping Channel: $N \geq 75$
<input type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input type="checkbox"/>	If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input checked="" type="checkbox"/>	For Hopping Channel: $N \geq 15$
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 21$ dBm (0.125 W)
<input type="checkbox"/>	If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/>	For Hopping Channel: $N \geq 75 - P_{eirp} \leq 36$ dBm (4 W)
<input checked="" type="checkbox"/>	For Hopping Channel: $75 > N \geq 15 - P_{eirp} \leq 27$ dBm (0.5 W)
G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm. N: Number of Hopping Frequencies ChS: Hopping Channel Separation	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC DA 00-0705, spectrum analyzer for peak power.
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, peak power meter for peak power.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW \geq EBW).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.5.4 Test Setup

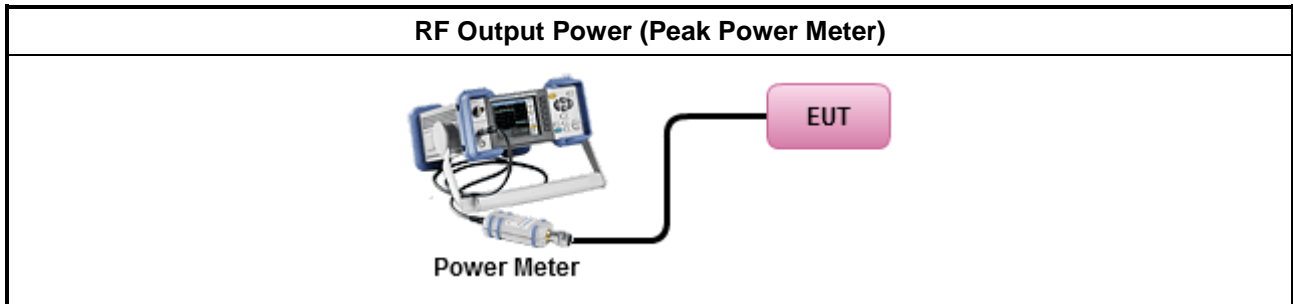

3.5.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	0.21	21	2.78	2.99	27
BR-1Mbps	2440	0.19	21	2.78	2.97	27
BR-1Mbps	2480	-0.11	21	2.78	2.67	27
Result		Complied				

Maximum Average Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	0.15	21	2.78	2.93	27
BR-1Mbps	2440	0.09	21	2.78	2.87	27
BR-1Mbps	2480	-0.12	21	2.78	2.66	27
Result		Complied				

Note: Average power is for reference only.

3.6 Emissions in Non-restricted Frequency Bands

3.6.1 Emissions in Non-restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level


Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.4 Test Setup

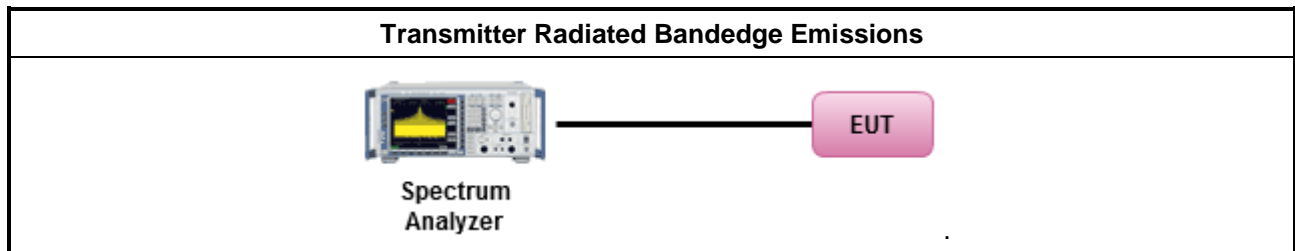

3.6.5 Test Result of Emissions in Non-restricted Frequency Bands

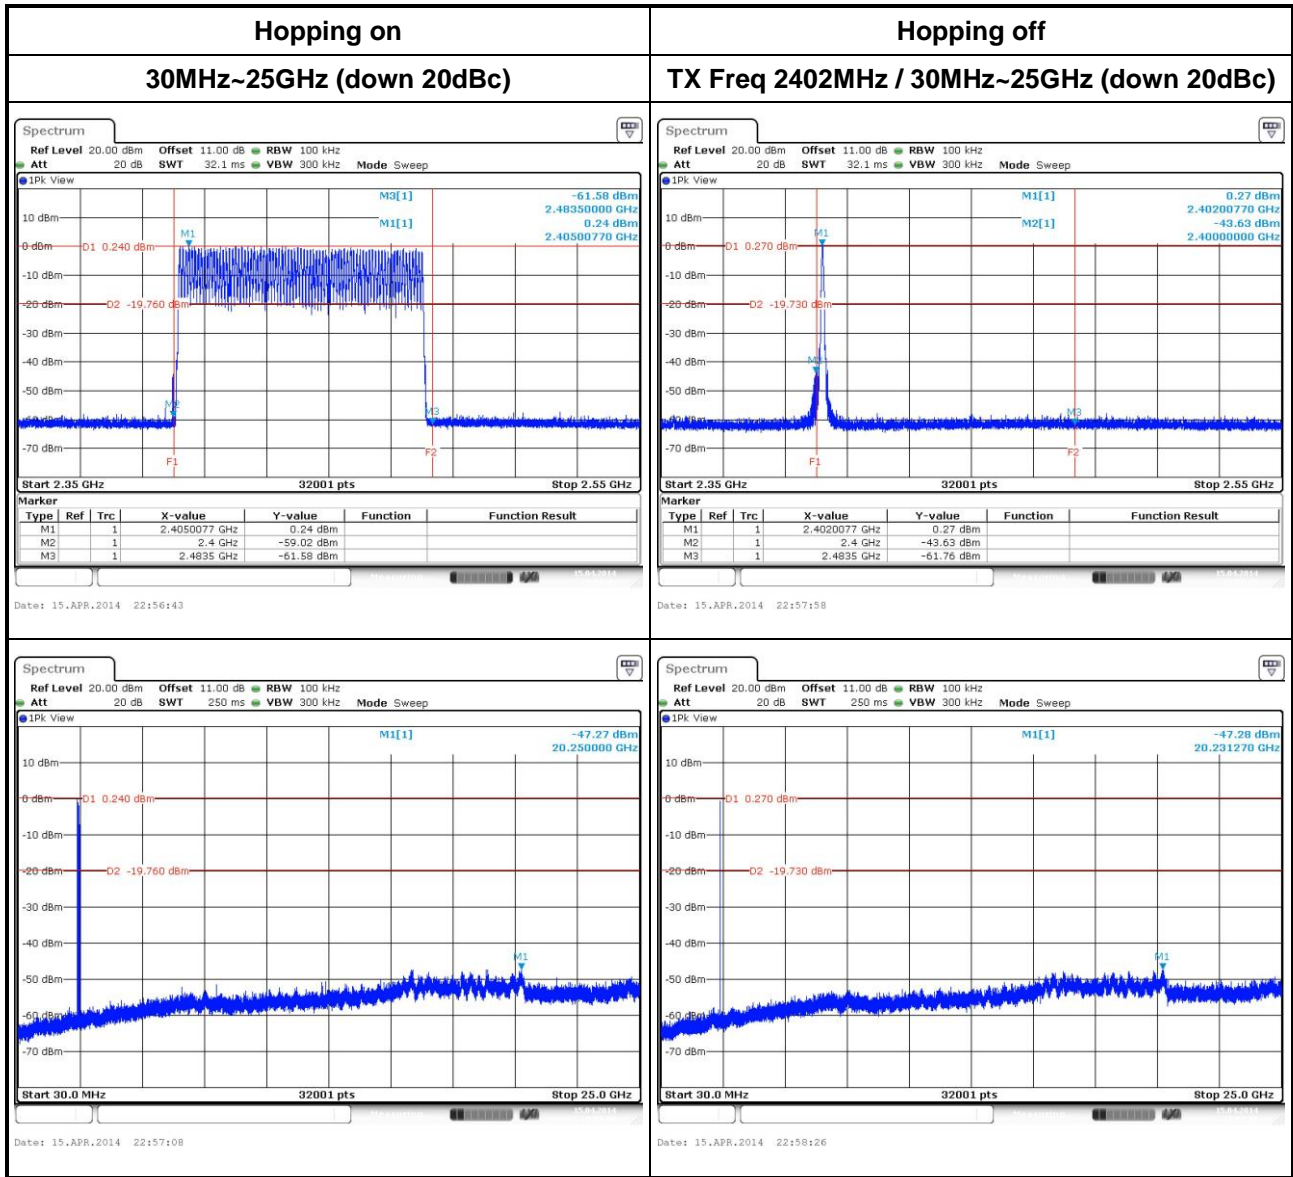

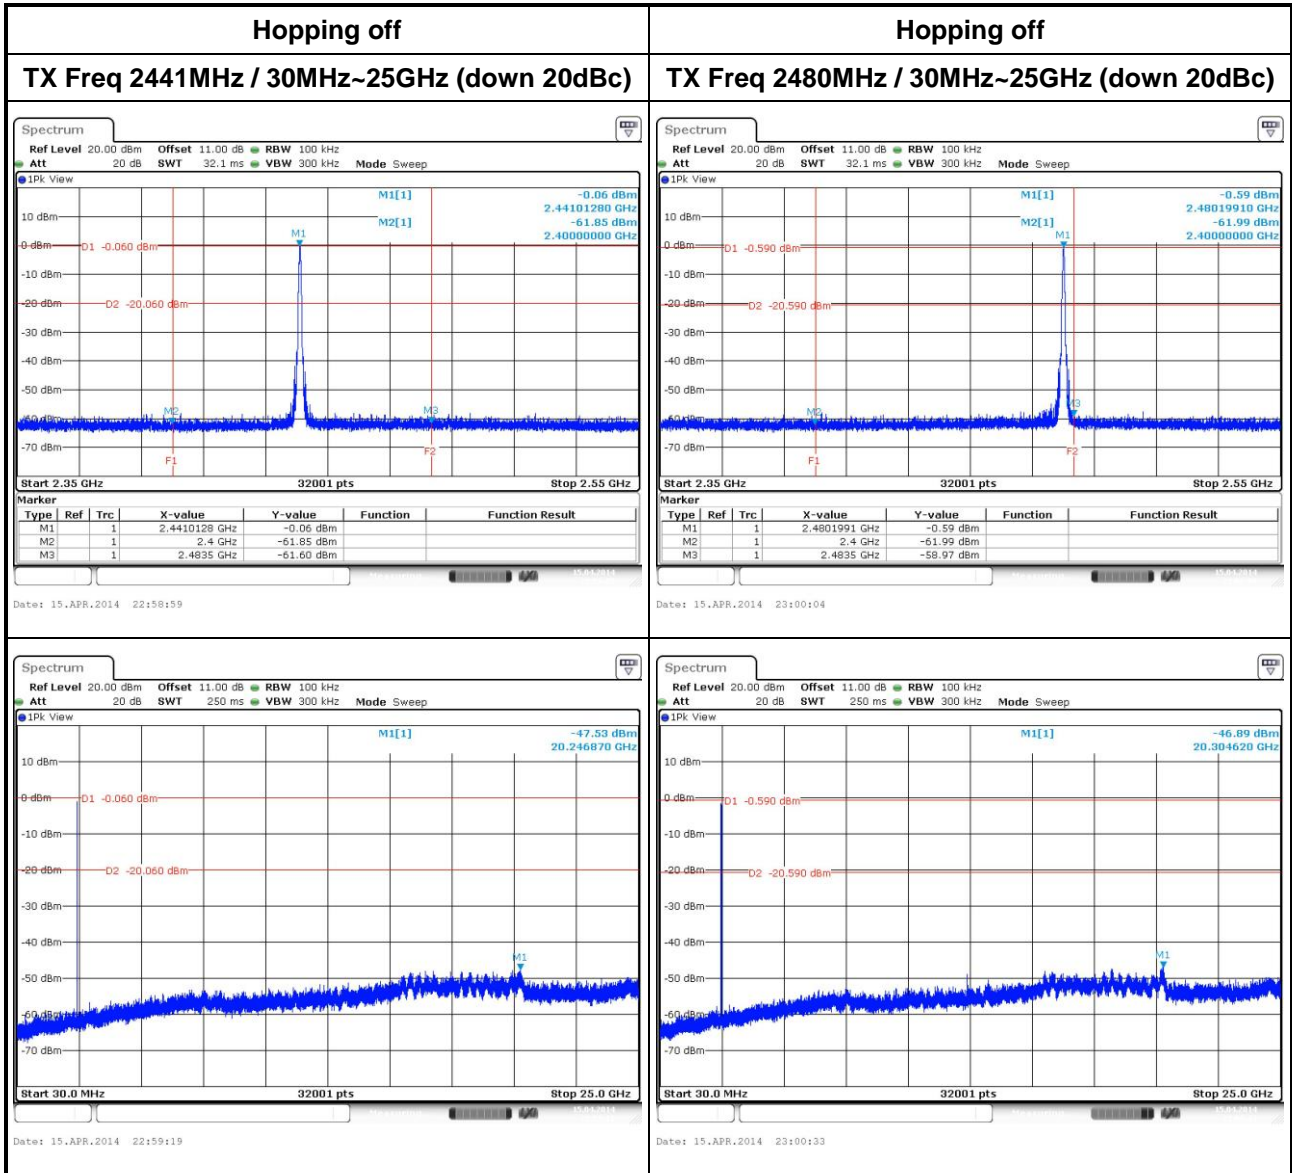

3.7 Transmitter Radiated Unwanted Emissions

3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $\text{VBW} \geq 1/T$, where T is pulse time.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

3.7.4 Test Setup

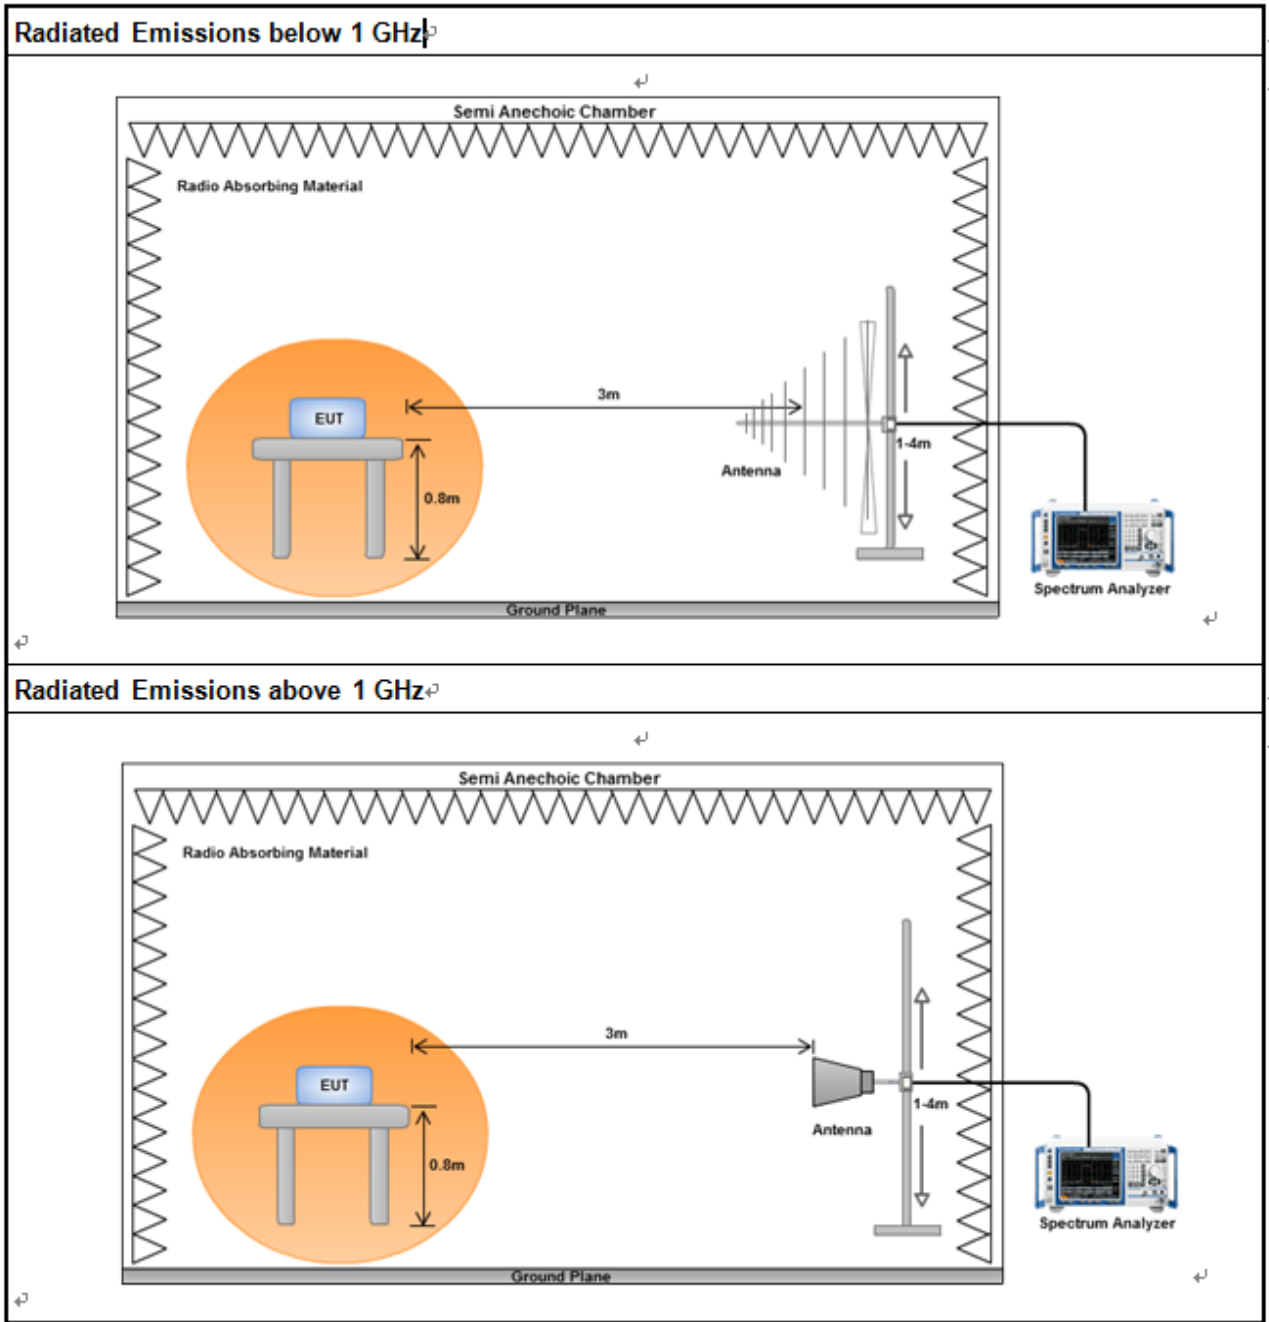


3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402
Operating Mode	1	Polarization	H

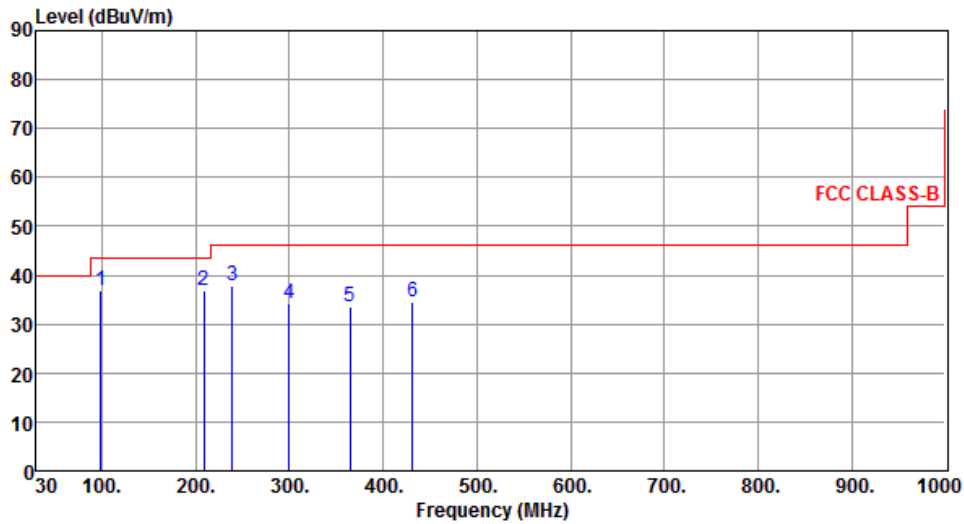

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	98.87	36.91	43.50	-6.59	58.71	-21.80	QP	109	221
2	208.48	36.82	43.50	-6.68	56.33	-19.51	Peak	---	---
3	239.52	37.72	46.00	-8.28	55.88	-18.16	Peak	---	---
4	299.66	34.33	46.00	-11.67	50.56	-16.23	Peak	---	---
5	364.65	33.67	46.00	-12.33	48.38	-14.71	Peak	---	---
6	431.58	34.41	46.00	-11.59	47.36	-12.95	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




Transmitter Radiated Unwanted Emissions (Below 1GHz)									
Modulation Mode	BR-1Mbps		Test Freq. (MHz)	2402					
Operating Mode	1		Polarization	V					
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the FCC CLASS-B limit, starting at 40 dBuV/m from 30 MHz to 100 MHz, rising to 45 dBuV/m at 100 MHz, and then to 55 dBuV/m at 1000 MHz. Six blue vertical lines represent emission peaks, labeled 1 through 6, with their respective frequencies and levels indicated in the table below.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB			
1	98.87	33.73	43.50	-9.77	55.53	-21.80	Peak	---	---
2	133.79	29.02	43.50	-14.48	46.82	-17.80	Peak	---	---
3	147.37	28.04	43.50	-15.46	44.93	-16.89	Peak	---	---
4	231.76	30.00	46.00	-16.00	48.65	-18.65	Peak	---	---
5	335.55	26.98	46.00	-19.02	42.41	-15.43	Peak	---	---
6	431.58	29.81	46.00	-16.19	42.76	-12.95	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402
Operating Mode	2	Polarization	H

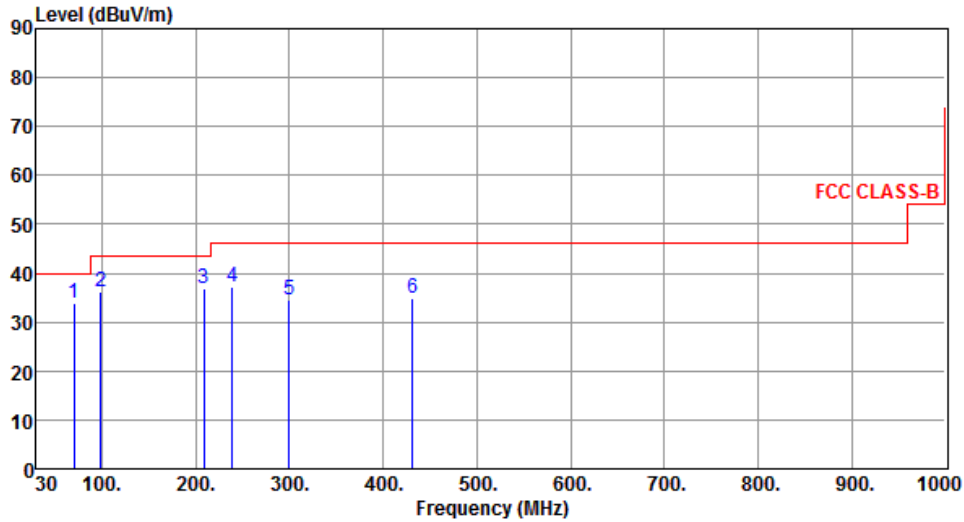


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	69.77	33.77	40.00	-6.23	52.75	-18.98	QP	103	84
2	98.87	36.14	43.50	-7.36	57.94	-21.80	QP	100	188
3	208.48	36.99	43.50	-6.51	56.50	-19.51	Peak	---	---
4	239.52	37.18	46.00	-8.82	55.34	-18.16	Peak	---	---
5	299.66	34.44	46.00	-11.56	50.67	-16.23	Peak	---	---
6	431.58	34.72	46.00	-11.28	47.67	-12.95	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402
Operating Mode	2	Polarization	V

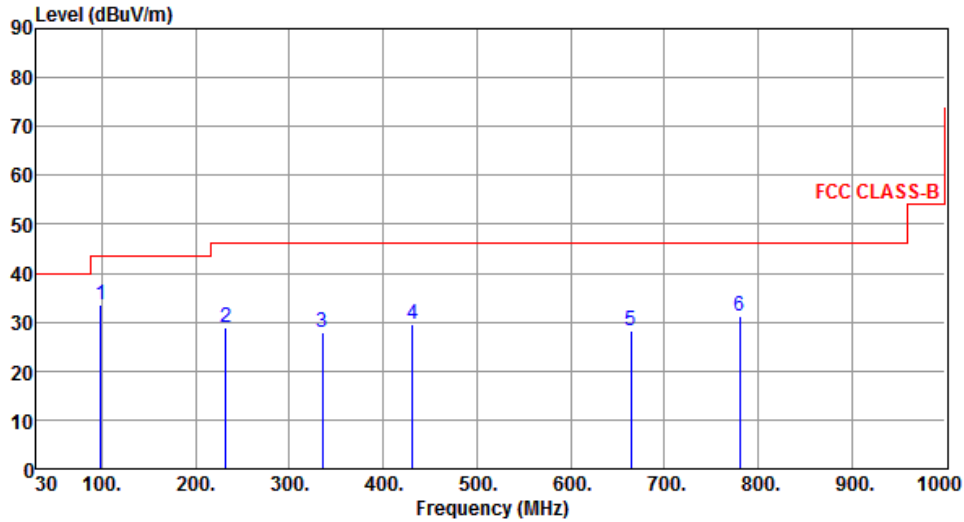

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	98.87	33.64	43.50	-9.86	55.44	-21.80	Peak	---	---
2	231.76	28.87	46.00	-17.13	47.52	-18.65	Peak	---	---
3	335.55	28.06	46.00	-17.94	43.49	-15.43	Peak	---	---
4	431.58	29.72	46.00	-16.28	42.67	-12.95	Peak	---	---
5	664.38	28.34	46.00	-17.66	37.17	-8.83	Peak	---	---
6	780.78	31.37	46.00	-14.63	38.33	-6.96	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402						
Operating Mode	1	Polarization	H						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2230.00	26.66	54.00	-27.34	30.11	-3.45	Average	---	---
2	2230.00	39.34	74.00	-34.66	42.79	-3.45	Peak	---	---
3	2390.00	29.75	54.00	-24.25	32.57	-2.82	Average	---	---
4	2390.00	43.30	74.00	-30.70	46.12	-2.82	Peak	---	---
5	4804.00	15.58	54.00	-38.42	10.53	5.05	Average	---	---
6	4804.00	45.68	74.00	-28.32	40.63	5.05	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p> <p>Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW$\geq 1/3.125ms$, VBW=1kHz.</p>									



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402
Operating Mode	1	Polarization	V

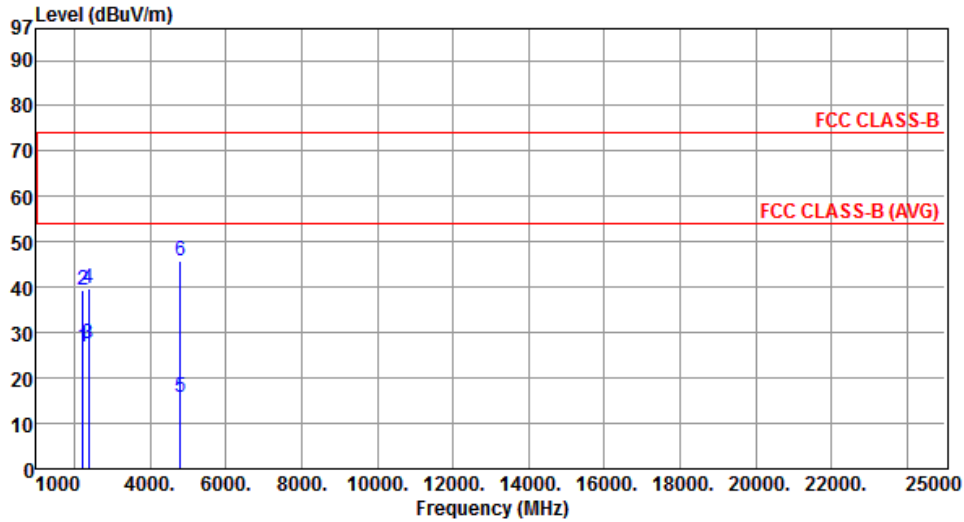


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2230.00	26.88	54.00	-27.12	30.33	-3.45	Average	---	---
2	2230.00	39.39	74.00	-34.61	42.84	-3.45	Peak	---	---
3	2390.00	27.43	54.00	-26.57	30.25	-2.82	Average	---	---
4	2390.00	39.68	74.00	-34.32	42.50	-2.82	Peak	---	---
5	4804.00	15.79	54.00	-38.21	10.74	5.05	Average	---	---
6	4804.00	45.89	74.00	-28.11	40.84	5.05	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2441
Operating Mode	1	Polarization	H

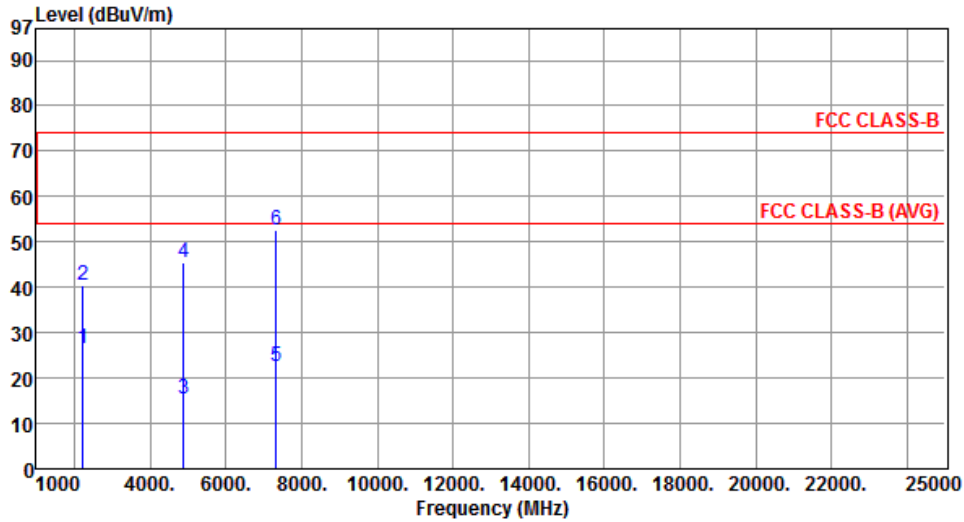


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2230.00	26.66	54.00	-27.34	30.11	-3.45	Average	---	---
2	2230.00	40.33	74.00	-33.67	43.78	-3.45	Peak	---	---
3	4882.00	15.44	54.00	-38.56	10.25	5.19	Average	---	---
4	4882.00	45.54	74.00	-28.46	40.35	5.19	Peak	---	---
5	7323.00	22.46	54.00	-31.54	11.71	10.75	Average	---	---
6	7323.00	52.56	74.00	-21.44	41.81	10.75	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2441
Operating Mode	1	Polarization	V

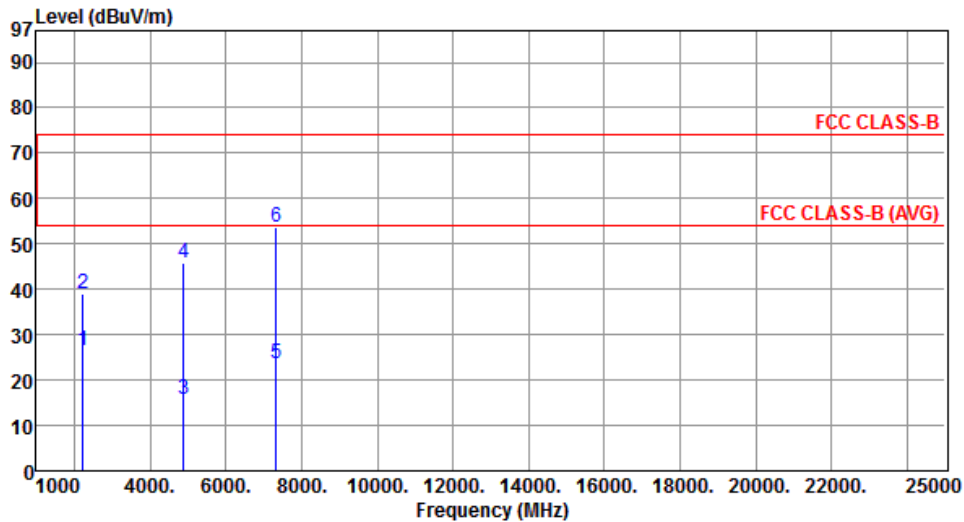

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2230.00	26.64	54.00	-27.36	30.09	-3.45	Average	---	---
2	2230.00	39.17	74.00	-34.83	42.62	-3.45	Peak	---	---
3	4882.00	15.83	54.00	-38.17	10.64	5.19	Average	---	---
4	4882.00	45.93	74.00	-28.07	40.74	5.19	Peak	---	---
5	7323.00	23.59	54.00	-30.41	12.84	10.75	Average	---	---
6	7323.00	53.69	74.00	-20.31	42.94	10.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.




Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	BR-1Mbps		Test Freq. (MHz)	2480					
Operating Mode	1		Polarization	H					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2230.00	26.65	54.00	-27.35	30.10	-3.45	Average	---	---
2	2230.00	39.92	74.00	-34.08	43.37	-3.45	Peak	---	---
3	2483.50	29.86	54.00	-24.14	32.25	-2.39	Average	---	---
4	2483.50	46.34	74.00	-27.66	48.73	-2.39	Peak	---	---
5	4960.00	15.92	54.00	-38.08	10.58	5.34	Average	---	---
6	4960.00	46.02	74.00	-27.98	40.68	5.34	Peak	---	---
7	7440.00	22.65	54.00	-31.35	11.72	10.93	Average	---	---
8	7440.00	52.75	74.00	-21.25	41.82	10.93	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2480
Operating Mode	1	Polarization	V

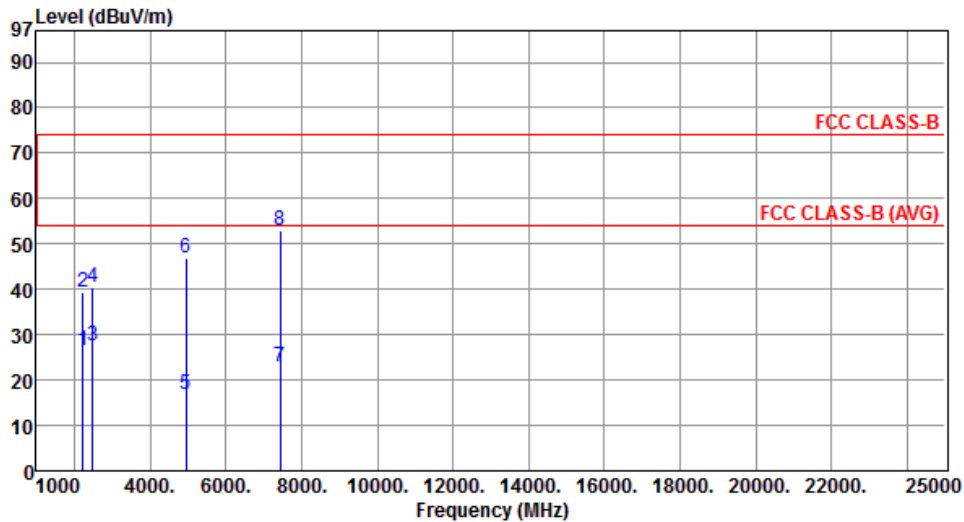


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2230.00	26.60	54.00	-27.40	30.05	-3.45	Average	---	---
2	2230.00	39.23	74.00	-34.77	42.68	-3.45	Peak	---	---
3	2483.50	27.41	54.00	-26.59	29.80	-2.39	Average	---	---
4	2483.50	40.42	74.00	-33.58	42.81	-2.39	Peak	---	---
5	4960.00	16.77	54.00	-37.23	11.43	5.34	Average	---	---
6	4960.00	46.87	74.00	-27.13	41.53	5.34	Peak	---	---
7	7440.00	23.00	54.00	-31.00	12.07	10.93	Average	---	---
8	7440.00	53.10	74.00	-20.90	42.17	10.93	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402
Operating Mode	2	Polarization	H

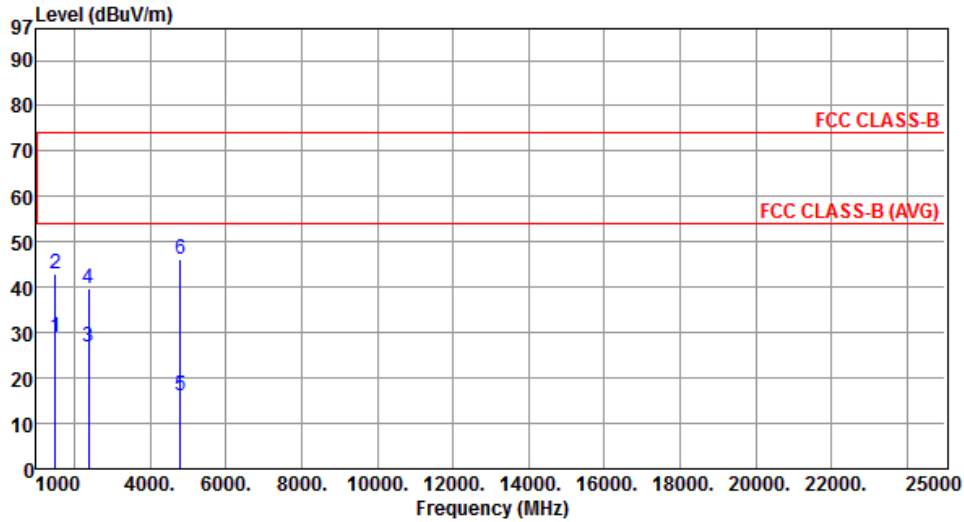


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	29.13	54.00	-24.87	35.60	-6.47	Average	---	---
2	1500.00	43.09	74.00	-30.91	49.56	-6.47	Peak	---	---
3	2390.00	26.99	54.00	-27.01	29.81	-2.82	Average	---	---
4	2390.00	39.79	74.00	-34.21	42.61	-2.82	Peak	---	---
5	4804.00	16.05	54.00	-37.95	11.00	5.05	Average	---	---
6	4804.00	46.15	74.00	-27.85	41.10	5.05	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402
Operating Mode	2	Polarization	V

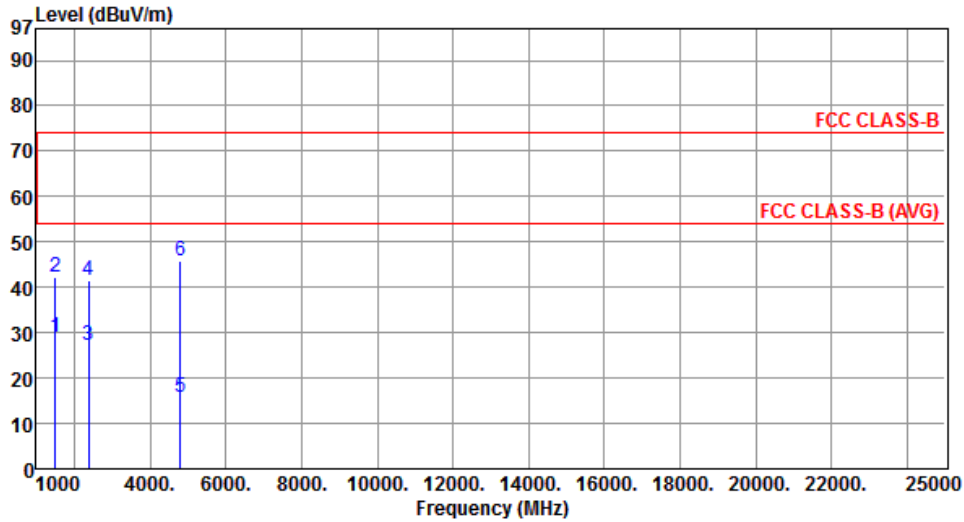


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	29.01	54.00	-24.99	35.48	-6.47	Average	---	---
2	1500.00	42.38	74.00	-31.62	48.85	-6.47	Peak	---	---
3	2390.00	27.11	54.00	-26.89	29.93	-2.82	Average	---	---
4	2390.00	41.51	74.00	-32.49	44.33	-2.82	Peak	---	---
5	4804.00	15.83	54.00	-38.17	10.78	5.05	Average	---	---
6	4804.00	45.93	74.00	-28.07	40.88	5.05	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2441
Operating Mode	2	Polarization	H

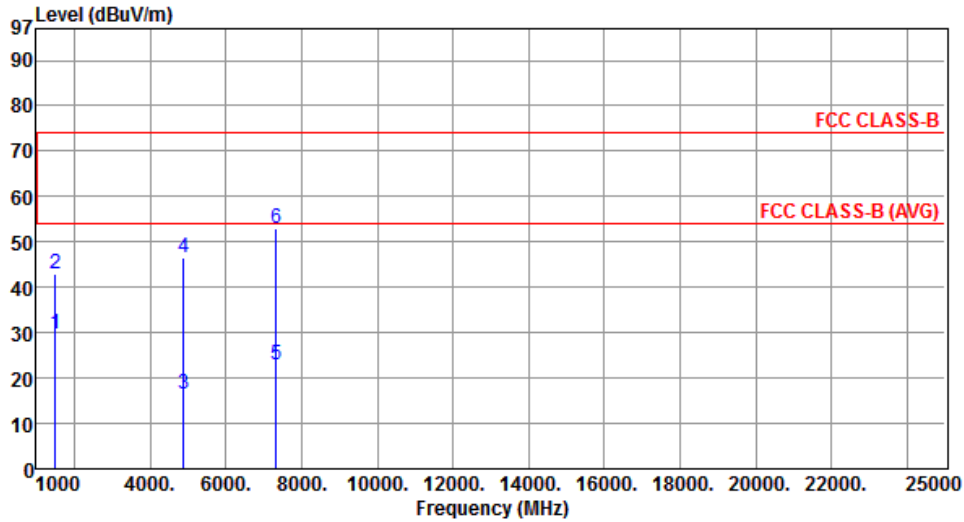

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	29.87	54.00	-24.13	36.34	-6.47	Average	---	---
2	1500.00	43.04	74.00	-30.96	49.51	-6.47	Peak	---	---
3	4882.00	16.53	54.00	-37.47	11.34	5.19	Average	---	---
4	4882.00	46.63	74.00	-27.37	41.44	5.19	Peak	---	---
5	7323.00	22.73	54.00	-31.27	11.98	10.75	Average	---	---
6	7323.00	52.83	74.00	-21.17	42.08	10.75	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2441						
Operating Mode	2	Polarization	V						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1500.00	29.35	54.00	-24.65	35.82	-6.47	Average	---	---
2	1500.00	43.45	74.00	-30.55	49.92	-6.47	Peak	---	---
3	4882.00	16.17	54.00	-37.83	10.98	5.19	Average	---	---
4	4882.00	46.27	74.00	-27.73	41.08	5.19	Peak	---	---
5	7323.00	24.76	54.00	-29.24	14.01	10.75	Average	---	---
6	7323.00	54.86	74.00	-19.14	44.11	10.75	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p> <p>Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW$\geq 1/3.125ms$, VBW=1kHz.</p>									




Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	BR-1Mbps		Test Freq. (MHz)	2480					
Operating Mode	2		Polarization	H					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	27.25	54.00	-26.75	29.64	-2.39	Average	---	---
2	2483.50	43.58	74.00	-30.42	45.97	-2.39	Peak	---	---
3	4960.00	16.78	54.00	-37.22	11.44	5.34	Average	---	---
4	4960.00	46.88	74.00	-27.12	41.54	5.34	Peak	---	---
5	7440.00	22.30	54.00	-31.70	11.37	10.93	Average	---	---
6	7440.00	52.40	74.00	-21.60	41.47	10.93	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission obtained from the worst average correction factor = $20 \log ((1s/1600x5)/100ms) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2480
Operating Mode	2	Polarization	V

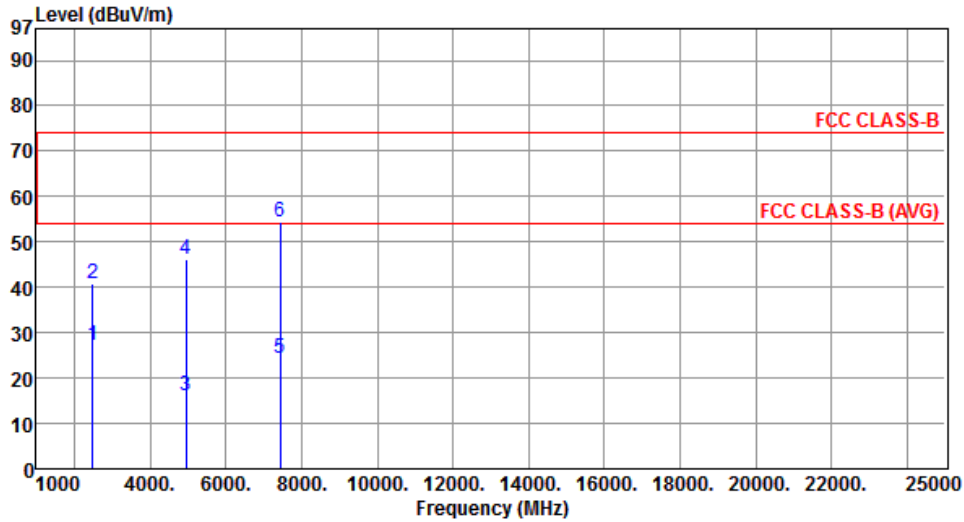

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	27.11	54.00	-26.89	29.50	-2.39	Average	---	---
2	2483.50	40.70	74.00	-33.30	43.09	-2.39	Peak	---	---
3	4960.00	16.10	54.00	-37.90	10.76	5.34	Average	---	---
4	4960.00	46.20	74.00	-27.80	40.86	5.34	Peak	---	---
5	7440.00	24.25	54.00	-29.75	13.32	10.93	Average	---	---
6	7440.00	54.35	74.00	-19.65	43.42	10.93	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission obtained from the worst average correction factor = $20 \log \left(\frac{1s/1600x5}{100ms} \right) = -30.1dB$ or Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125ms$, VBW=1kHz.



4 Test Equipment and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 17, 2014	Apr. 16, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Feb. 08, 2014	Feb. 07, 2015
Receiver	R&S	ESR3	101657	Jan. 18, 2014	Jan. 17, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Jan. 08, 2014	Jan. 07, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Jan. 07, 2014	Jan. 06, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 17, 2013	Dec. 16, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 17, 2013	Dec. 16, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 17, 2013	Dec. 16, 2014
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Note: Calibration Interval of instruments listed above is two year.					



Test Item	RF Conducted				
Test Site	TH01-HY				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 17, 2014	Feb. 16, 2015
Spectrum Analyzer	Agilent	N9010A	MY53400091	Oct. 07, 2013	Oct. 06, 2014
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	Nov. 21, 2013	Nov. 20, 2014
Signal Generator	R&S	SMB100A	175727	Jan. 07, 2014	Jan. 06, 2015
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
DC Power Source	G.W.	GPC-6030D	C671845	Jun. 21, 2013	Jun. 20, 2014
AC Power Source	G.W.	APS-9102	EL920581	Jul. 16, 2013	Jul. 15, 2014
Note: Calibration Interval of instruments listed above is one year.					