

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM130100050601 Page: 1 of 75

FCC REPORT

Application No:	SZEM1301000506RF
Applicant:	ZAGG Inc.
Manufacturer:	Cosonic Electronics Co., Ltd
Factory:	Cosonic Electronics Co., Ltd
Product Name:	bluetooth headphone
Model No.(EUT):	IF-CFB
FCC ID:	QTGCDFORTE
Standards:	47 CFR Part 15, Subpart C (2011)
Date of Receipt:	2013-01-31
Date of Test:	2013-02-03 to 2013-02-22
Date of Issue:	2013-04-28
Test Result:	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM130100050601 Page: 2 of 75

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

Remark:

Model No.: IF-CFB

Only the sample was tested in the first page of external photos, the IF-CFB are series and identical in the electrical circuit design, layout, components used and internal wiring. Only different on color.



Report No.: SZEM130100050601 Page: 3 of 75

3 Contents

1	CC	OVER PAGE	1
2	TE	EST SUMMARY	
3		ONTENTS	
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	Test Environment	
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST LOCATION	6
	4.6	Test Facility	7
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	Equipment List	
5		EST RESULTS AND MEASUREMENT DATA	
C		EST RESULTS AND MEASUREMENT DATA	
	5.1	ST RESULTS AND MEASUREMENT DATA	
			11
	5.1	ANTENNA REQUIREMENT	
	5.1 5.2	Antenna Requirement Conducted Emissions	
	5.1 5.2 5.3	Antenna Requirement Conducted Emissions Conducted Peak Output Power	
	5.1 5.2 5.3 5.4	Antenna Requirement Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth	
	5.1 5.2 5.3 5.4 5.5	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time	
	5.1 5.2 5.3 5.4 5.5 5.6	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time. Band-edge for RF Conducted Emissions	
	5.1 5.2 5.3 5.4 5.5 5.6 5.7	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions	
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence	11 12 16 23 29 36 39 45 52 58
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence Radiated Spurious Emission	11 12 16 23 29 36 39 39 45 52 58 58 59
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.2	ANTENNA REQUIREMENT CONDUCTED EMISSIONS CONDUCTED PEAK OUTPUT POWER 20DB OCCUPY BANDWIDTH CARRIER FREQUENCIES SEPARATION HOPPING CHANNEL NUMBER DWELL TIME BAND-EDGE FOR RF CONDUCTED EMISSIONS SPURIOUS RF CONDUCTED EMISSIONS PSEUDORANDOM FREQUENCY HOPPING SEQUENCE RADIATED SPURIOUS EMISSION 11.1 Radiated Emission below 1GHz	11 12 16 23 29 36 39 39 45 52 52 58 59 62
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.2	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence Radiated Spurious Emission	11 12 16 23 29 36 39 45 52 58 59 62



Report No.: SZEM130100050601 Page: 4 of 75

4 General Information

4.1 Client Information

Applicant:	ZAGG Inc.
Address of Applicant:	3855 So. 500 W., Salt Lake City, UT 84115-4279, USA
Manufacturer:	Cosonic Electronics Co., Ltd
Address of Manufacturer:	Cosonic Industrial Park, Shajin Village, Shipai Town, Dongguan City, Guangdong, China. 523343
Factory:	Cosonic Electronics Co., Ltd
Address of Factory:	Cosonic Industrial Park, Shajin Village, Shipai Town, Dongguan City, Guangdong, China. 523343

4.2 General Description of EUT

Product Name:	bluetooth headphone
Model No.:	IF-CFB
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Test Power Grade:	255,32 (manufacturer declare)
Test Software of EUT:	CSR Bluesuite (manufacturer declare)
Antenna Type:	Integral
Antenna Gain	0dBi
Power Supply:	DC 5V by USB Port from PC input AC 120V/60Hz
	DC 3.7V 360mAh 1.33Wh
Micro-USB Cable:	95cm
Earphone Cable:	115cm
Test Voltage:	DC 5V by USB Port from PC input AC 120V/60Hz





Report No.: SZEM130100050601 Page: 5 of 75

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130100050601 Page: 6 of 75

4.3 Test Environment

Operating Environment:		
Temperature:	26.0 °C	
Humidity:	57 % RH	
Atmospheric Pressure:	1020mbar	

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
PC	DELL	DCSM
LCD-displaying	DELL	SP2208WFPt
KEYBOARD	DELL	SK-8115
MOUSE	Lenovo	MO28UOL
PC	IBM	8172
LCD-displaying	Lenovo	L1711pC
KEYBOARD	IBM	SK-8115
MOUSE	Lenovo	MO28UOA
Coder	HT4000	HengTong ELECTRON
Printer	BJC-1000SP	Canon

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM130100050601 Page: 7 of 75

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.



Report No.: SZEM130100050601 Page: 8 of 75

4.10 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2013-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2013-05-17		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2013-11-10		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2013-11-10		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2013-11-10		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2013-05-17		
8	Coaxial Cable	SGS	N/A	SEL0025	2013-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24		



Report No.: SZEM130100050601 Page: 9 of 75

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24		
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24		
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24		
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17		
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24		
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59		
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29		
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29		
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29		
13	Band filter	Amindeon	82346	SEL0094	2013-05-17		
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24		
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24		
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17		
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24		
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04		



Report No.: SZEM130100050601 Page: 10 of 75

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17
8	Band filter	amideon	82346	SEL0094	2013-05-17
9	POWER METER	R & S	NRVS	SEL0144	2013-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-17
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

Note: the calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130100050601 Page: 11 of 75

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
-----------------------	--

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

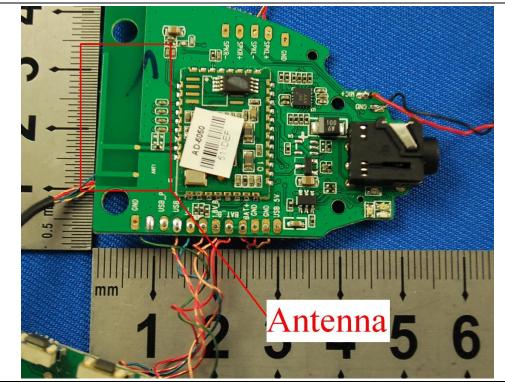




Report No.: SZEM130100050601 Page: 12 of 75

Test Deminstration		207		—
Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			_
Limit:	Frequency range (MHz)	Limit (c	lBuV)	
		Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		-
Test Procedure:	0.5-5 56 46		inear t he was he the 2.	

5.2 Conducted Emissions



Report No.: SZEM130100050601 Page: 13 of 75

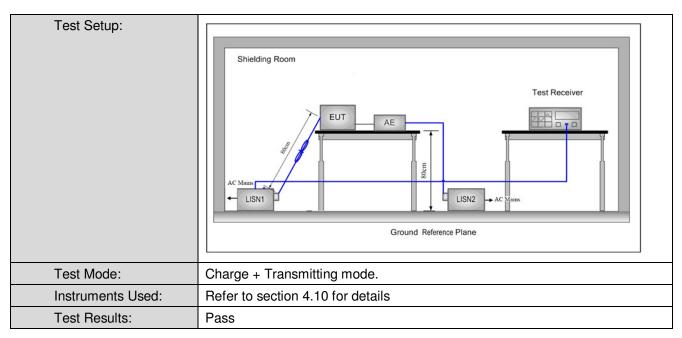


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.




Report No.: SZEM130100050601 Page: 14 of 75

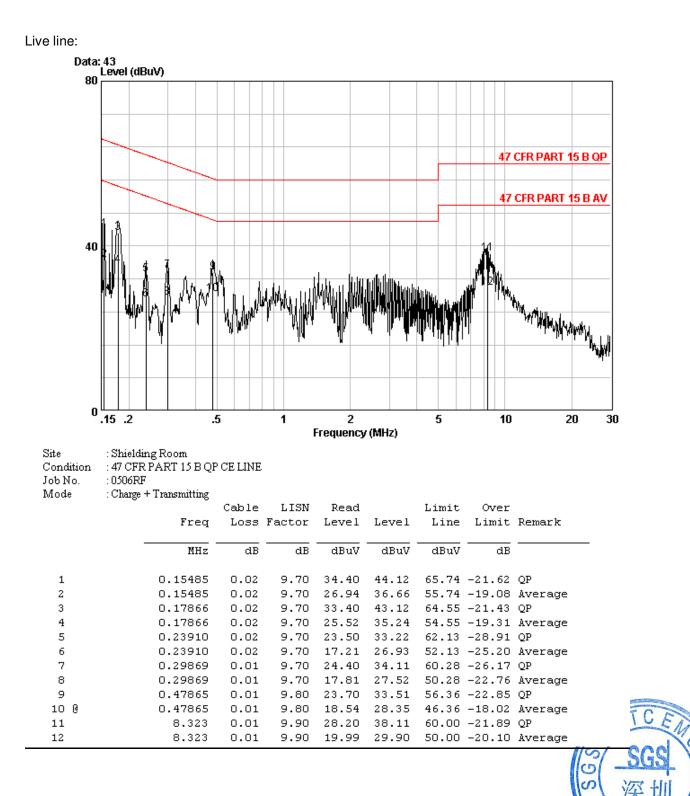



Report No.: SZEM130100050601 Page: 15 of 75

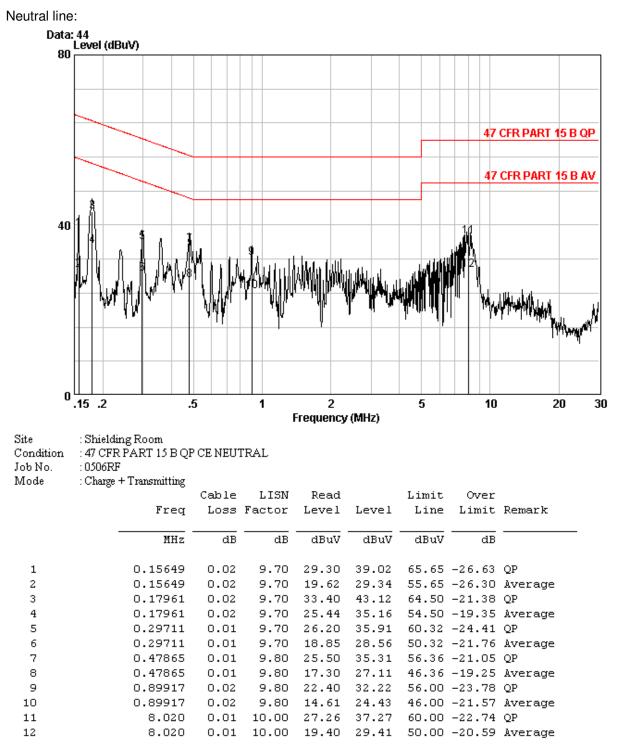

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM130100050601 Page: 16 of 75

5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer Image: Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	30dBm	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	




Report No.: SZEM130100050601 Page: 17 of 75

Measurement Data			
GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.07	30.00	Pass
Middle	3.87	30.00	Pass
Highest	3.58	30.00	Pass
	π/4DQPSK me	ode	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.09	30.00	Pass
Middle	1.30	30.00	Pass
Highest	0.60	30.00	Pass
	8DPSK mode		
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.30	30.00	Pass
Middle	1.85	30.00	Pass
Highest	1.30	30.00	Pass

Measurement Data




Report No.: SZEM130100050601 Page: 18 of 75

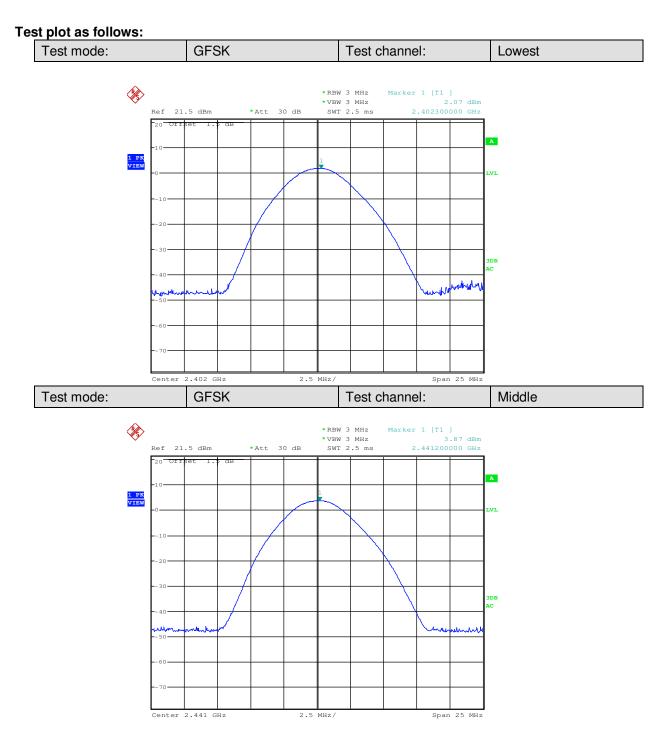




Report No.: SZEM130100050601 Page: 19 of 75

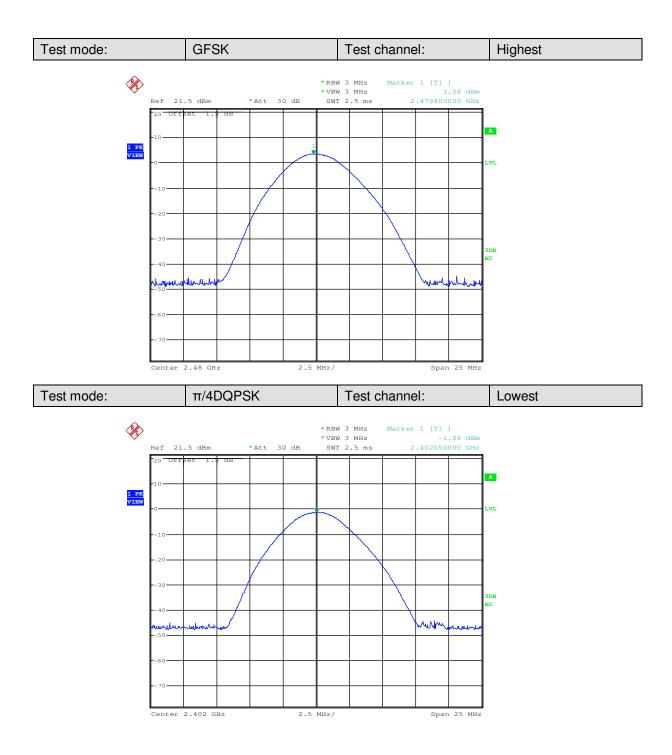




Report No.: SZEM130100050601 Page: 20 of 75

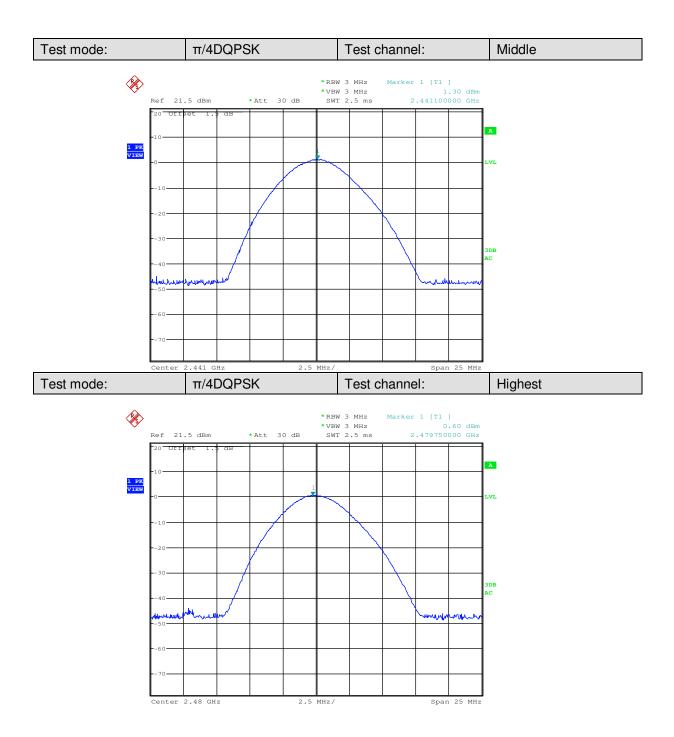




Report No.: SZEM130100050601 Page: 21 of 75

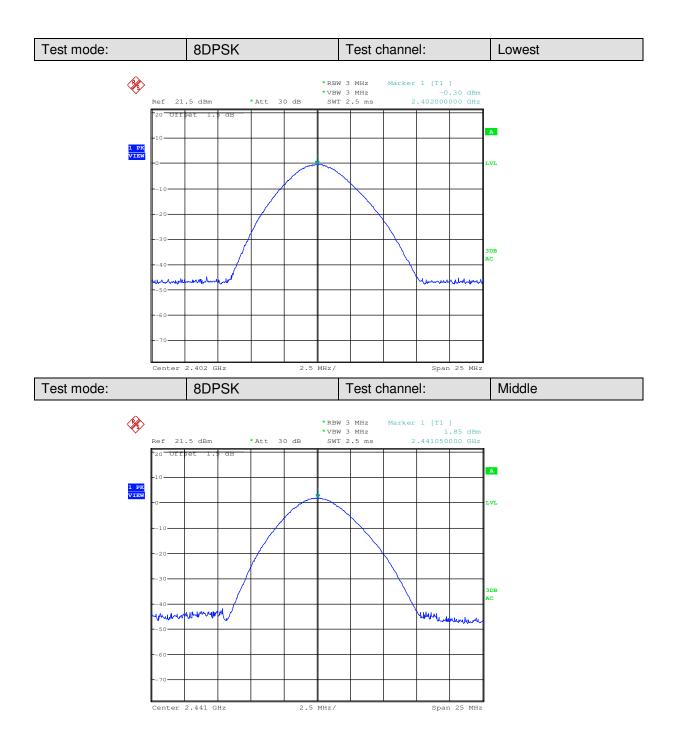



Report No.: SZEM130100050601 Page: 22 of 75

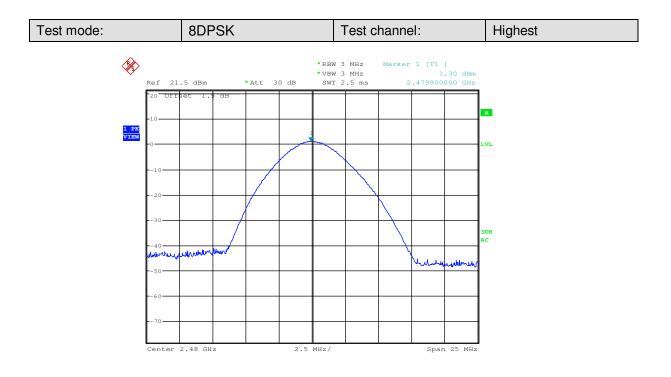



Report No.: SZEM130100050601 Page: 23 of 75

5.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	NA	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	

Measurement Data

Test shannel	20dB Occupy Bandwidth (kHz)		<u>z)</u>
Test channel	GFSK	π/4DQPSK	8DPSK
Lowest	840	1212	1212
Middle	840	1206	1212
Highest	876	1212	1212




Report No.: SZEM130100050601 Page: 24 of 75

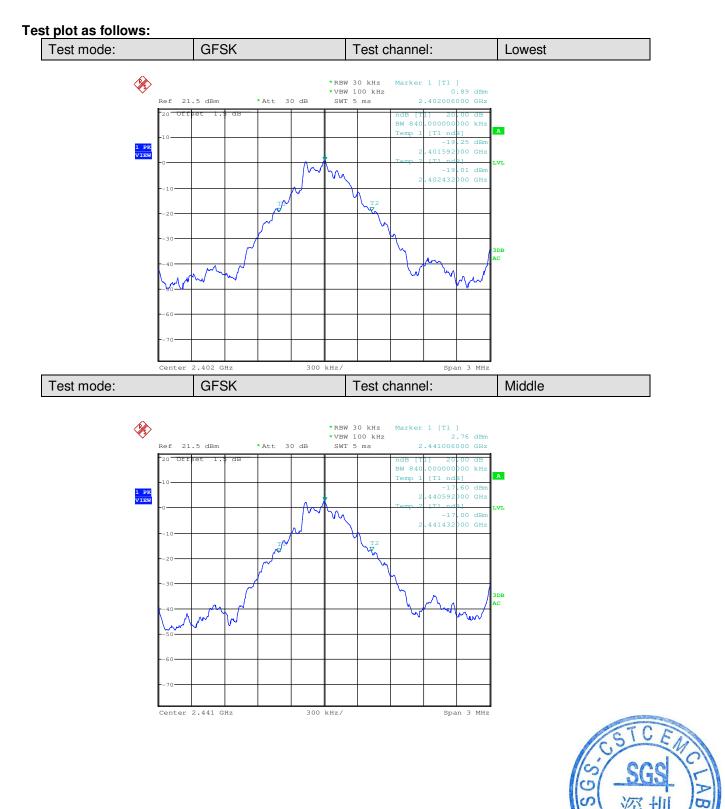




Report No.: SZEM130100050601 Page: 25 of 75

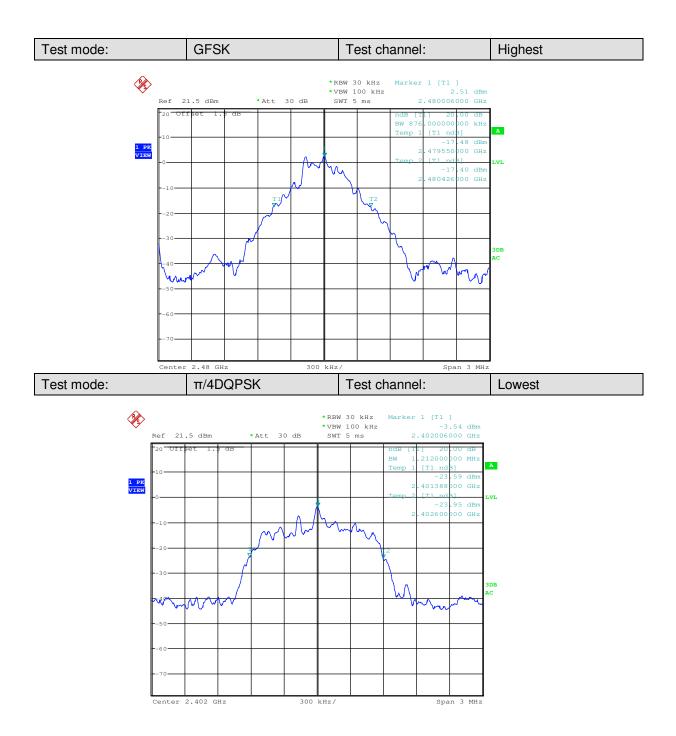




Report No.: SZEM130100050601 Page: 26 of 75

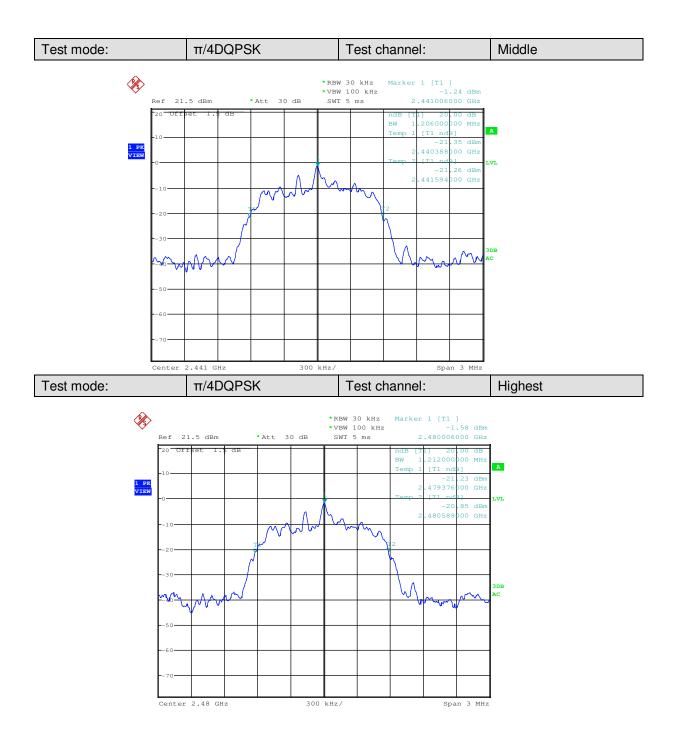

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130100050601 Page: 27 of 75

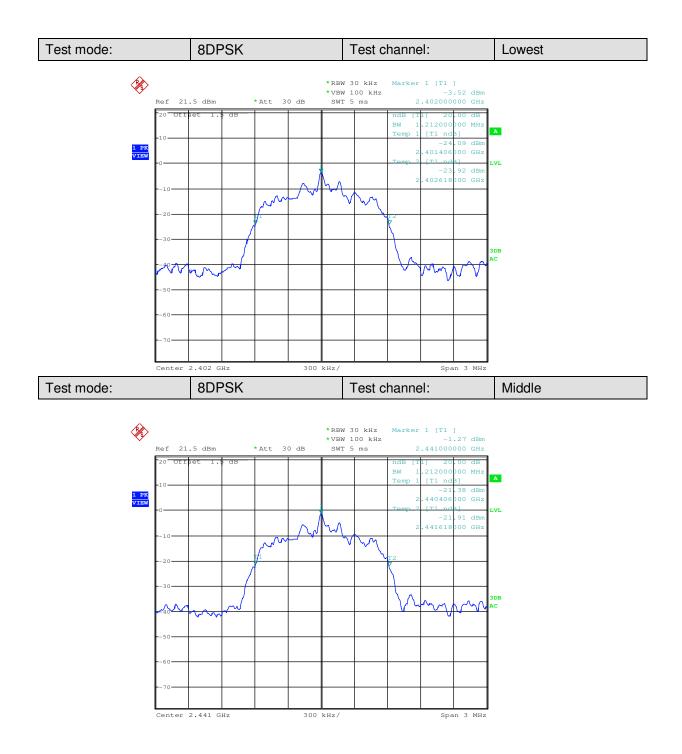



Report No.: SZEM130100050601 Page: 28 of 75

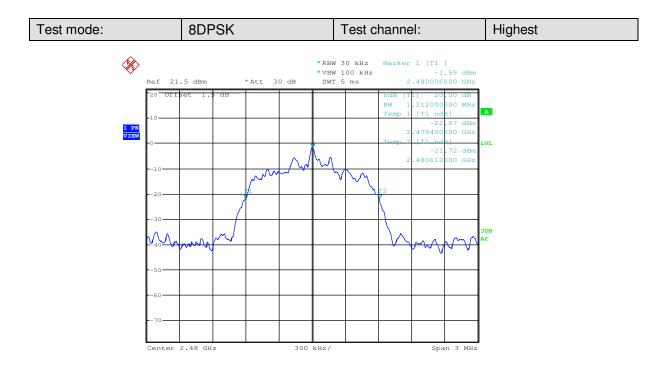



Report No.: SZEM130100050601 Page: 29 of 75

5.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	



Report No.: SZEM130100050601 Page: 30 of 75

Measurement Data


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1005	≥808	Pass
Middle	1005	≥808	Pass
Highest	1005	≥808	Pass
	π/4DQPSK m	ode	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1005	≥808	Pass
Middle	1000	≥808	Pass
Highest	1000	≥808	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥808	Pass
Middle	1005	≥808	Pass
Highest	1005	≥808	Pass

Note: According to section 5.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	876	584
π/4DQPSK	1212	808
8DPSK	1212	808




Report No.: SZEM130100050601 Page: 31 of 75

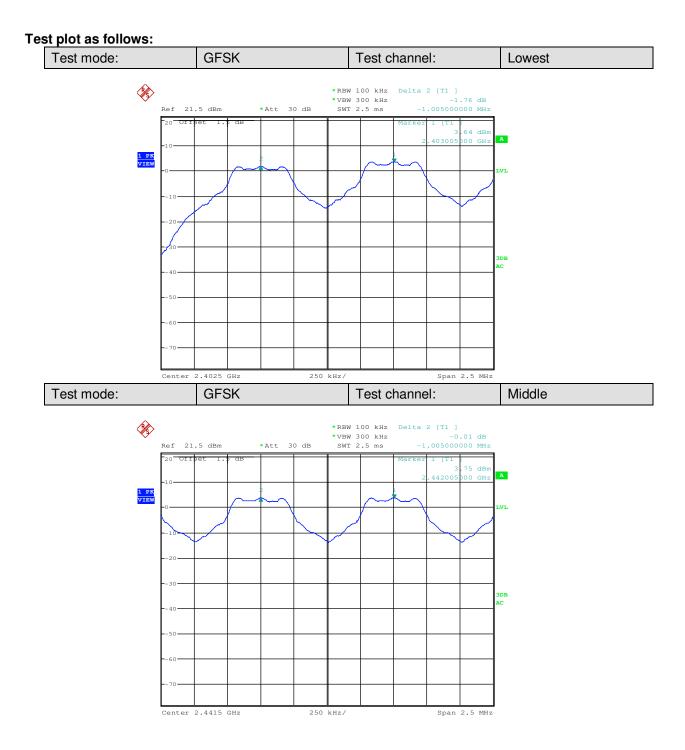




Report No.: SZEM130100050601 Page: 32 of 75

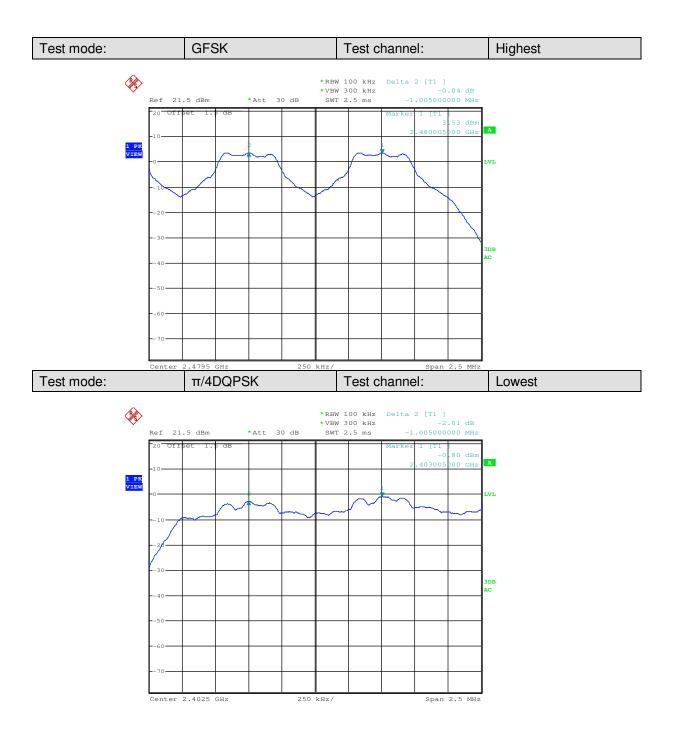

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130100050601 Page: 33 of 75

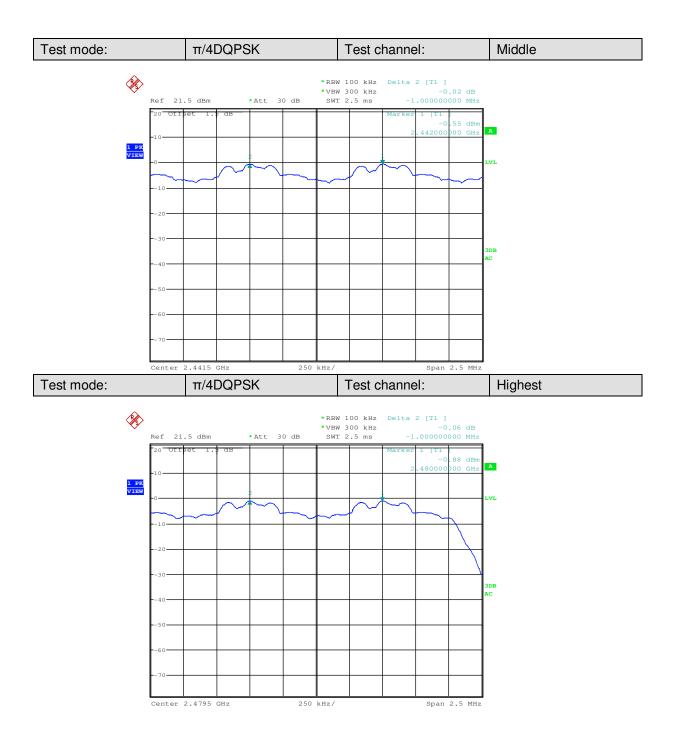

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130100050601 Page: 34 of 75

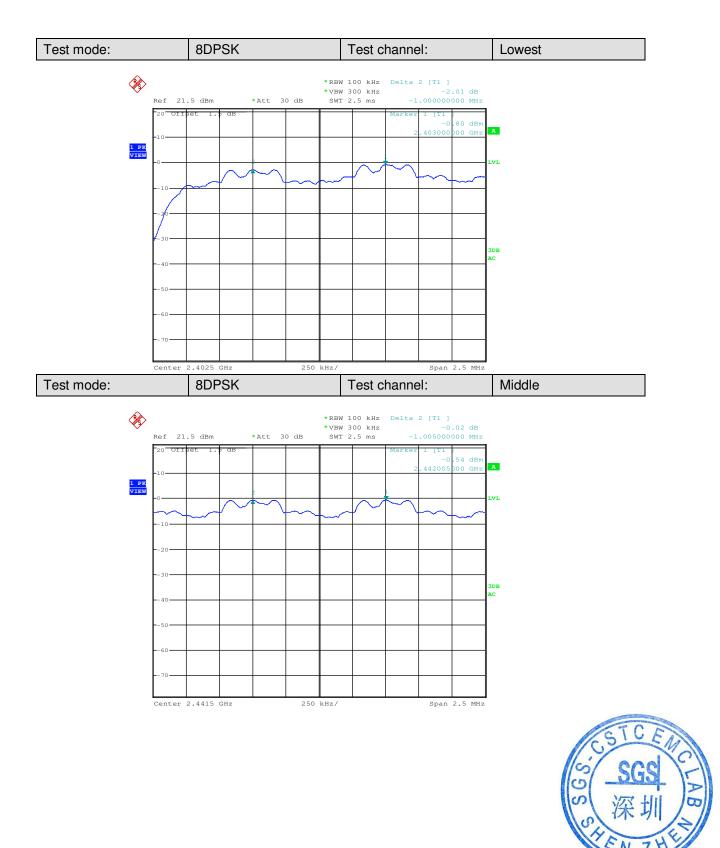



Report No.: SZEM130100050601 Page: 35 of 75

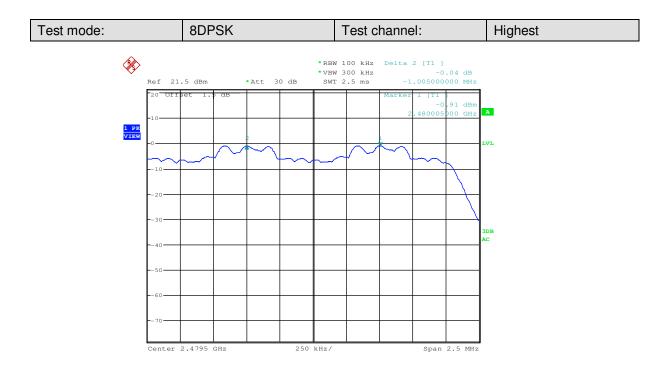



Report No.: SZEM130100050601 Page: 36 of 75

5.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	At least 75 channels	
Test Mode:	Hopping transmitting with all kind of modulation	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥75
π/4DQPSK	79	≥75
8DPSK	79	≥75

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130100050601 Page: 37 of 75

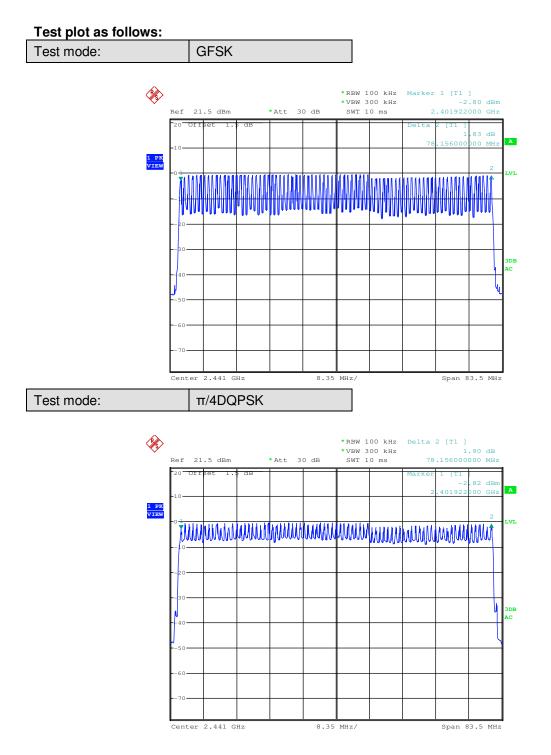



Report No.: SZEM130100050601 Page: 38 of 75

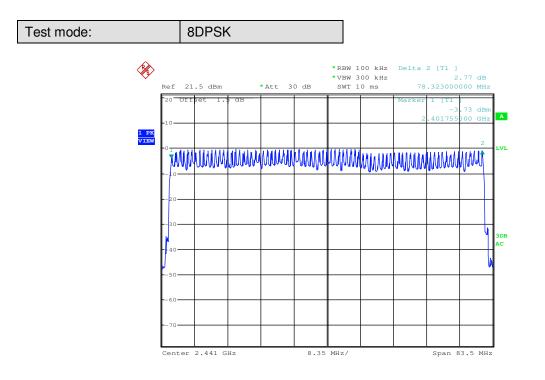



Report No.: SZEM130100050601 Page: 39 of 75

5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table				
	Ground Reference Plane				
Instruments Used:	Refer to section 4.10 for details				
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.				
Limit:	0.4 Second				
Test Results:	Pass				

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.1296	0.4
GFSK	DH3	0.2696	0.4
	DH5	0.3141	0.4
	2-DH1	0.1392	0.4
π/4DQPSK	2-DH3	0.2648	0.4
	2-DH5	0.1851	0.4
	3-DH1	0.1376	0.4
8DPSK	3-DH3	0.2688	0.4
	3-DH5	0.3136	0.4

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below


DH1 time slot=0.405(ms)*(1600/ (2*79))*31.6=129.6ms

DH3 time slot=1.685(ms)*(1600/ (4*79))*31.6=269.6ms

DH5 time slot=2.945(ms)*(1600/ (6*79))*31.6=314.1ms




Report No.: SZEM130100050601 Page: 40 of 75

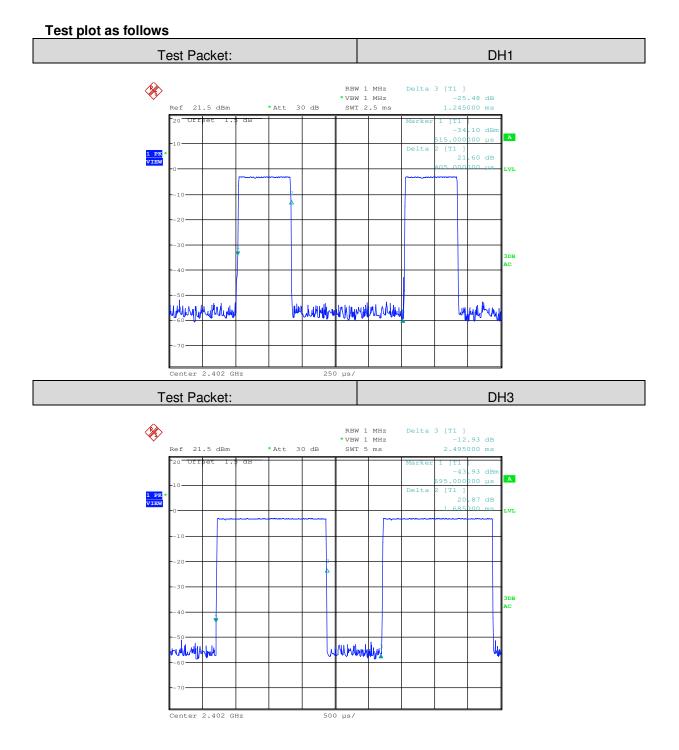




Report No.: SZEM130100050601 Page: 41 of 75

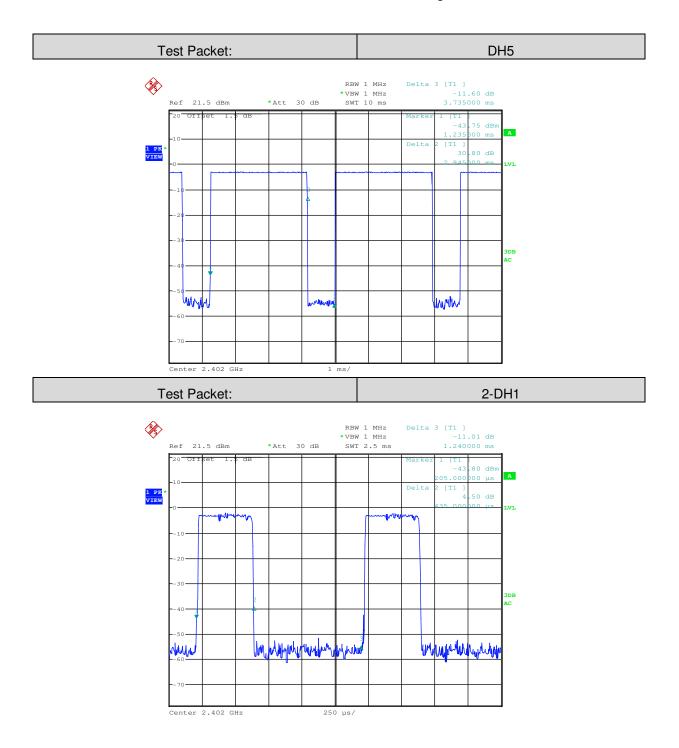




Report No.: SZEM130100050601 Page: 42 of 75

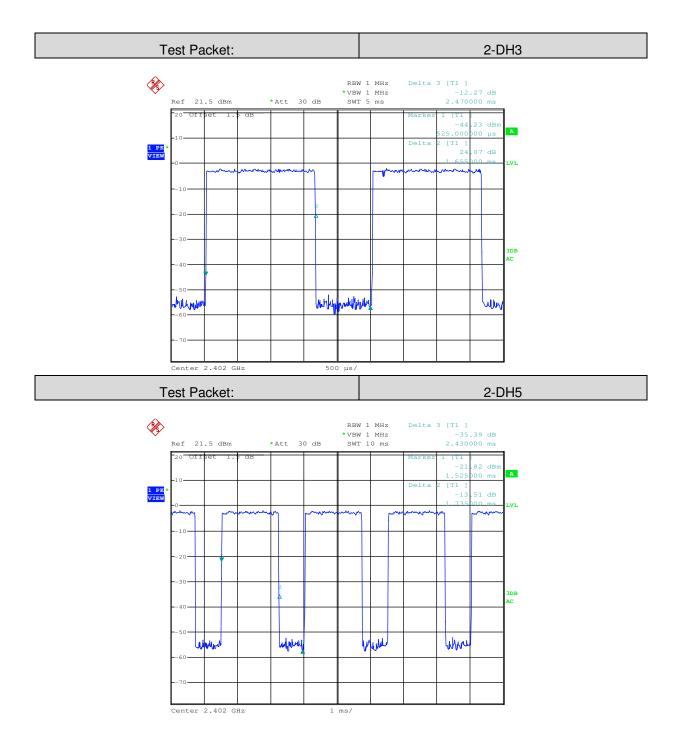




Report No.: SZEM130100050601 Page: 43 of 75

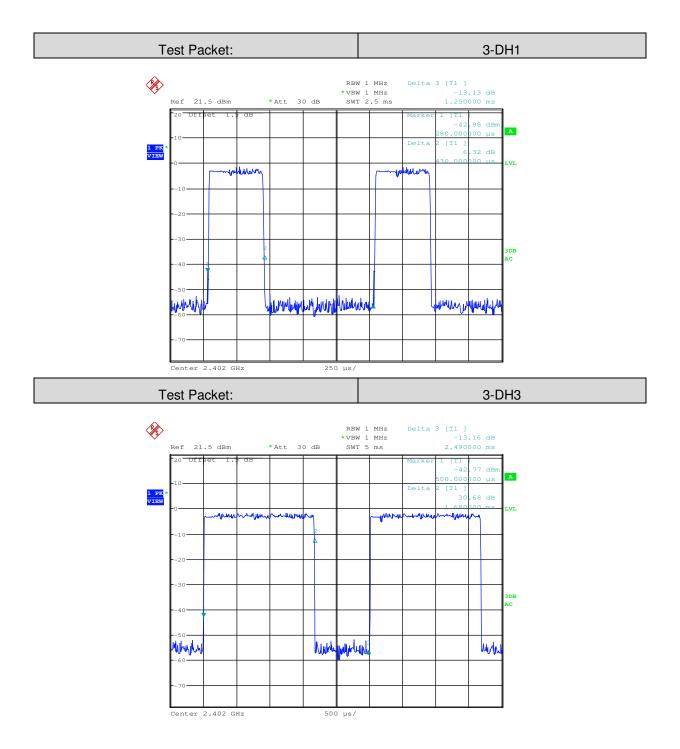



Report No.: SZEM130100050601 Page: 44 of 75

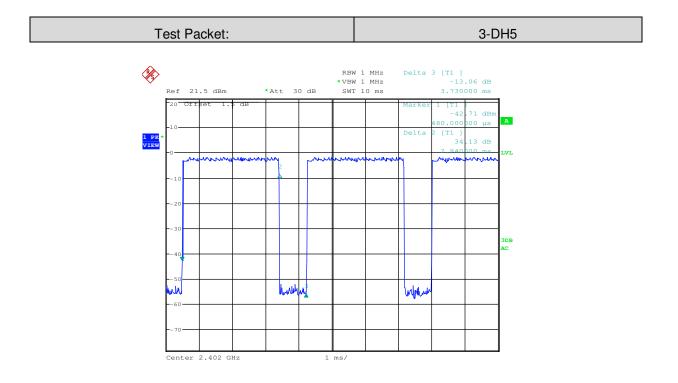





Report No.: SZEM130100050601 Page: 45 of 75


5.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type				
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type, 2-DH5 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH5 of data type is worse case of 8DPSK modulation type.				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130100050601 Page: 46 of 75

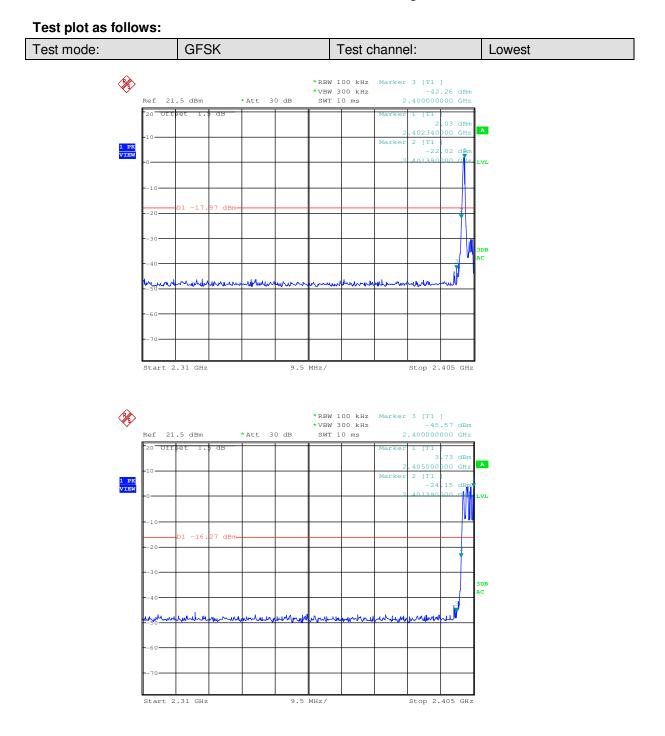




Report No.: SZEM130100050601 Page: 47 of 75

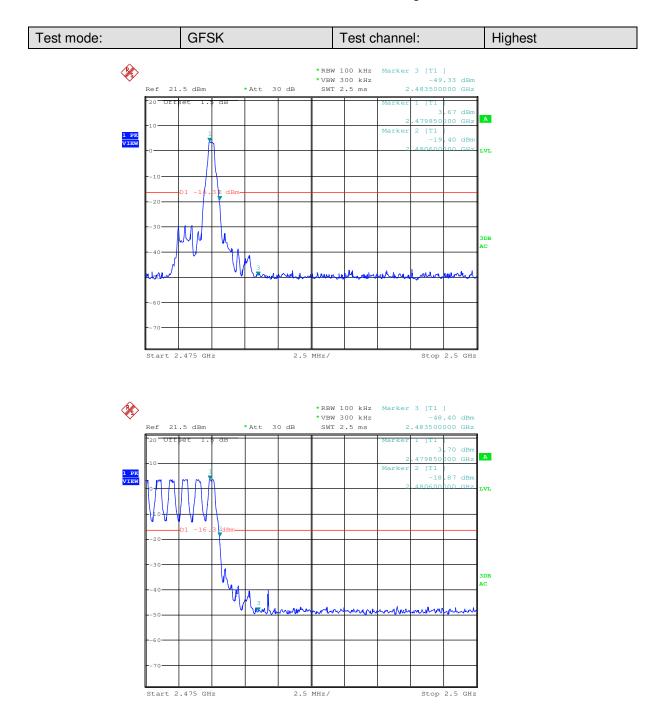




Report No.: SZEM130100050601 Page: 48 of 75

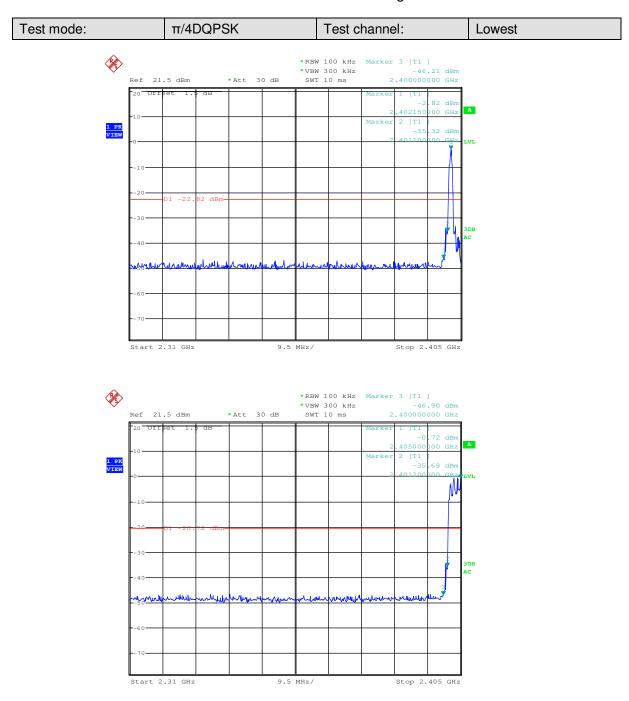

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130100050601 Page: 49 of 75

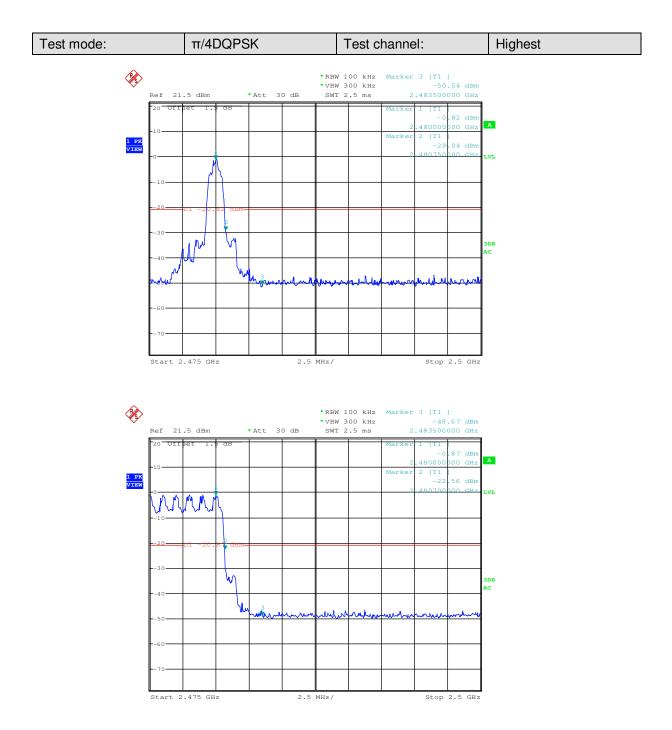




Report No.: SZEM130100050601 Page: 50 of 75

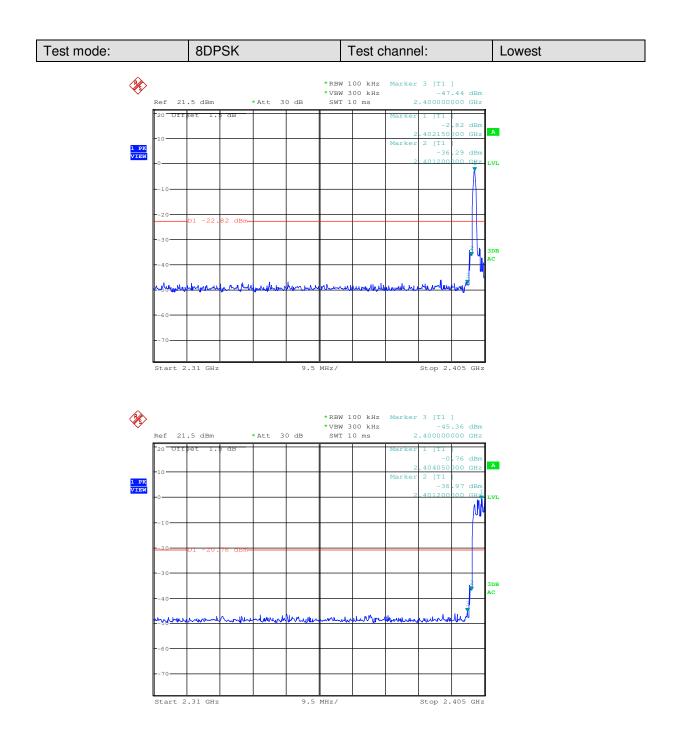



Report No.: SZEM130100050601 Page: 51 of 75

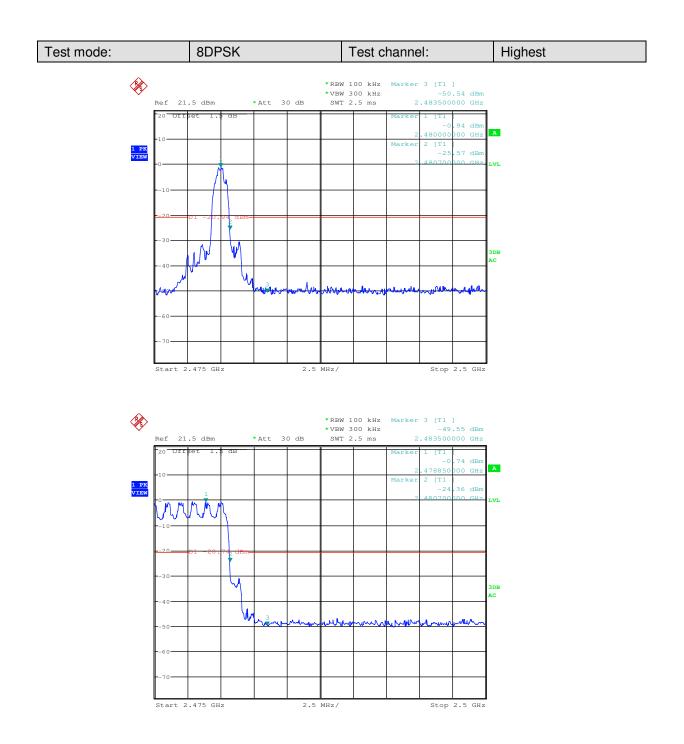



Report No.: SZEM130100050601 Page: 52 of 75


5.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:				
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type				
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type, 2-DH5 of data type is worse case of π /4DQPSK modulation type, 3-DH5 of data type is worse case of 8DPSK modulation type.				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130100050601 Page: 53 of 75

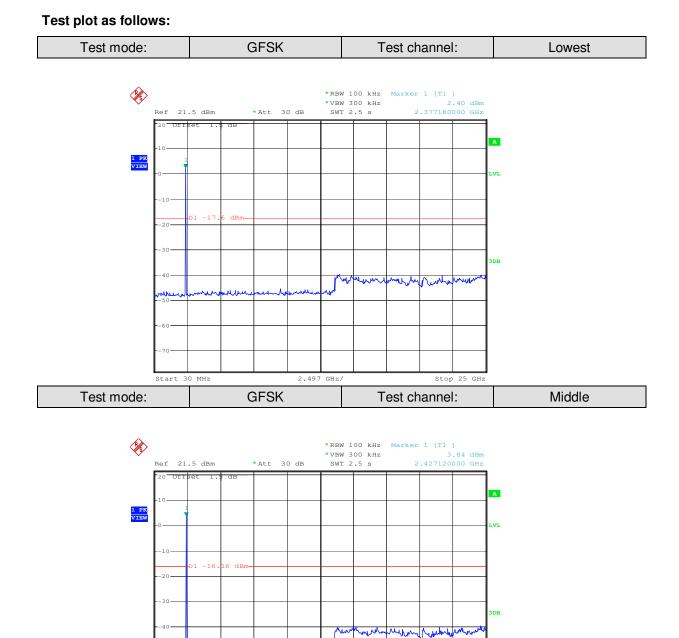

2.497 GHz/


Stop 25 GHz

Start 30 MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130100050601 Page: 54 of 75

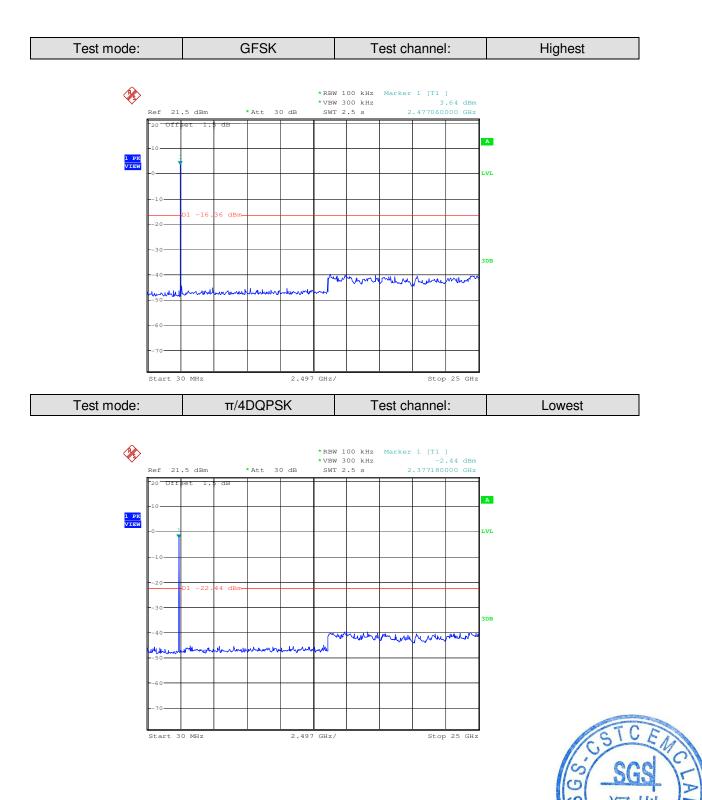




Report No.: SZEM130100050601 Page: 55 of 75

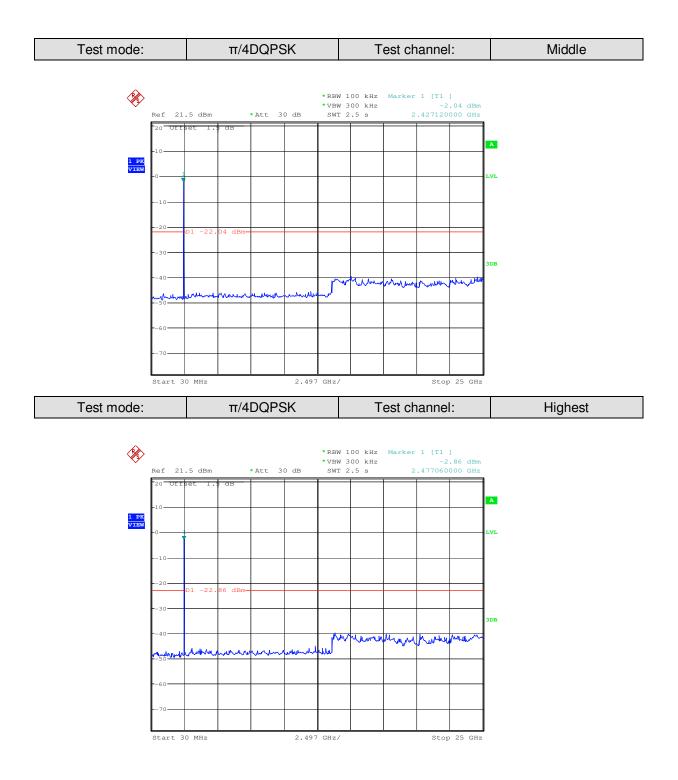




Report No.: SZEM130100050601 Page: 56 of 75

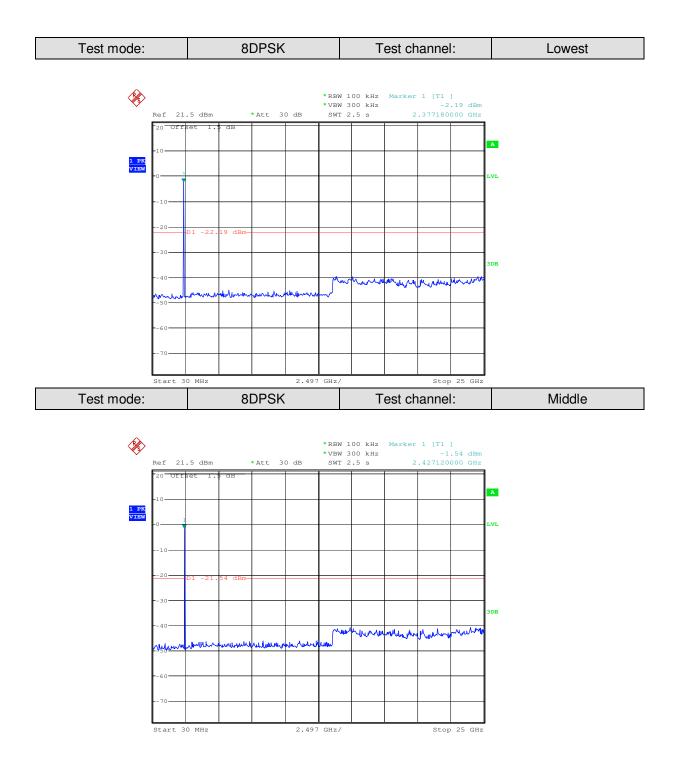



Report No.: SZEM130100050601 Page: 57 of 75

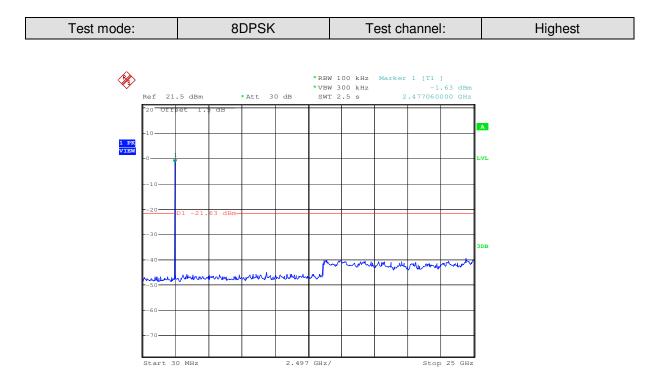



Report No.: SZEM130100050601 Page: 58 of 75

5.10Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping system	ns shall have hopping channel carrier frequencies separated by a minimum
of 25 kHz or the 20 dB ban	ndwidth of the hopping channel, whichever is greater.
Alternatively. Frequency ho	opping systems operating in the 2400-2483.5 MHz band may have hopping
	s that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the
	er is greater, provided the systems operate with an output power no greater
-	shall hop to channel frequencies that are selected at the system hopping
	ordered list of hopping frequencies. Each frequency must be used equally
	ansmitter. The system receivers shall have input bandwidths that match the
	hs of their corresponding transmitters and shall shift frequencies in
synchronization with the tra	
EUT Pseudorandom Freq	quency Hopping Sequence
The pseudorandom sequer	nce may be generated in a nine-stage shift register whose 5th and 9th stage
outputs are added in a mod	dulo-two addition stage. And the result is fed back to the input of the first
stage. The sequence begin	ns with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialize
with nine ones.	
Number of shift register st	tages: 9
· Length of pseudo-random	n sequence: 29 -1 = 511 bits
 Longest sequence of zero 	os: 8 (non-inverted signal)
	<u>}</u> <u>}</u>
	×
	(+)
Linear Feedback	Shift Register for Generation of the PRBS sequence
An example of Pseudorand	dom Frequency Hopping Sequence as follow:
0 2 4 6	62 64 <u>78 1</u> <u>73 75 77</u>
	Illy on the average by each transmitter.
	e input bandwidths that match the hopping channel bandwidths of their
Corresponding transmitters	s and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM130100050601 Page: 59 of 75


5.11 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency Detector RBW VBW Rema								
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak			
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average			
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak			
	0.110MHz-0.490MH	z	Average	10kHz	z 30kHz	Average			
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	z 3MHz	Peak			
	Above ronz		Peak	1MHz	z 10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m			
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30			
	1.705MHz-30MHz		30	-	-	30			
	30MHz-88MHz		100	40.0	Quasi-peak	3			
	88MHz-216MHz		150	43.5	Quasi-peak	3			
	216MHz-960MHz		200	46.0	Quasi-peak	3			
	960MHz-1GHz		500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3				
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130100050601 Page: 60 of 75

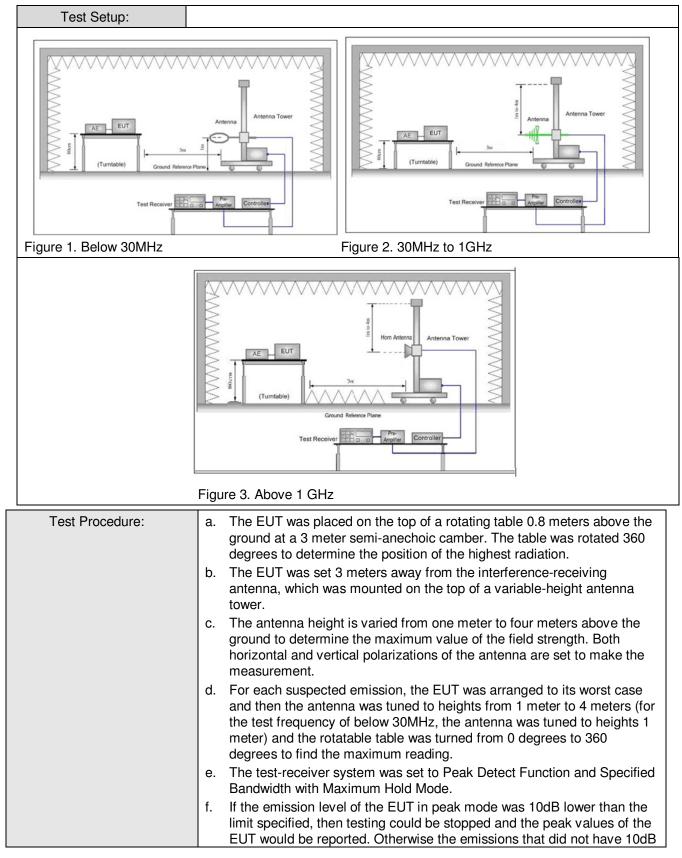



Report No.: SZEM130100050601 Page: 61 of 75


	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
	h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting , Charge + Transmitting mode.
Final Test Mode:	Charge + Transmitting mode.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM130100050601 Page: 62 of 75

5.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)				
Test mode:	Transmitting	Vertical		

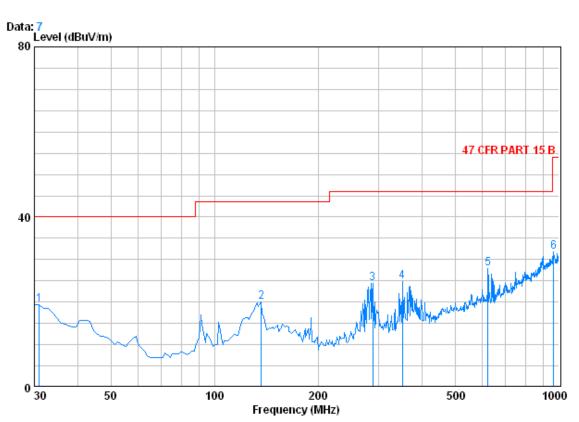

Condition : 47 CFR PART 15 B 3m 3142C NEW HORIZONTAL


Mode : Charge + Transmitting

	8-	Freq		Antenna Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		30.970	0.60	17.15	27.35	28.90	19.30	40.00	-20.70
2		136.700	1.29	8.42	26.97	37.26	20.00	43.50	-23.50
3		288.020	1.85	9.28	26.43	39.79	24.48	46.00	-21.52
4		351.070	2.06	10.66	26.81	39.01	24.93	46.00	-21.07
5		622.670	2.75	15.48	27.51	37.23	27.94	46.00	-18.06
6		964.110	3.67	21.13	26.47	33.43	31.76	54.00	-22.24

Job No. : 0506RF



Report No.: SZEM130100050601 Page: 63 of 75

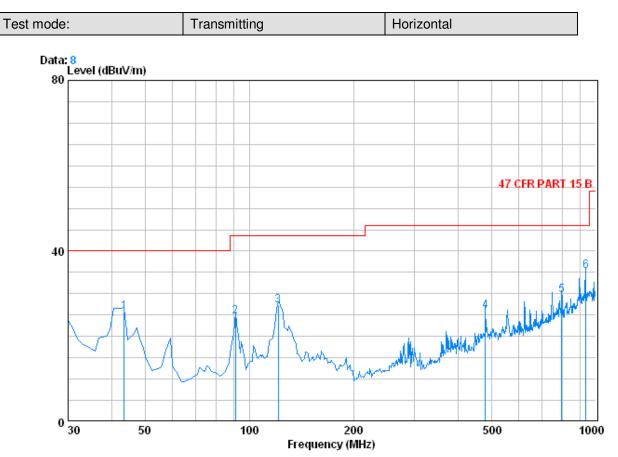

Condition	: 47 CFR PART 15 B 3m 3142C NEW VERTICAL
Job No	- 0.506PF

Job No. : 0506RF Mode : Charge + Transmitting

		Freq			Preamp Factor	Read Level	Level	Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	-	43.580	0.68	10.37	27.31	41.98	25.71	40.00	-14.29
2		91.110	1.11	5.91	27.21	44.86	24.68	43.50	-18.82
3	0	121.180	1.26	7.75	27.06	45.26	27.20	43.50	-16.30
4		479.110	2.52	13.40	27.60	37.65	25.98	46.00	-20.02
5	0	797.270	3.19	18.63	27.30	35.23	29.75	46.00	-16.25
6	0	935.980	3.64	20.63	26.61	37.56	35.22	46.00	-10.78




Report No.: SZEM130100050601 Page: 64 of 75

Worse case	mode:	GFSK(DH1)	(DH1) Test channel:		st channel: Lowest R		ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4797.271	7.44	34.73	41.63	52.97	53.51	74	-20.49	Vertical
6544.350	8.16	36.27	40.45	47.73	51.71	74	-22.29	Vertical
7781.104	9.26	36.00	39.38	47.42	53.30	74	-20.70	Vertical
8725.477	9.55	36.37	38.55	45.81	53.18	74	-20.82	Vertical
9611.663	9.68	37.32	37.80	43.53	52.73	74	-21.27	Vertical
11692.920	11.07	38.59	38.15	40.82	52.33	74	-21.67	Vertical
3672.110	6.00	33.41	40.80	48.36	46.97	74	-27.03	Horizontal
4797.271	7.44	34.73	41.63	52.48	53.02	74	-20.98	Horizontal
6156.505	8.03	35.88	40.79	49.78	52.90	74	-21.10	Horizontal
7721.909	9.25	36.00	39.43	47.91	53.73	74	-20.27	Horizontal
8814.774	9.57	36.45	38.49	45.26	52.79	74	-21.21	Horizontal
11457.210	10.90	38.41	38.05	42.14	53.40	74	-20.60	Horizontal

5.11.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1) Τε	st channel:	Middle	Middle Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
4883.519	7.48	34.59	41.68	52.41	52.80	74	-21.20	Vertical	
5747.586	7.86	35.29	41.14	47.54	49.55	74	-24.45	Vertical	
6494.564	8.15	36.28	40.50	48.12	52.05	74	-21.95	Vertical	
7643.683	9.23	36.00	39.49	47.14	52.88	74	-21.12	Vertical	
8973.250	9.62	36.57	38.34	44.24	52.09	74	-21.91	Vertical	
11963.890	11.26	38.87	38.26	41.70	53.57	74	-20.43	Vertical	
4883.519	7.48	34.59	41.68	52.56	52.95	74	-21.05	Horizontal	
5925.863	7.94	35.59	40.99	49.51	52.05	74	-21.95	Horizontal	
6561.030	8.17	36.25	40.43	48.08	52.07	74	-21.93	Horizontal	
7489.599	9.08	36.00	39.62	47.98	53.44	74	-20.56	Horizontal	
8615.126	9.51	36.29	38.65	46.65	53.80	74	-20.20	Horizontal	
11603.960	11.00	38.50	38.11	41.30	52.69	74	-21.31	Horizontal	





Report No.: SZEM130100050601 Page: 65 of 75

Worse case	mode:	GFSK(DH1) Tes	t channel:	Highest	est Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit L (dBuV/		Over Limit (dB)	Polarization
3728.625	6.08	33.49	40.84	48.16	46.89	74		-27.11	Vertical
4971.316	7.53	34.43	41.75	52.75	52.96	74		-21.04	Vertical
7547.013	9.14	36.00	39.57	46.62	52.19	74		-21.81	Vertical
8615.126	9.51	36.29	38.65	44.94	52.09	74		-21.91	Vertical
9465.979	9.66	37.16	37.91	44.04	52.95	74		-21.05	Vertical
12334.980	11.42	39.24	38.42	41.12	53.36	74		-20.64	Vertical
3634.910	5.95	33.37	40.77	48.88	47.43	74		-26.57	Horizontal
4971.316	7.53	34.43	41.75	51.11	51.32	74		-22.68	Horizontal
6363.645	8.10	36.14	40.61	48.27	51.90	74		-22.10	Horizontal
7566.249	9.17	36.00	39.56	47.85	53.46	74		-20.54	Horizontal
9065.084	9.63	36.66	38.27	44.55	52.57	74		-21.43	Horizontal
11963.890	11.26	38.87	38.26	41.02	52.89	74		-21.11	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130100050601 Page: 66 of 75

5.12Band edge (Radiated Emission)

Test Requirement: 47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
		74.0	Peak Value					
Test Setup:								
Test Setup:								
Figure 1. 30MHz to 1GHz Figure 2. Above 1 GHz								



Report No.: SZEM130100050601 Page: 67 of 75

Test Procedure:a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelg. Test the EUT in the Iowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.exploratory Test Mode:Non-hopping transmitting mode with all kind of modulation and all kind of data typefinal Test Mode:Refer to section 4.10 for detailsTest Results:Pass		
Exploratory Test Mode:Non-hopping transmitting mode with all kind of modulation and all kind of data typeFinal Test Mode:Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation typeInstruments Used:Refer to section 4.10 for details	Test Procedure:	 the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. i. Repeat above procedures until all frequencies measured was
GFSK modulation type Instruments Used: Refer to section 4.10 for details	Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
Instruments Used: Refer to section 4.10 for details	Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of
		GFSK modulation type
Test Results: Pass	Instruments Used:	Refer to section 4.10 for details
	Test Results:	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



1

2 X


2390.000

2402.245

2.98

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM130100050601 Page: 68 of 75

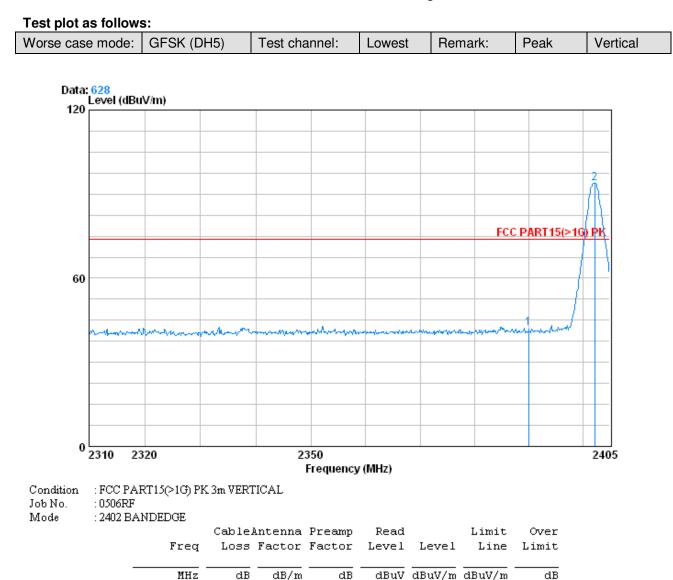

32.51 39.85 46.57


2.98 32.51 39.86 98.31 93.94 74.00 19.94

42.21 74.00 -31.79



Report No.: SZEM130100050601 Page: 69 of 75

Worse case mode: GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
-----------------------------	---------------	--------	---------	------	------------

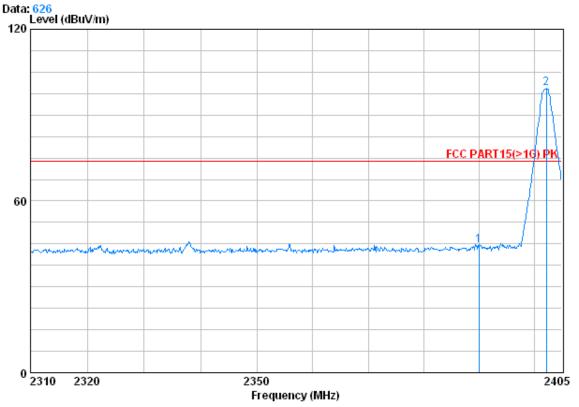

Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job No. : 0506RF


Mode : 2402 BANDEDGE

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2402.245			39.85 39.86				



Report No.: SZEM130100050601 Page: 70 of 75

Worse case mode: GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical	
-----------------------------	---------------	--------	---------	---------	----------	--

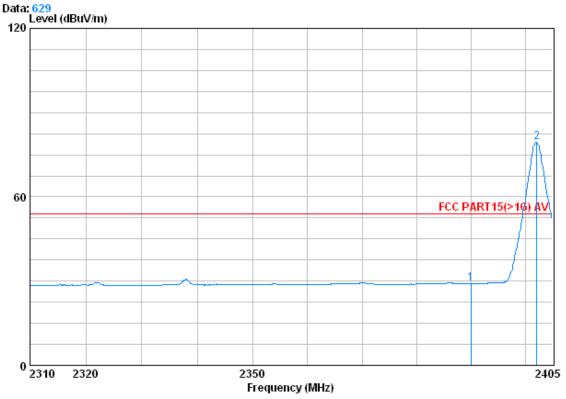

Condition : FCC PART15(>1G) AV 3m VERTICAL : 0506RF Job No.


Mode	: 2402 BANDEDGE	
		Cable.

		CableA	Intenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	33.45	29.10	54.00	-24.90
2 X	2402.150	2.98	32.51	39.86	83.90	79.54	54.00	25.54



Report No.: SZEM130100050601 Page: 71 of 75

Worse case mode: GFSK (D	5) Test channel:	Lowest I	Remark:	Average	Horizontal	
--------------------------	------------------	----------	---------	---------	------------	--

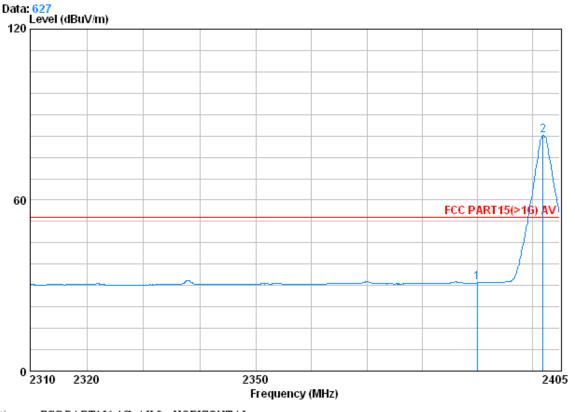


Condition : FCC PART15(>1G) AV 3m HORIZONTAL Job No. :0506RF DEDGE

	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 20	2390.000 2401.960			39.85 39.86				



Report No.: SZEM130100050601 Page: 72 of 75

Worse case mode: GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
-----------------------------	---------------	---------	---------	------	----------

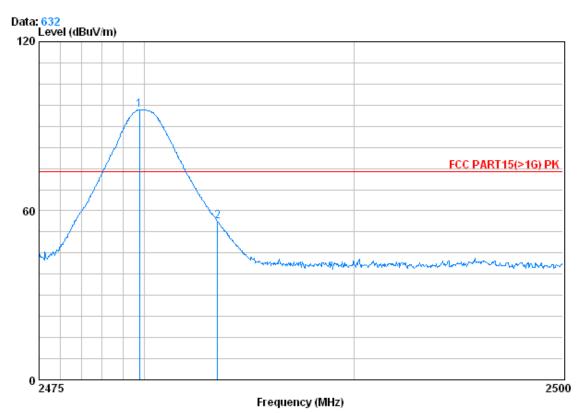


Condition : FCC PART15(>1G) PK 3m VERTICAL Job No. : 0506RF

	Freq			Preamp Factor	Read Level		Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2479.775 2483.500				100.09 60.32			



Report No.: SZEM130100050601 Page: 73 of 75

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	------------	---------------	---------	---------	------	------------

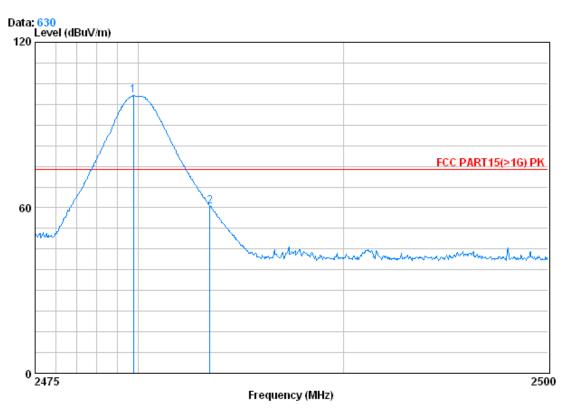

Condition : FCC PART15(>1G) PK 3m HORIZONTAL


Job No. : 0506RF Mode : 2480 BANDEDGE

loue		. 2460 BANDEDGE			Preamp Factor			Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	х	2479.775 2483.500			39.92 39.92				



Report No.: SZEM130100050601 Page: 74 of 75

Worse case mode: GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical	
-----------------------------	---------------	---------	---------	---------	----------	--

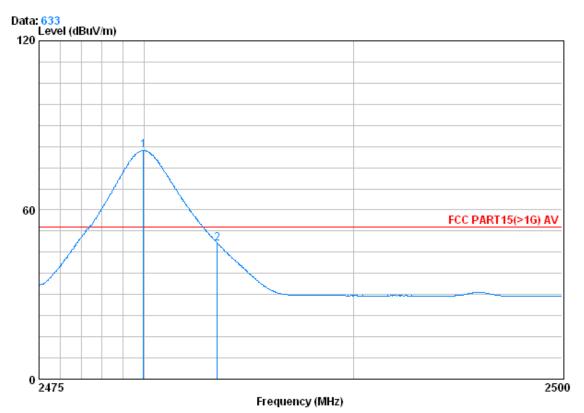

Condition : FCC PART15(>1G) AV 3m VERTICAL Job No. :0506RF GE


	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2479.975 2483.500			39.92 39.92				





Report No.: SZEM130100050601 Page: 75 of 75

Worse case mode: GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
-----------------------------	---------------	---------	---------	---------	------------

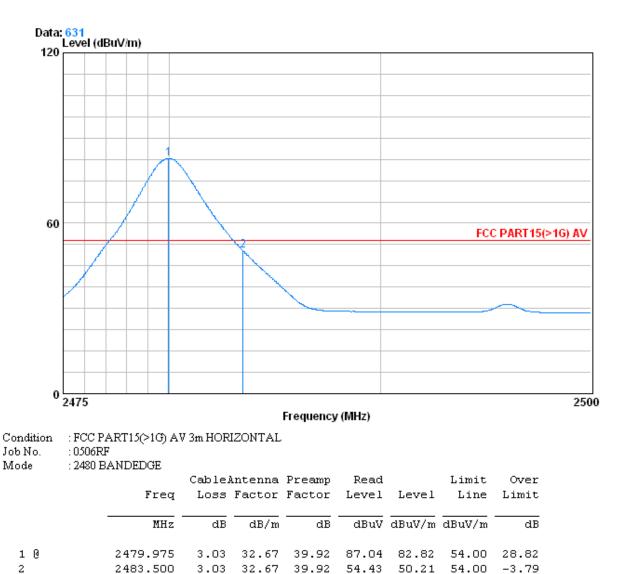

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor