

SAR Compliance Test Report

Test report no.:	Cph_SAR_0819_04	Date of report:	2008-05-09
Template version:	9.0	Number of pages:	64
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
Responsible test engineer:	Jose Gomez	Product contact person:	Ernest Mayer
Measurements made by:	Leif Klysner & Jesper Nielsen		
Tested device:	RM-365		
FCC ID:	QTKRM-365	IC:	661AD-RM365
Supplement reports:	Cph_SAR_0819_05; Cph_SAR_0807_17 for RM-364 / FCC ID: QTKRM-364 / IC ID: 661AD-RM364		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures:



For the contents:

Jose Gomez
Certification Test Engineer

2008-05-09

CONTENTS

1. SUMMARY OF SAR TEST REPORT	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 Head Configuration.....	3
1.2.2 Body Worn Configuration	3
1.2.3 Maximum Drift	4
1.2.4 Measurement Uncertainty.....	4
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	4
2.1 DESCRIPTION OF THE ANTENNA.....	4
3. TEST CONDITIONS	5
3.1 TEMPERATURE AND HUMIDITY.....	5
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....	5
4. DESCRIPTION OF THE TEST EQUIPMENT	6
4.1 MEASUREMENT SYSTEM AND COMPONENTS	6
4.1.1 Isotropic E-field Probe Type ES3DV3	7
4.2 PHANTOMS	7
4.3 TISSUE SIMULANTS.....	8
4.3.1 Tissue Simulant Recipes.....	8
4.3.2 System Checking	9
4.3.3 Tissue Simulants used in the Measurements.....	10
5. DESCRIPTION OF THE TEST PROCEDURE	11
5.1 DEVICE HOLDER.....	11
5.2 TEST POSITIONS.....	11
5.2.1 Against Phantom Head.....	11
5.2.2 Body Worn Configuration	12
5.3 SCAN PROCEDURES.....	12
5.4 SAR AVERAGING METHODS.....	12
6. MEASUREMENT UNCERTAINTY	13
7. RESULTS.....	14
APPENDIX A: SYSTEM CHECKING SCANS.....	17
APPENDIX B: MEASUREMENT SCANS.....	22
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	49
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S).....	58

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2008-02-07 to 2008-02-14
SN, HW and SW numbers of tested device	SN: 004401/01/700402/5, HW: 0300, SW: Vp at07w15_08w03, DUT: 27633
Batteries used in testing	BL-4U, DUT: 25408, 25410, 25411, 25412
Headsets used in testing	HS-47, DUT: 27618
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration**

Mode	Ch / f (MHz)	Radiated power	Position	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
GSM 850	190 / 836.6	29.4 dBm ERP	Left, Cheek	0.712 W/kg	0.80 W/kg	1.6 W/kg	PASSED
GSM 1900	810 / 1909.8	31.9 dBm EIRP	Left, Tilt	0.693 W/kg	0.78 W/kg	1.6 W/kg	PASSED

1.2.2 Body Worn Configuration**

Mode	Ch / f (MHz)	Radiated power	Separation distance	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
GSM 850	128 / 824.2	29.4 dBm ERP	1.5 cm	0.853 W/kg	0.96 W/kg	1.6 W/kg	PASSED
GSM 1900	661 / 1880.0	30.9 dBm EIRP	1.5 cm	0.458 W/kg	0.51 W/kg	1.6 W/kg	PASSED

*SAR values are scaled up by 12% to cover measurement drift.

**SAR values taken from Cph_SAR_0807_17 for RM-364 / FCC ID: QTKRM-364 / IC ID: 661AD-RM364.

1.2.3 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	0.23 dB

1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 25.8%
--------------------------------	---------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)
GSM	850 1900	GMSK	1/8	824 – 849 1850 – 1910
GPRS	850 1900	GMSK	1/8 to 3/8	824 – 849 1850 – 1910
EGPRS	850 1900	GMSK / 8PSK	1/8 to 3/8	824 – 849 1850 – 1910
BT	2450	GFSK	1	2402 – 2480

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900, GSM/GPRS/EGPRS1800, WCDMA900 and WCDMA2100 bands which are not part of this filing.

This device has Push to Talk/Dual Transfer Mode capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom.

2.1 Description of the Antenna

The device has an internal antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	21.7 to 21.9
Ambient humidity (RH %):	35 to 55

3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing.

The SAR results, SAR plots and test details given in this report are duplicated from the earlier test report Cph_SAR_0807_17 for RM-364 / FCC ID: QTKRM-364 / IC ID: 661AD-RM364. The difference between RM-364 and RM-365 is that RM-365 has had WCDMA850 components replaced by WCDMA900 components.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE3	339	12 months	2008-06
DAE3	501	12 months	2008-02
DAE4	682	12 months	2008-08
DAE4	710	12 months	2008-10
E-field Probe ES3DV3	3116	12 months	2008-08
E-field Probe ES3DV3	3117	12 months	2008-08
E-field Probe ES3DV3	3118	12 months	2008-10
E-field Probe ES3DV3	3119	12 months	2008-10
Dipole Validation Kit, D835V2	4d042	24 months	2008-09
Dipole Validation Kit, D1900V2	5d026	24 months	2008-02
DASY4 software	Version 4.7	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SME06	848650/011	36 months	2008-07
Amplifier	2100-BBS3Q8CCJ	1003	-	-
Power Meter	NRP	100808	24 months	2008-03
Power Sensor	NRP-Z51	100412	24 months	2008-03
Call Tester	CMU200	105900	-	-
BT Tester	CBT	100263	-	-
Vector Network Analyzer	AT8753ES	MY40001091	12 months	2008-08
Dielectric Probe Kit	HP85070B	US33020403	-	-

4.1.1 Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	39.74	55.97
HEC	0.25	1.21
Sugar	58.31	41.76
Preservative	0.15	0.27
Salt	1.55	0.79

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.33	42.2	0.90	
	$\pm 10\%$ window	2.10 - 2.56			
	2008-02-13	2.48	41.9	0.91	21.9
1900	Reference result	9.83	39.4	1.42	
	$\pm 10\%$ window	8.85 - 10.81			
	2008-02-07	10.4	39.0	1.41	21.7

System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.45	53.8	0.98	
	$\pm 10\%$ window	2.20 - 2.70			
	2008-02-14	2.46	54.0	0.97	21.8
1900	Reference result	10.0	54.8	1.54	
	$\pm 10\%$ window	9.0 - 11.0			
	2008-02-07	10.9	52.4	1.51	21.9

Plots of the system checking scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836	Recommended value	41.5	0.90	
	± 5% window	39.4 – 43.6	0.86 – 0.95	
	2008-02-13	42.0	0.91	21.9
1880	Recommended value	40.0	1.40	
	± 5% window	38.0 – 42.0	1.33 – 1.47	
	2008-02-07	39.0	1.39	21.7

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836	Recommended value	55.2	0.97	
	± 5% window	52.4 – 58.0	0.92 – 1.02	
	2008-02-14	54.0	0.97	21.8
1880	Recommended value	53.3	1.52	
	± 5% window	50.6 – 56.0	1.44 – 1.60	
	2008-02-07	52.4	1.49	21.9

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in Section 1.2.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	c_i	$c_i \cdot u_i$ (%)	ν_i
Measurement System							
Probe Calibration	E2.1	±5.9	N	1	1	±5.9	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±1.0	R	√3	1	±0.6	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±0.0	R	√3	1	±0.0	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±12.9	116
Coverage Factor for 95%			k=2				
Expanded Uncertainty						±25.8	

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

850MHz Head SAR results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
GSM	Power		29.4 dBm	29.4 dBm	28.6 dBm
	Left	Cheek	0.575	0.712	0.643
		Tilt	-	0.475	-
	Right	Cheek	-	0.624	-
		Tilt	-	0.410	-
2-slot GPRS	Power		26.4 dBm	27.2 dBm	26.2 dBm
	Left	Cheek	-	0.711	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot GPRS	Power		24.5 dBm	25.5 dBm	24.4 dBm
	Left	Cheek	-	0.699	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
1-slot 8PSK EGPRS	Power		21.5 dBm	22.5 dBm	21.5 dBm
	Left	Cheek	-	0.170	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
GSM	Left Cheek, BT active		-	0.598	-

1900MHz Head SAR results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM	Power		31.4 dBm	30.9 dBm	31.9 dBm
	Left	Cheek	-	0.558	-
		Tilt	0.497	0.606	0.693
	Right	Cheek	-	0.367	-
		Tilt	-	0.446	-
2-slot GPRS	Power		28.3 dBm	27.8 dBm	28.9 dBm
	Left	Cheek	-	0.514	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot GPRS	Power		26.7 dBm	26.3 dBm	27.4 dBm
	Left	Cheek	-	0.517	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
1-slot 8PSK EGPRS	Power		25.3 dBm	24.4 dBm	26.0 dBm
	Left	Cheek	-	-	-
		Tilt	-	-	0.265
	Right	Cheek	-	-	-
		Tilt	-	-	-
GSM	Left Tilt, BT active		-	-	0.685

The measured Body SAR values for the test device are tabulated below:

850 MHz Body SAR results

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
GSM	Power	29.4 dBm	29.4 dBm	28.6 dBm
Antenna facing phantom	Without headset	0.853	0.805	0.838
	Headset HS-47	0.638	0.581	0.569
Display facing phantom	Without headset	-	0.505	-
	Headset HS-47	-	0.381	-
GSM Antenna facing phantom	Without headset, BT active	0.851	-	-

1900 MHz Body SAR results

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM	Power	31.4 dBm	30.9 dBm	31.9 dBm
Antenna facing phantom	Without headset	0.455	0.458	0.425
	Headset HS-47	0.300	0.322	0.331
Display facing phantom	Without headset	-	0.213	-
	Headset HS-47	-	0.140	-
GSM Antenna facing phantom	Without headset, BT active	-	0.443	-

Plots of the Measurement scans are given in Appendix B.

APPENDIX A: SYSTEM CHECKING SCANS

See the following pages

Date/Time: 2008-02-13 17:07:45

Test Laboratory: TCC Nokia

Type: D835V2; Serial: 4d042

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.67 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.1 V/m


Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.48 mW/g

SAR(10 g) = 1.63 mW/g

Power Drift = -0.015 dB

Maximum value of SAR (measured) = 2.68 mW/g

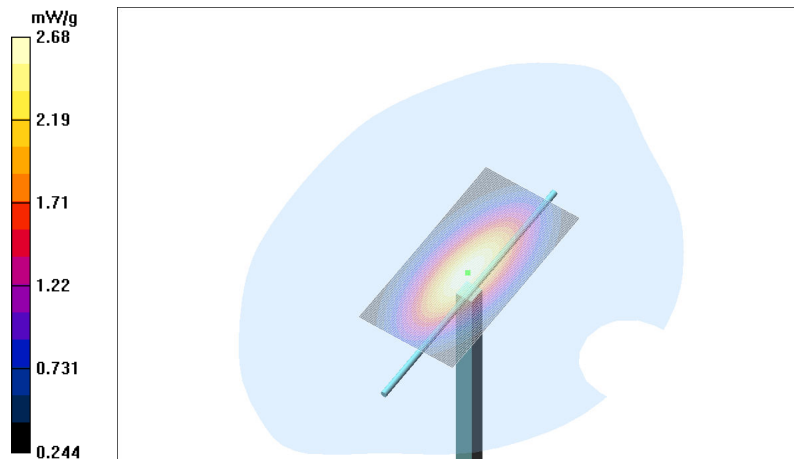

Date/Time: 2008-02-07 08:33:37

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: 5d026

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.8 V/m


Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 10.4 mW/g

SAR(10 g) = 5.38 mW/g

Power Drift = -0.041 dB

Maximum value of SAR (measured) = 11.7 mW/g

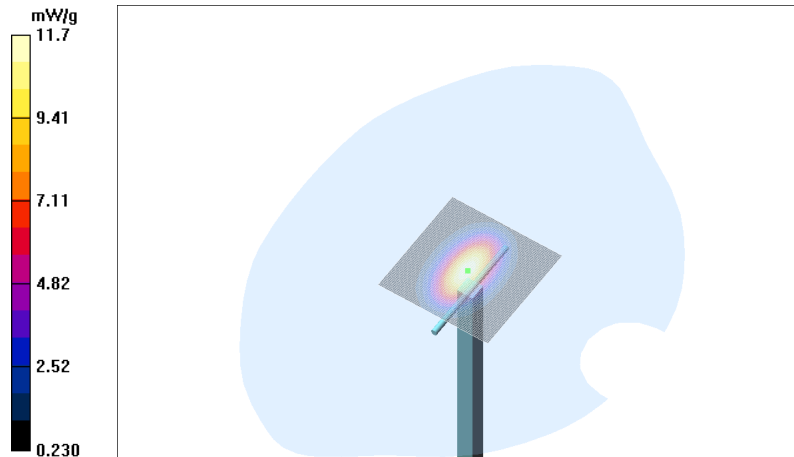

Date/Time: 2008-02-14 10:08:53

Test Laboratory: TCC Nokia

Type: D835V2; Serial: 4d042

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.966 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.66 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.5 V/m


Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 2.46 mW/g

SAR(10 g) = 1.62 mW/g

Power Drift = 0.000 dB

Maximum value of SAR (measured) = 2.66 mW/g

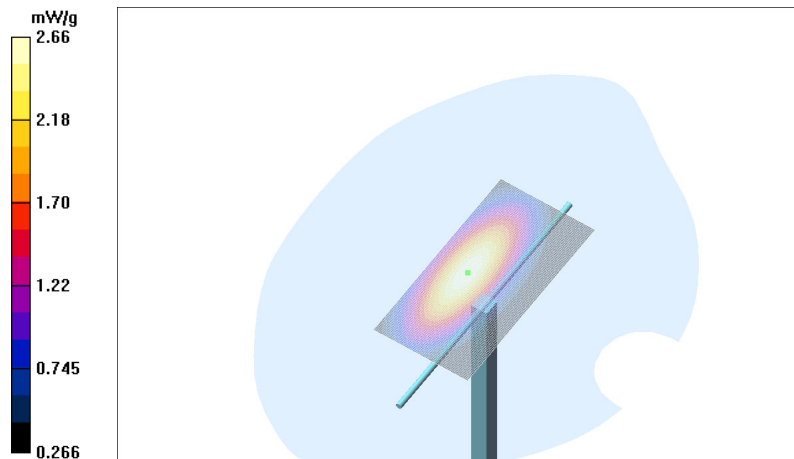

Date/Time: 2008-02-07 09:18:19

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: 5d026

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2007-10-16
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 12.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 66.3 V/m


Peak SAR (extrapolated) = 19.3 W/kg

SAR(1 g) = 10.9 mW/g

SAR(10 g) = 5.77 mW/g

Power Drift = -0.008 dB

Maximum value of SAR (measured) = 12.3 mW/g

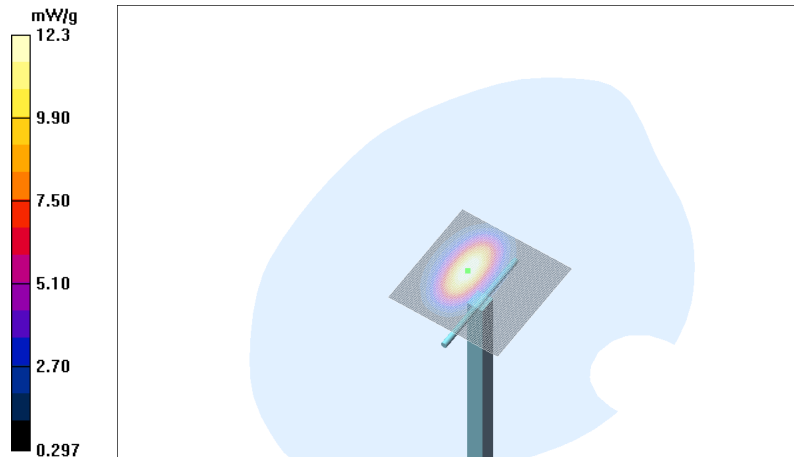

APPENDIX B: MEASUREMENT SCANS

See the following pages

Date/Time: 2008-02-13 19:30:36

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.747 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.6 V/m

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.712 mW/g

SAR(10 g) = 0.490 mW/g

Power Drift = 0.086 dB

Maximum value of SAR (measured) = 0.760 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.6 V/m

Peak SAR (extrapolated) = 0.918 W/kg


SAR(1 g) = 0.584 mW/g

SAR(10 g) = 0.373 mW/g

Power Drift = 0.086 dB

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.659 mW/g

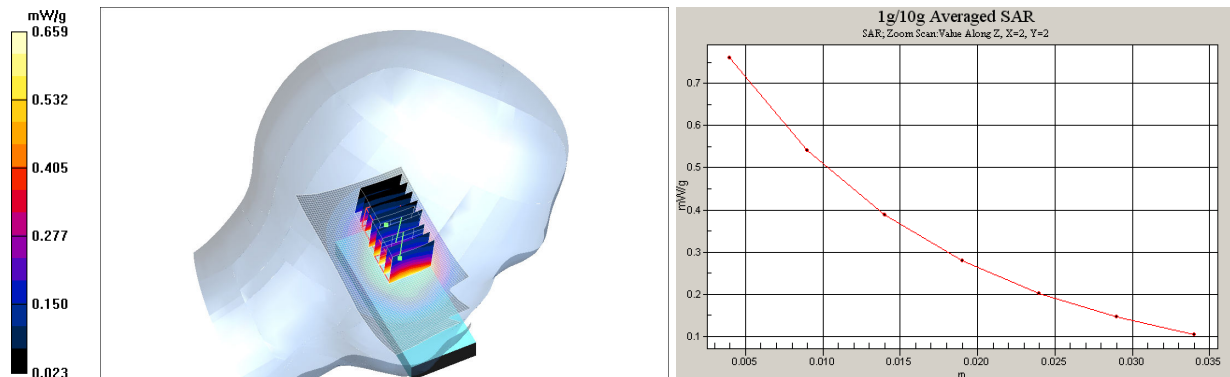

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-13 20:37:40

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.534 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.4 V/m

Peak SAR (extrapolated) = 0.878 W/kg


SAR(1 g) = 0.475 mW/g

SAR(10 g) = 0.290 mW/g

Power Drift = 0.002 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.534 mW/g

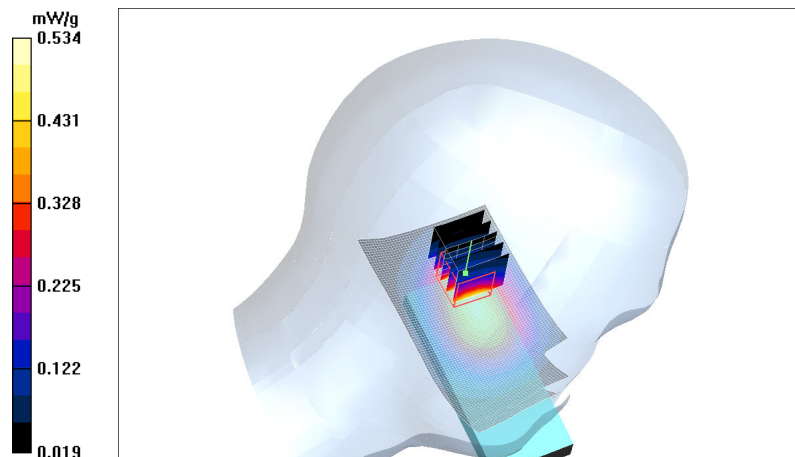

Date/Time: 2008-02-13 20:51:11

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.694 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.1 V/m

Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.624 mW/g

SAR(10 g) = 0.435 mW/g

Power Drift = 0.026 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.661 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.1 V/m

Peak SAR (extrapolated) = 0.721 W/kg


SAR(1 g) = 0.490 mW/g

SAR(10 g) = 0.367 mW/g

Power Drift = 0.026 dB

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.595 mW/g

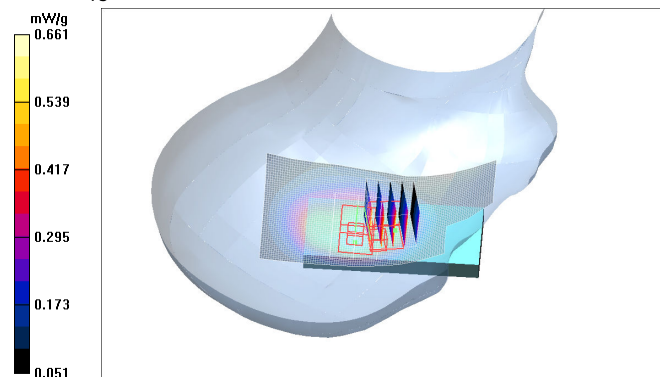

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-13 21:11:19

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.482 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.0 V/m

Peak SAR (extrapolated) = 0.650 W/kg


SAR(1 g) = 0.410 mW/g

SAR(10 g) = 0.282 mW/g

Power Drift = 0.001 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.452 mW/g

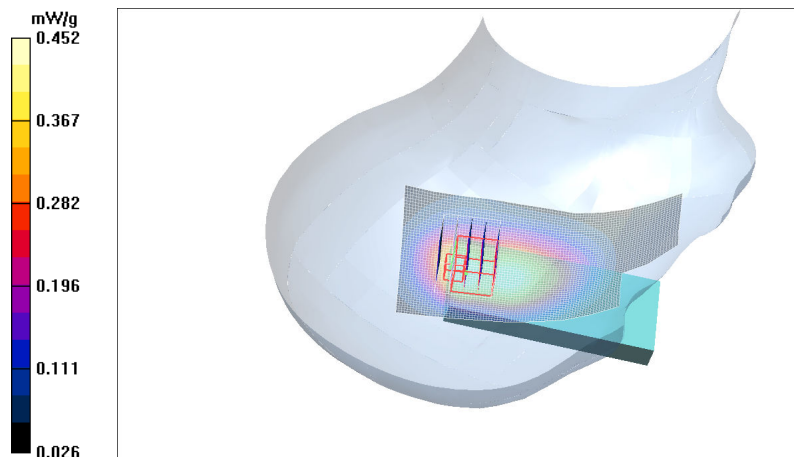

Date/Time: 2008-02-13 19:54:32

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: 2-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.765 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.0 V/m

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.711 mW/g

SAR(10 g) = 0.491 mW/g

Power Drift = -0.093 dB

Maximum value of SAR (measured) = 0.754 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.0 V/m

Peak SAR (extrapolated) = 0.909 W/kg


SAR(1 g) = 0.591 mW/g

SAR(10 g) = 0.376 mW/g

Power Drift = -0.093 dB

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.667 mW/g

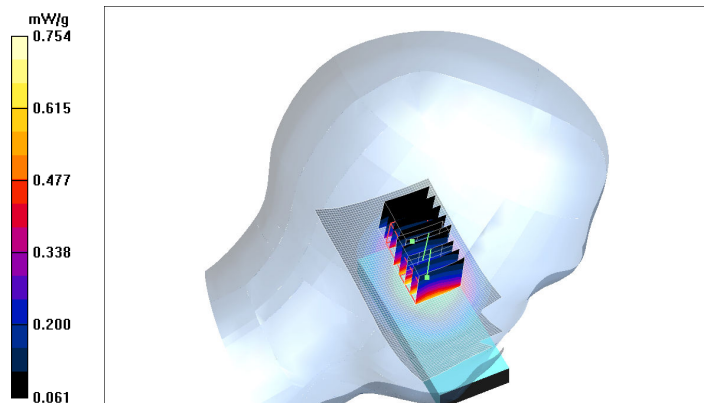

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-13 20:16:12

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: 3-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.744 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.9 V/m

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.699 mW/g

SAR(10 g) = 0.483 mW/g

Power Drift = -0.093 dB

Maximum value of SAR (measured) = 0.742 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.9 V/m

Peak SAR (extrapolated) = 0.890 W/kg


SAR(1 g) = 0.580 mW/g

SAR(10 g) = 0.369 mW/g

Power Drift = -0.093 dB

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.655 mW/g

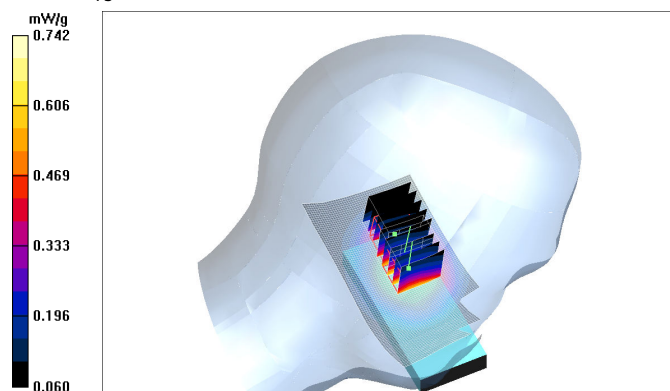

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-13 22:28:39

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: 1-slot 8PSK EGPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.186 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.3 V/m


Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.170 mW/g

SAR(10 g) = 0.114 mW/g

Power Drift = 0.016 dB

Maximum value of SAR (measured) = 0.187 mW/g

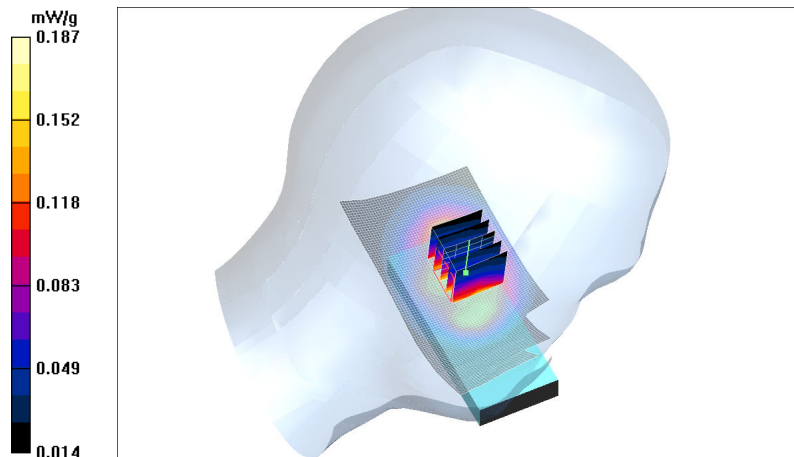

Date/Time: 2008-02-13 22:08:29

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3116; Probe Notes:
- ConvF(5.98, 5.98, 5.98); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn682; Calibrated: 2007-08-29
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle - BT active/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.635 mW/g

Cheek position - Middle - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.5 V/m

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.598 mW/g

SAR(10 g) = 0.407 mW/g

Power Drift = -0.077 dB

Maximum value of SAR (measured) = 0.630 mW/g

Cheek position - Middle - BT active/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.5 V/m

Peak SAR (extrapolated) = 0.716 W/kg


SAR(1 g) = 0.457 mW/g

SAR(10 g) = 0.326 mW/g

Power Drift = -0.077 dB

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.567 mW/g

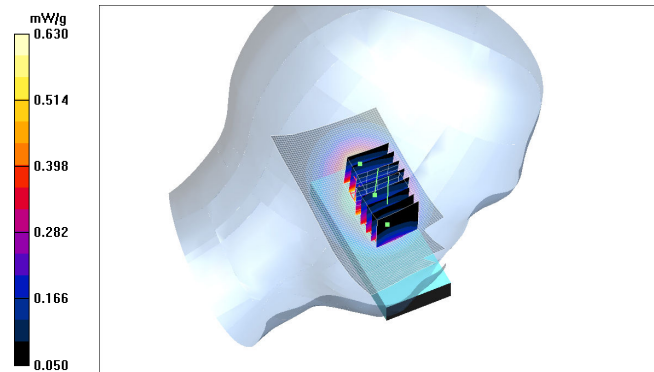

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-07 16:43:34

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.652 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.4 V/m

Peak SAR (extrapolated) = 1.06 W/kg


SAR(1 g) = 0.558 mW/g

SAR(10 g) = 0.307 mW/g

Power Drift = -0.027 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.629 mW/g

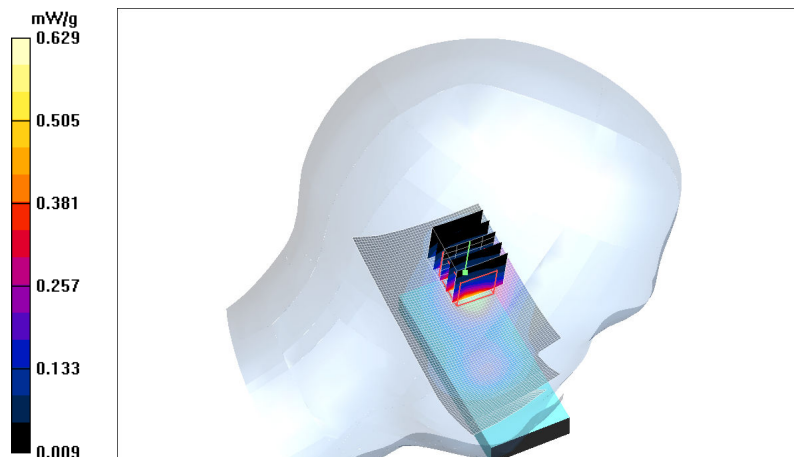

Date/Time: 2008-02-07 18:37:16

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt position - High/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.829 mW/g

Tilt position - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.7 V/m


Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.693 mW/g

SAR(10 g) = 0.357 mW/g

Power Drift = 0.067 dB

Maximum value of SAR (measured) = 0.796 mW/g

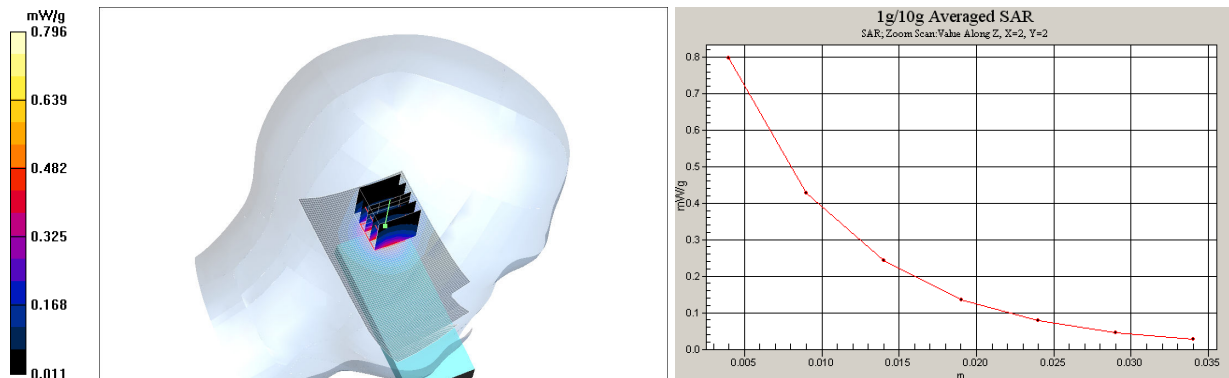

Date/Time: 2008-02-07 17:57:10

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.421 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.5 V/m


Peak SAR (extrapolated) = 0.608 W/kg

SAR(1 g) = 0.367 mW/g

SAR(10 g) = 0.214 mW/g

Power Drift = -0.010 dB

Maximum value of SAR (measured) = 0.402 mW/g

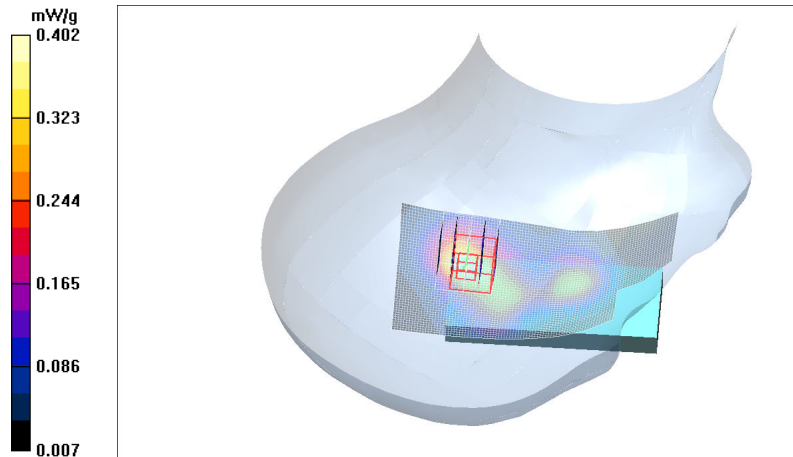

Date/Time: 2008-02-07 18:11:23

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.522 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.9 V/m


Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.446 mW/g

SAR(10 g) = 0.250 mW/g

Power Drift = 0.013 dB

Maximum value of SAR (measured) = 0.492 mW/g

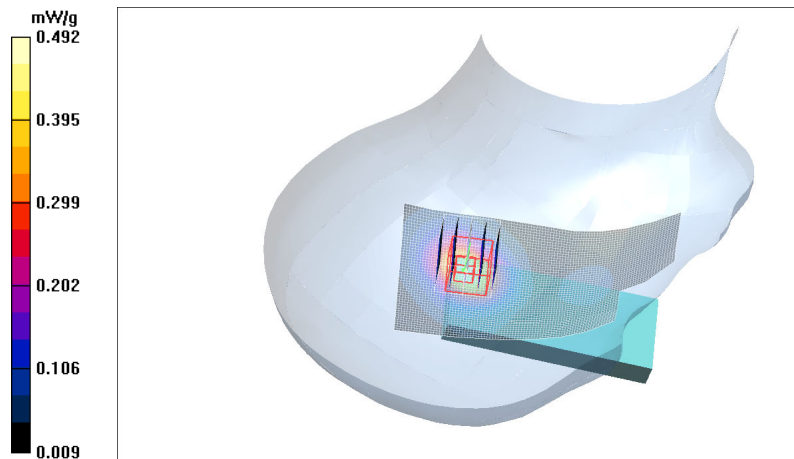

Date/Time: 2008-02-07 16:59:34

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: 2-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.602 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.8 V/m

Peak SAR (extrapolated) = 0.977 W/kg


SAR(1 g) = 0.514 mW/g

SAR(10 g) = 0.284 mW/g

Power Drift = -0.053 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.580 mW/g

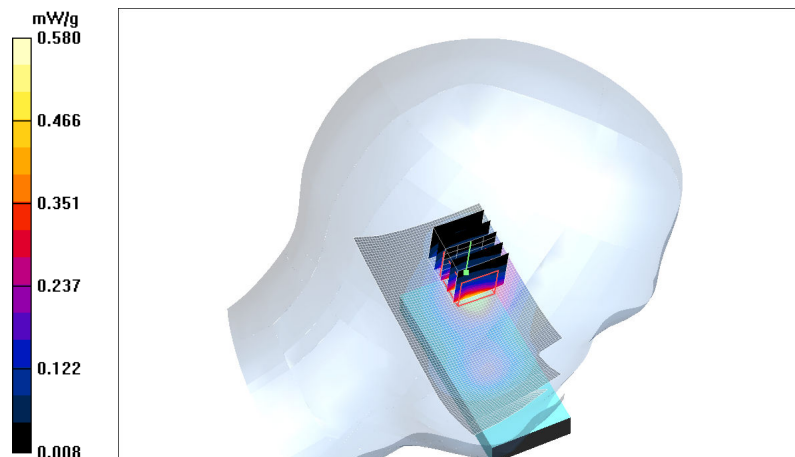

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-07 17:20:13

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: 3-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:2.8

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Cheek position - Middle/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.619 mW/g

Cheek position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.7 V/m

Peak SAR (extrapolated) = 0.974 W/kg


SAR(1 g) = 0.517 mW/g

SAR(10 g) = 0.286 mW/g

Power Drift = -0.201 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.582 mW/g

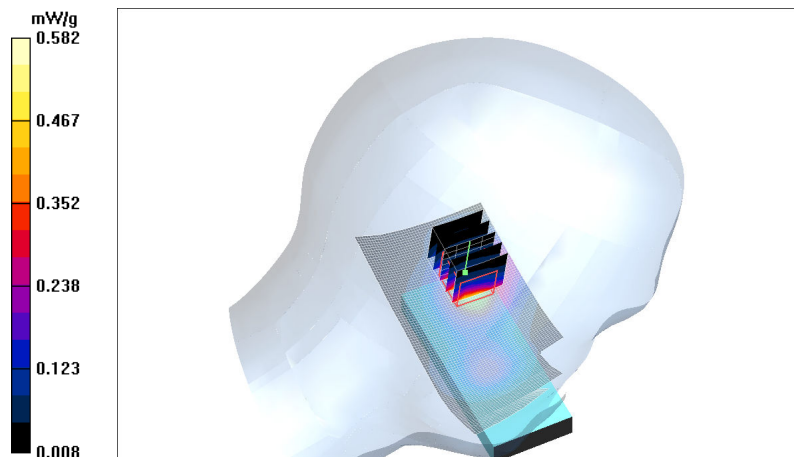

Date/Time: 2008-02-07 19:34:01

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: 1-slot 8PSK EGPRS 1900

Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt position - High/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.306 mW/g

Tilt position - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.2 V/m


Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.265 mW/g

SAR(10 g) = 0.139 mW/g

Power Drift = -0.225 dB

Maximum value of SAR (measured) = 0.299 mW/g

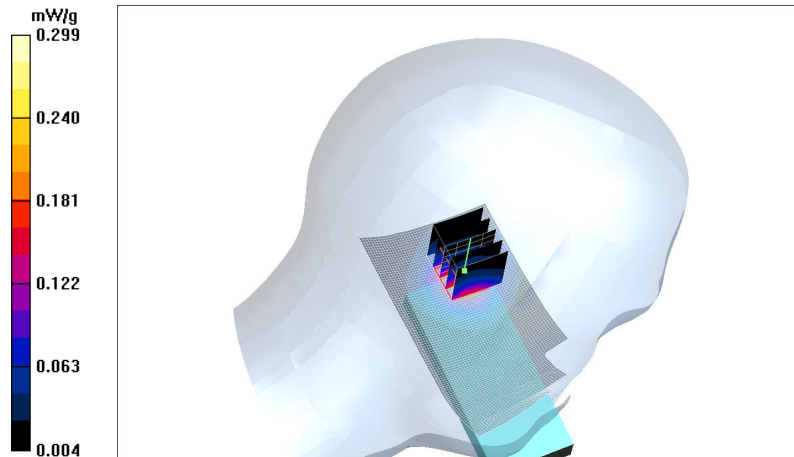

Date/Time: 2008-02-07 18:50:21

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium Notes: Medium Temperature: 21.7 C

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3118; Probe Notes:
- ConvF(5.26, 5.26, 5.26); Calibrated: 2007-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2007-02-21
- Phantom: SAM 6; Type: SAM Twin Phantom; Serial: TP-1301
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt position - High - BT active/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.814 mW/g

Tilt position - High - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.7 V/m


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.685 mW/g

SAR(10 g) = 0.352 mW/g

Power Drift = -0.029 dB

Maximum value of SAR (measured) = 0.792 mW/g

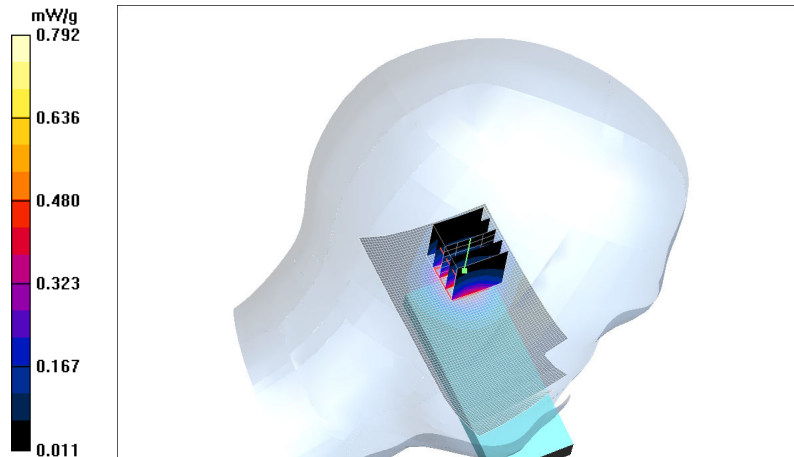

Date/Time: 2008-02-14 16:03:24

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Body 900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Low - No Accessory – Antenna facing phantom/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.910 mW/g

Body - Low - No Accessory – Antenna facing phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.2 V/m


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.853 mW/g

SAR(10 g) = 0.624 mW/g

Power Drift = 0.025 dB

Maximum value of SAR (measured) = 0.897 mW/g

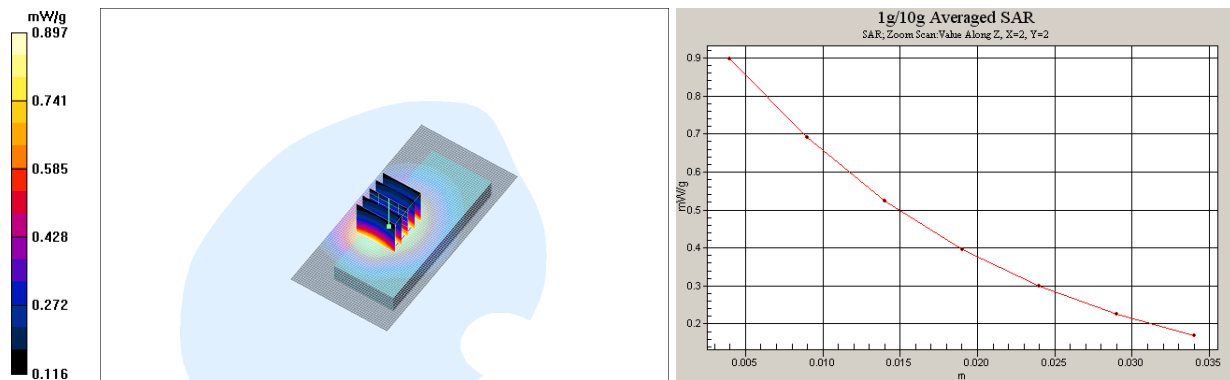

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-14 15:19:25

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Body 900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Low - HS-47 – Antenna facing phantom/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.682 mW/g

Body - Low - HS-47 – Antenna facing phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.8 V/m


Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.638 mW/g

SAR(10 g) = 0.468 mW/g

Power Drift = 0.021 dB

Maximum value of SAR (measured) = 0.674 mW/g

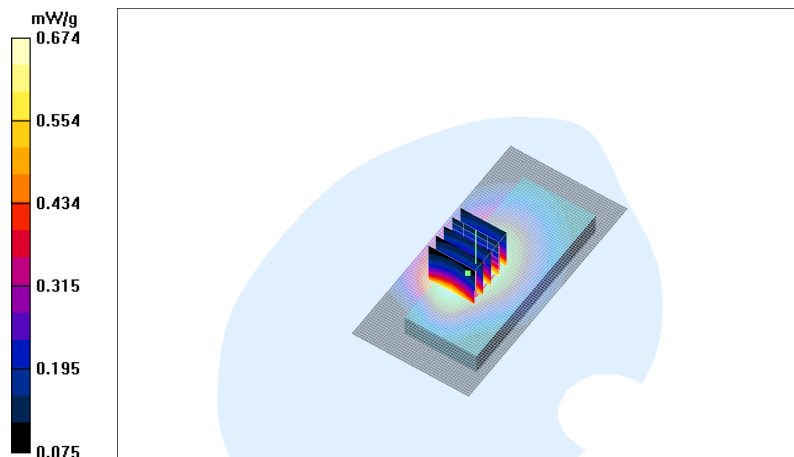

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-14 14:13:15

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Body 900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.968$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Middle - No Accessory - Display facing phantom/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.545 mW/g

Body - Middle - No Accessory - Display facing phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.5 V/m


Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.505 mW/g

SAR(10 g) = 0.364 mW/g

Power Drift = -0.102 dB

Maximum value of SAR (measured) = 0.536 mW/g

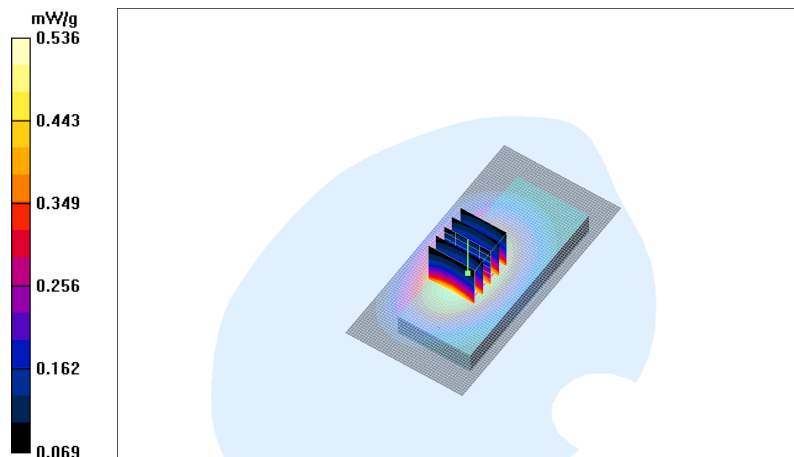

Date/Time: 2008-02-14 14:26:16

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Body 900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.968$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Middle - HS-47 - Display facing phantom/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.409 mW/g

Body - Middle - HS-47 - Display facing phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.0 V/m


Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.381 mW/g

SAR(10 g) = 0.276 mW/g

Power Drift = -0.136 dB

Maximum value of SAR (measured) = 0.405 mW/g

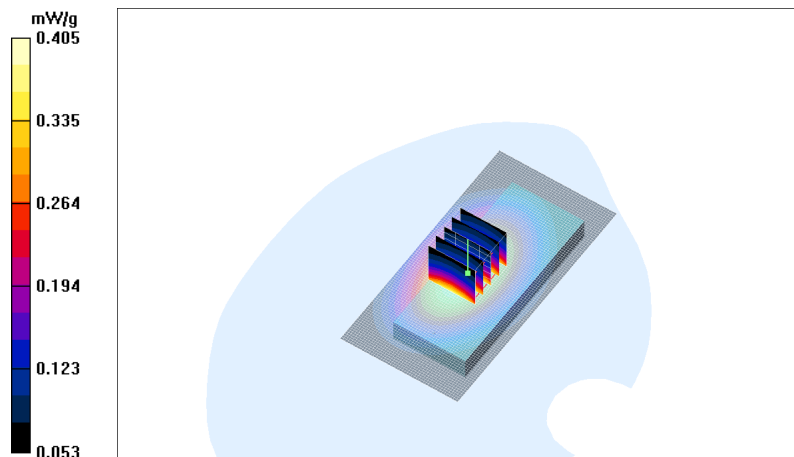

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-14 16:35:15

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM850

Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Body 900; Medium Notes: Medium Temperature: 21.8 C

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3117; Probe Notes:
- ConvF(5.74, 5.74, 5.74); Calibrated: 2007-08-29
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2007-06-12
- Phantom: SAM 5; Type: Twin Phantom; Serial: TP-1412
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Low - No Accessory - Antenna facing phantom - BT active/Area Scan (51x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.905 mW/g

Body - Low - No Accessory - Antenna facing phantom - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.9 V/m


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.851 mW/g

SAR(10 g) = 0.620 mW/g

Power Drift = 0.004 dB

Maximum value of SAR (measured) = 0.905 mW/g

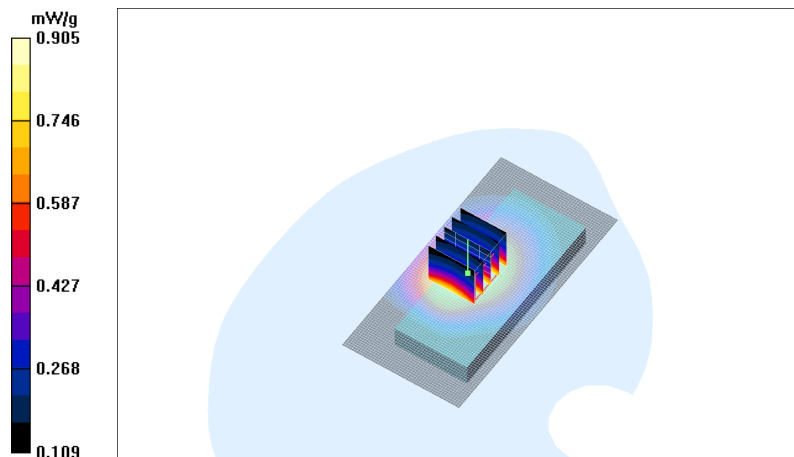

Date/Time: 2008-02-07 20:13:19

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Body 1900; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2007-10-16
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Middle - No Accessory – Antenna facing phantom/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.509 mW/g

Body - Middle - No Accessory – Antenna facing phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.2 V/m


Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = 0.458 mW/g

SAR(10 g) = 0.278 mW/g

Power Drift = -0.056 dB

Maximum value of SAR (measured) = 0.489 mW/g

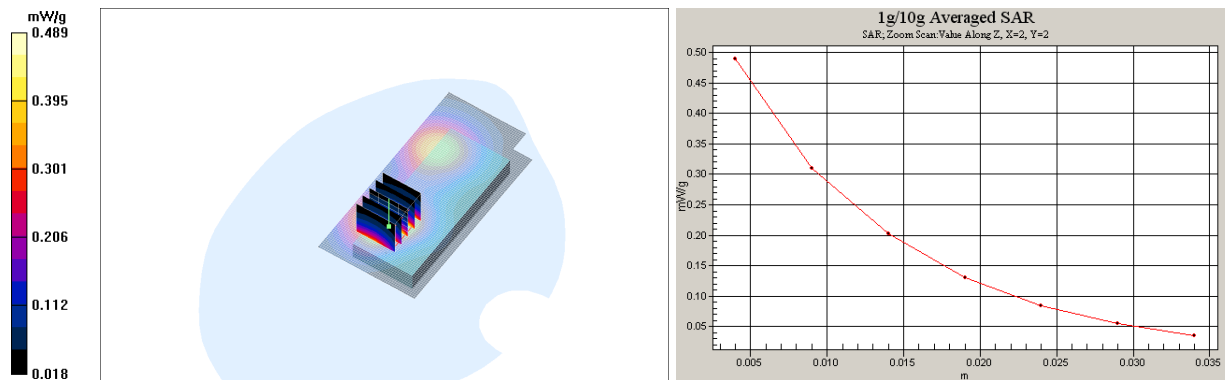

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-07 20:38:50

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 0044001/01/700402/5

Communication System: GSM 1900

Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Body 1900; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2007-10-16
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - High - HS-47/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.364 mW/g

Body - High - HS-47/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.4 V/m


Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.331 mW/g

SAR(10 g) = 0.216 mW/g

Power Drift = 0.003 dB

Maximum value of SAR (measured) = 0.354 mW/g

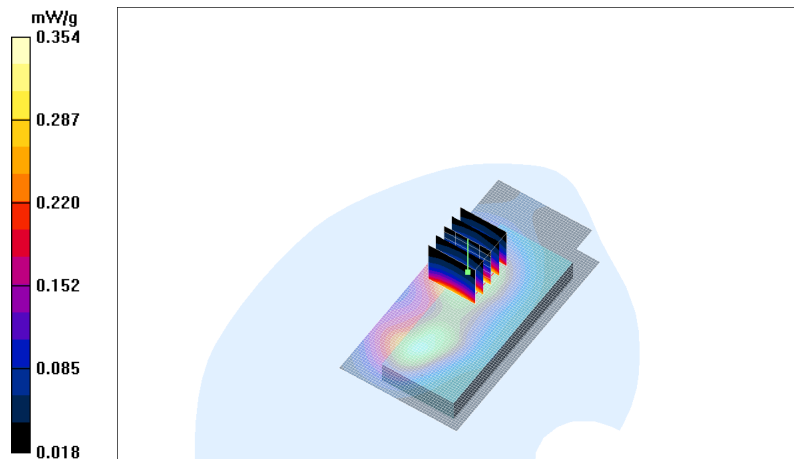

Date/Time: 2008-02-07 21:29:19

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Body 1900; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2007-10-16
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Middle - No Accessory - Display facing phantom/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.237 mW/g

Body - Middle - No Accessory - Display facing phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.62 V/m


Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.213 mW/g

SAR(10 g) = 0.131 mW/g

Power Drift = -0.017 dB

Maximum value of SAR (measured) = 0.230 mW/g

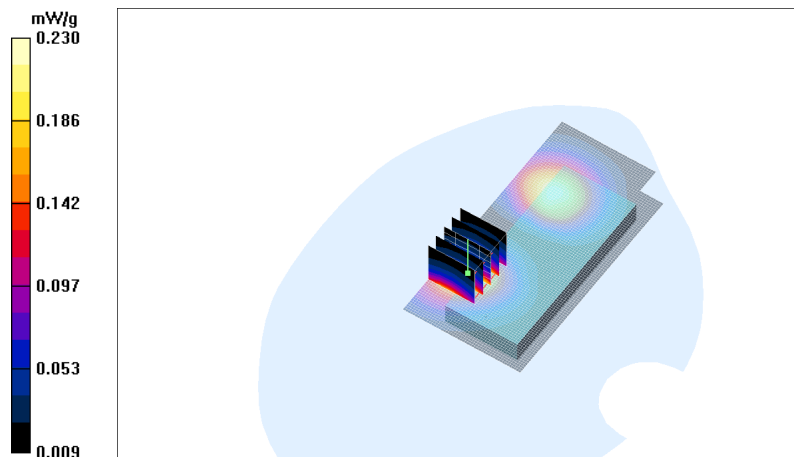

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia

Date/Time: 2008-02-07 21:41:12

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Body 1900; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2007-10-16
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Middle - HS-47 - Display facing phantom/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.154 mW/g

Body - Middle - HS-47 - Display facing phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.88 V/m


Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.140 mW/g

SAR(10 g) = 0.085 mW/g

Power Drift = 0.112 dB

Maximum value of SAR (measured) = 0.154 mW/g

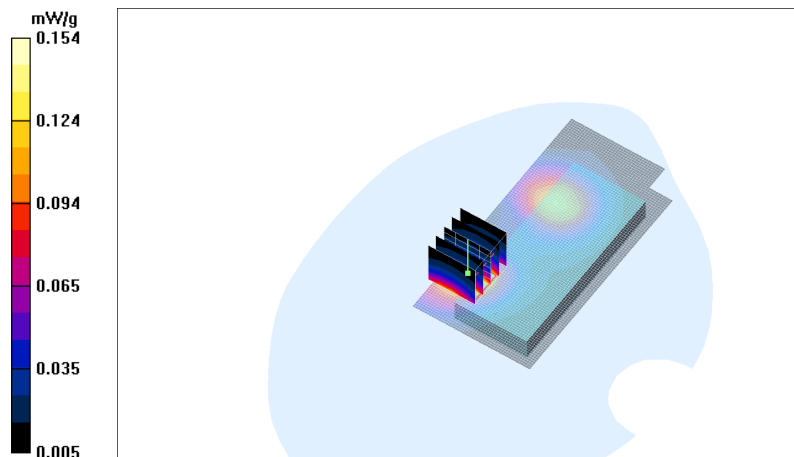

Date/Time: 2008-02-07 21:16:22

Test Laboratory: TCC Nokia

Type: RM-364; Serial: 004401/01/700402/5

Communication System: GSM 1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Body 1900; Medium Notes: Medium Temperature: 21.9 C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3119; Probe Notes:
- ConvF(5.02, 5.02, 5.02); Calibrated: 2007-10-24
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn710; Calibrated: 2007-10-16
- Phantom: SAM 8; Type: SAM Twin Phantom; Serial: TP-1408
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Body - Middle - No Accessory - Antenna facing phantom - BT active/Area Scan (51x101x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.496 mW/g

Body - Middle - No Accessory - Antenna facing phantom - BT active/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.0 V/m


Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.443 mW/g

SAR(10 g) = 0.269 mW/g

Power Drift = -0.024 dB

Maximum value of SAR (measured) = 0.464 mW/g

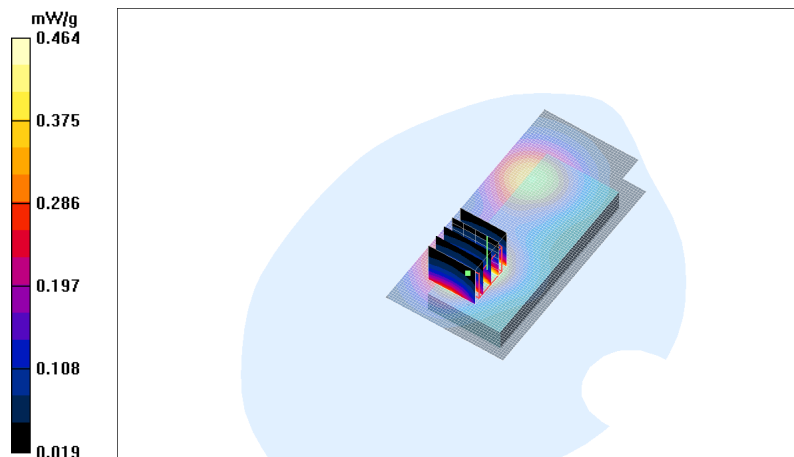

SAR Report

Cph_SAR_0819_04

Applicant: Nokia Corporation

Type: RM-365

Copyright © 2008 TCC Nokia