

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0822_05.doc	Date of Report:	27-May-2008
Number of pages:	41	Customer's Contact person:	Ernest Mayer
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-365 / Battery BL-4U, Headset HS-40 and AC-Charger AC-3		
FCC ID:	QTKRM-365	IC:	661AD-RM365
Supplement reports:	This report is based on report: Salo_FCC_0806_20		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Niels Christian Andersen, Test System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	04-Feb-2008
Testing completed	22-Feb-2008
The customer's contact person	Ernest Mayer
Test Plan referred to	T:\Projects\RM-365\TestPlan_RS\RS_TestPlan_RM-365.xls
Notes	Test results in this report is based on measurements results from report Salo_FCC_0806_20
Document name	\\satcc01nmp\TCC_salo\Projects\RM-365\EMC\Results\FCC\Cph_FCC_0822_05.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band I/VI) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-364	004401/01/700486/8	0300	-	at07w15_08w03	12543
Phone	RM-364	004401/01/700433/0	0300	-	at07w15_08w03	12539
Battery	BL-4U	4620408013J10108310;0670560	-	-	-	12536
Headset	HS-40	3508536353020034112	-	-	-	12538
AC-Charger	AC-3E	4090497177021006321;0675370	-	-	-	12537
Phone	RM-364	004401/01/700448/8	0300	-	at07w15_08w03	12564
Battery	BL-4U	4620408013J10108313;0670560	-	-	-	12465
Headset	HS-40	350853635302 0034108	-	-	-	12567
AC- Charger	AC-3E	4090497177021006317;0675370	-	-	-	12566

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Salo Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit	6
3.2. Bluetooth Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	10
4.1. Test method and limit	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	15
5.1. Test method and limit	15
5.2. Bluetooth Test results	16
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	19
6.1. Test method and limit	19
6.2. Bluetooth Test results	20
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	24
7.1. Test method and limit	24
7.2. Bluetooth Test results	25
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	27
8.1. Test method and limit	27
8.2. Bluetooth Test results	28
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	31
9.1. Test method and limit	31
9.2. Bluetooth Test results	32
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	34
10.1. Test method and limit	34
10.2. Bluetooth Test results	35
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	37
11.1. Test method and limit	37
11.2. Bluetooth test results	38


12.	Test Equipment	40
12.1.	Conducted measurements	40
12.2.	Radiated measurements	40

2. Test setups


2.1. Conducted RF test setup

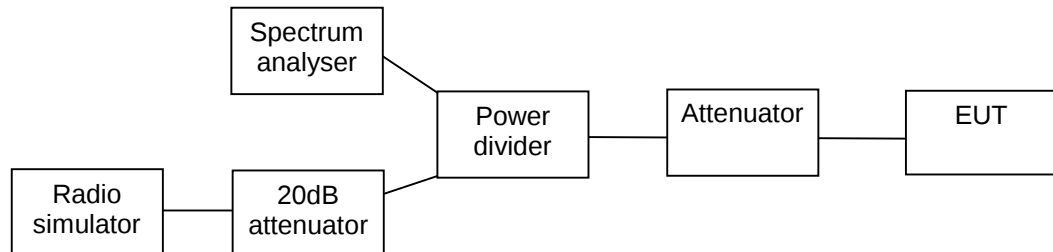

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

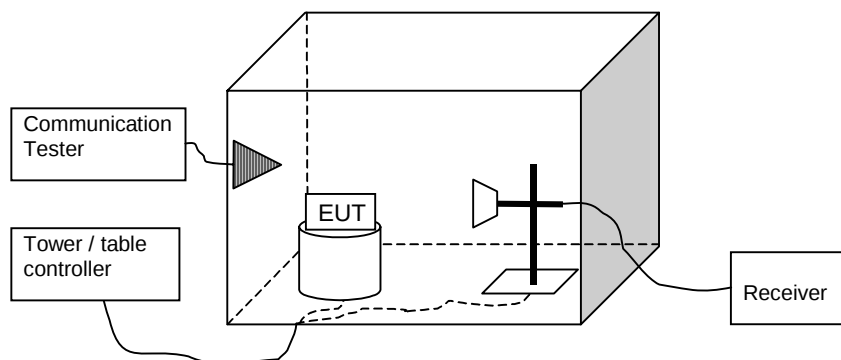

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-364, DUT 12543
Accessories with DUT numbers	BL-4U, DUT 12536; HS-40, DUT 12538; AC-3E, DUT 12537
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 101
Date of measurements	11-Feb-2008
Measured by	Anni Manninen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.70	1.479	PASSED
40 / 2442	1.40	1.380	PASSED
78 / 2480	1.00	1.259	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

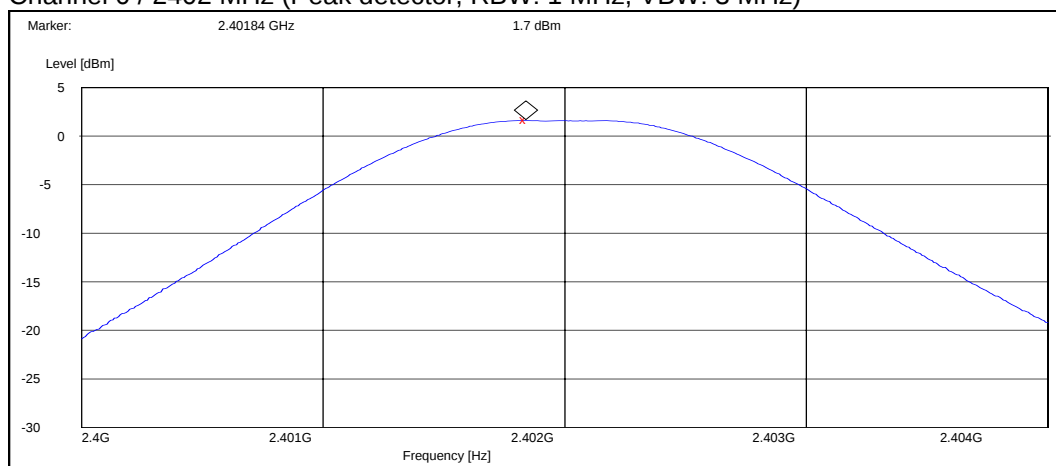

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

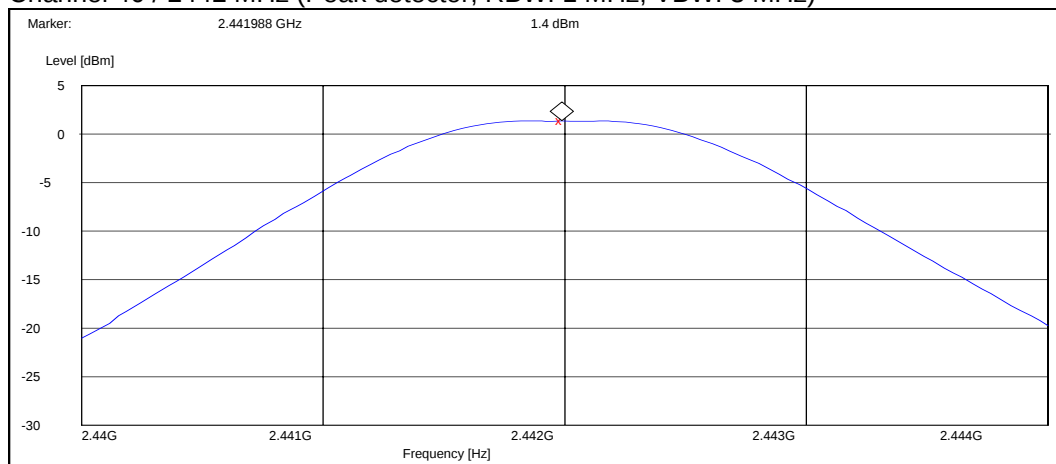


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

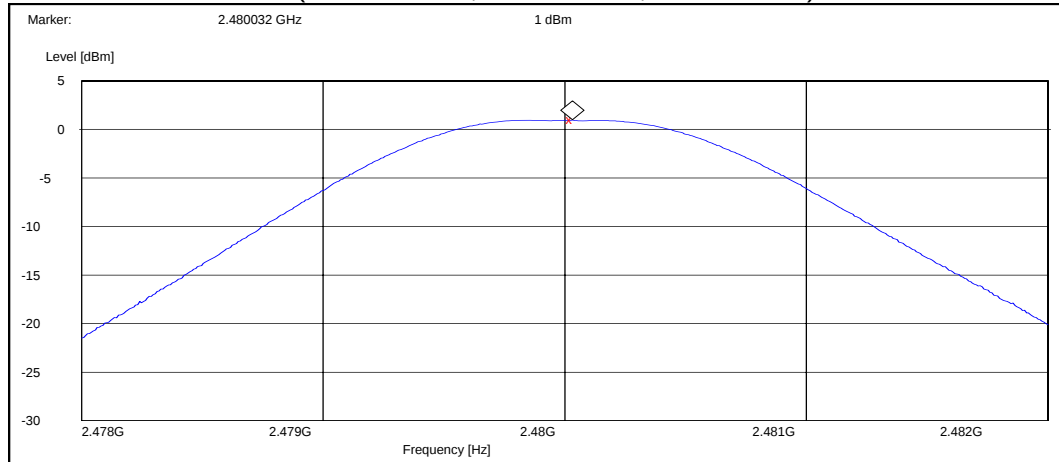


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.50	1.413	PASSED
40 / 2442	0.90	1.230	PASSED
78 / 2480	0.10	1.023	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

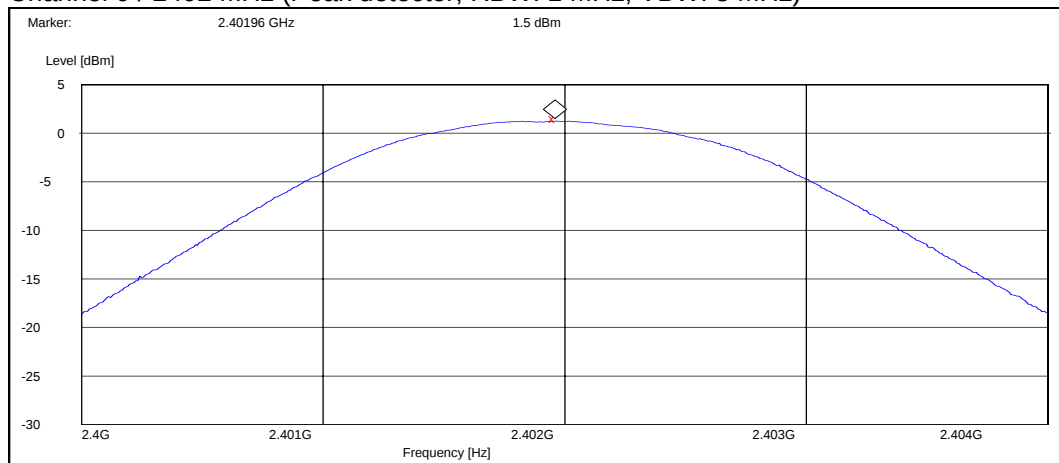

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

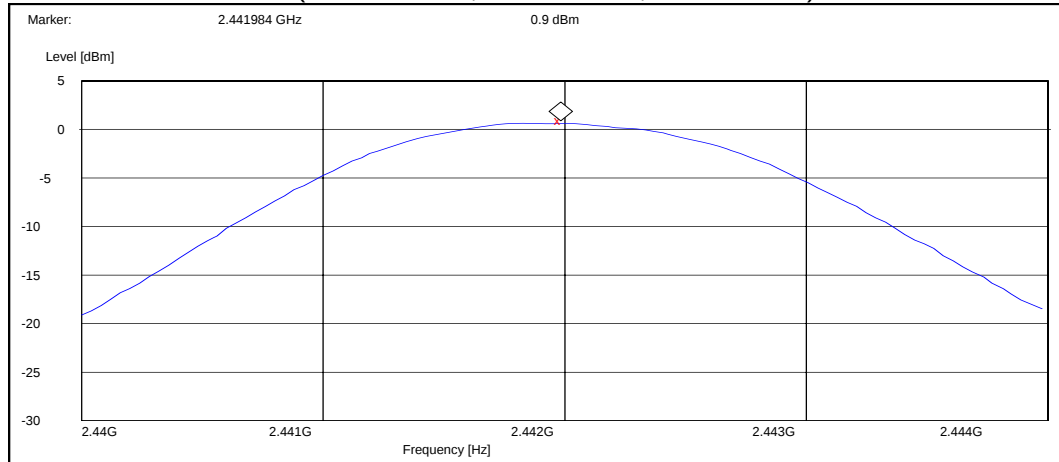

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

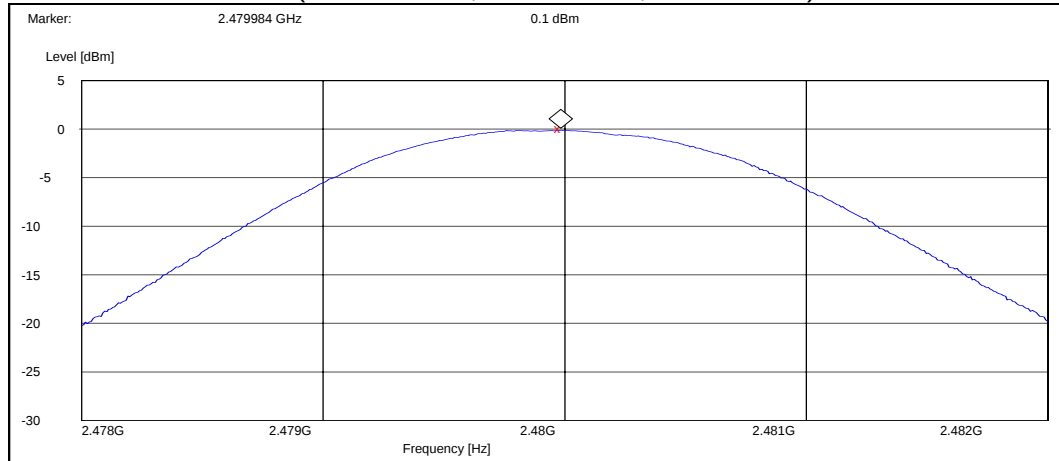

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-364, DUT 12564
Accessories with DUT numbers	BL-4U, DUT 12565; HS-40, DUT 12567; AC-3E, DUT 12566
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 42 / 100.3
Date of measurements	21-Feb-2008
Measured by	Sami Lehtonen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

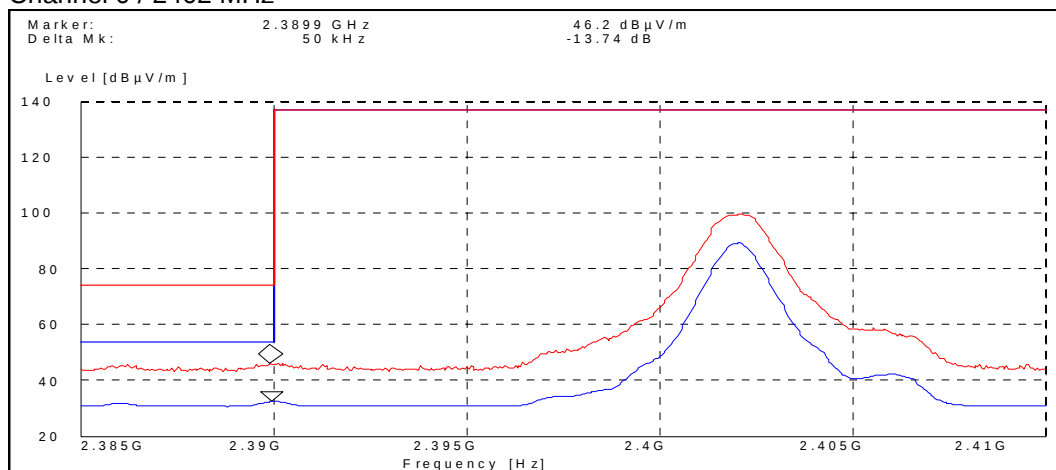


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	46.20	PASSED
Average	32.50	PASSED

Channel 78 / 2480 MHz

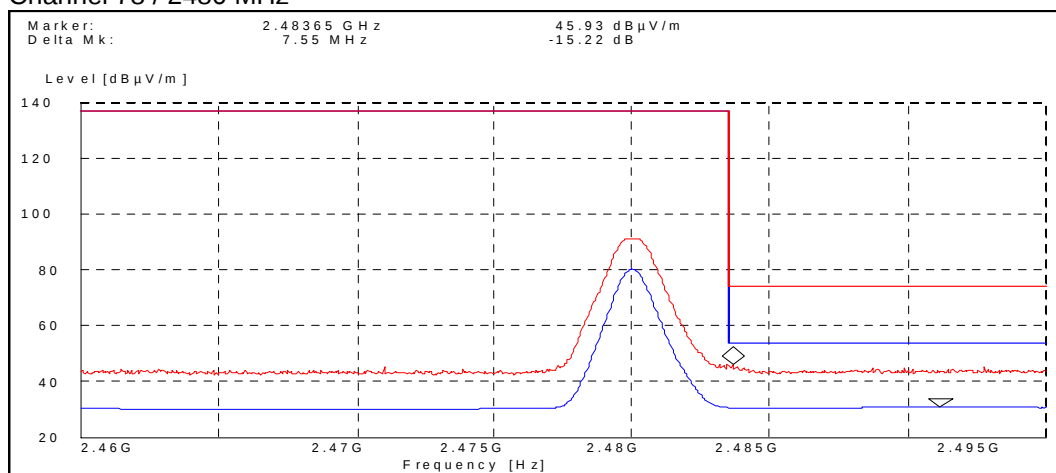


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	45.90	PASSED
Average	30.70	PASSED

Hopping on, low end

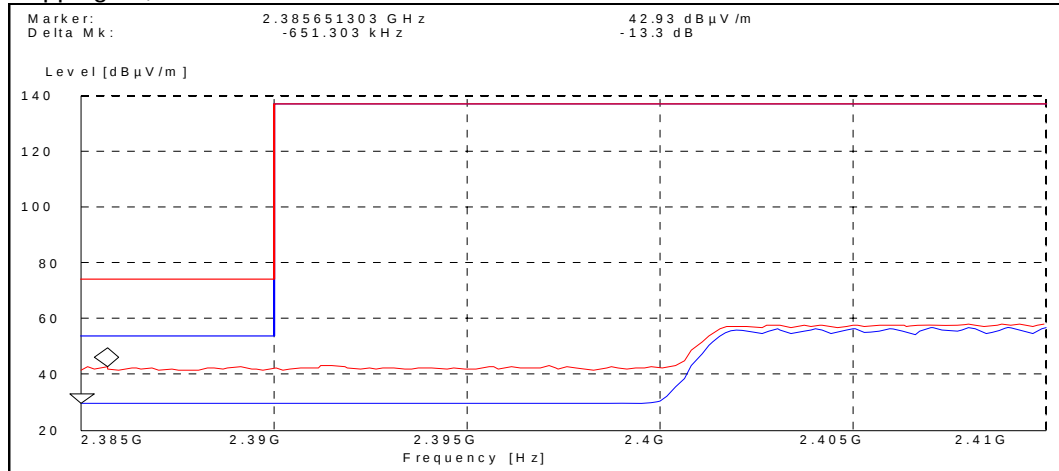

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	42.90	PASSED
Average	29.60	PASSED


Hopping on, high end

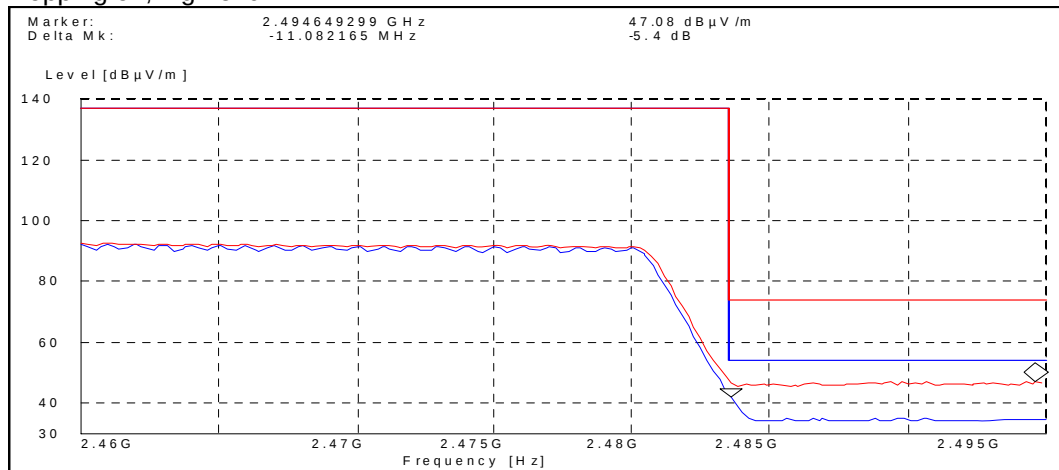

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	47.10	PASSED
Average	41.70	PASSED


4.2.2 PSK modulation, PRBS packet type

Channel 0 / 2402 MHz

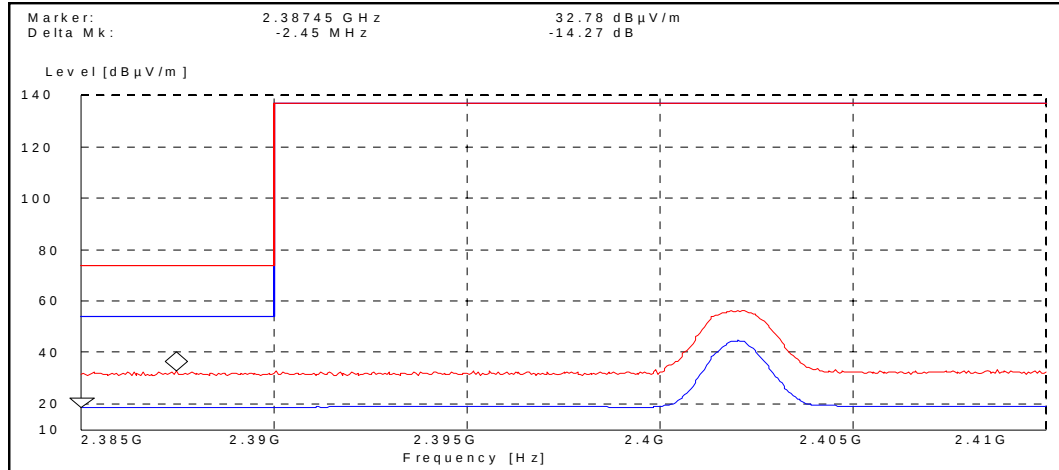


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	32.80	PASSED
Average	18.50	PASSED

Channel 78 / 2480 MHz

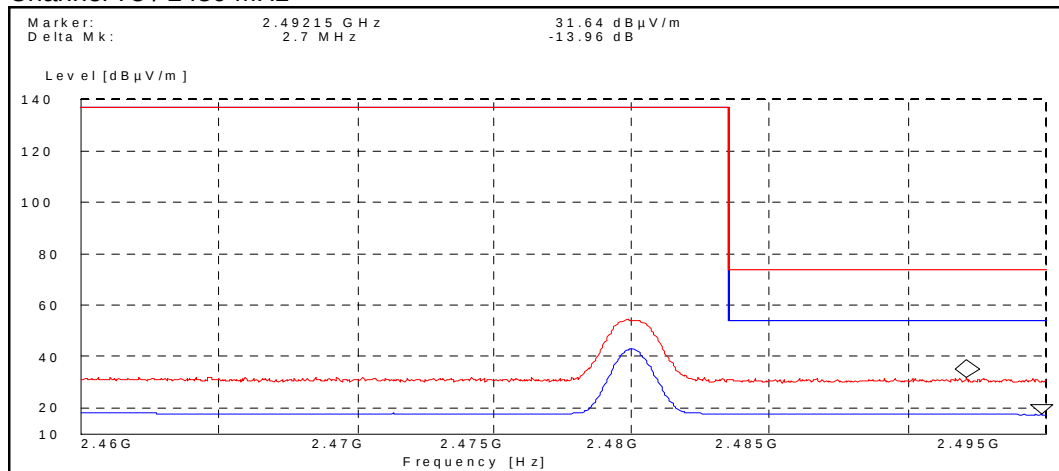


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	31.60	PASSED
Average	17.70	PASSED

Hopping on, low end

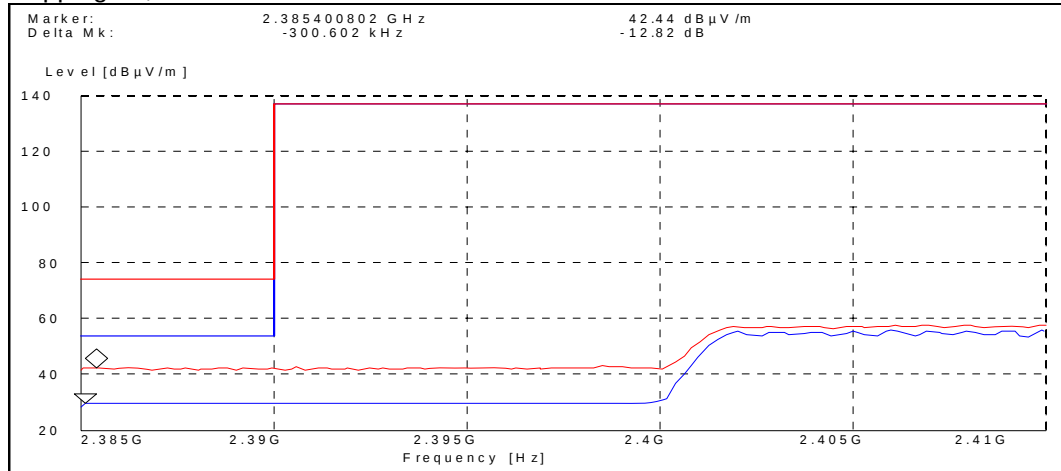

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	42.40	PASSED
Average	29.60	PASSED

Hopping on, high end

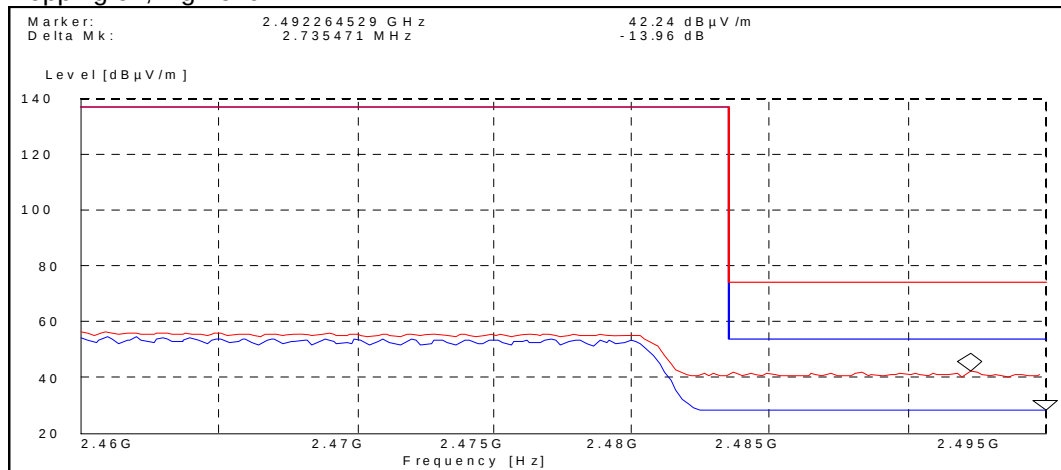

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	42.20	PASSED
Average	28.30	PASSED

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-364, DUT 12543
Accessories with DUT numbers	BL-4U, DUT 12536; HS-40, DUT 12538; AC-3E, DUT 12537
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 101
Date of measurements	11-Feb-2008
Measured by	Anni Manninen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

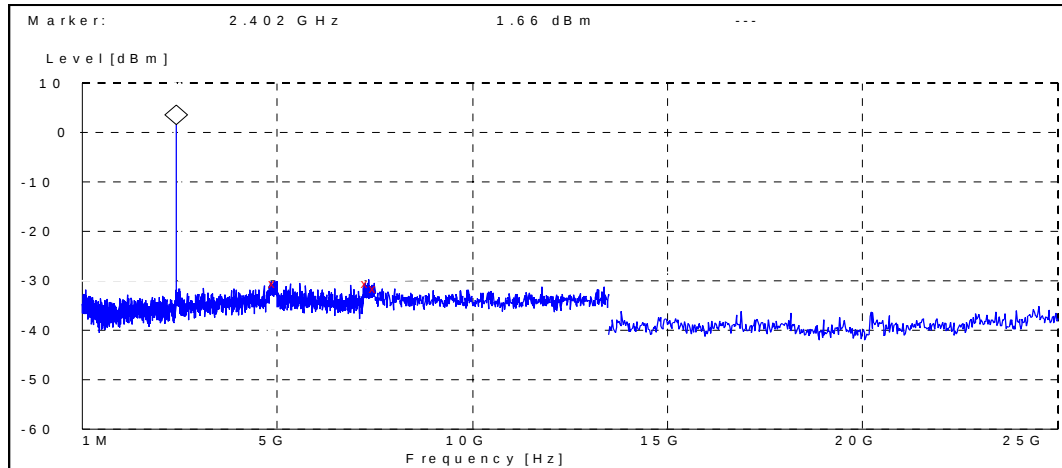

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4934.800000	-32.062292	PASSED
7333.800000	-32.162292	PASSED
7500.000000	-33.162292	PASSED


Channel 40 / 2442 MHz

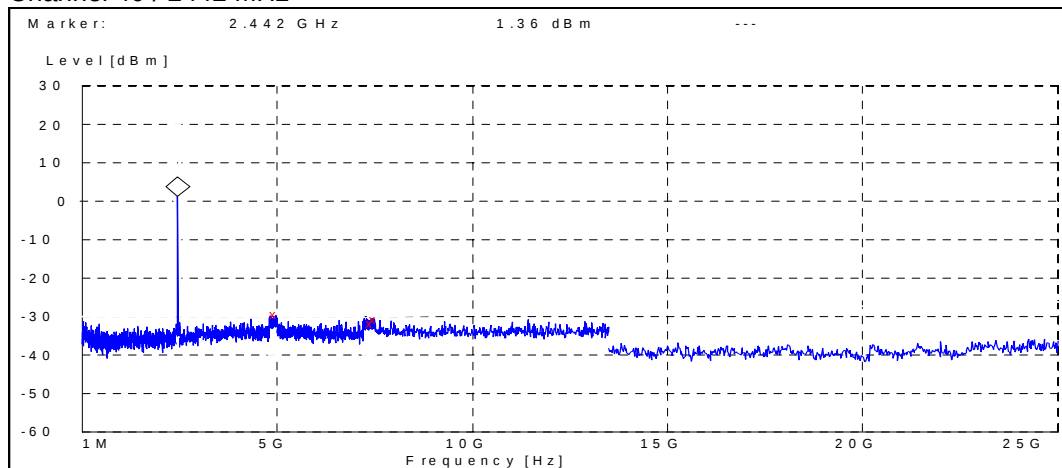

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4971.200000	-30.664801	PASSED
7439.400000	-33.264801	PASSED
7500.000000	-32.164801	PASSED

Channel 78 / 2480 MHz

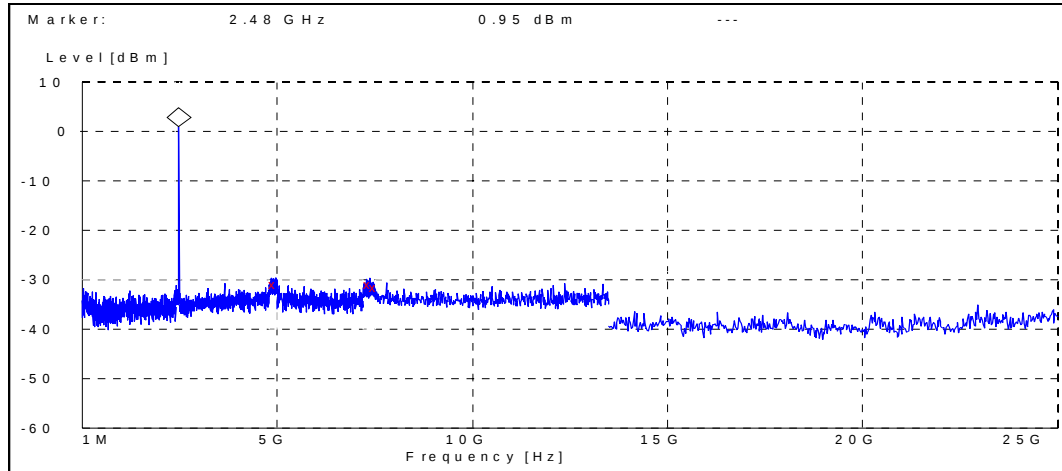


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4955.600000	-31.851009	PASSED
7378.800000	-31.851009	PASSED
7500.000000	-32.451009	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

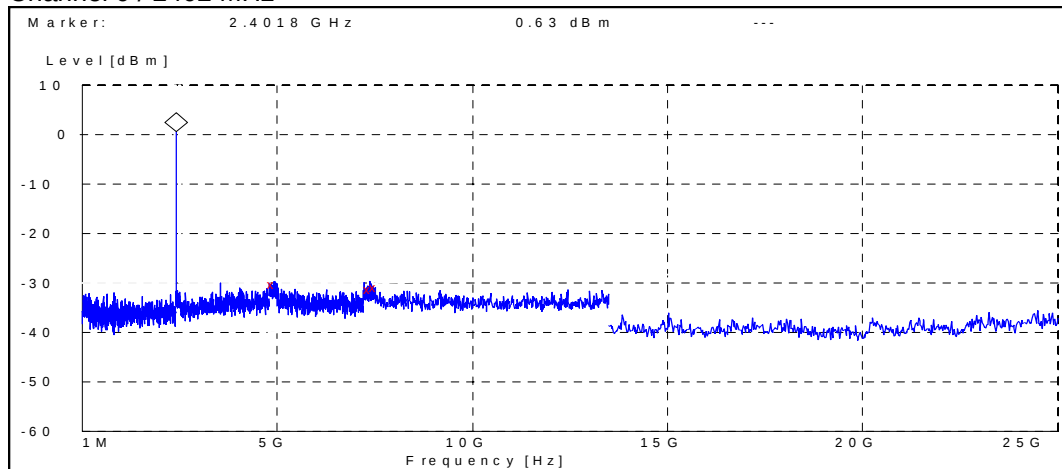

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4921.600000	-30.934281	PASSED
7368.600000	-31.934281	PASSED
7500.000000	-31.534281	PASSED


Channel 40 / 2442 MHz

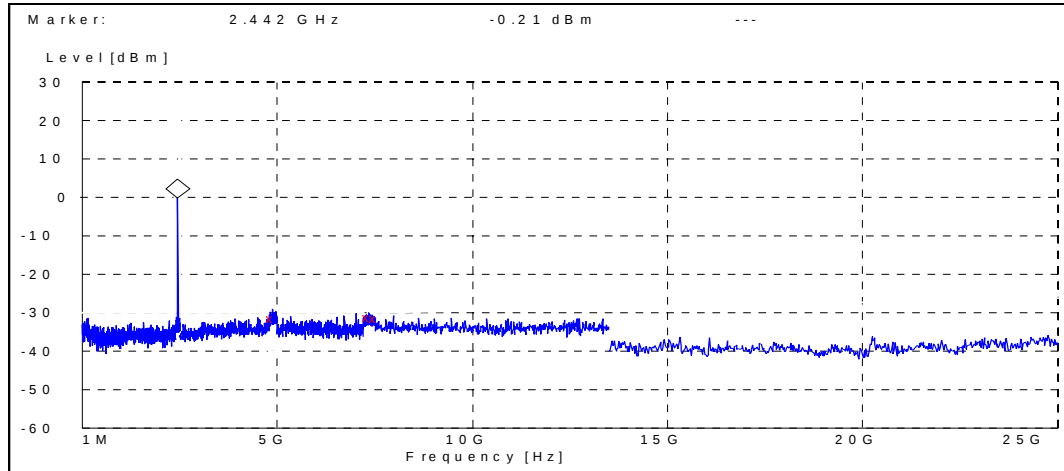

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4882.400000	-31.387065	PASSED
7360.200000	-30.787065	PASSED
7500.000000	-31.087065	PASSED

Channel 78 / 2480 MHz

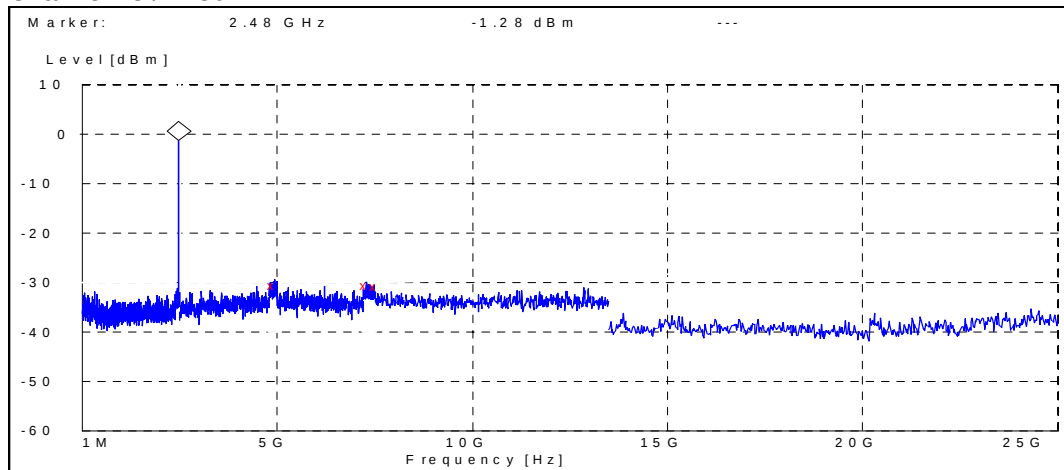

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4925.200000	-29.316702	PASSED
7291.800000	-29.316702	PASSED
7500.000000	-29.516702	PASSED

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-364, DUT 12564
Accessories with DUT numbers	BL-4U, DUT 12565; HS-40, DUT 12567; AC-3E, DUT 12566
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 42 / 100.3
Date of measurements	08-Feb-2008
Measured by	Sami Lehtonen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	43.20	144.54	43.00	0.2	HORIZONTAL	PASSED
7206.000000	45.60	190.55	43.40	2.2	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	30.70	34.28	30.50	0.2	VERTICAL	PASSED
7206.000000	32.90	44.16	30.70	2.2	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.776353	23.50	14.96	43.80	-20.3	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4848.697395	44.90	175.79	44.00	0.9	VERTICAL	PASSED
13286.577154	52.90	441.57	40.20	12.7	VERTICAL	PASSED
13364.221443	53.50	473.15	40.10	13.4	VERTICAL	PASSED
15407.815631	52.90	441.57	37.50	15.4	VERTICAL	PASSED
15832.657315	54.60	537.03	37.90	16.7	VERTICAL	PASSED
16191.384770	54.90	555.90	37.50	17.4	VERTICAL	PASSED
17916.833667	56.60	676.08	37.70	18.9	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4849.697395	30.90	35.08	30.00	0.9	VERTICAL	PASSED
13287.077154	40.20	102.33	27.50	12.7	VERTICAL	PASSED
13358.721443	40.40	104.71	27.00	13.4	VERTICAL	PASSED
15404.815631	40.00	100.00	24.60	15.4	VERTICAL	PASSED
15824.657315	41.60	120.23	24.80	16.8	VERTICAL	PASSED

16189.384770	42.30	130.32	24.90	17.4	VERTICAL	PASSED
17920.333667	43.90	156.68	24.90	19.0	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	43.20	144.54	43.60	-0.4	VERTICAL	PASSED
7440.000000	46.40	208.93	43.30	3.1	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	30.10	31.99	30.50	-0.4	VERTICAL	PASSED
7440.000000	33.90	49.55	30.80	3.1	VERTICAL	PASSED

6.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	43.40	147.91	43.20	0.2	VERTICAL	PASSED
7206.000000	45.50	188.36	43.30	2.2	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	30.30	32.73	30.10	0.2	VERTICAL	PASSED
7206.000000	32.80	43.65	30.60	2.2	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.895391	21.80	12.30	42.10	-20.3	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4843.695391	44.50	167.88	43.70	0.8	VERTICAL	PASSED
12465.431864	52.10	402.72	41.30	10.8	VERTICAL	PASSED
13335.675351	53.30	462.38	40.20	13.1	VERTICAL	PASSED
15451.899800	52.70	431.52	37.50	15.2	VERTICAL	PASSED
15588.670341	52.90	441.57	37.00	15.9	HORIZONTAL	PASSED
16187.376754	55.30	582.10	38.00	17.3	VERTICAL	PASSED
17920.839679	56.10	638.26	37.10	19.0	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4849.695391	30.60	33.88	29.70	0.9	VERTICAL	PASSED
12464.431864	39.40	93.33	28.60	10.8	VERTICAL	PASSED
13336.175351	40.50	105.93	27.40	13.1	VERTICAL	PASSED
15450.399800	39.80	97.72	24.60	15.2	VERTICAL	PASSED
15589.170341	39.80	97.72	23.90	15.9	HORIZONTAL	PASSED
16186.876754	42.20	128.82	24.90	17.3	VERTICAL	PASSED
17923.839679	43.90	156.68	24.80	19.1	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	42.20	128.82	42.60	-0.4	HORIZONTAL	PASSED
7440.000000	46.80	218.78	43.70	3.1	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	29.70	30.55	30.10	-0.4	VERTICAL	PASSED
7440.000000	33.70	48.42	30.60	3.1	VERTICAL	PASSED

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-364, DUT 12539
Accessories with DUT numbers	BL-4U, DUT 12536; HS-40, DUT 12538; AC-3E, DUT 12537
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 100
Date of measurements	07-Feb-2008
Measured by	Anni Manninen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results


7.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

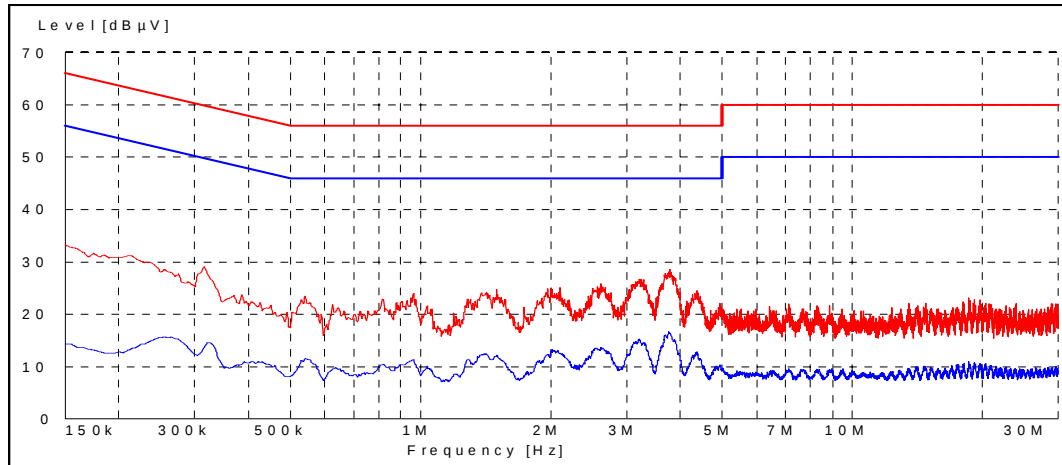

7.2.2 8DPSK modulation, PRBS packet type

TX mode, channel 40 / 2442 MHz

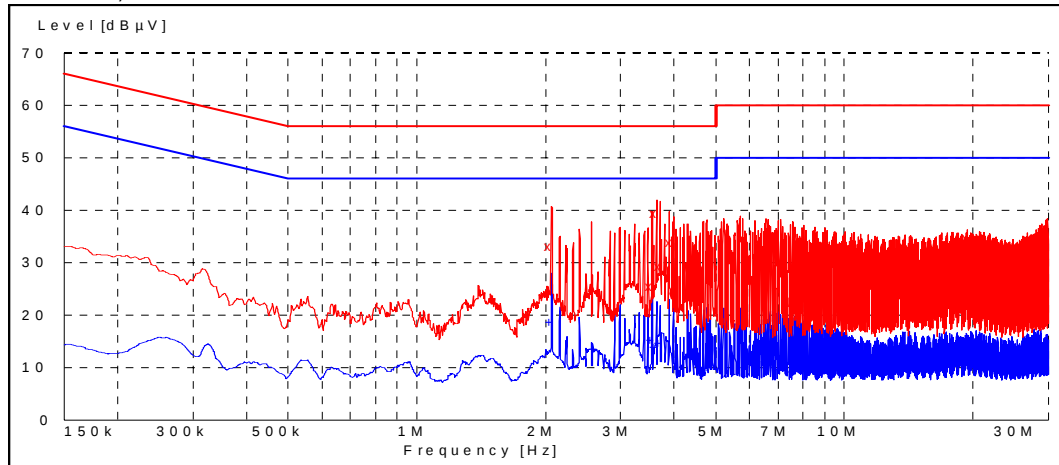

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
2.055000	33.20	L1	PASSED
3.540000	25.50	N	PASSED
3.625000	39.30	L1	PASSED
3.715000	29.30	L1	PASSED
3.940000	34.00	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
2.065000	18.60	L1	PASSED
3.555000	15.20	L1	PASSED
3.635000	13.90	L1	PASSED
3.710000	14.60	L1	PASSED

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-364, DUT 12543
Accessories with DUT numbers	BL-4U, DUT 12536; HS-40, DUT 12538; AC-3E, DUT 12537
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 101
Date of measurements	11-Feb-2008
Measured by	Anni Manninen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	760.000	PASSED
40 / 2442	756.000	PASSED
78 / 2480	764.000	PASSED


Channel 0 / 2402 MHz

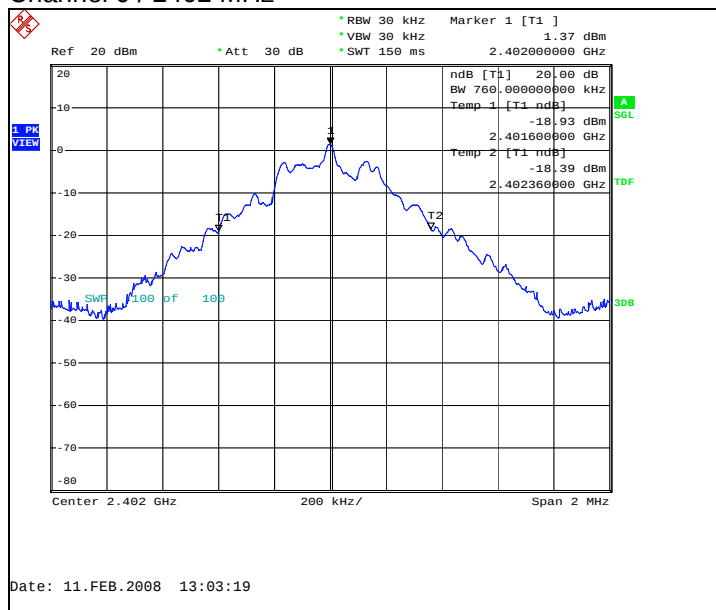

Channel 40 / 2442 MHz

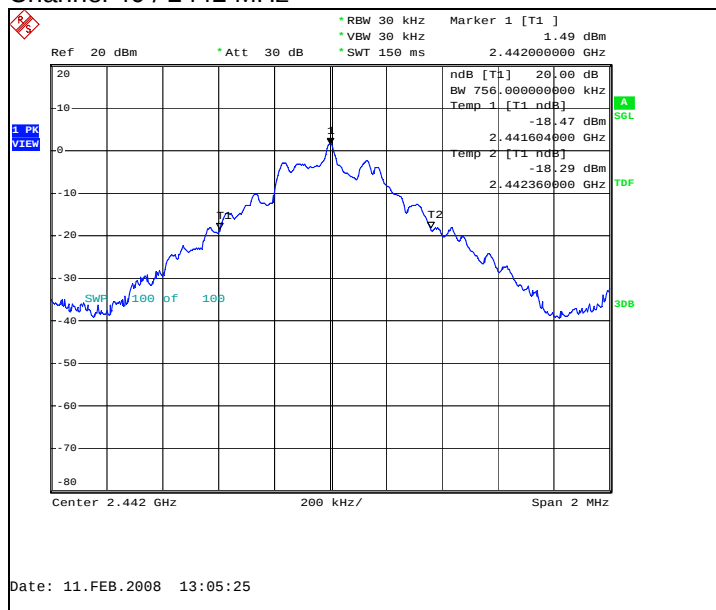


Channel 78 / 2480 MHz

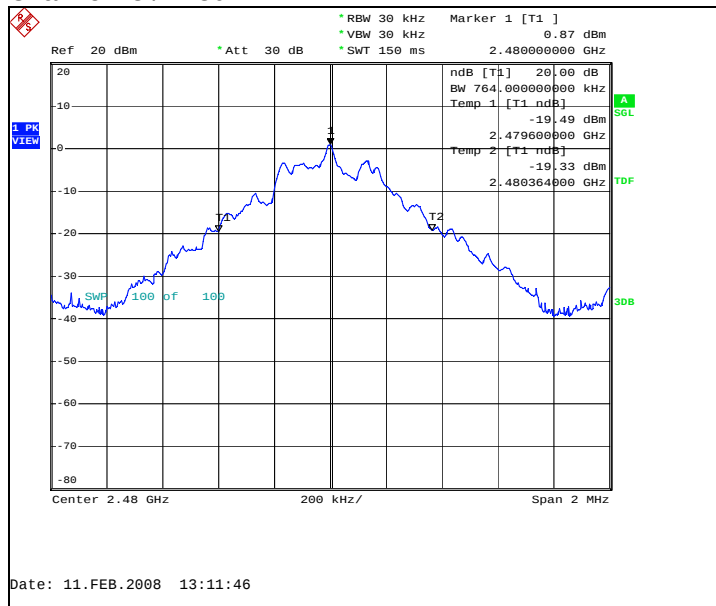


8.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1260.000	PASSED
40 / 2442	1256.000	PASSED
78 / 2480	1256.000	PASSED


Channel 0 / 2402 MHz

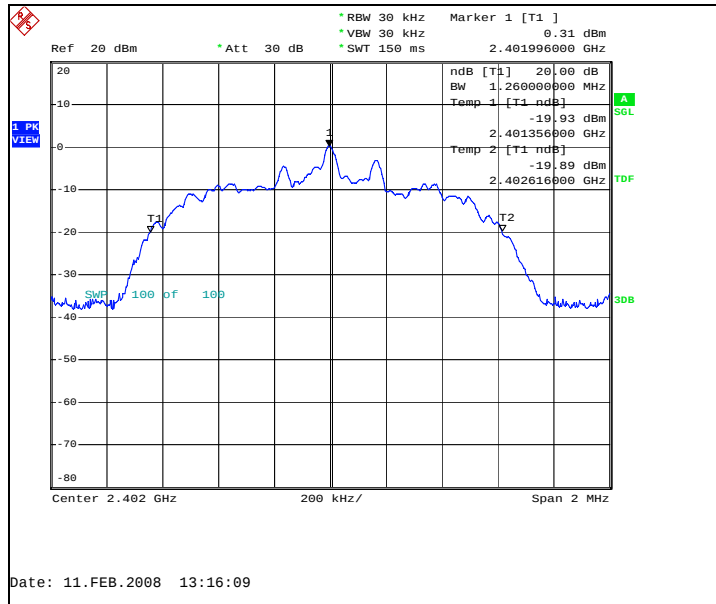

Channel 40 / 2442 MHz

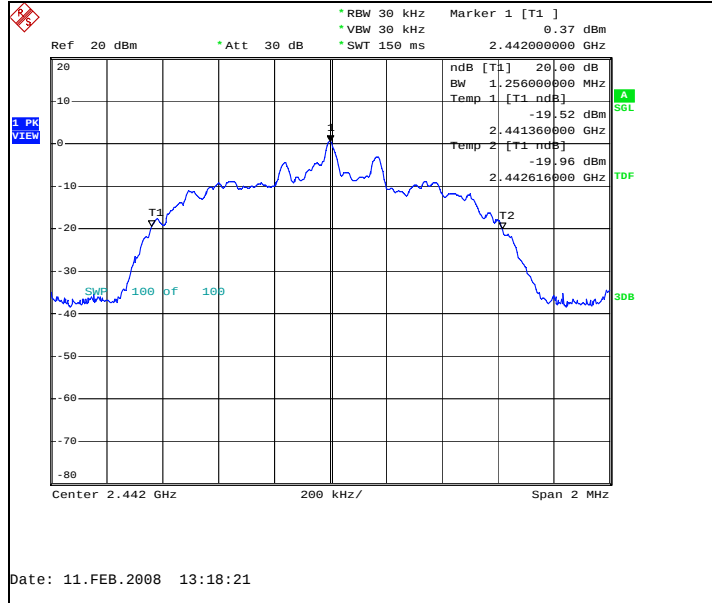

Channel 78 / 2480 MHz

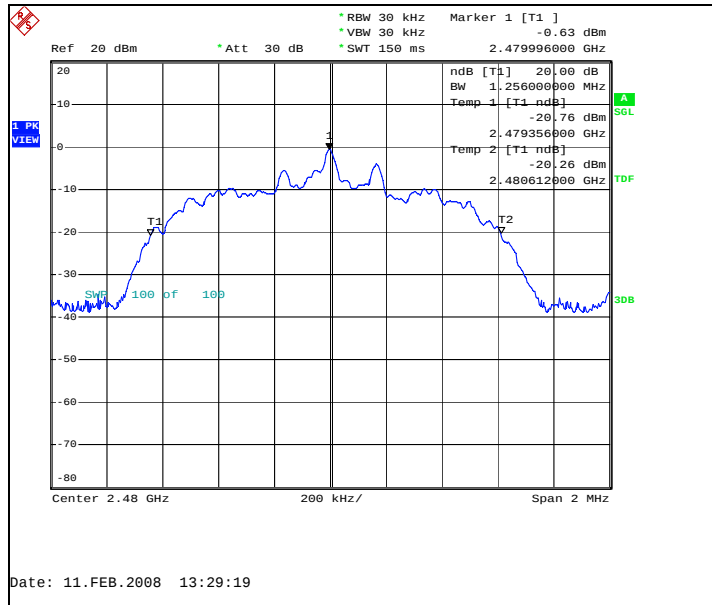

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-364, DUT 12543
Accessories with DUT numbers	BL-4U, DUT 12536; HS-40, DUT 12538; AC-3E, DUT 12537
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 101
Date of measurements	11-Feb-2008
Measured by	Anni Manninen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or 2/3 of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1000	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

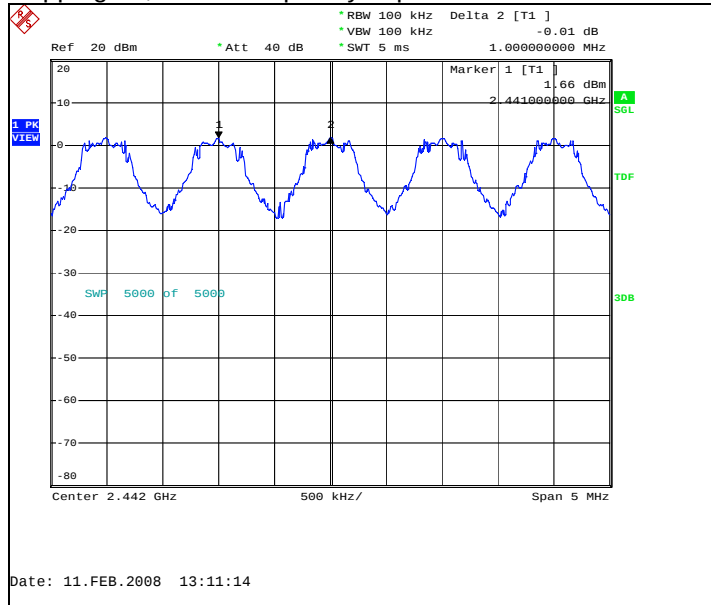

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1080	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

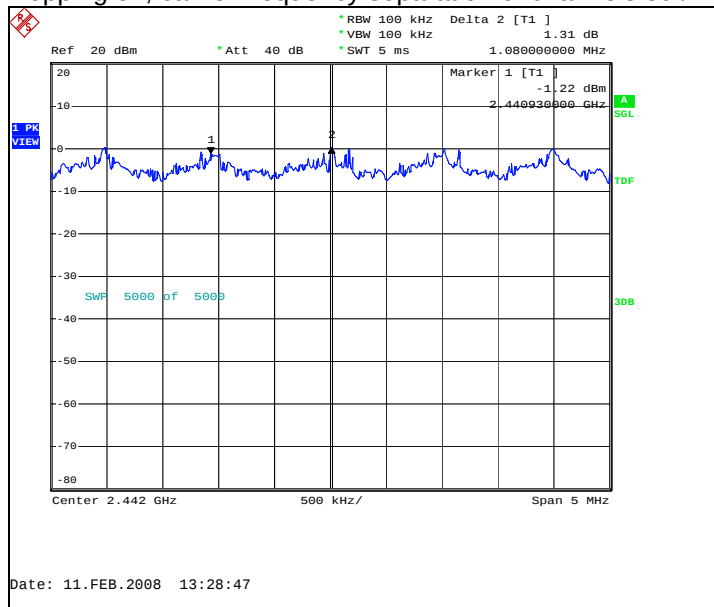

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-364, DUT 12543
Accessories with DUT numbers	BL-4U, DUT 12536; HS-40, DUT 12538; AC-3E, DUT 12537
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 101
Date of measurements	11-Feb-2008
Measured by	Anni Manninen

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

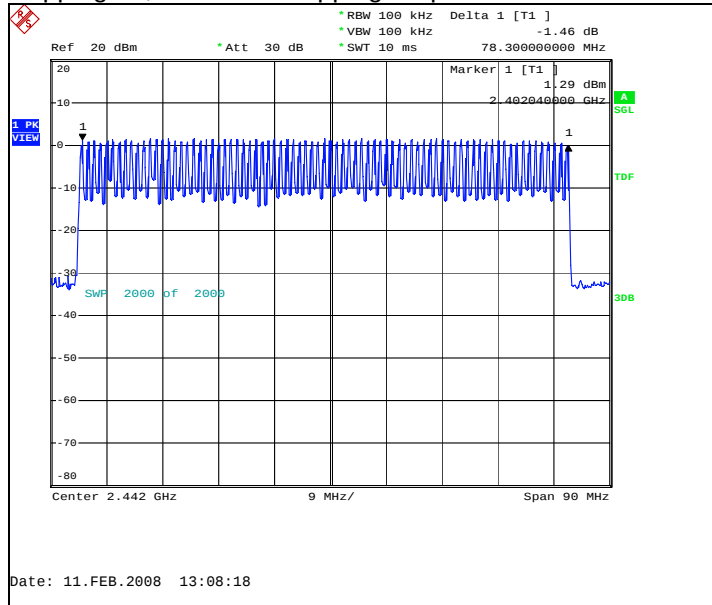

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
70	PASSED

Hopping on, number of hopping frequencies

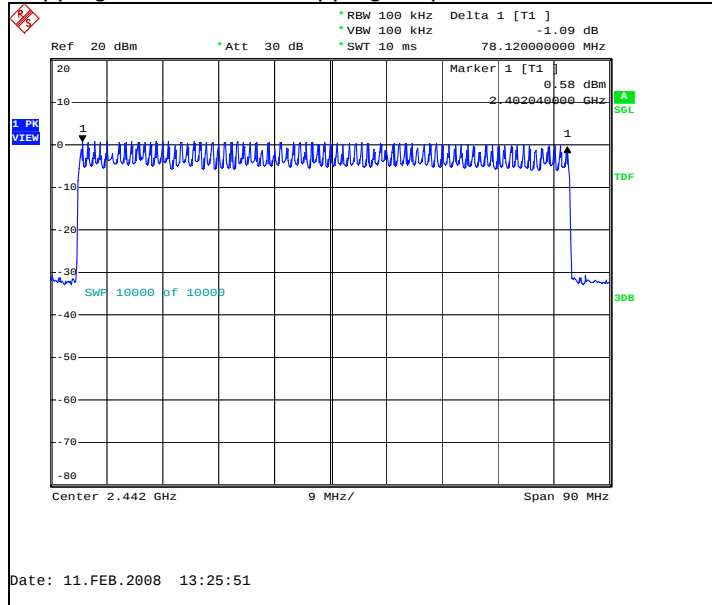

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-364, DUT 12543
Accessories with DUT numbers	BL-4U, DUT 12536; HS-40, DUT 12538; AC-3E, DUT 12537
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 101
Date of measurements	11-Feb-2008
Measured by	Anni Manninen

11.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
89	2 968	0.264152	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

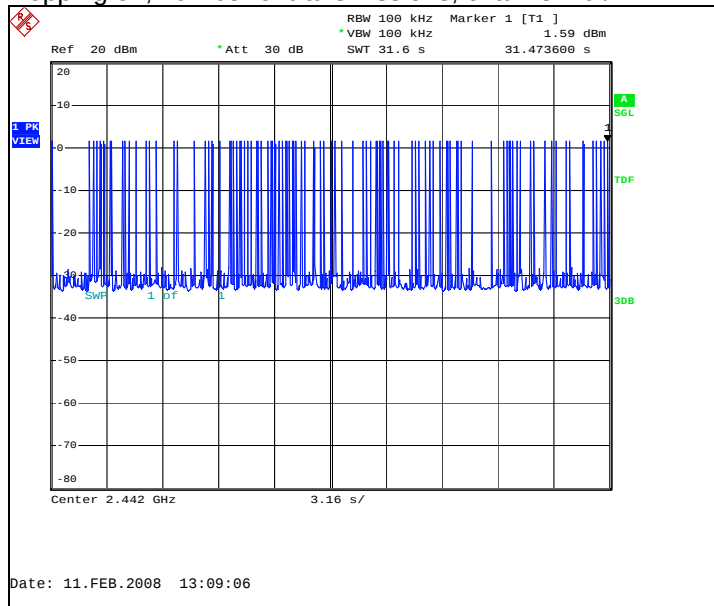


Hopping on, duration of one transmission, channel 40 / 2442 MHz

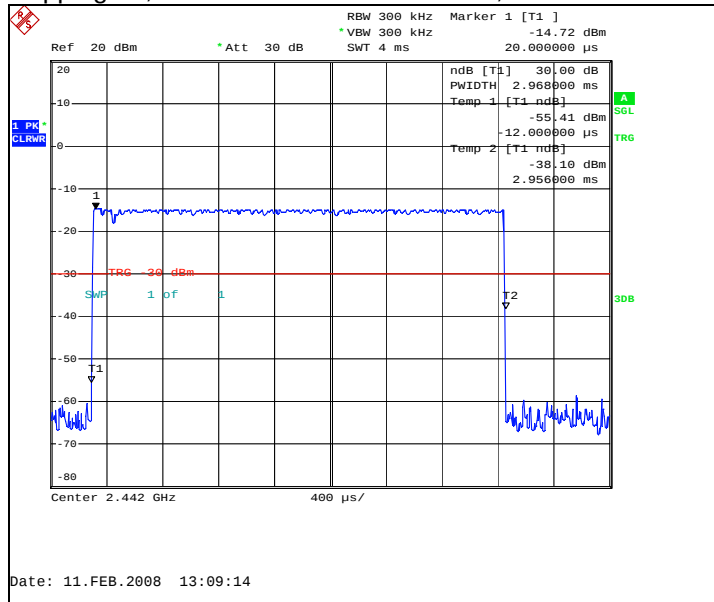


11.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
90	2 976	0.267840	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

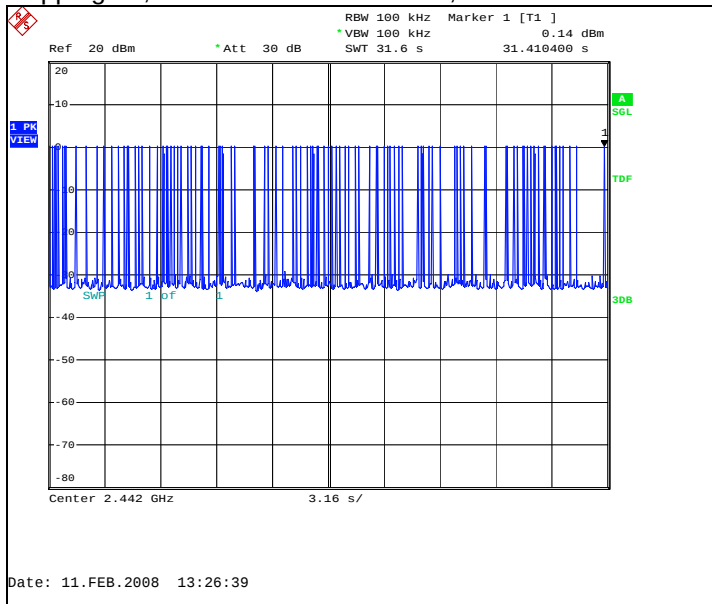

Hopping on, duration of one transmission, channel 40 / 2442 MHz

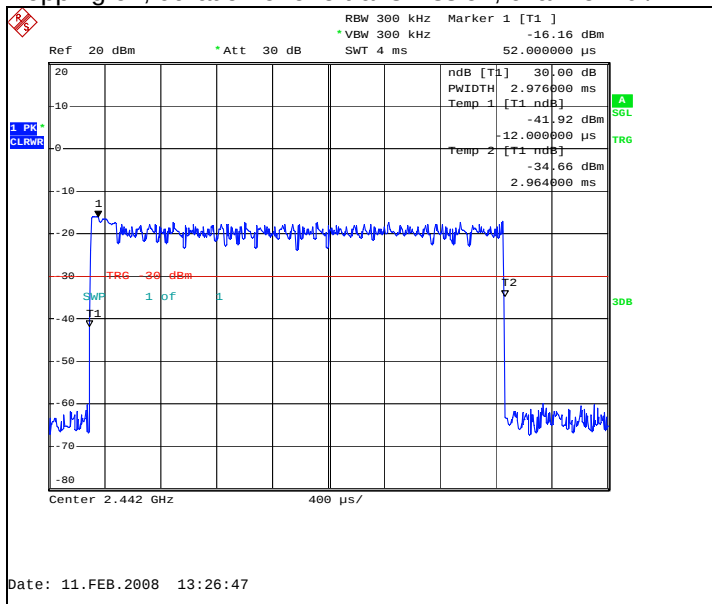

12. Test Equipment

12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24/27, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B

12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1749	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24/27, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24/27, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24/27, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24/27, 15C
2006	Radiation Reference Source	VSQ	MEB	22/24/27, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24/27, 15C, 15B
2019	Multimeter	34401A	HP	22/24/27, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24/27, 15C, 15B
2043	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24, 15C, 15B
2048	Band Reject Filter	WRCC1700/1800-0.2-10SS	Wainwright	27, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24/27, 15C
2057	Log. per. Antenna	HL025	R&S	22/24/27, 15C
2109	Power Supply	PL330QMD	THURLBY	22/24/27, 15C, 15B
2110	Multimeter	34401A	HP	22/24/27, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24/27, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24/27, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24/27, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24/27, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2138	Ultra Broadband Antenna	HL562	R&S	22/24/27, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24/27, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24/27, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24/27, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24/27, 15C, 15B
2334	GPIB Switch 2 to 1	-	National Instruments	22/24/27, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24/27, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24/27, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24/27, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24/27, 15C
2363	Band Reject Filter	WRCG 832/838-825/845/5SS	Wainwright	22/24/27
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	22/24/27
2365	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B