

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-634_07.docx	Date of Report:	29-May-2010
Number of pages:	48	Customer's Contact person:	Shao Xu
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-634 / Battery BL-4D, Headset HS-125 and AC-Charger AC-8E		
FCC ID:	QTKRM-634	IC:	661AD-RM634
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Sami Lehtonen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	15-Apr-2010
Testing completed	03-May-2010
The customer's contact person	Shao Xu
Test Plan referred to	T:\Projects\RM-632\TestPlan \RS_testplan_RM-632.xls
Notes	-
Document name	FCC15C_RM-634_07.docx

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-632	004401109337564	0200	-	041.007	14694
Phone	RM-632	004401109337812	0200	-	041.007	14679
Battery	BL-4D	4620409514N1017666460670603	-	-	-	14695
Headset	HS-125	06943239443F4108316	-	-	-	14706
AC-Charger	AC-8E	486867946432060220460675387	-	-	-	14696

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	PASSED

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (a)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (b)	Power spectral density	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Salo Laboratory.

The test results of QTKRM-632 are re-used for certification of the QTKRM-634. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit	6
3.2. Bluetooth Test results	7
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)	10
4.1. Test method and limit	10
4.2. Bluetooth Test results	11
5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	14
5.1. Test method and limit	14
5.2. Bluetooth Test results	15
6. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))	16
6.1. Test method and limit	16
6.2. Bluetooth Test results	17
7. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))	20
7.1. Test method and limit	20
7.2. Bluetooth Test results	21
8. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	23
8.1. Test method and limit	23
8.2. Bluetooth Test results	24
9. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	26
9.1. Test method and limit	26
9.2. Bluetooth test results	27
10. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))	29
10.1. Test method and limit	29
10.2. WLAN Test results	30
11. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)	33
11.1. Test method and limit	33
11.2. WLAN Test results	34


12.	AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2).....	37
12.1.	Test method and limit	37
12.2.	WLAN Test results.....	38
13.	6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a)).....	39
13.1.	Test method and limit	39
13.2.	WLAN test results.....	40
14.	Power spectral density (FCC §15.247(e), RSS-210 A8.2 (b))	43
14.1.	Test method and limit	43
14.2.	WLAN test results	44
15.	Test Equipment	47
15.1.	Conducted measurements	47
15.2.	Radiated measurements	47

2. Test setups


2.1. Conducted RF test setup

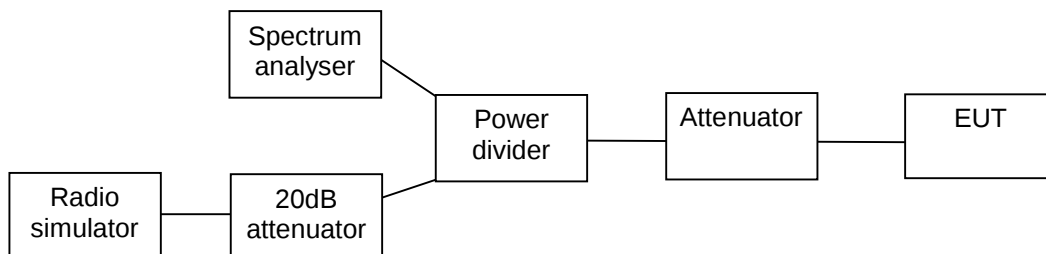

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

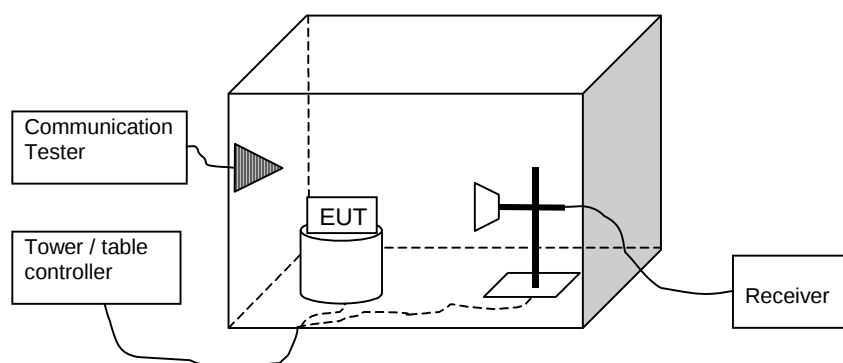

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-0.30	0.933	PASSED
40 / 2442	-0.30	0.933	PASSED
78 / 2480	-0.40	0.912	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

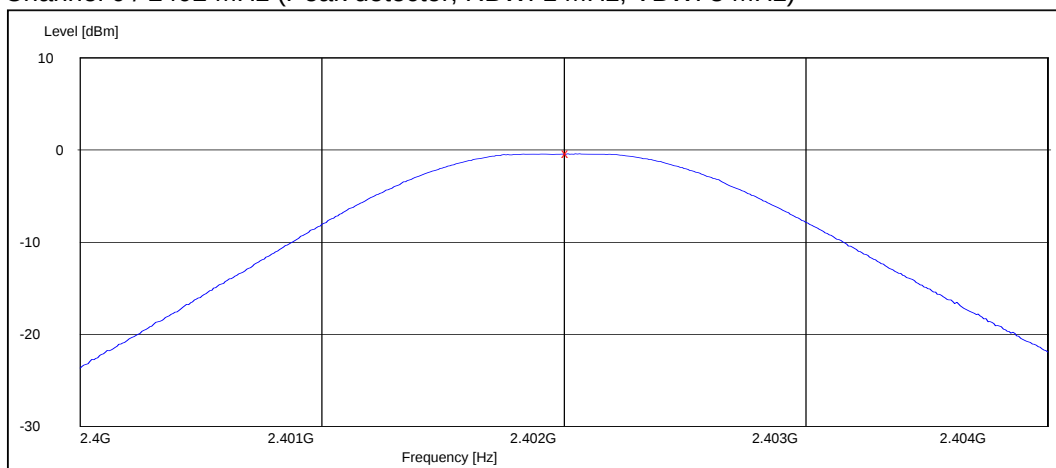

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

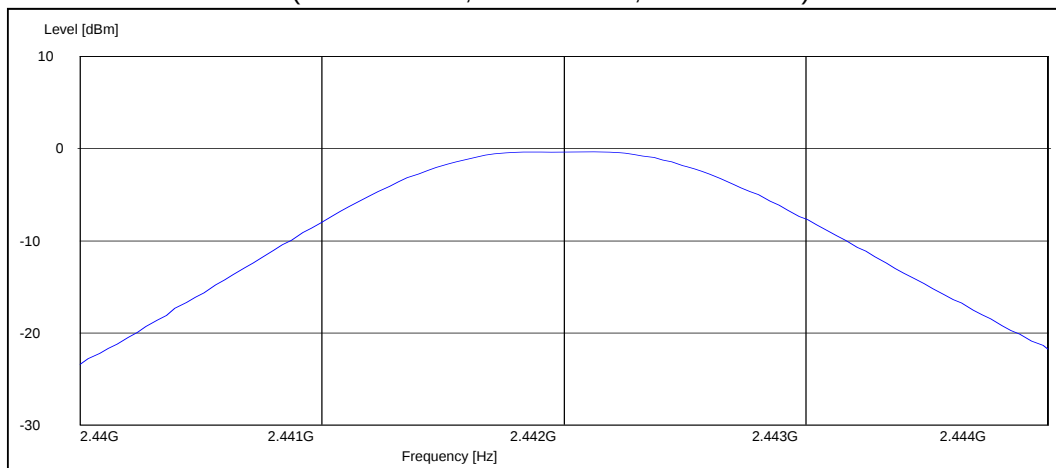


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

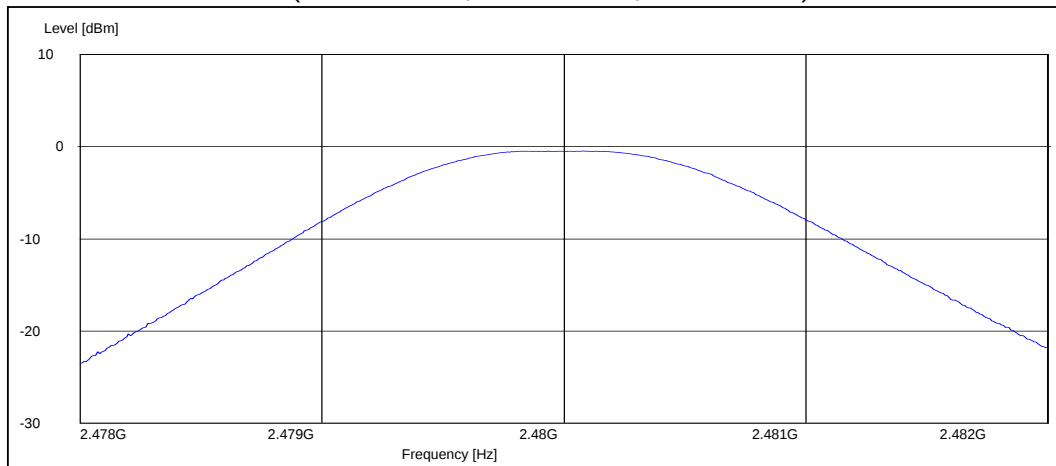


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.10	1.288	PASSED
40 / 2442	1.20	1.318	PASSED
78 / 2480	1.10	1.288	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

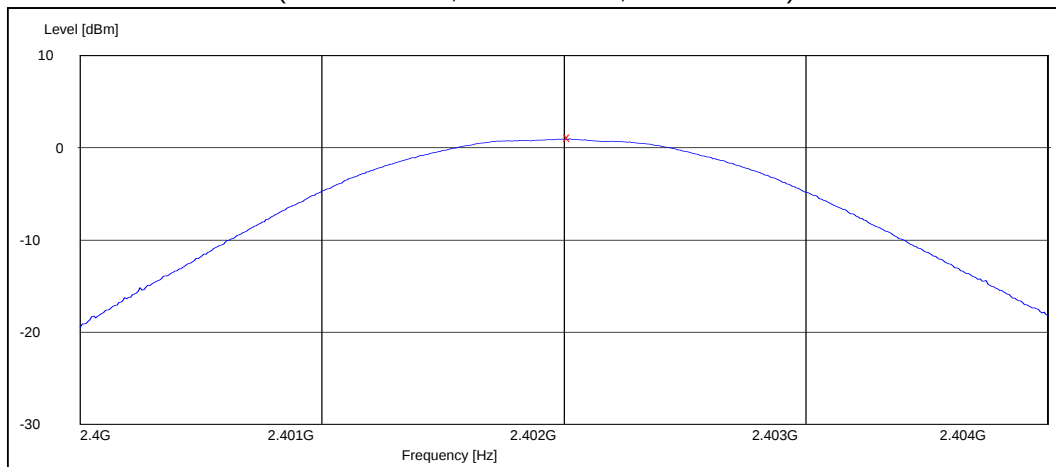

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

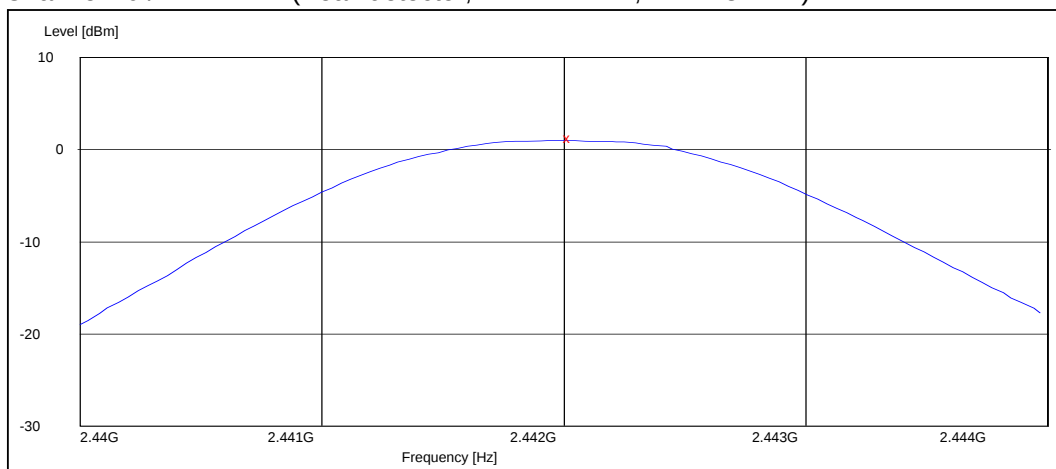

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

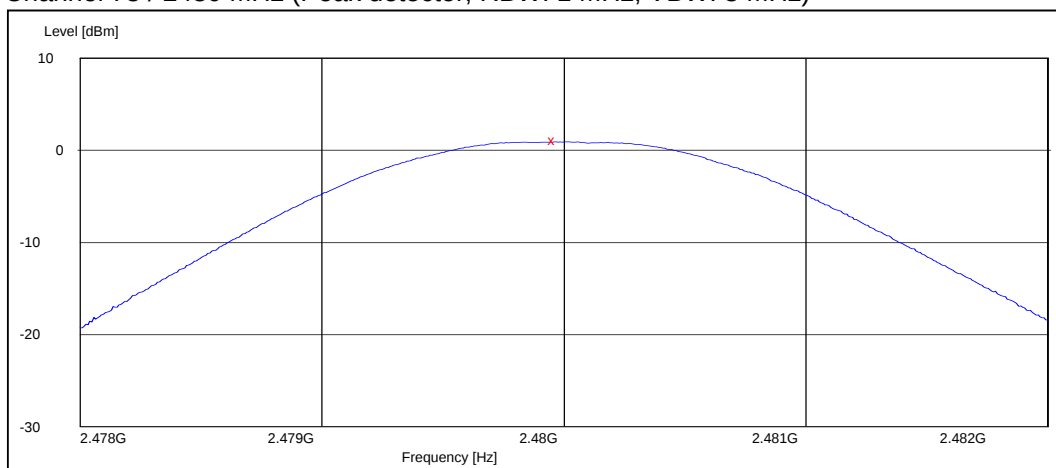

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

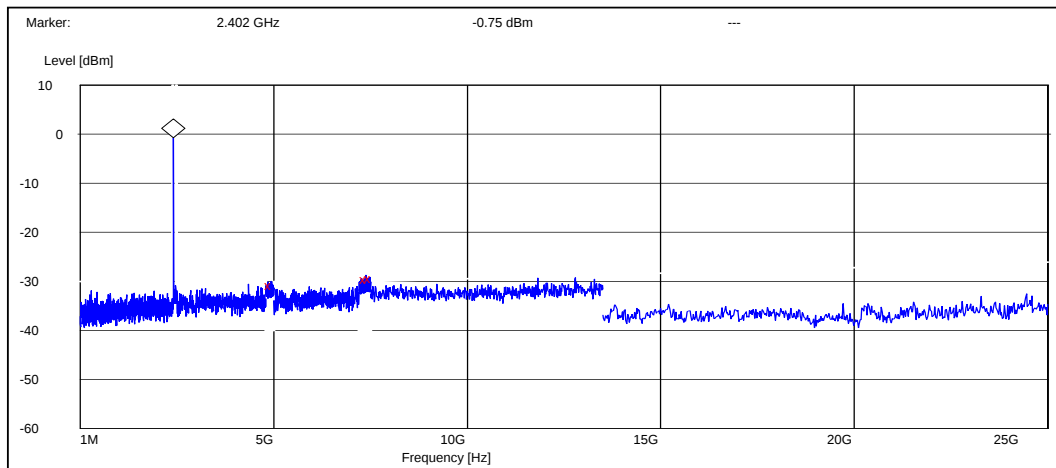

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4934.800000	-30.148499	PASSED
7384.800000	-28.848499	PASSED
7500.000000	-28.648499	PASSED


Channel 40 / 2442 MHz

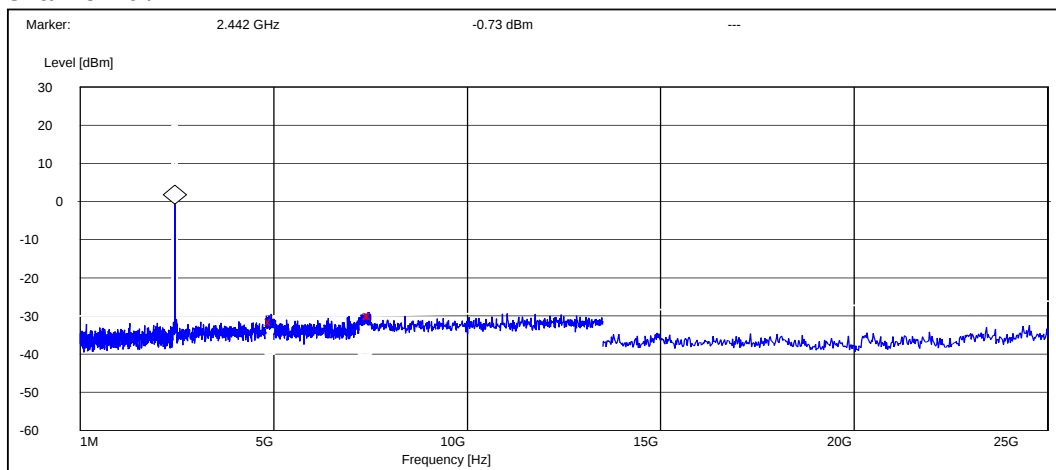

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4931.600000	-30.569333	PASSED
7468.200000	-29.069333	PASSED
7500.000000	-29.169333	PASSED

Channel 78 / 2480 MHz

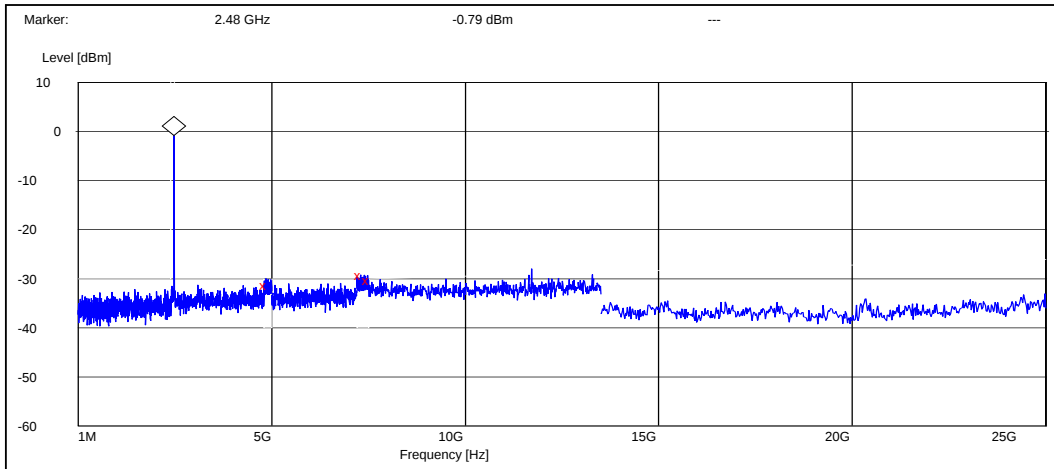


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4856.000000	-30.608806	PASSED
7296.600000	-28.408806	PASSED
7500.000000	-29.608806	PASSED

4.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

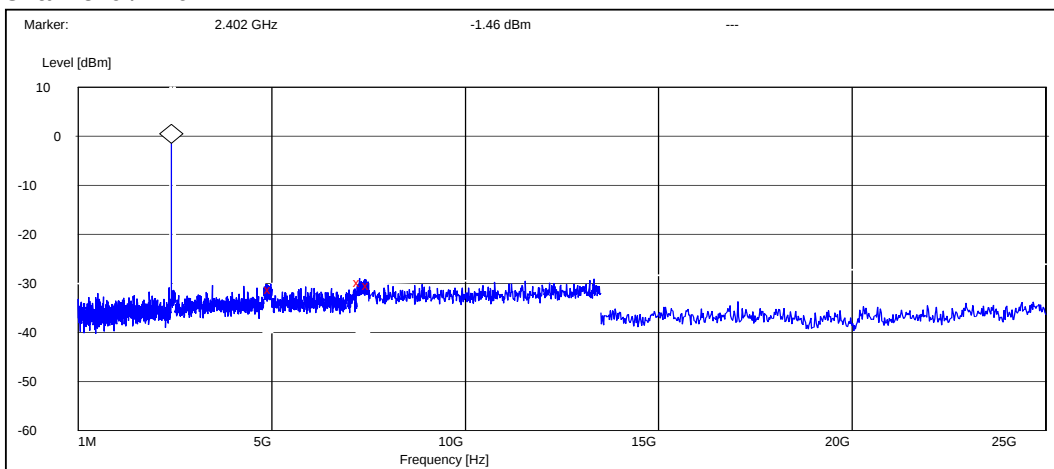

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4978.400000	-29.736684	PASSED
7276.800000	-28.336684	PASSED
7500.000000	-28.836684	PASSED


Channel 40 / 2442 MHz

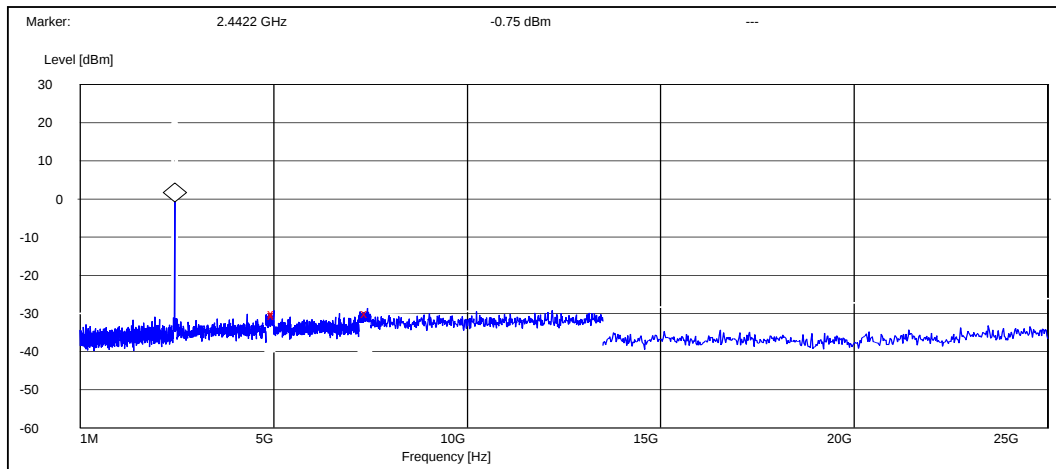

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4997.600000	-29.146370	PASSED
5000.000000	-29.846370	PASSED
7423.200000	-29.046370	PASSED

Channel 78 / 2480 MHz

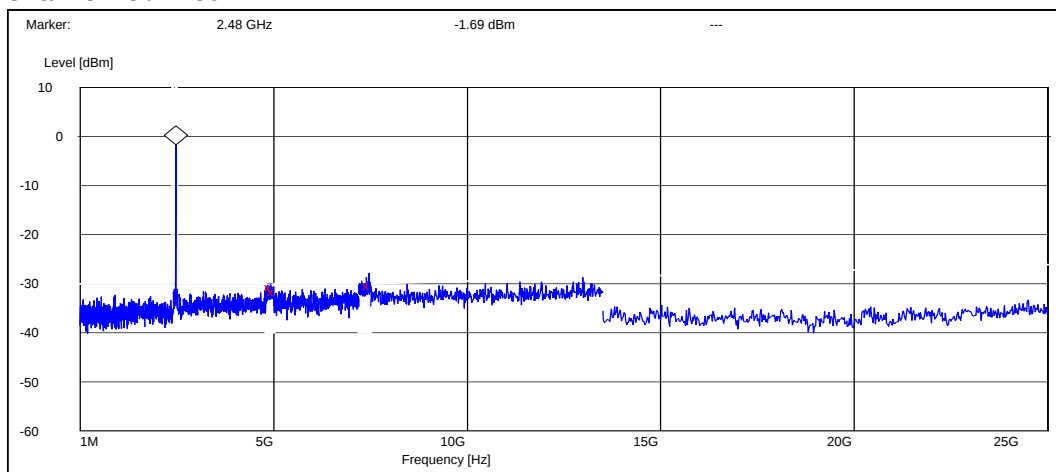

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4918.000000	-29.014900	PASSED
5000.000000	-29.914900	PASSED
7457.400000	-28.614900	PASSED

5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-632, DUT 14679
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	03-May-2010
Measured by	Anni Manninen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

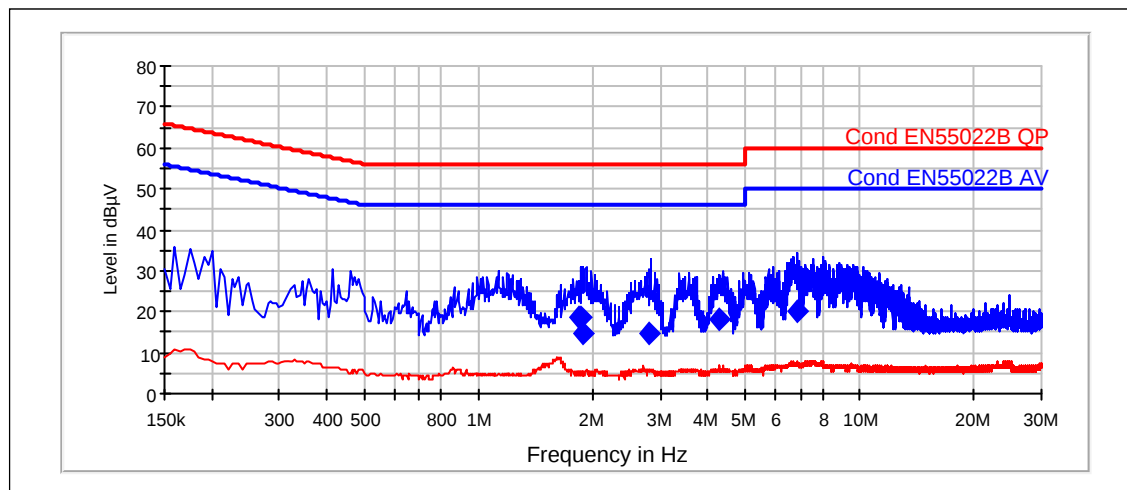

Quasi peak

Frequency [MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
1.845	18.84	15000	9	N	37.2	PASSED
1.86	18.67	15000	9	N	37.3	PASSED
1.87	14.72	15000	9	L1	41.3	PASSED
2.79	14.83	15000	9	L1	41.2	PASSED
4.27	17.96	15000	9	N	38	PASSED
6.88	19.98	15000	9	N	40	PASSED

6. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

6.2. Bluetooth Test results


6.2.1 GFSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	800.000	PASSED
40 / 2442	796.000	PASSED
78 / 2480	796.000	PASSED


Channel 0 / 2402 MHz

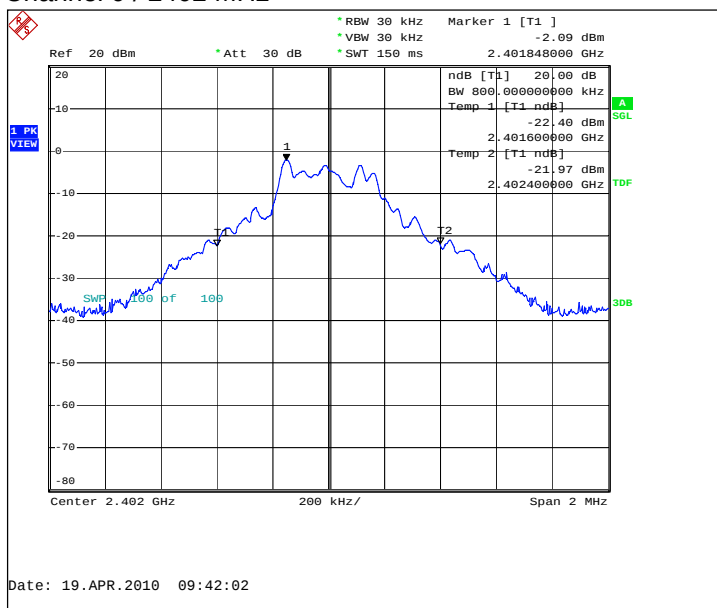

Channel 40 / 2442 MHz

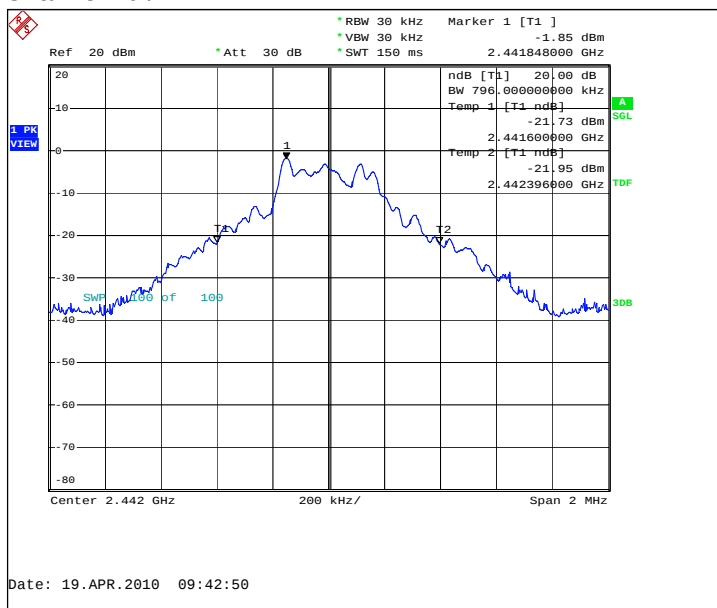


Channel 78 / 2480 MHz

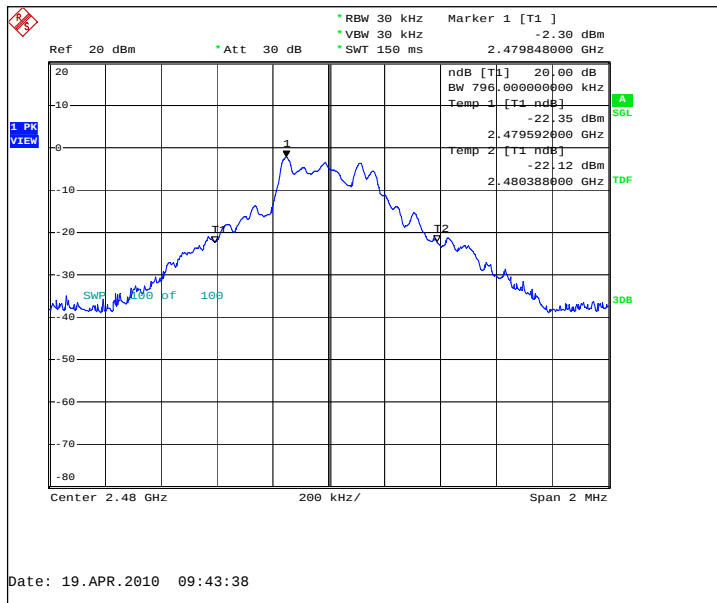


6.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1312.000	PASSED
40 / 2442	1312.000	PASSED
78 / 2480	1320.000	PASSED


Channel 0 / 2402 MHz

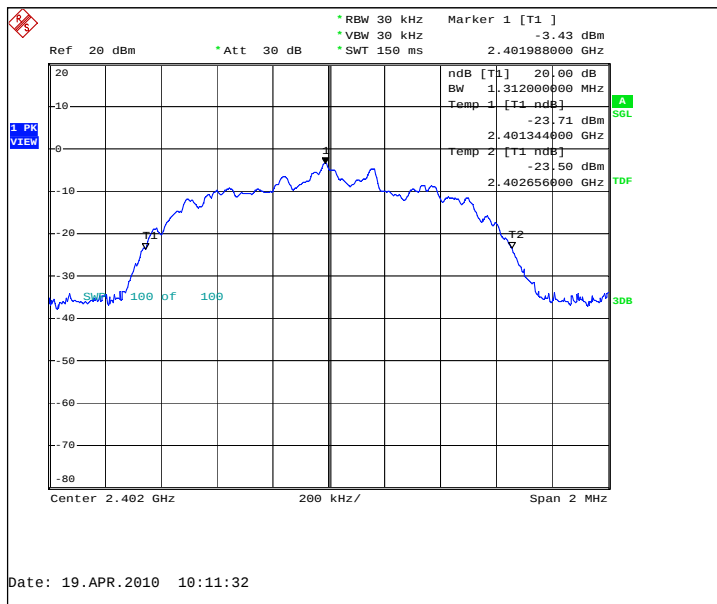

Channel 40 / 2442 MHz

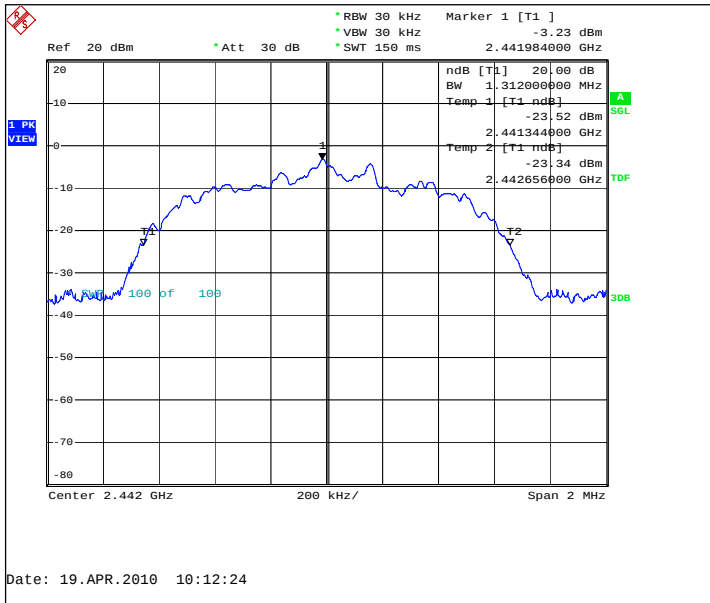

Channel 78 / 2480 MHz

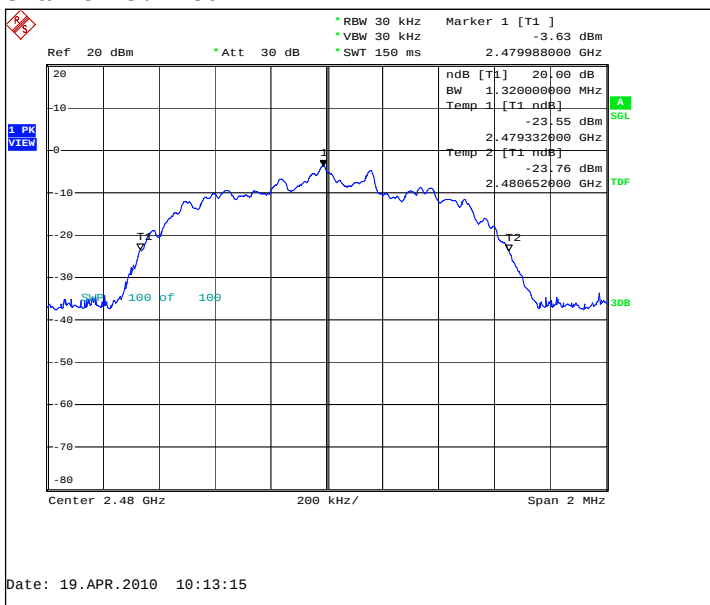

7. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
980	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

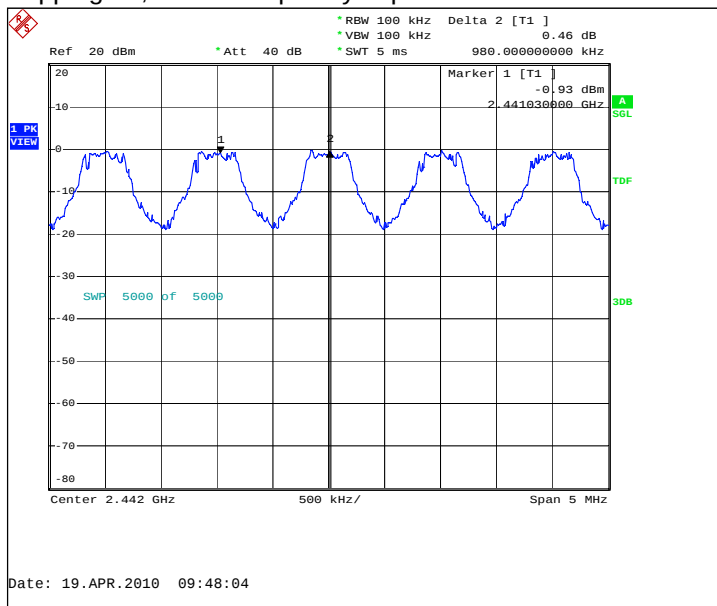

7.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
990	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

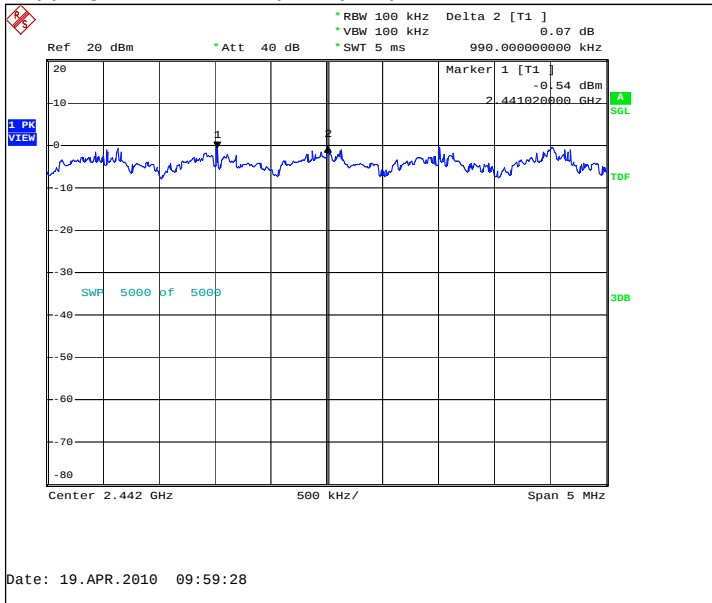

8. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

8.2. Bluetooth Test results

8.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

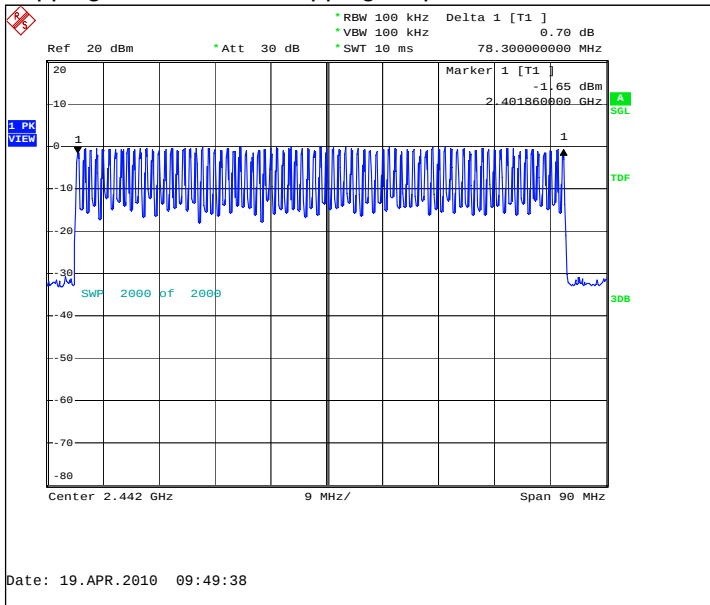

8.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
72	PASSED

Hopping on, number of hopping frequencies

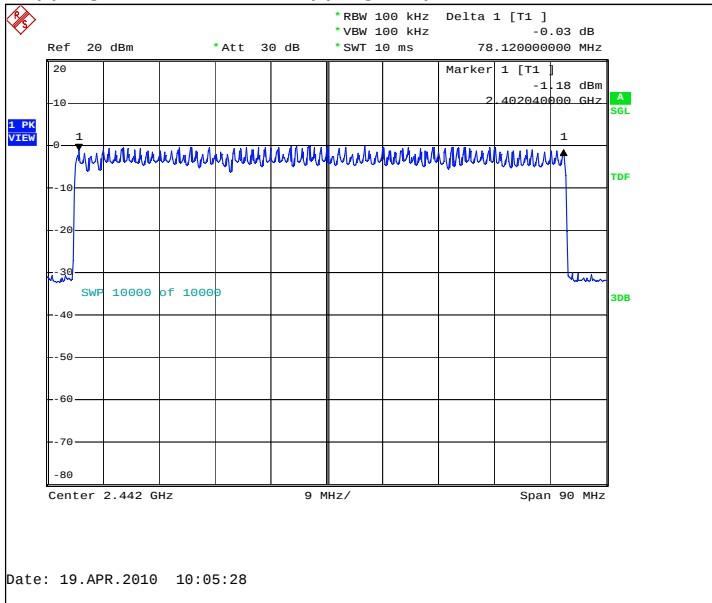

9. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

9.2. Bluetooth test results


9.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
86	2 920	0.251120	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

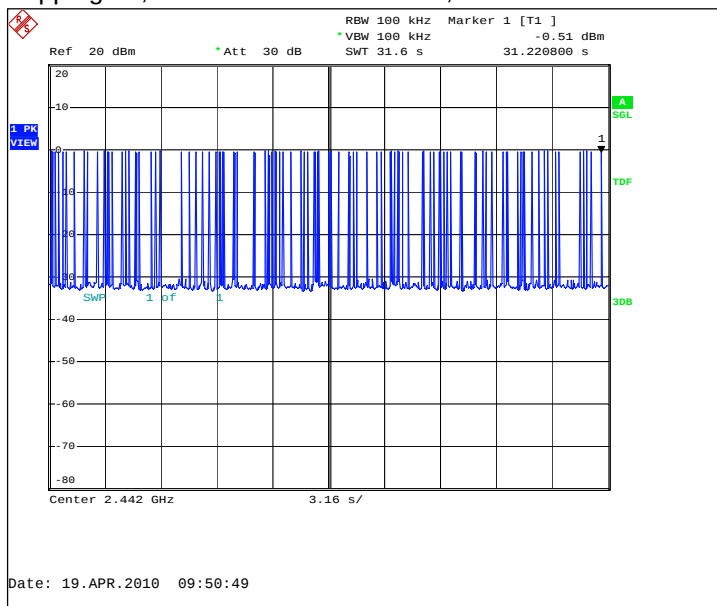


Hopping on, duration of one transmission, channel 40 / 2442 MHz

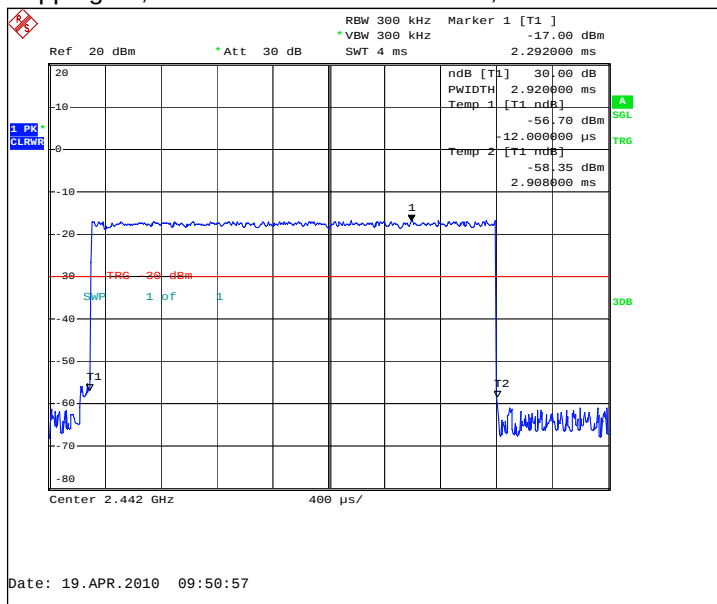


9.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
87	2 920	0.254040	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

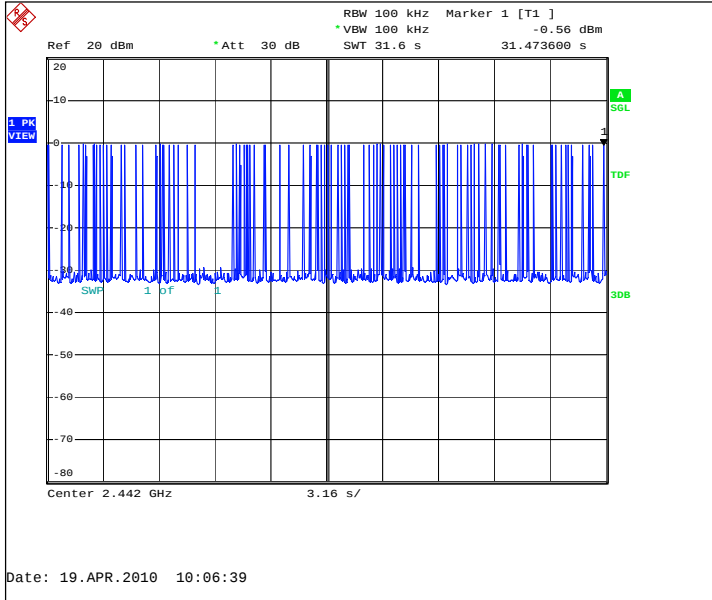

Hopping on, duration of one transmission, channel 40 / 2442 MHz

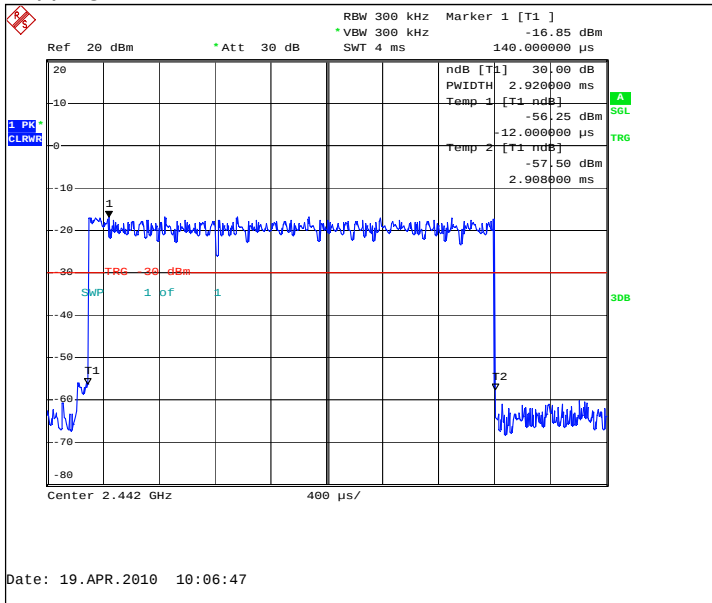

10. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

10.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

10.2. WLAN Test results


10.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [W]	Result
1 / 2412	22.61	0.182	PASSED
7 / 2442	22.66	0.185	PASSED
11 / 2462	22.52	0.179	PASSED


Channel 1 / 2412 MHz

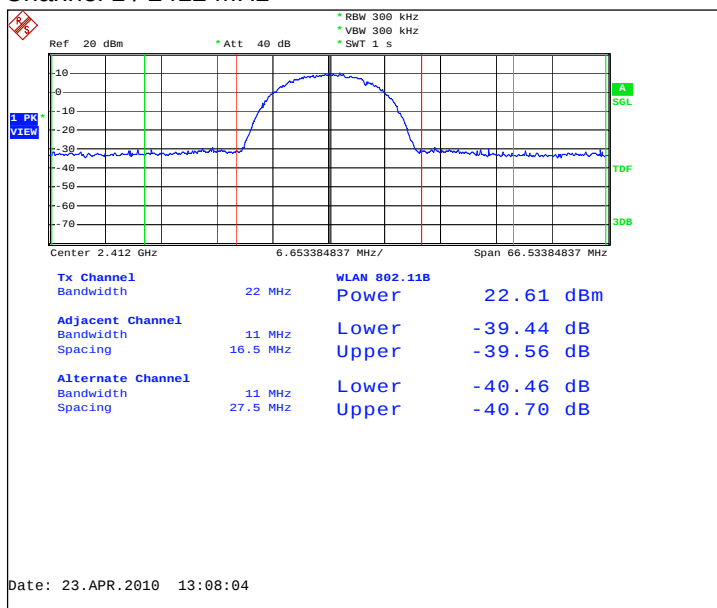

Channel 7 / 2442 MHz

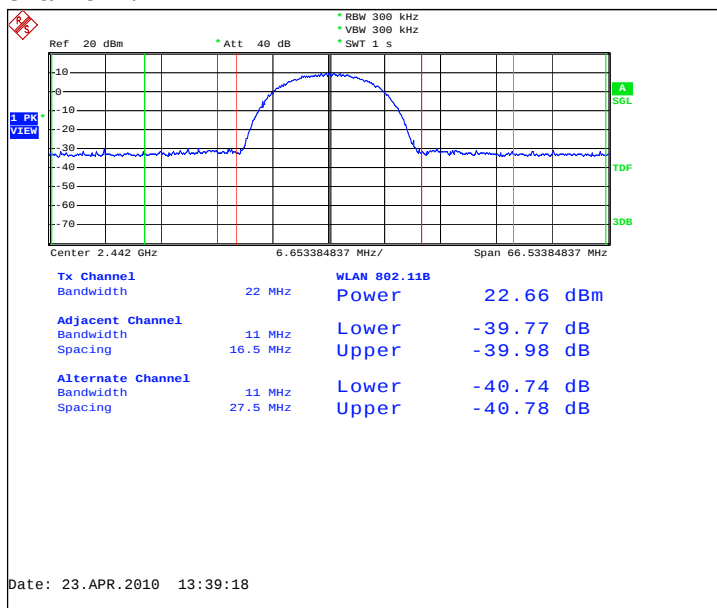


Channel 11 / 2462 MHz

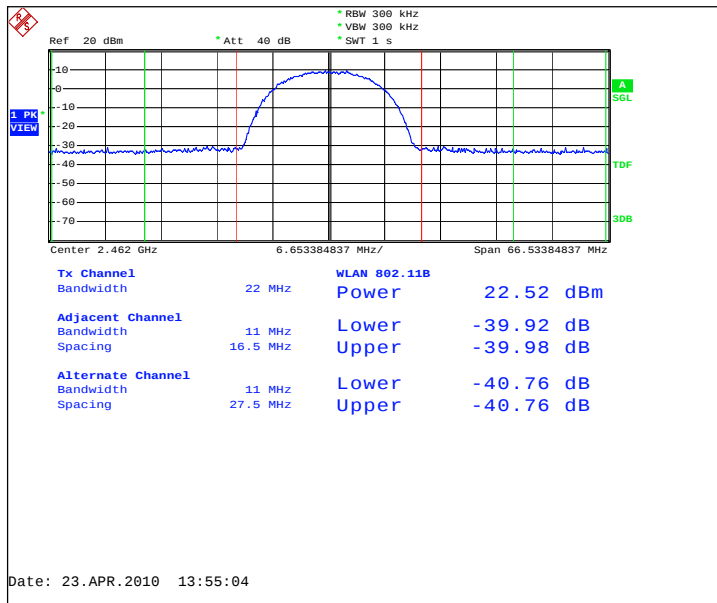


10.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [W]	Result
1 / 2412	20.96	0.125	PASSED
7 / 2442	22.16	0.164	PASSED
11 / 2462	20.85	0.122	PASSED


Channel 1 / 2412 MHz

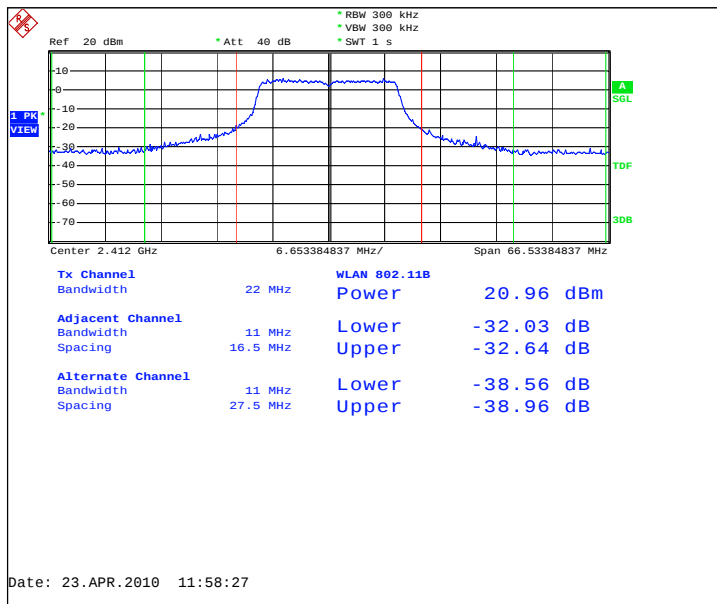

Channel 7 / 2442 MHz

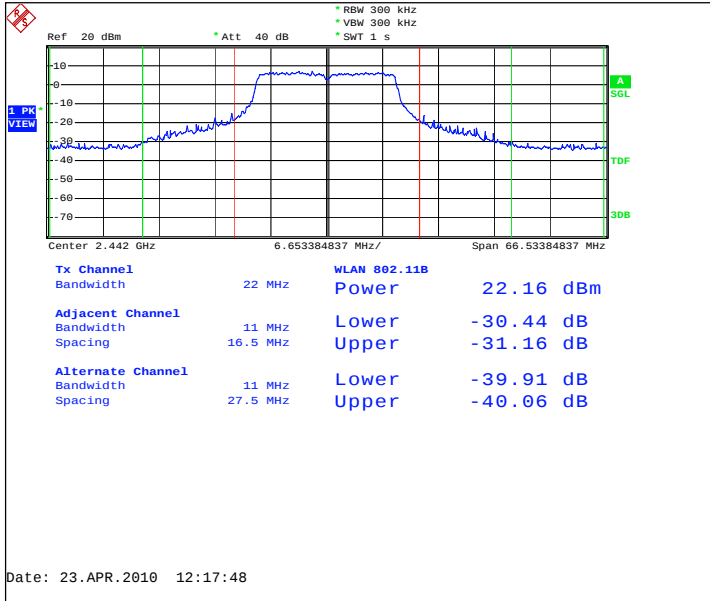

Channel 11 / 2462 MHz

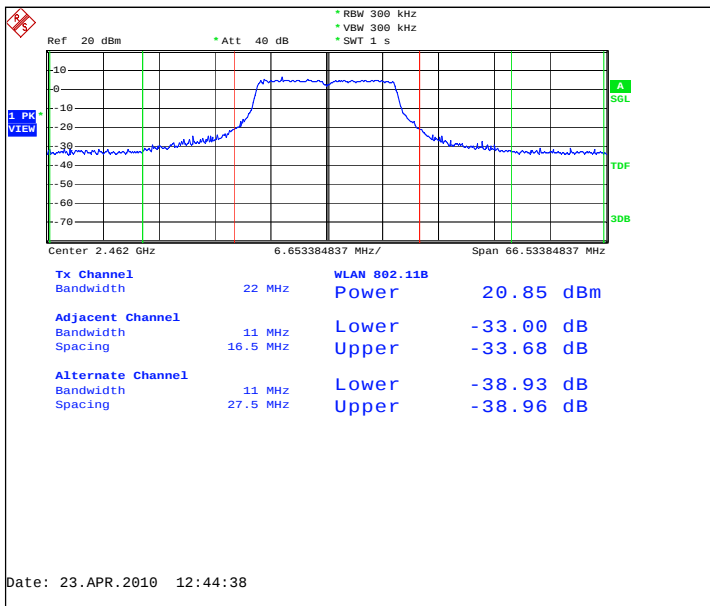

11. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

11.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

11.2. WLAN Test results

11.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

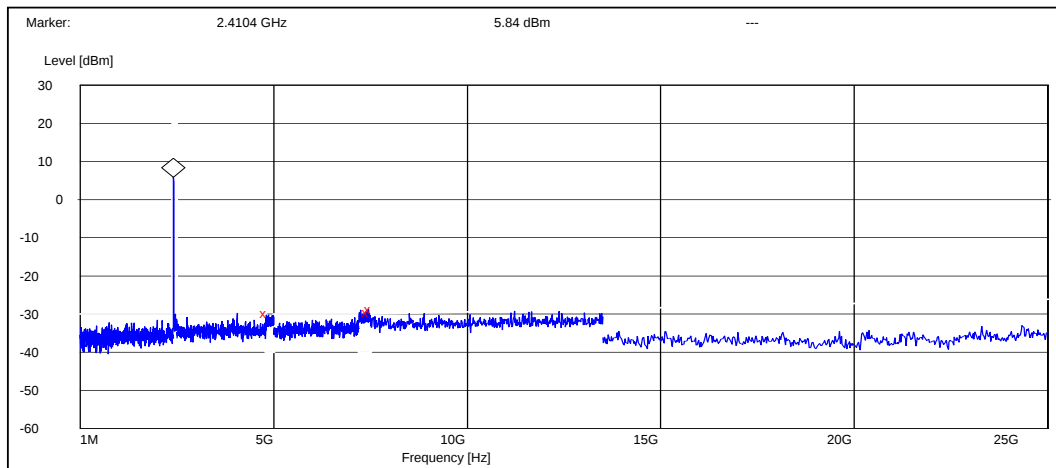

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4807.600000	-35.635453	PASSED
7454.400000	-35.435453	PASSED
7500.000000	-34.535453	PASSED


Channel 7 / 2442 MHz

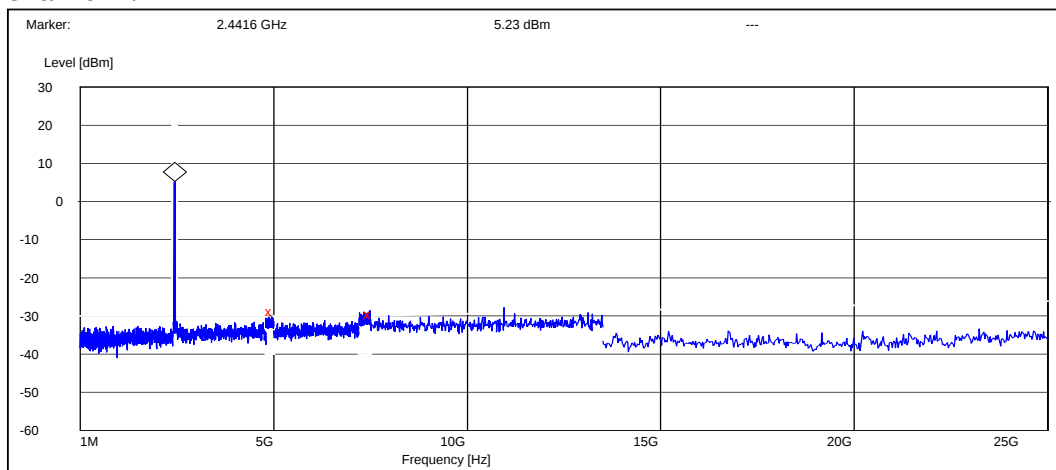

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4955.200000	-33.928920	PASSED
7496.400000	-34.828920	PASSED
7500.000000	-34.728920	PASSED

Channel 11 / 2462 MHz

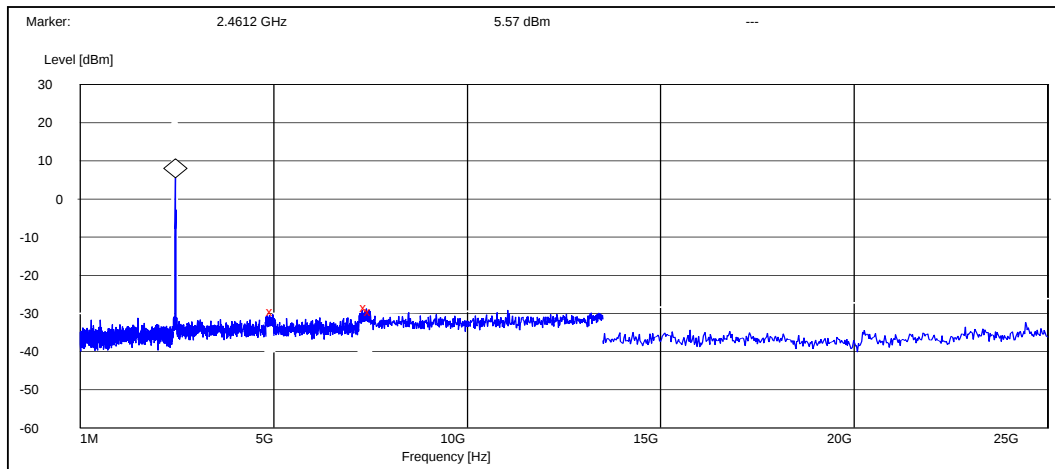


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4976.800000	-35.067222	PASSED
7389.600000	-34.067222	PASSED
7500.000000	-35.067222	PASSED

11.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

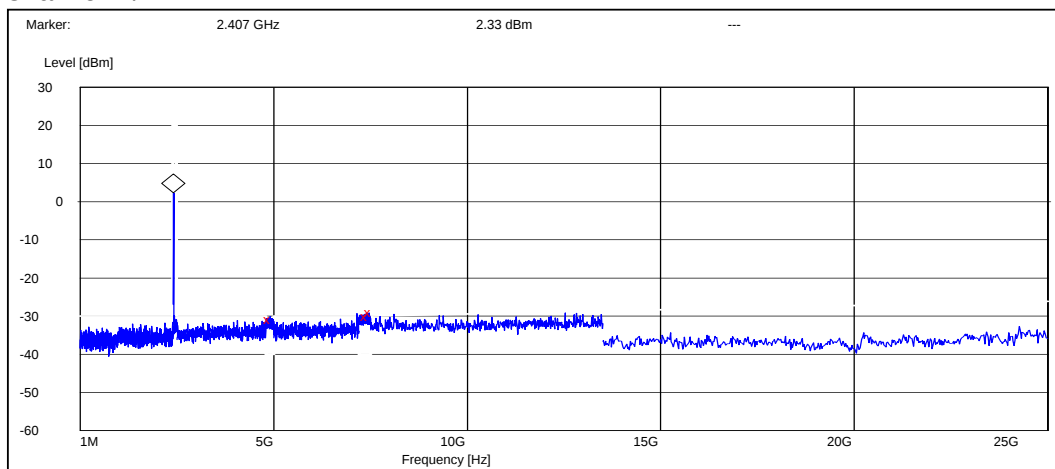

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4901.200000	-33.126697	PASSED
7411.200000	-32.326697	PASSED
7500.000000	-31.226697	PASSED


Channel 7 / 2442 MHz

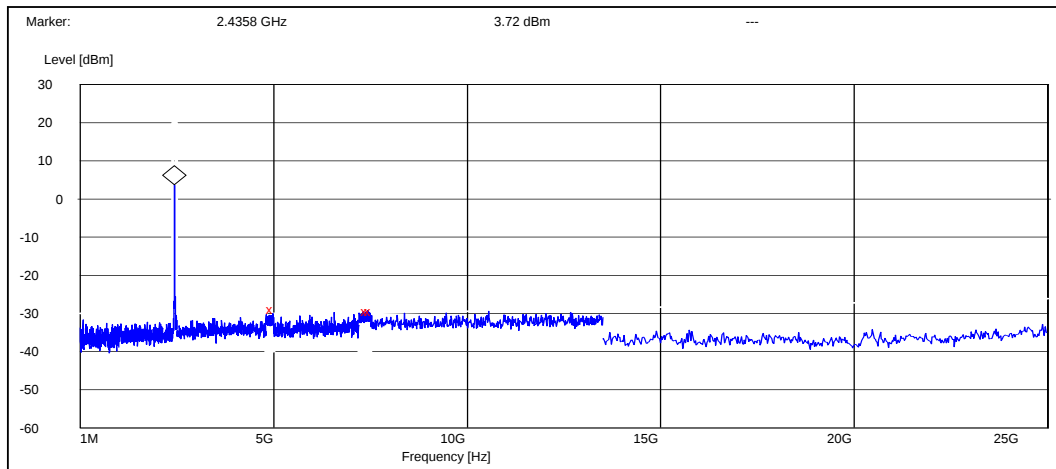

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4976.400000	-32.618185	PASSED
7420.800000	-33.118185	PASSED
7500.000000	-33.118185	PASSED

Channel 11 / 2462 MHz

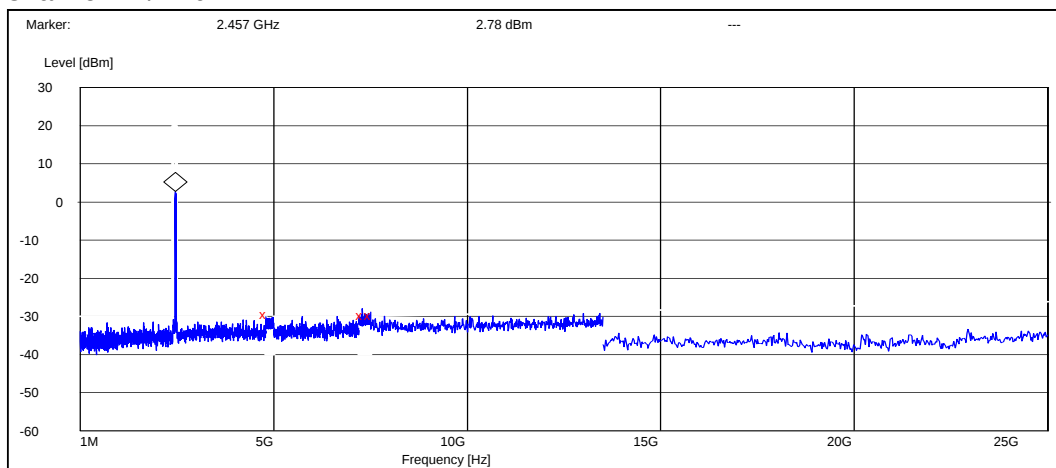

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4803.600000	-32.183469	PASSED
7288.800000	-32.483469	PASSED
7500.000000	-32.583469	PASSED

12. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-632, DUT 14679
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	03-May-2010
Measured by	Anni Manninen

12.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

12.2. WLAN Test results

12.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

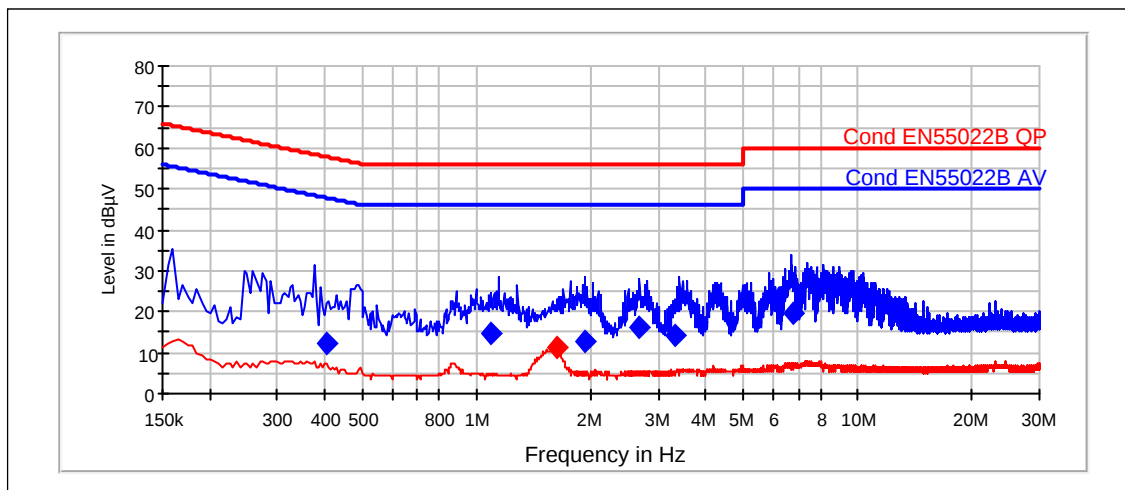

Quasi peak

Frequency [MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
0.405	12.2	15000	9	N	45.55	PASSED
1.085	14.67	15000	9	N	41.3	PASSED
1.92	12.98	15000	9	L1	43	PASSED
2.665	16.28	15000	9	N	39.7	PASSED
3.335	14.3	15000	9	N	41.7	PASSED
6.75	19.81	15000	9	N	40.2	PASSED

Average

Frequency [MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
1.625	11.08	15000	9	N	34.9	PASSED

13. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

13.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

13.2. WLAN test results


13.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1	10900.000	PASSED
7	10800.000	PASSED
11	10900.000	PASSED


Channel 1 / 2412 MHz

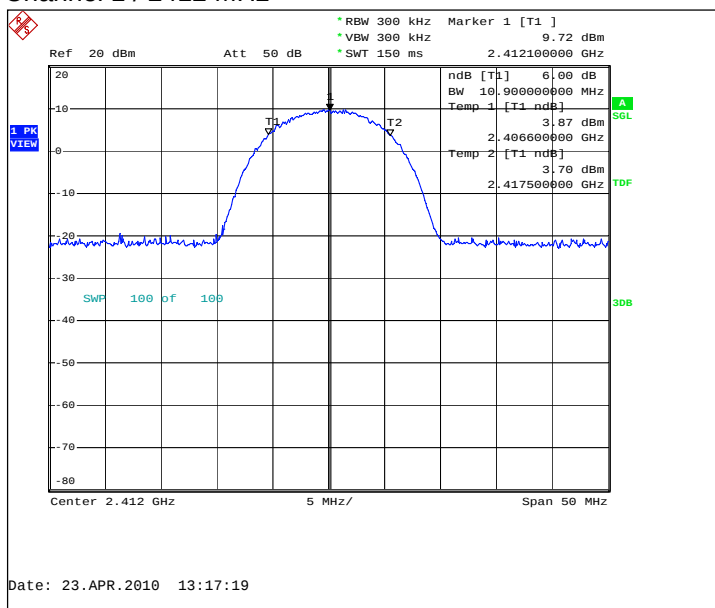

Channel 7 / 2442 MHz

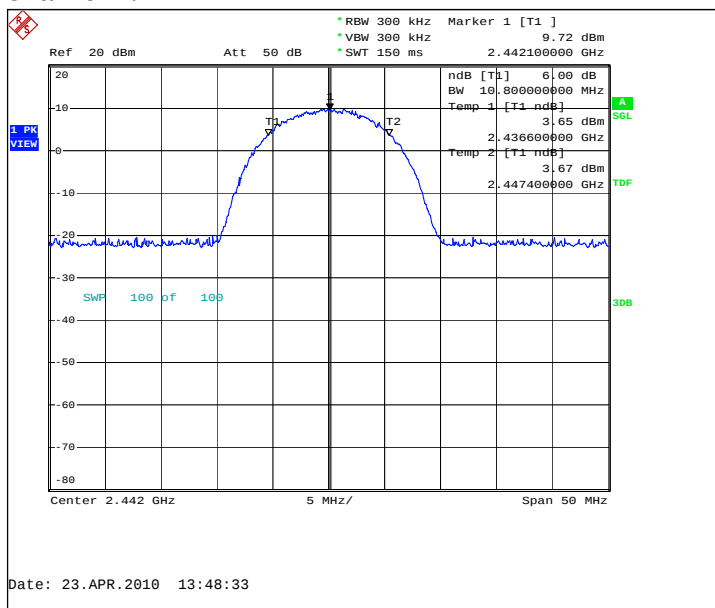


Channel 11 / 2462 MHz

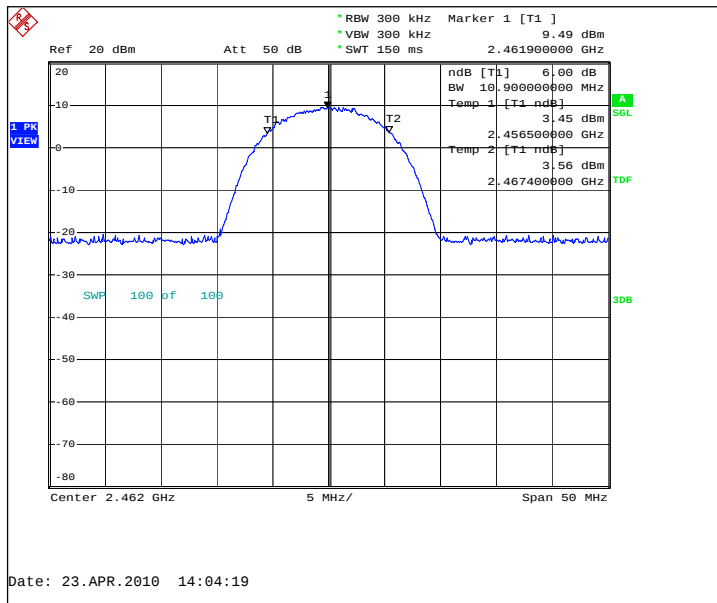


13.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1	16600.000	PASSED
7	16600.000	PASSED
11	16600.000	PASSED


Channel 1 / 2412 MHz

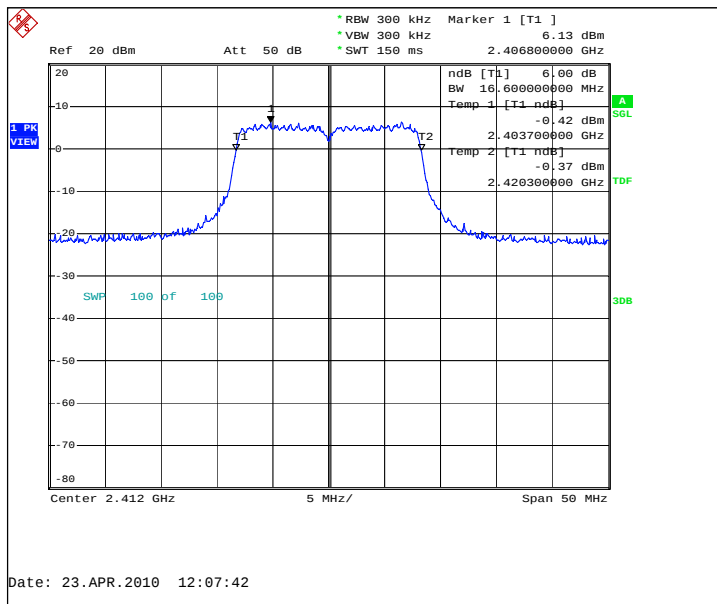

Channel 7 / 2442 MHz

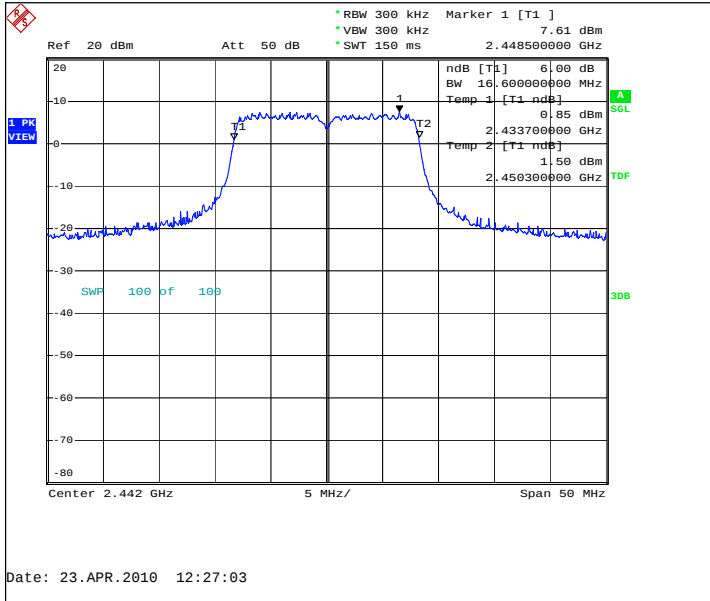

Channel 11 / 2462 MHz

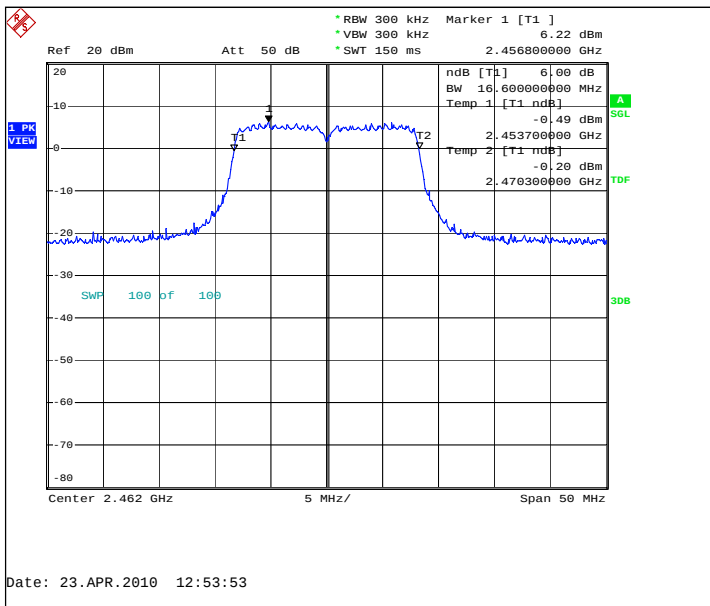

14. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (b))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

14.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
≤ 8

14.2. WLAN test results


14.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	P [dBm]	Result
1 / 2412	-4.05	PASSED
7 / 2442	-4.02	PASSED
11 / 2462	-4.34	PASSED


Channel 1 / 2412 MHz

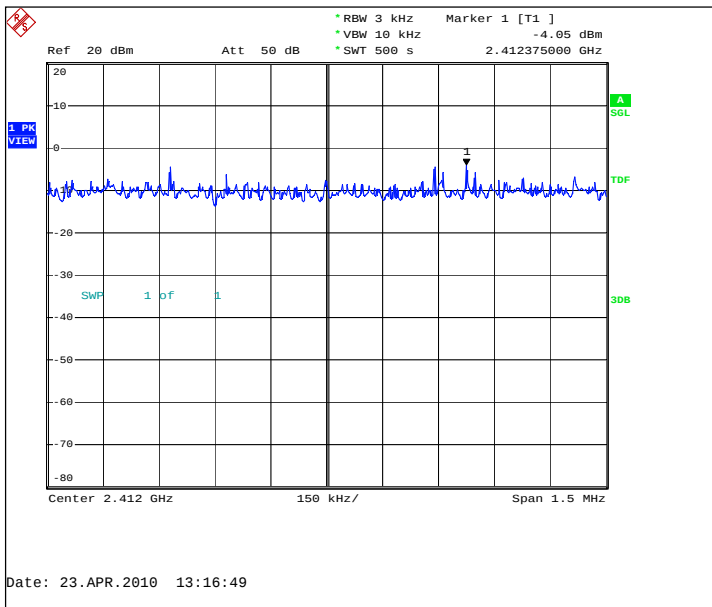

Channel 7 / 2442 MHz

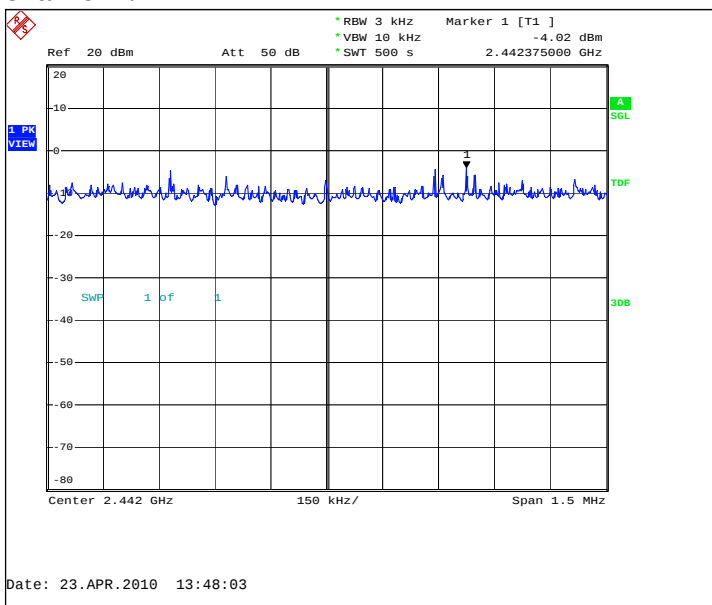


Channel 11 / 2462 MHz

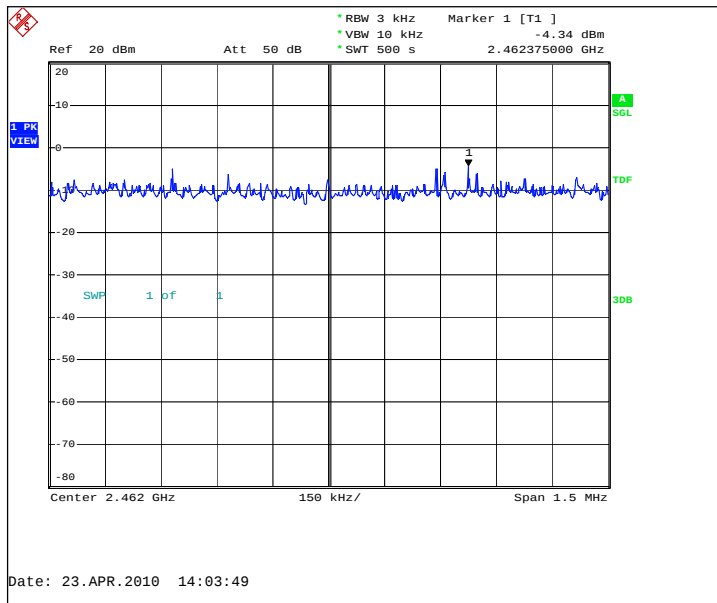

14.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-10.62	PASSED
7 / 2442	-9.87	PASSED
11 / 2462	-11.18	PASSED

Channel 1 / 2412 MHz

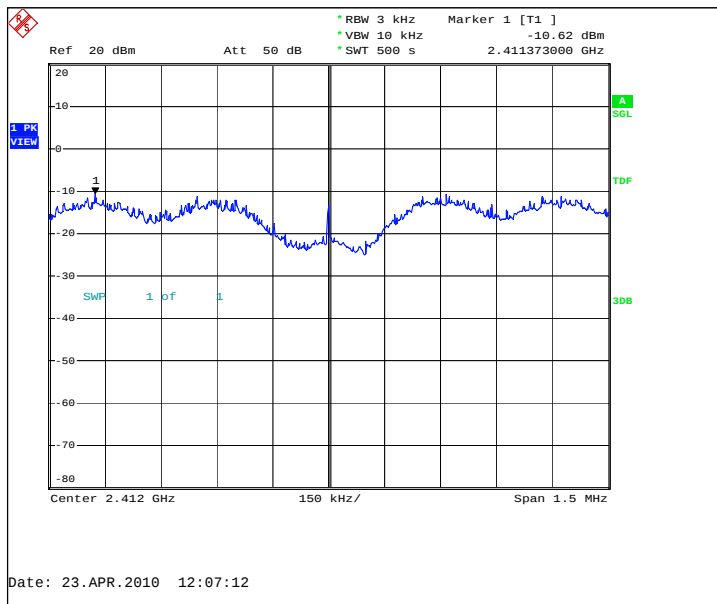

Ref 20 dBm Att 50 dB Marker 1 [T1] 2.441646000 GHz

*RBW 3 kHz
*VBW 10 kHz
*SWT 500 s

-9.87 dBm

3 PR VIEW

1

SWR 1 pf 1

SGL

TDF

30B

Center 2.442 GHz 150 kHz/ Span 1.5 MHz

Date: 23.APR.2010 12:26:33

Ref 20 dBm Att 50 dB
 Center 2.462 GHz 150 kHz/ Span 1.5 MHz

* RBW 3 kHz
 * VBW 10 kHz
 * SWT 500 s

Marker 1 [T1]
 -11.18 dBm

1 PK VIEW
 1
 SWF 1 pf 1
 A SGL
 TDF
 3DB

15. Test Equipment

15.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIO Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24/27, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B

15.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1749	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24/27, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24/27, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24/27, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24/27, 15C
2006	Radiation Reference Source	VSQ	MEB	22/24/27, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24/27, 15C, 15B
2019	Multimeter	34401A	HP	22/24/27, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24/27, 15C, 15B
2043	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24, 15C, 15B
2048	Band Reject Filter	WRCC1700/1800-0.2-10SS	Wainwright	27, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24/27, 15C
2057	Log. per. Antenna	HL025	R&S	22/24/27, 15C
2109	Power Supply	PL330QMD	THURLBY	22/24/27, 15C, 15B
2110	Multimeter	34401A	HP	22/24/27, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24/27, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24/27, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24/27, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24/27, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B
2138	Ultra Broadband Antenna	HL562	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2140	Biconical Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24/27, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24/27, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24/27, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24/27, 15C, 15B
2334	GPIB Switch 2 to 1	-	National Instruments	22/24/27, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24/27, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24/27, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24/27, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24/27, 15C
2363	Band Reject Filter	WRCG 832/838-825/845/5SS	Wainwright	22/24/27
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	22/24/27
2365	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B