
SAR Compliance Test Report

Test report no.:	Cph_SAR_0538_4	Date of report:	2005-09-20
Template version:	4	Number of pages:	31
Testing laboratory:	TCC Copenhagen Nokia Danmark A/S Frederikskaej DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01	Client:	Nokia Danmark A/S Frederikskaej DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01
Responsible test engineer:	Leif Funch Klysner	Product contact person:	Ernest Mayer
Measurements made by:	Jesper Nielsen / Leif Klysner		
Tested device:	RM-78		
FCC ID:	QTKRM-78	IC:	661AD-RM78
Supplement reports:	-		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:	2005-09-26		
For the contents:			


 Leif Funch Klysner
 Test System Manager

CONTENTS

1. SUMMARY OF SAR TEST REPORT.....	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 <i>Head Configuration</i>	3
1.2.2 <i>Body Worn Configuration</i>	3
1.2.3 <i>Maximum Drift</i>	3
1.2.4 <i>Measurement Uncertainty</i>	3
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	4
2.1 PICTURE OF THE DEVICE.....	4
2.2 DESCRIPTION OF THE ANTENNA.....	4
3. TEST CONDITIONS	5
3.1 TEMPERATURE AND HUMIDITY.....	5
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....	5
4. DESCRIPTION OF THE TEST EQUIPMENT	5
4.1 MEASUREMENT SYSTEM AND COMPONENTS	5
4.1.1 <i>Isotropic E-field Probe 1807</i>	6
4.2 PHANTOMS	7
4.3 TISSUE SIMULANTS	7
4.3.1 <i>Tissue Simulant Recipes</i>	8
4.3.2 <i>System Checking</i>	8
4.3.3 <i>Tissue Simulants used in the Measurements</i>	9
5. DESCRIPTION OF THE TEST PROCEDURE	10
5.1 DEVICE HOLDER.....	10
5.2 TEST POSITIONS.....	11
5.2.1 <i>Against Phantom Head</i>	11
5.2.2 <i>Body Worn Configuration</i>	11
5.3 SCAN PROCEDURES.....	12
5.4 SAR AVERAGING METHODS.....	12
6. MEASUREMENT UNCERTAINTY.....	13
7. RESULTS	14
APPENDIX A: SYSTEM CHECKING SCANS.....	16
APPENDIX B: MEASUREMENT SCANS.....	19
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	30
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	31

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2005-09-14 to 2005-09-15
SN, HW and SW numbers of tested device	IMEI: 004400/74/160006/6 HW: 0407 SW: 3.01.2 DUT#28446
Batteries used in testing	BP-6M, DUT#28441, 28442, 28443, 28444
Headsets used in testing	HS-6, DUT#28715
Other accessories used in testing	MU-16, DUT#28409
State of sample	Prototype unit
Notes	

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f(MHz)	Radiated power	Position	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
GSM1900	512 / 1850.2	31.7 dBm EIRP	Right, Tilt	1.6 W/kg	0.57 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f(MHz)	Radiated power	Separation distance	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
GSM1900	661 / 1880.0	31.4 dBm EIRP	2.2 cm	1.6 W/kg	0.48 W/kg	PASSED

1.2.3 Maximum Drift

Maximum drift during measurements	-0.14 dB
-----------------------------------	----------

1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%	± 29.8 %
--------------------------------	----------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes and Bands of Operation	GSM 1900	GPRS 1900	EGPRS 1900	BT
Modulation Mode	GMSK	GMSK	8PSK	GFSK
Duty Cycle	1/8	1/8 or 2/8	1/8 or 2/8	
Transmitter Frequency Range (MHz)	1850 - 1910	1850 - 1910	1850 - 1910	2402-2480

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM900/GSM1800/WCDMA, which are not part of this filing.

This device has Push to Talk/Voice-over-IP capability for use at the ear. Therefore, SAR for 2-slot GPRS mode was evaluated against the head profile of the phantom.

2.1 Picture of the Device



Front, Closed



Side, Closed



Front, Open



Side, Open

2.2 Description of the Antenna

The device has an internal patch antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 to 22.5
Ambient humidity (RH %):	35 to 55

3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4 software version 4.5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'worst-case extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE 3	501	12 months	2006-01
E-field Probe ET3DV6	1807	12 months	2006-01
Dipole Validation Kit, D1800V2	230	24 months	2006-01

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SMIQ03B	826046/034	36 months	2007-02
Amplifier	ZHL-42W	E012903	-	-
Power Meter	NRVD	840297/008	24 months	2005-11
Power Sensor	NRV-Z51	100184	24 months	2005-11
Call Tester	4400M	0411216	-	-
Vector Network Analyzer	AT8753ES	MY40001091	12 months	2006-08
Dielectric Probe Kit	HP85070B	US33020403	-	-

4.1.1 Isotropic E-field Probe 1807

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Detection	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB

Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm
Application	Distance from probe tip to dipole centers: 2.7 mm General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checking and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipes were used for Head and Body tissue simulants:

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
1800	Reference result	10.0	39.0	1.38	
	± 10% window	9.0 to 11.0			
	2005-09-15	9.56	39.0	1.38	21.2

System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
1800	Reference result	9.36	53.2	1.49	
	± 10% window	8.42 – 10.30			
	2005-09-14	9.55	54.6	1.50	21.2

Plots of the system checking scans are given in Appendix A.

 4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
1880	Recommended value	40.0	1.40	
	$\pm 5\%$ window	38.0 – 42.0	1.33 – 1.47	
	2005-09-15	38.6	1.46	21.2

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
1880	Recommended value	53.3	1.52	
	$\pm 5\%$ window	50.6 – 56.0	1.44 – 1.60	
	2005-09-14	54.4	1.58	21.2

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”.

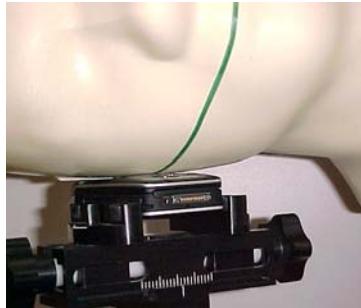


Photo of the device in “cheek” position,
Slide closed

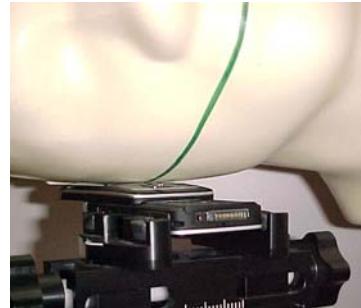


Photo of the device in “cheek” position,
Slide open



Photo of the device in “tilt” position,
Slide closed

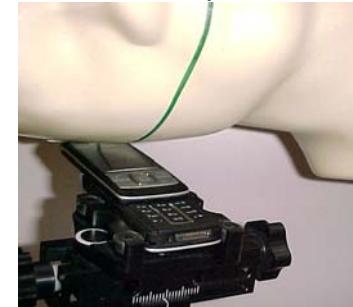


Photo of the device in “tilt” position,
Slide open

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gives higher results.



Photo of the device positioned for Body SAR measurement.
The spacer was removed for the tests.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	c_i	$c_i \cdot u_i$ (%)	v_i
Measurement System							
Probe Calibration	E2.1	± 5.8	N	1	1	± 5.8	∞
Axial Isotropy	E2.2	± 4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Hemispherical Isotropy	E2.2	± 9.6	R	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary Effect	E2.3	± 8.3	R	$\sqrt{3}$	1	± 4.8	∞
Linearity	E2.4	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	E2.5	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	E2.6	± 1.0	N	1	1	± 1.0	∞
Response Time	E2.7	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	E2.8	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Conditions - Noise	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Conditions - Reflections	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	± 0.4	R	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	± 2.9	R	$\sqrt{3}$	1	± 1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	± 3.9	R	$\sqrt{3}$	1	± 2.3	∞
Test sample Related							
Test Sample Positioning	E4.2.1	± 6.0	N	1	1	± 6.0	11
Device Holder Uncertainty	E4.1.1	± 5.0	N	1	1	± 5.0	7
Output Power Variation - SAR drift measurement	6.6.3	± 10.0	R	$\sqrt{3}$	1	± 5.8	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Conductivity Target - tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Conductivity - measurement uncertainty	E3.3	± 5.5	N	1	0.64	± 3.5	5
Permittivity Target - tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Permittivity - measurement uncertainty	E3.3	± 2.9	N	1	0.6	± 1.7	5
Combined Standard Uncertainty				RSS		± 14.9	206
Coverage Factor for 95%				k=2			
Expanded Standard Uncertainty						± 29.8	

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

1900 MHz Head SAR results

Options	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM1900	Power	31.7 dBm	31.4 dBm	29.8 dBm
Slide Closed	Left	Cheek	-	0.284
		Tilt	-	0.323
	Right	Cheek	-	0.397
		Tilt	0.569	0.450
GSM1900	Power	30.3 dBm	32.1 dBm	28.1 dBm
Slide Open	Left	Cheek	-	0.136
		Tilt	-	0.086
	Right	Cheek	-	0.131
		Tilt	-	0.092
2-Slot GPRS1900	Power	26.3 dBm	25.6 dBm	24.1 dBm
Slide Closed	Left	Cheek	-	-
		Tilt	-	-
	Right	Cheek	-	-
		Tilt	0.506	-
2-Slot EGPRS1900	Power	28.4 dBm	28.1 dBm	26.9 dBm
Slide Closed	Left	Cheek	-	-
		Tilt	-	-
	Right	Cheek	-	-
		Tilt	0.314	-
Slide Closed	Highest SAR value position in this band repeated with SD card	0.542	0.493	0.450
Slide Closed	Highest SAR value measurement in this band repeated with BT active	0.562	-	-

The measured Body SAR values for the test device are tabulated below:

1900 MHz Body SAR results

Options	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM1900	Power level	31.7 dBm	31.4 dBm	29.8 dBm
Slide Closed	Without headset	0.431	0.448	0.408
	Headset HS-6	0.454	0.477	0.424
2-Slot GPRS1900	Power level	26.3 dBm	25.6 dBm	24.1 dBm
Slide Closed	Without headset	-	0.395	-
	Headset HS-6	-	-	-
Slide Closed	Highest SAR value position in this band repeated with SD card	0.438	0.454	0.415
Slide Closed	Highest SAR value measurement in this band repeated with BT active	-	0.466	-

Plots of the Measurement scans are given in Appendix B.

APPENDIX A: SYSTEM CHECKING SCANS

See the following pages.

Date/Time: 2005-09-15 09:18:03

Test Laboratory: TCC Copenhagen

Type: D1800V2; Serial: 230

Communication System: Continuous Wave

Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: Head 1800; Medium Notes: Medium Temperature: $t=21.2\text{ C}$

Medium parameters used: $f = 1800\text{ MHz}$; $\sigma = 1.38\text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Advanced Extrapolation
- ConvF(5.19, 5.19, 5.19); Calibrated: 2005-01-21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2005-01-24
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 10.9 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.5 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 9.56 mW/g; SAR(10 g) = 5 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

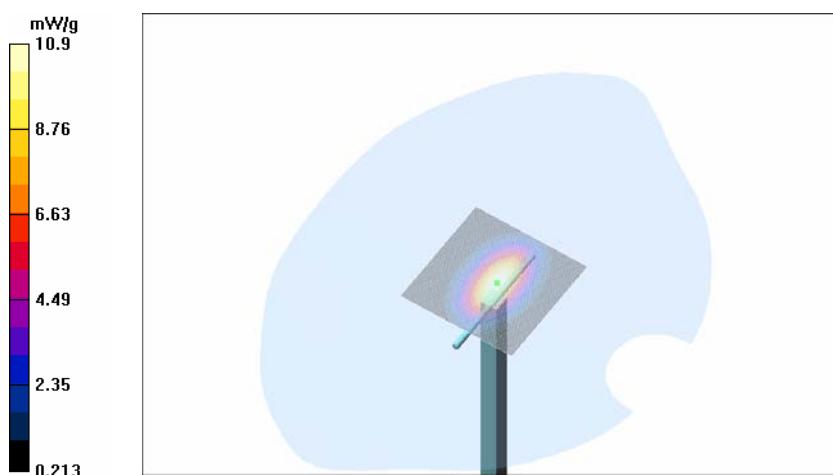

Date/Time: 2005-09-14 10:22:59

Test Laboratory: TCC Copenhagen

Type: D1800V2; Serial: 230

Communication System: Continuous Wave

Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: Body 1800; Medium Notes: Medium Temperature: $t=21.2\text{ C}$

Medium parameters used: $f = 1800\text{ MHz}$; $\sigma = 1.5\text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Advanced Extrapolation
- ConvF(4.59, 4.59, 4.59); Calibrated: 2005-01-21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2005-01-24
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 11.2 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 89.7 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.55 mW/g; SAR(10 g) = 5.09 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

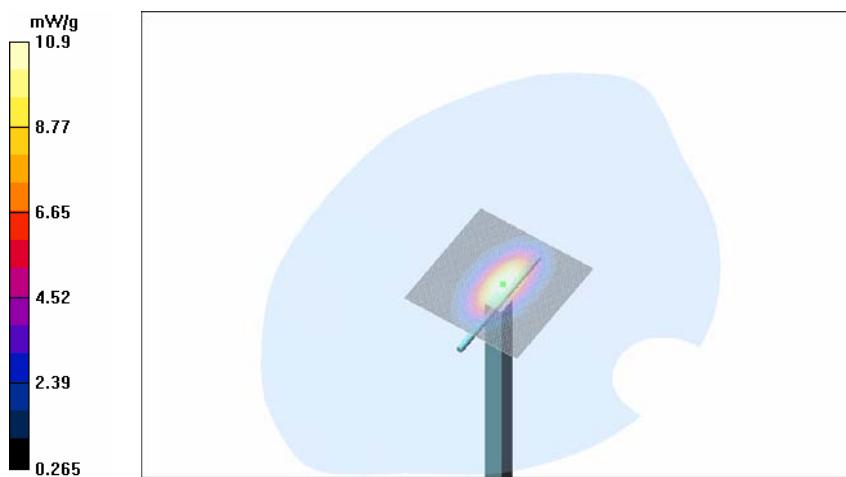

APPENDIX B: MEASUREMENT SCANS

See the following pages.

Date/Time: 2005-09-15 18:53:17

Test Laboratory: TCC Copenhagen
Type: RM-78; Serial: 004400/74/160006/6

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.2 C
Medium parameters used: f = 1880 MHz; σ = 1.46 mho/m; ϵ_r = 38.6; ρ = 1000 kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 2005-01-21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2005-01-24
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Cheek position - Middle - Slide closed/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.304 mW/g

Cheek position - Middle - Slide closed/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.0 V/m; Power Drift = -0.042 dB
Peak SAR (extrapolated) = 0.471 W/kg
SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.173 mW/g

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.
Maximum value of SAR (measured) = 0.301 mW/g

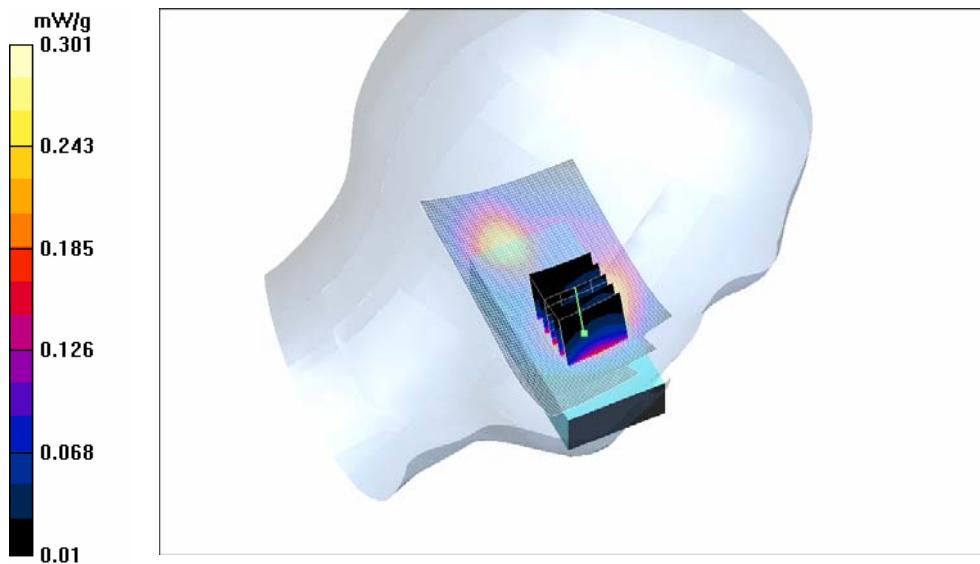

Date/Time: 2005-09-15 19:09:51

Test Laboratory: TCC Copenhagen
Type: RM-78; Serial: 004400/74/160006/6

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.2 C
Medium parameters used: f = 1880 MHz; σ = 1.46 mho/m; ϵ_r = 38.6; ρ = 1000 kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 2005-01-21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2005-01-24
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt position - Middle - Slide closed/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.346 mW/g


Tilt position - Middle - Slide closed/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.660 W/kg

SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.173 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

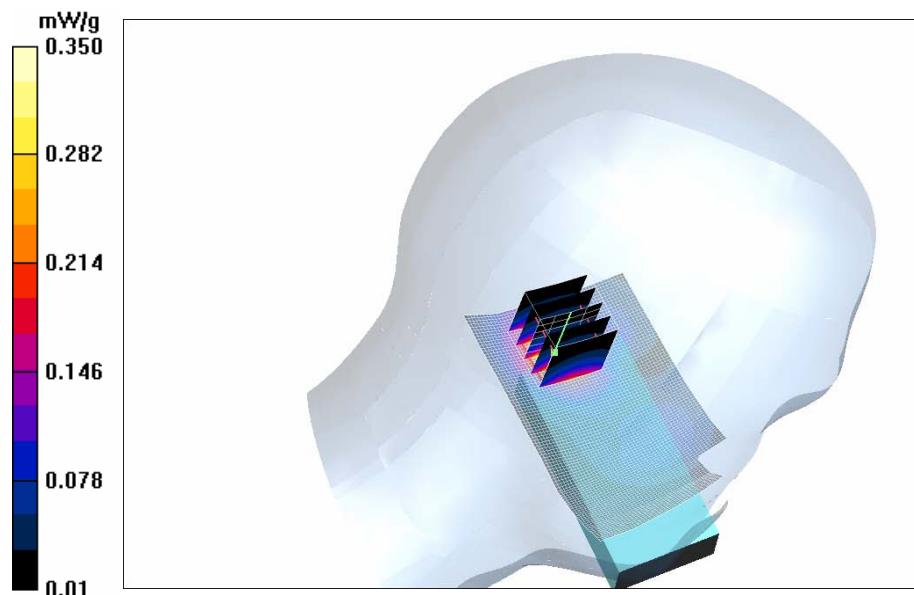

Date/Time: 2005-09-15 17:40:26

Test Laboratory: TCC Copenhagen
Type: RM-78; Serial: 004400/74/160006/6

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.2 C
Medium parameters used: f = 1880 MHz; σ = 1.46 mho/m; ϵ_r = 38.6; ρ = 1000 kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 2005-01-21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2005-01-24
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Cheek position - Middle - Slide closed/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.438 mW/g


Cheek position - Middle - Slide closed/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.433 mW/g

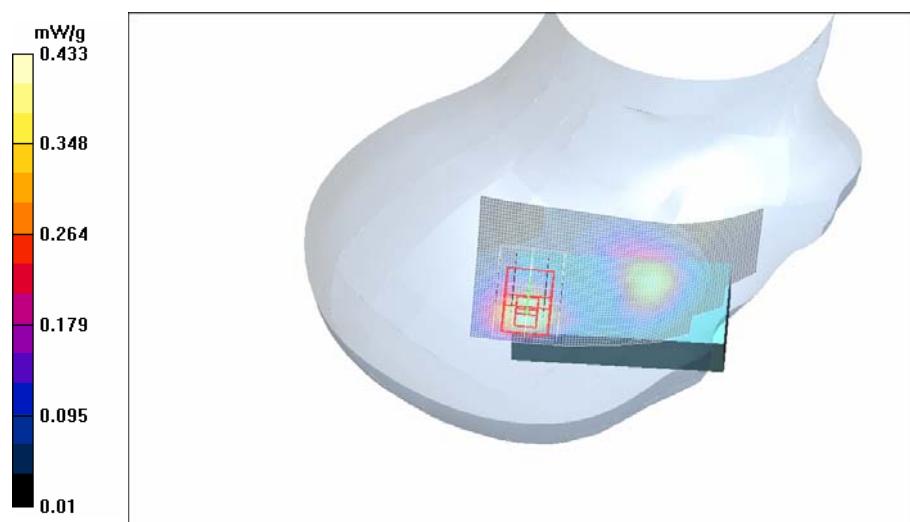

Date/Time: 2005-09-15 20:11:22

Test Laboratory: TCC Copenhagen
Type: RM-78; Serial: 004400/74/160006/6

Communication System: GSM 1900
Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.2 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.43 mho/m; ϵ_r = 38.7; ρ = 1000 kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 2005-01-21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2005-01-24
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt position - Low - Slide closed/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.642 mW/g

Tilt position - Low - Slide closed/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.1 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.292 mW/g

Info: Interpolated medium parameters used for SAR evaluation!


Maximum value of SAR (measured) = 0.613 mW/g

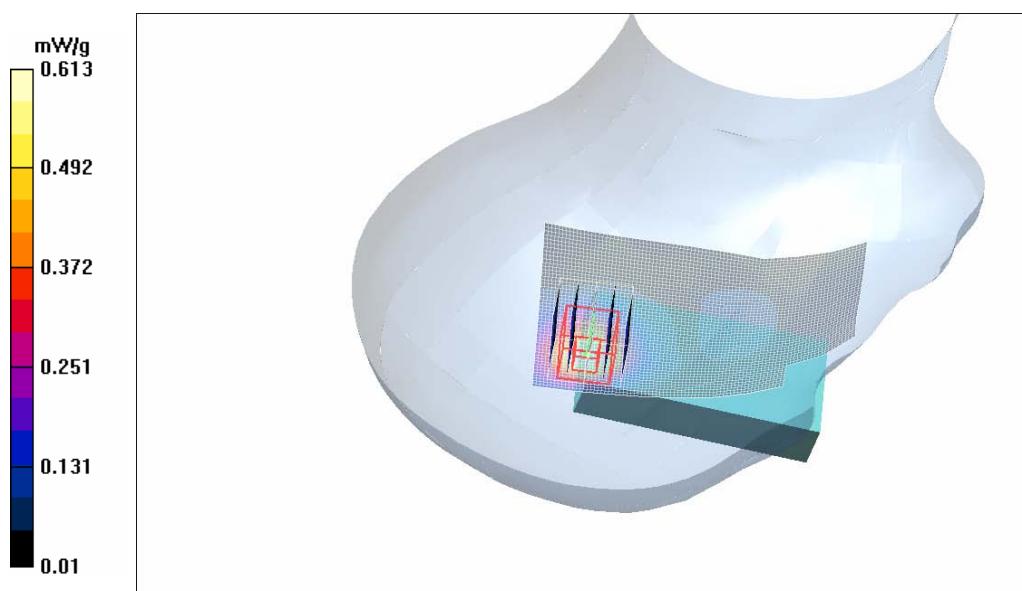

SAR Report
Cph_SAR_0538_4
Applicant: Nokia Corporation

Type: RM-78

Copyright © 2005 TCC Copenhagen

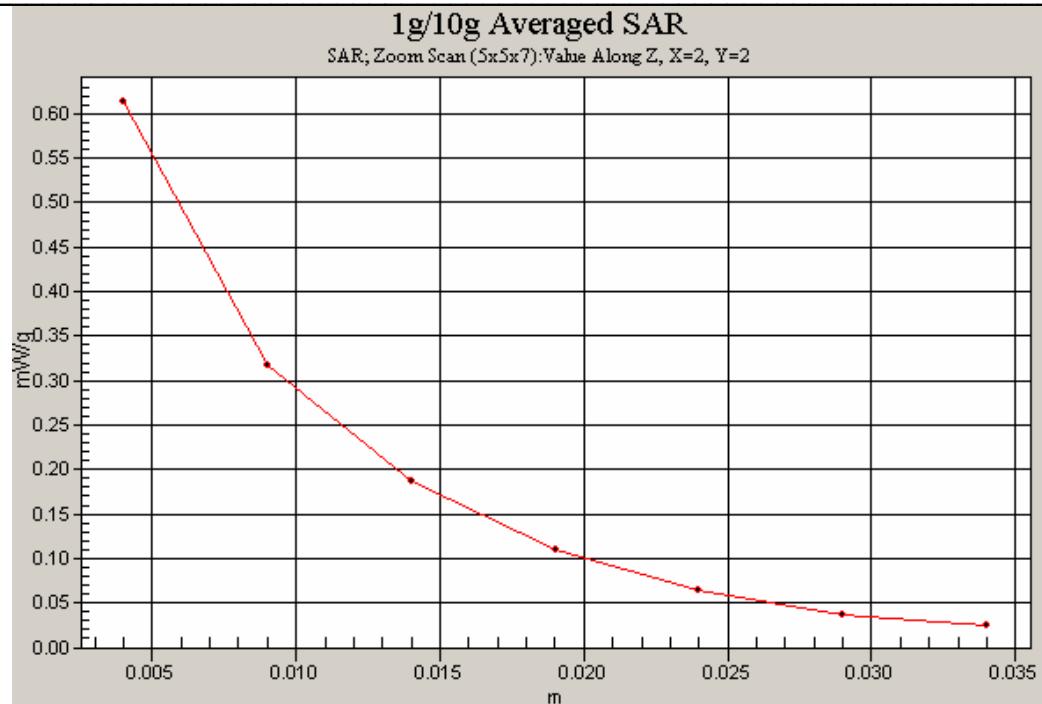

Date/Time: 15-09-2005 22:17:25

Test Laboratory: TCC Copenhagen
Type: RM-78; Serial: 004400/74/160006/6

Communication System: 2-slot GPRS1900
Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.2 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.43 mho/m; ϵ_r = 38.7; ρ = 1000 kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21-01-2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24-01-2005
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt position - Low - Slide closed/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.567 mW/g

Tilt position - Low - Slide closed/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.0 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.258 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.553 mW/g

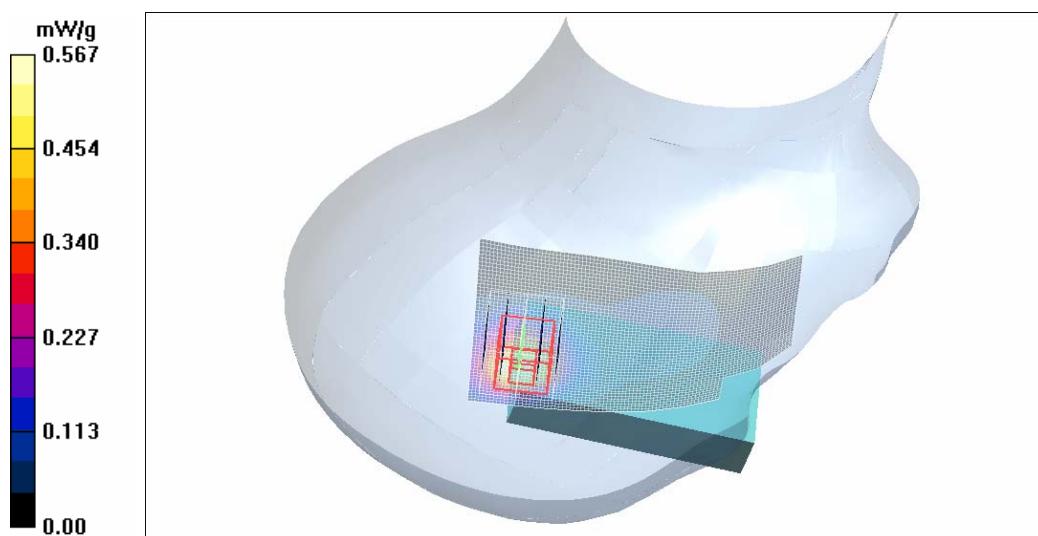

Date/Time: 15-09-2005 22:46:12

Test Laboratory: TCC Copenhagen
Type: RM-78; Serial: 004400/74/160006/6

Communication System: 2-slot EGPRS1900
Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.2 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.43 mho/m; ϵ_r = 38.7; ρ = 1000 kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(5.04, 5.04, 5.04); Calibrated: 21-01-2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24-01-2005
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt position - Low - Slide closed/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.352 mW/g

Tilt position - Low - Slide closed/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.5 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.162 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.347 mW/g

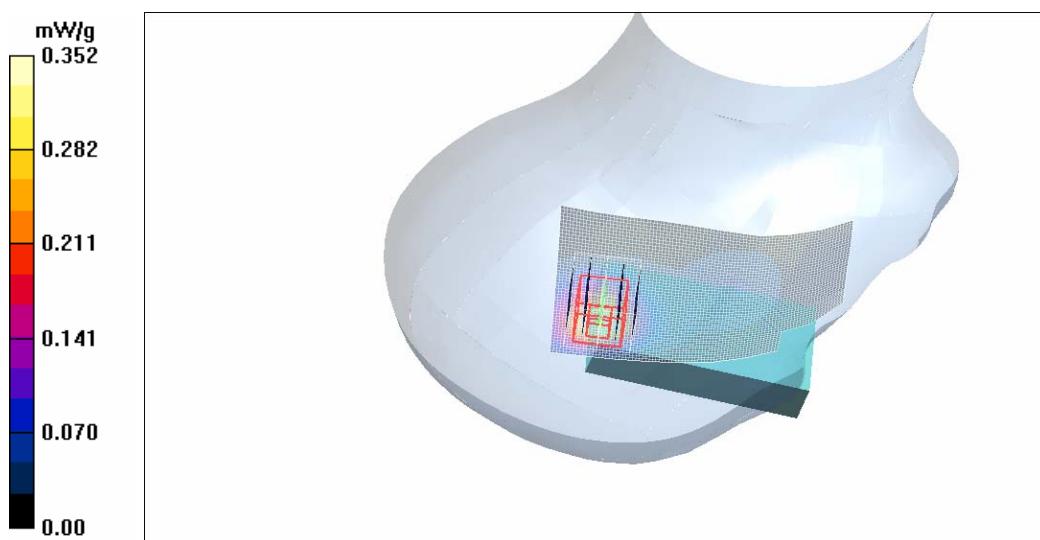

Date/Time: 2005-09-14 18:39:11

Test Laboratory: TCC Copenhagen
Type: RM-78; Serial: 004400/74/160006/6

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Body 1900; Medium Notes: Medium Temperature: t=21.2 C
Medium parameters used: f = 1880 MHz; σ = 1.58 mho/m; ϵ_r = 54.4; ρ = 1000 kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(4.44, 4.44, 4.44); Calibrated: 2005-01-21
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 2005-01-24
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Body - Middle + HS-6/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.501 mW/g


Body - Middle + HS-6/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 16.3 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.949 W/kg

SAR(1 g) = 0.477 mW/g; SAR(10 g) = 0.276 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

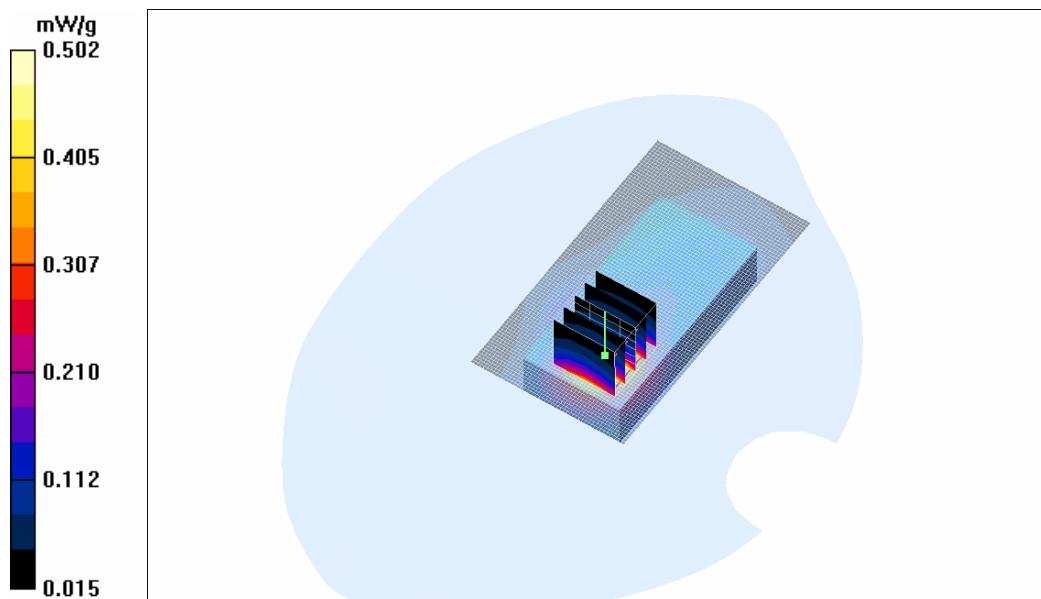

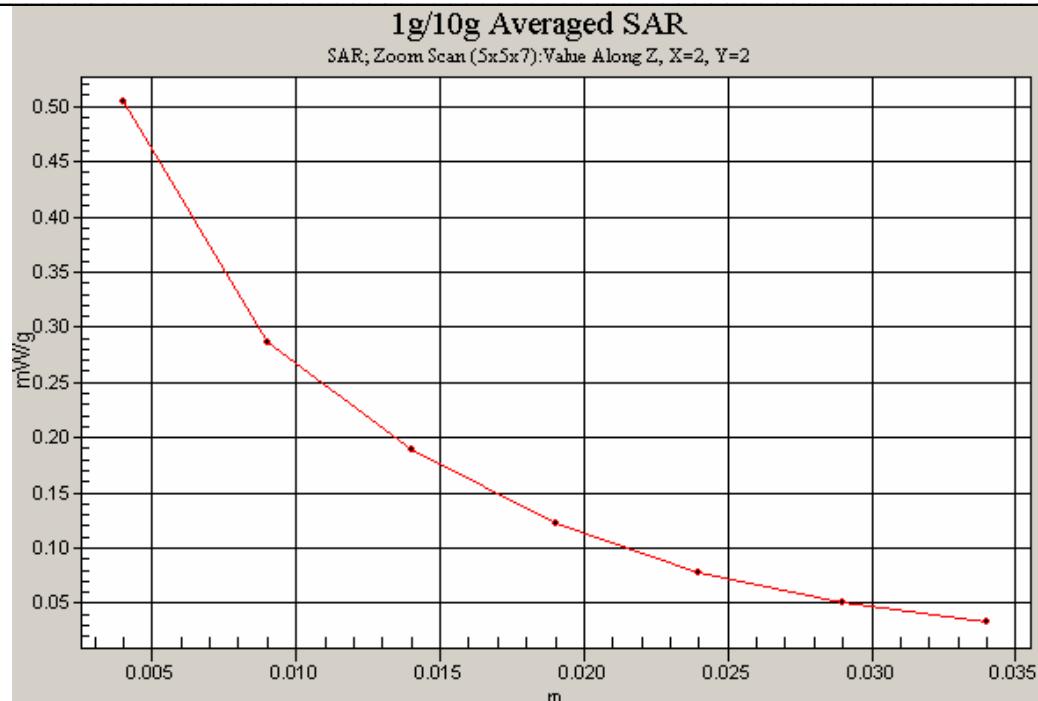

Date/Time: 14-09-2005 17:08:47

Test Laboratory: TCC Copenhagen
Type: RM-78; Serial: 004400/74/160006/6

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Body 1900; Medium Notes: Medium Temperature: t=21.2 C
Medium parameters used: f = 1880 MHz; σ = 1.58 mho/m; ϵ_r = 54.4; ρ = 1000 kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1807; Probe Notes: Worst Case Extrapolation
- ConvF(4.44, 4.44, 4.44); Calibrated: 21-01-2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn501; Calibrated: 24-01-2005
- Phantom: SAM Body; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Body - Middle - No Accessory/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.477 mW/g


Body - Middle - No Accessory/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.474 mW/g

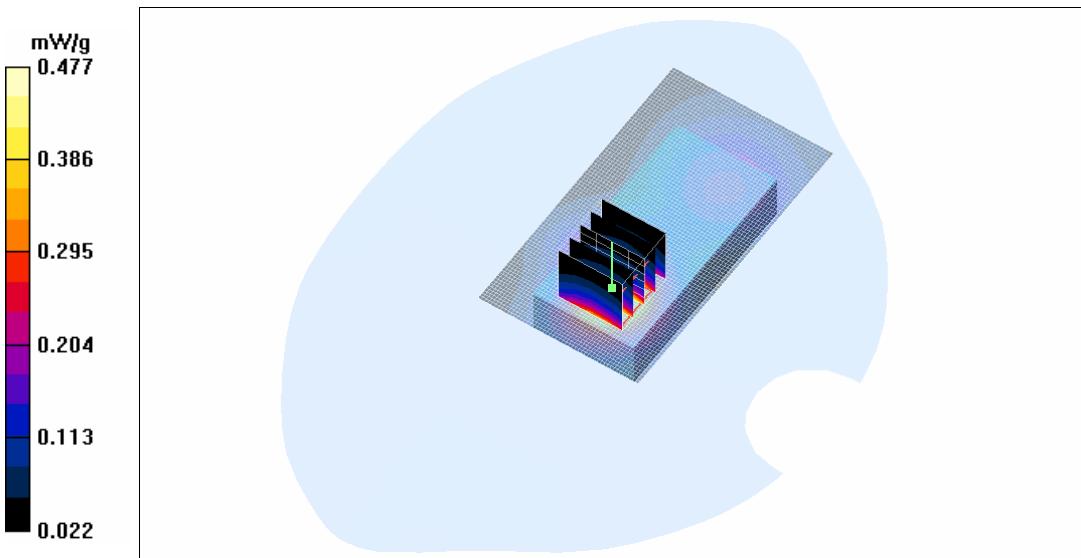

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

See the following pages.

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

See the following pages.