

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-898_08.docx	Date of Report:	24-Aug-2012
Number of pages:	11	Customer's Contact person:	Hu Helen
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-898 / Battery BP-3L		
FCC ID:	QTLRM-898	IC:	661AB-RM898
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Zou Ming, Engineer, EMC

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	07-Aug-2012
Testing completed	17-Aug-2012
The customer's contact person	Hu Helen
Test Plan referred to	T:\Projects\RM-898\TestPlan\RS_testplan_RM-898.xlsm
Notes	-
Document name	FCC22&24_RM-898_08.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-898	353661/05/000056/3	2000	-	1102.0000.8779.12290	52793
Battery	BP-3L	4955402172050108170;0670635	-	-	-	52799

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	PASSED
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP

§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	PASSED
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-132 4.4, RSS-133 6.4)	5
2.2. Test method and limit	5
2.3. GSM1900 TX test results	6
2.4. GSM1900-E1 TX test results	6
2.5. WCDMA 1900 (Band II) test results	6
3. Band edge compliance (FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5)	7
3.2. Test method and limit	7
3.3. GSM1900 test results	8
3.4. GSM1900-E1 test results	9
3.5. WCDMA 1900 (Band II) test results	10
4. Test Equipment.....	11
4.1. Conducted measurements	11
4.2. Radiated measurements	11

2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-132 4.4, RSS-133 6.4)

EUT with DUT number	RM-898, DUT 52793
Accessories with DUT numbers	BP-3L, DUT 52799
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 63 / 100.5
Date of measurements	16-Aug-2012
Measured by	Zou Ming

2.1.1 Test setup

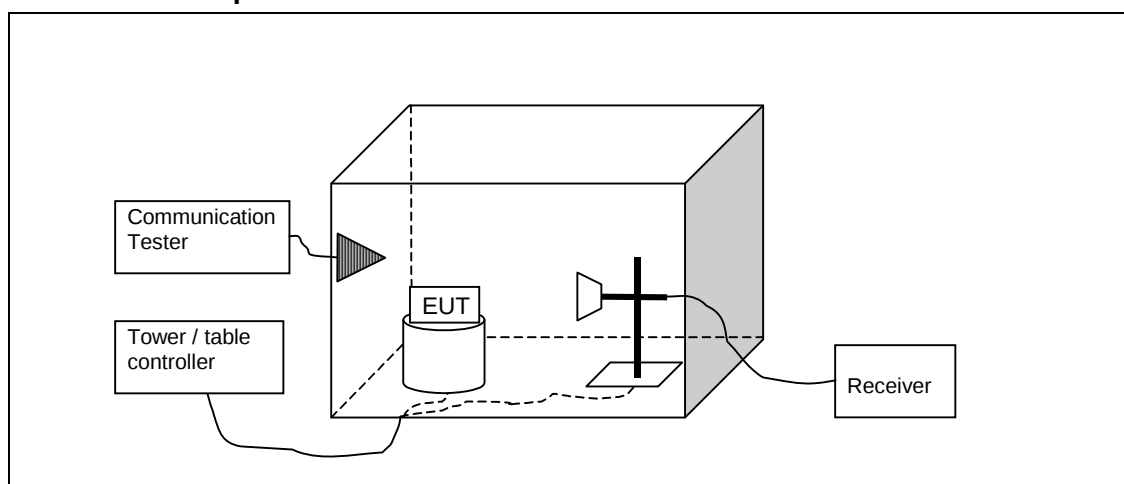

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. The measurement results are obtained as described below:

$$P[\text{dBm}] = P_{\text{SUBST TX}} + P_{\text{MEAS}} - P_{\text{SUBST RX}} - L_{\text{SUBST CABLES}} + G_{\text{SUBST TX ANT}}$$

Where $P_{\text{SUBST TX}}$ is signal generator level. P_{MEAS} is measured power level from the EUT. $P_{\text{SUBST RX}}$ is measured power level in substitute measurement. $L_{\text{SUBST CABLE}}$ is the loss of the cable between the signal generator and the substitution antenna and $G_{\text{SUBST TX ANT}}$ is substitution antenna gain.

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7 ERP	38.5
1850 - 1910	2 EIRP	33

2.3. GSM1900 TX test results

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
512 / 1850.2	31.76	1.500	-11.95	+10	-30.63	8.12	5.04	HORIZONTAL	PASSED
661 / 1880	29.88	0.973	-14.16	+10	-31.04	8.06	5.06	HORIZONTAL	PASSED
810 / 1909.8	29.3	0.851	-15.89	+10	-32	8.3	5.11	HORIZONTAL	PASSED

2.4. GSM1900-E1 TX test results

EGPRS mode, 1 TX Slot

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
512 / 1850.2	29.48	0.887	-14.23	+10	-30.63	8.12	5.04	HORIZONTAL	PASSED
661 / 1880	29.18	0.828	-14.86	+10	-31.04	8.06	5.06	HORIZONTAL	PASSED
810 / 1909.8	28.3	0.676	-16.89	+10	-32	8.3	5.11	HORIZONTAL	PASSED

2.5. WCDMA 1900 (Band II) test results


Peak Detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dB]	L _{SUBST CABLE} [dB]	Polarisation	Result
9262 / 1852.4	28.19	0.659	-15.29	10	-30.38	8.11	5.01	HORIZONTAL	PASSED
9400 / 1880	28.01	0.632	-16.03	10	-31.04	8.06	5.06	HORIZONTAL	PASSED
9538 / 1907.6	27.97	0.627	-17.14	10	-31.88	8.29	5.06	HORIZONTAL	PASSED

RMS Detector


Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dB]	L _{SUBST CABLE} [dB]	Polarisation	Result
9262 / 1852.4	23.99	0.251	-19.49	+10	-30.38	8.11	5.01	HORIZONTAL	PASSED
9400 / 1880	24.18	0.262	-19.86	+10	-31.04	8.06	5.06	HORIZONTAL	PASSED
9538 / 1907.6	24.14	0.259	-20.97	+10	-31.88	8.29	5.06	HORIZONTAL	PASSED

3.3. GSM1900 test results

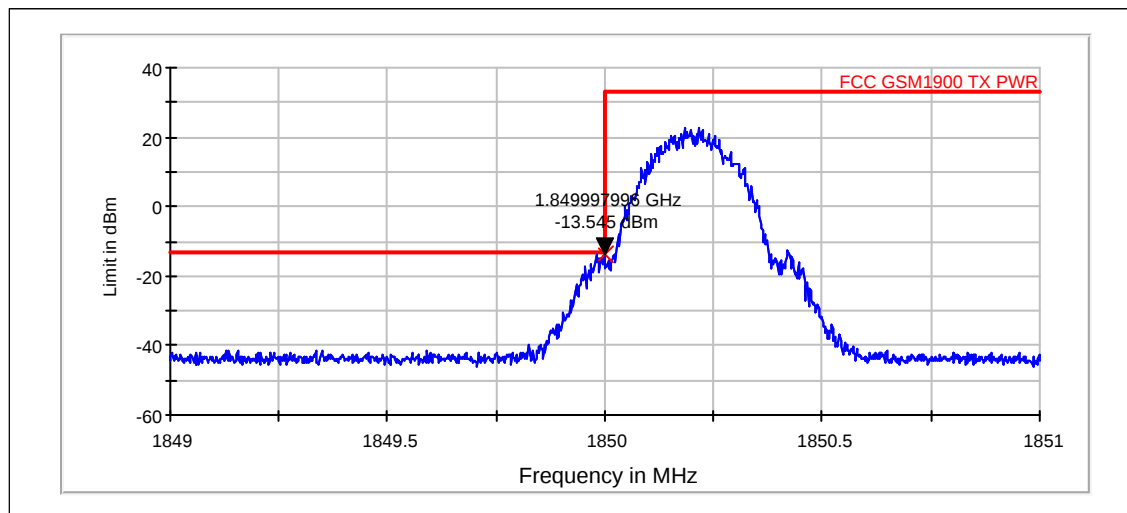

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
GSM	512 / 1850.2	-13.55	PASSED

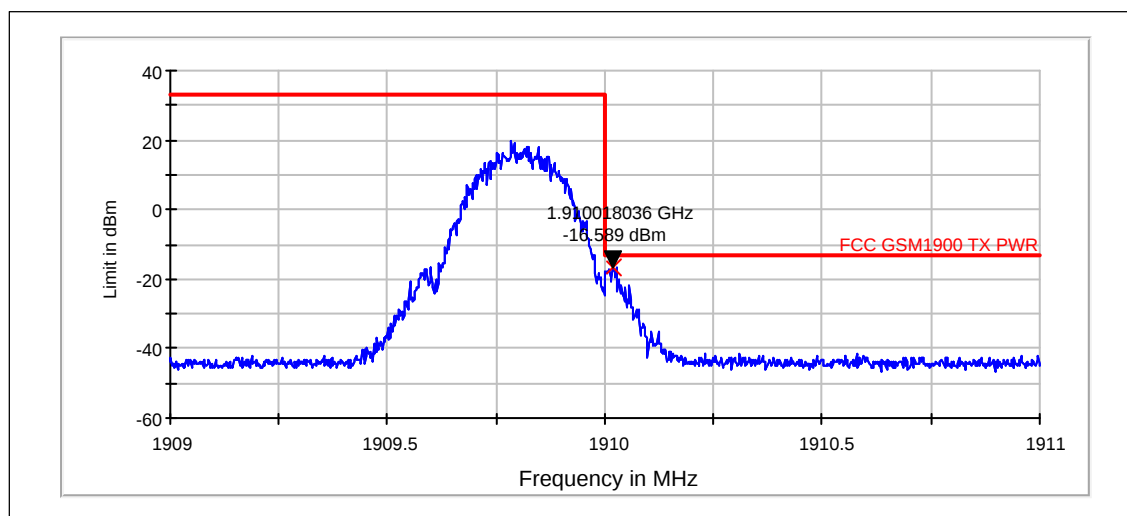

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
GSM	810 / 1909.8	-16.59	PASSED

3.4. GSM1900-E1 test results

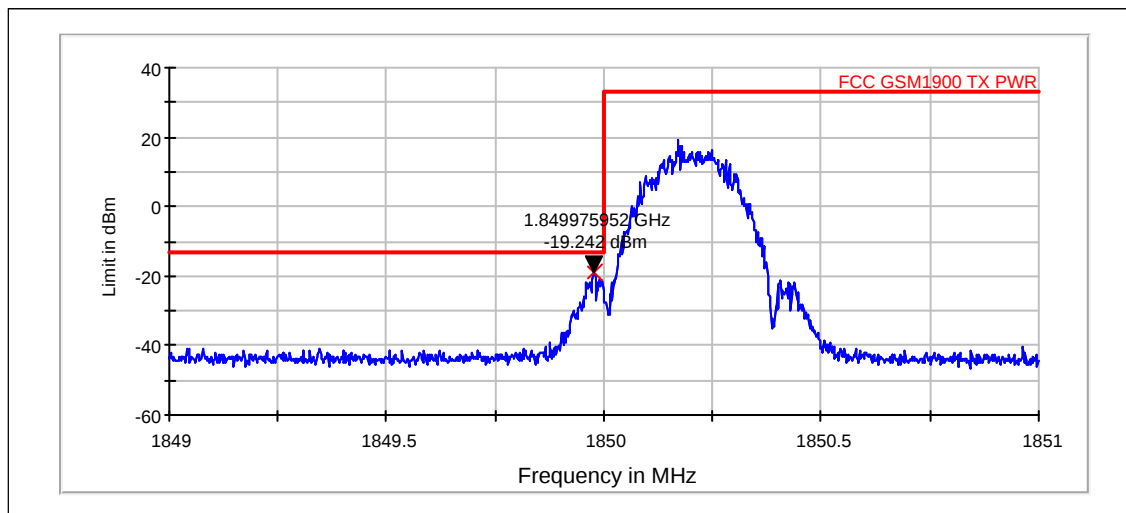

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
E-GPRS (MSC9)	512 / 1850.2	-19.24	PASSED

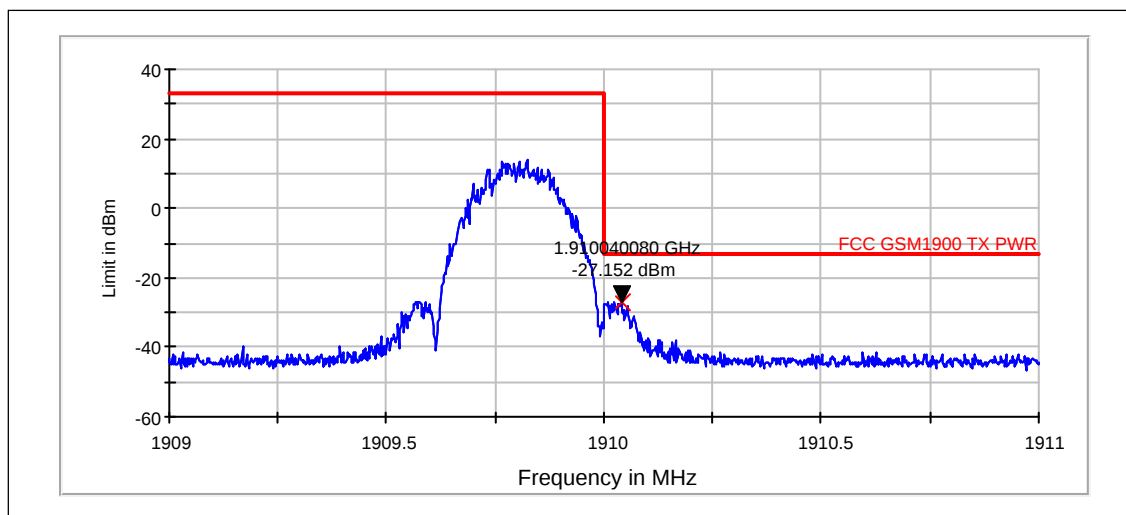

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
E-GPRS (MSC9)	810 / 1909.8	-27.15	PASSED

3.5. WCDMA 1900 (Band II) test results

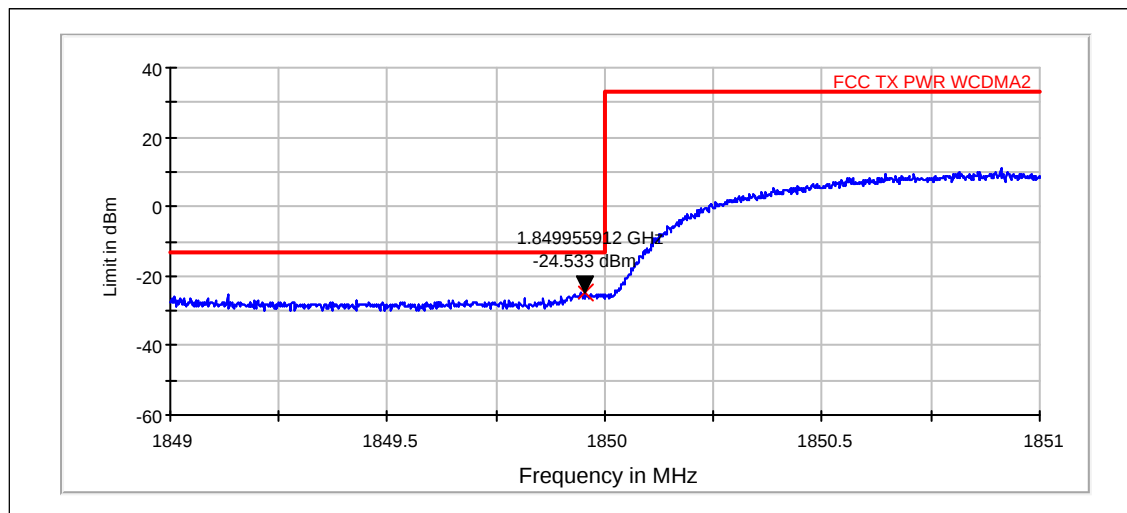

RMS (RBW: 50 kHz, VBW: 50 kHz, Max hold)

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD	9262 / 1852.4	-24.53	PASSED

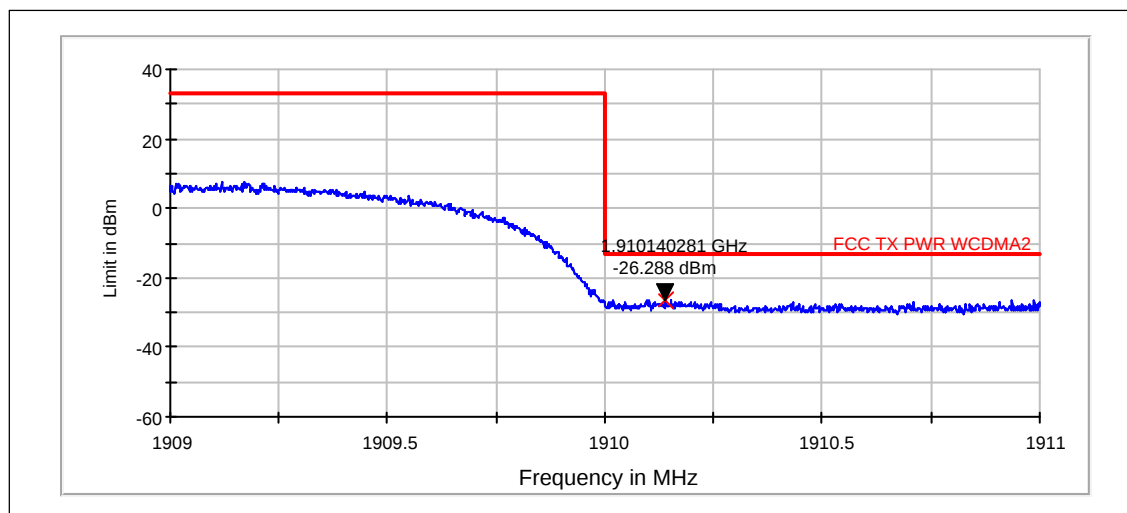

RMS (RBW: 50 kHz, VBW: 50 kHz, Max hold)

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
FDD	9538 / 1907.6	-26.29	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0069	LISN 50 μ H	ESH3-Z5	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0114	Signal Generator	E8257C	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-