

FCC Part 15B Compliance Test Report

Test Report no.:	Salo_FCC_0922_09.doc	Date of Report:	25-May-2009
Number of pages:	8	Customer's Contact person:	Asko Pasanen
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation P.O. Box 50 Mattianniemi 6-8 FIN-40101 JYVÄSKYLÄ, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 78000
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-486 / Battery BL-5K / AC-charger AC-10E / Audio adapter AD-54 / Headset HS-44		
FCC ID:	QURRM-486	IC:	661AC-RM486
Supplement reports:	Bej_FCC_0917_05.doc		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132 (Issue 2, September 2005), RSS-133 (Issue 4, February 2008), RSS-139 (Issue 1, February 2008) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jufo Tuohino, Specialist

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	24-Mar-2009
Testing completed	28-Apr-2009
The customer's contact person	Asko Pasanen
Test Plan referred to	T:\Projects\RM-486\TestPlan_RS\RS_Testplan_RM-486.xls
Notes	-
Document name	T:\Projects\RM-486\EMC\Results\FCC\Salo_FCC_0922_09.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/V) mobile phone with GPRS, EGPRS and Bluetooth. GSM bands are tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-484	004401105659169	0800	-	0.527	51253
Battery	BL-5K	4620408441L10102994;0670580	-	-	-	51256
AC-charger	AC-10E	3997918305050506222;0675408	-	-	-	51247
Audio adapter	AD-54	0751156841581R20931	-	-	-	51257
Headset	HS-44	0694557744218606791	-	-	-	51258

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (4.6)	Radiated emissions	PASSED

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Beijing Laboratory.

The test results of QURRM-484 are re-used for certification of the QURRM-486. The table above indicates the results, which will be re-used.

CONTENTS


1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions	
(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6).....	4
2.1. Test setup	4
2.2. Test method and limit.....	4
2.3. GSM 850 Test results	5
2.4. GSM 1900 Test results	6
3. Test Equipment.....	8
3.1. Conducted measurements	8
3.2. Radiated measurements	8

2. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-484, DUT51253
Accessories with DUT numbers	BL-5K, DUT51256; AC-10E, DUT51247; AD-54, DUT51257; HS-44, DUT51258
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	FM receiver on during the GSM850 testing. GPS receiver on during GSM1900 testing.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 35 / 101.6
Date of measurements	28-Apr-2009
Measured by	Jia Dongsheng

2.1. Test setup

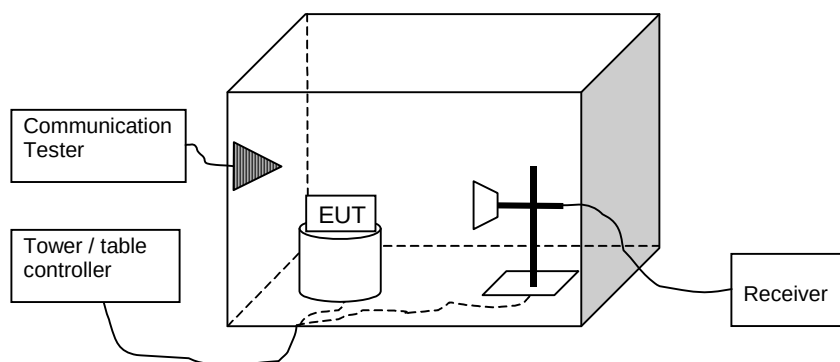

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

2.3. GSM 850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	42.10	127.35	43.40	-1.3	HORIZONTAL	PASSED
6953.600000	44.80	173.78	40.60	4.2	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	29.10	28.51	30.40	-1.3	VERTICAL	PASSED
6953.600000	31.80	38.90	27.60	4.2	VERTICAL	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.395391	27.80	24.55	42.90	-15.1	VERTICAL	PASSED
70.581764	15.10	5.69	42.90	-27.8	VERTICAL	PASSED
87.474950	15.50	5.96	42.30	-26.8	VERTICAL	PASSED
843.185371	14.40	5.25	27.60	-13.2	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3526.052104	43.00	141.25	44.10	-1.1	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2460.929860	32.70	43.15	29.60	3.1	VERTICAL	PASSED
2907.819639	37.80	77.62	29.80	8.0	VERTICAL	PASSED
3529.052104	29.20	28.84	30.40	-1.2	VERTICAL	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	42.10	127.35	43.70	-1.6	HORIZONTAL	PASSED
7150.400000	44.80	173.78	40.50	4.3	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	29.00	28.18	30.60	-1.6	HORIZONTAL	PASSED
7150.400000	31.50	37.58	27.20	4.3	VERTICAL	PASSED

2.4. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	43.10	142.89	43.20	-0.1	HORIZONTAL	PASSED
7720.000000	43.90	156.68	39.20	4.7	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	29.90	31.26	30.00	-0.1	VERTICAL	PASSED
7720.000000	31.60	38.02	26.90	4.7	VERTICAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.354910	29.10	28.51	44.20	-15.1	VERTICAL	PASSED
71.181764	20.30	10.35	48.00	-27.7	VERTICAL	PASSED
87.534469	19.20	9.12	46.00	-26.8	VERTICAL	PASSED
120.220842	22.70	13.65	47.80	-25.1	VERTICAL	PASSED
133.806814	15.70	6.10	41.80	-26.1	VERTICAL	PASSED
176.552305	17.80	7.76	43.50	-25.7	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
17997.493988	56.30	653.13	36.00	20.3	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2494.995992	33.80	48.98	29.50	4.3	VERTICAL	PASSED
2975.947896	37.60	75.86	28.70	8.9	HORIZONTAL	PASSED
17995.493988	43.50	149.62	23.20	20.3	VERTICAL	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	41.10	113.50	42.60	-1.5	VERTICAL	PASSED
7960.000000	44.70	171.79	39.30	5.4	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	28.30	26.00	29.80	-1.5	HORIZONTAL	PASSED
7960.000000	32.10	40.27	26.70	5.4	VERTICAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0073	SIGNAL GENERATOR	SMR 20	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0055	RADIO COMMUNICATION TESTER	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0039	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0040	TEST RECEIVER	ESCS30	Rohde&Schwarz	15C, 15B
BJPCPT0069	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0079	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0191	PULSE LIMITER	ESH3-Z2	Rohde&Schwarz	15C, 15B
BJPCPT0131	RADIO COMMUNICATION TESTER	CMU200	ROHDE&SCHWARZ	15C, 15B
BJPCTC0089	Temperature Test chamber	VT4002	Vötsch Industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0067	BLUETOOTH TESTER	CBT	R&S	22/24/27, 15C
BJPCHW0020	Dc Power supply	Hp6632B	HP	22/24/27, 15C
BJPCTC0094	GPB-RS232 convertor	GPB-RS232	National Instruments	22/24/27, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0129	Relay Unit	TS-RSP	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0130	Relay Unit	TS-RSP	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0080	Device Controller	EMCO2090	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0048	RF Preamplifier 10MHz-3GHz (Metal chassis)	AFS4-00100300-10-10P-4	MITEQ	22/24/27, 15C, 15B
BJPCTC0007	Ultra Broadband Antenna 30MHz-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0162	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0029	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0049	RF preamplifier 3GHz-18GHz	BLMA-0118-1A-BT	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0072	3m anechoic chamber	-	ETS-Lindgren	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2088	ETS-EMCO	22/24/27, 15C, 15B
BJPCPT0072	EMI Test Receiver 20Hz-26.5GHz	ESIB26	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0150	High Pass filter	WHKS 1200-10SS	Wainwright instruments	22/24/27, 15C, 15B
BJPCTC0034	Notch Filter	WRCT800/880-0.2/40-5SSK	Wainwright instruments	22, 15B
BJPCPT0151	Notch Filter	WRCD1800/2000-0.2/40-5SSK	Wainwright instruments	24, 15B
BJPCTC0017	Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0154	Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright instruments	15C, 15B
BJPCTC0058	Bluetooth tester	CBT	Rohde&Schwarz	15C, 15B
BJPCTC0064	WCDMA II FILTER	WRCG1877/1883-1870/1890-40/6SS	Wainwright instruments	24, 15B
BJPCTC0065	WCDMA V FILTER	WRCG832/838-825/845-40/5SS	Wainwright instruments	22, 15B
BJPCTC0066	ANTENNA	SBA9113	SWARZBECK	22/24/27
BJPCTC0096	RF Preamplifier 100MHz-3GHz	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B