

FCC Test Report

Report No.: AGC15705240914FR01

FCC ID : QV7-GC88752-103

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: DRONE

BRAND NAME : SYMA

MODEL NAME : W5

APPLICANT : GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL

CO.,LTD

DATE OF ISSUE : Nov. 08, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.249

REPORT VERSION: V1.0

Attestation Of Global Conce (Shenzhen) Co., Ltd



Page 2 of 42

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 08, 2024	Valid	Initial Release



Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	10
4.System Test Configuration	12
4.1 EUT Configuration	12
4.2 EUT Exercise	12
4.3 Configuration of Tested System	12
4.4 Equipment Used In Tested System	12
4.5 Summary of Test Results	13
5. Description of Test Modes	14
6. Duty Cycle Measurement	15
7. 20dB Bandwidth Measurement	16
7.1 Provisions Applicable	16
7.2 Measurement Procedure	16
7.3 Measurement Setup (Block Diagram of Configuration)	16
7.4 Measurement Results	17
8. Field Strength of Fundamental and Radiated Spurious Emission	19
8.1 Measurement Limit	19
8.2 Measurement Procedure	20
8.3 Measurement Setup (Block Diagram of Configuration)	23
8.4 Measurement Result	24
9. AC Power Line Conducted Emission	38
9.1 Measurement Limit	38
9.2 Measurement Setup (Block Diagram of Configuration)	38
9.3 Preliminary Procedure of Line Conducted Emission Test	39
9.4 Final Procedure of Line Conducted Emission Test	39
9.5 Measurement Resul	39
Appendix I: Photographs of Test Setup	42
Appendix II: Photographs of Test EUT	42



Report No.: AGC15705240914FR01 Page 4 of 42

1. General Information

Applicant	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO.,LTD
Address	NO.2 WEST XINGYE ROAD LAIMEI INDUSTRIAL AREA CHENG HAI, Shantou, China
Manufacturer	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO.,LTD
Address	NO.2 WEST XINGYE ROAD LAIMEI INDUSTRIAL AREA CHENG HAI, Shantou, China
Factory	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO.,LTD
Address	NO.2 WEST XINGYE ROAD LAIMEI INDUSTRIAL AREA CHENG HAI, Shantou, China
Product Designation	DRONE
Brand Name	SYMA
Test Model	W5
Date of receipt of test item	Sep. 12, 2024
Date of Test	Sep. 12, 2024~Nov. 08, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-NTX-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Cocili	
	Cici Li (Project Engineer)	Nov. 08, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Nov. 08, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Nov. 08, 2024



Page 5 of 42

2. Product Information

2.1 Product Technical Description

Equipment Specification	Low Power Short Range Equipment
Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2408MHz-2472MHz
Modulation Type	GFSK
Number of channels	65
Channel Separation	1MHz
Field Strength of Fundamental	88.53dBμV/m (Peak)
Hardware Version	SM-227-BKT-V1
Software Version	V1
Antenna Designation	Wire Antenna
Antenna Gain	-0.1823dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter



Page 6 of 42

2.2 Test Frequency List

Channel No.	Frequency (GHz)	Channel No.	Frequency (GHz)	Channel No.	Frequency (GHz)
01	2.408	23	2.430	45	2.452
02	2.409	24	2.431	46	2.453
03	2.410	25	2.432	47	2.454
04	2.411	26	2.433	48	2.455
05	2.412	27	2.434	49	2.456
06	2.413	28	2.435	50	2.457
07	2.414	29	2.436	51	2.458
08	2.415	30	2.437	52	2.459
09	2.416	31	2.438	53	2.460
10	2.417	32	2.439	54	2.461
11	2.418	33	2.440	55	2.462
12	2.419	34	2.441	56	2.463
13	2.420	35	2.442	57	2.464
14	2.421	36	2.443	58	2.465
15	2.422	37	2.444	59	2.466
16	2.423	38	2.445	60	2.467
17	2.424	39	2.446	61	2.468
18	2.425	40	2.447	62	2.469
19	2.426	41	2.448	63	2.470
20	2.427	42	2.449	64	2.471
21	2.428	43	2.450	65	2.472
22	2.429	44	2.451		



Page 7 of 42

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **QV7-GC88752-103**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	o. Identity Document Title			
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		

2.5 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -0.1823dBi



Page 8 of 42

3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 42

3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V by battery or DC 5V by adapter

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



Report No.: AGC15705240914FR01 Page 10 of 42

3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23		
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30		
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23		
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22		
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		

• A	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		



Page 11 of 42

• Te	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A				
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6				
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



Report No.: AGC15705240914FR01 Page 12 of 42

4. System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	N/A	USB-TTL	N/A	N/A
2	Adapter	Huawei	HW-200440C00		



Page 13 of 42

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.249(a)	Field Strength of Fundamental	Pass
3	§15.209&§15.249(d)	Radiated Emission& Band Edge	Pass
4	§15.205	Restricted Bands of Operation	Pass
5	§15.215	20dB Bandwidth	Pass
6	§15.207	AC Power Line Conducted Emission	Pass



Page 14 of 42

5. Description of Test Modes

Summary Table of Test Cases				
Test Item	Equipment type / Modulation			
rest item	Short Distance and Low Power Consumption/ GFSK			
Radiated & Conducted Test Cases	Mode 1: Normal Transmission on channel 01 (Battery powered or AC/DC adapter) Mode 2: Normal Transmission on channel 36 (Battery powered or AC/DC adapter) Mode 3: Normal Transmission on channel 65 (Battery powered or AC/DC adapter)			
AC Conducted Emission	2.4G play+Battery + USB Cable (Charging from AC Adapter)			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- The fixed-frequency transmission of the prototype is debugged through the buttons or software declared by the manufacturer.



Page 15 of 42


6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
GFSK_2408MHz	633	14.34	8.43	1.58

Remark:

1. Duty Cycle factor = 10 * log (1/ Duty cycle) The test plots as follows:

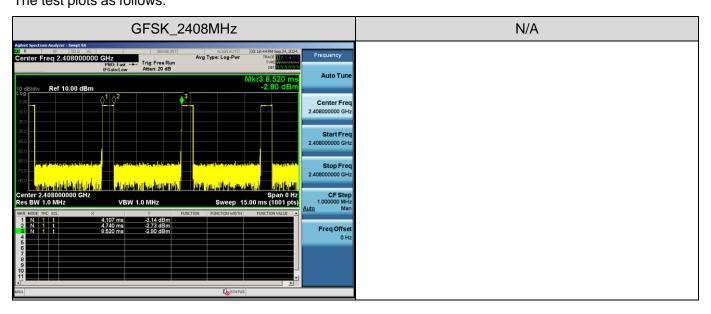



Page 16 of 42

7. 20dB Bandwidth Measurement


7.1 Provisions Applicable


N/A

7.2 Measurement Procedure

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 30 kHz. Set the Video bandwidth (VBW) = 100 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

7.3 Measurement Setup (Block Diagram of Configuration)

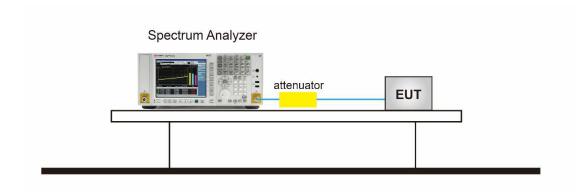







7.4 Measurement Results


Test Data of Occupied Bandwidth and -20dB Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
	2408	1.1727	0.5619	N/A			
GFSK	2443	0.8962	0.5619	N/A			
	2472	0.8371	0.6030	N/A			

Test Graphs of Occupied Bandwidth and -20 Bandwidth

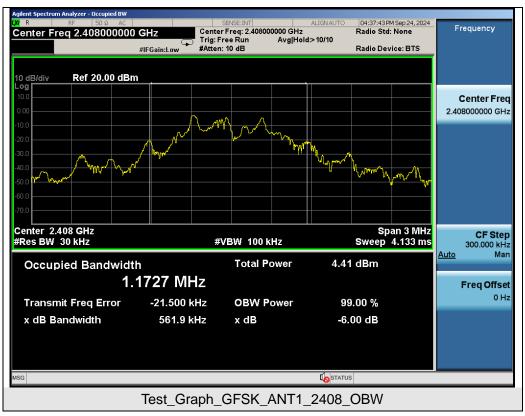





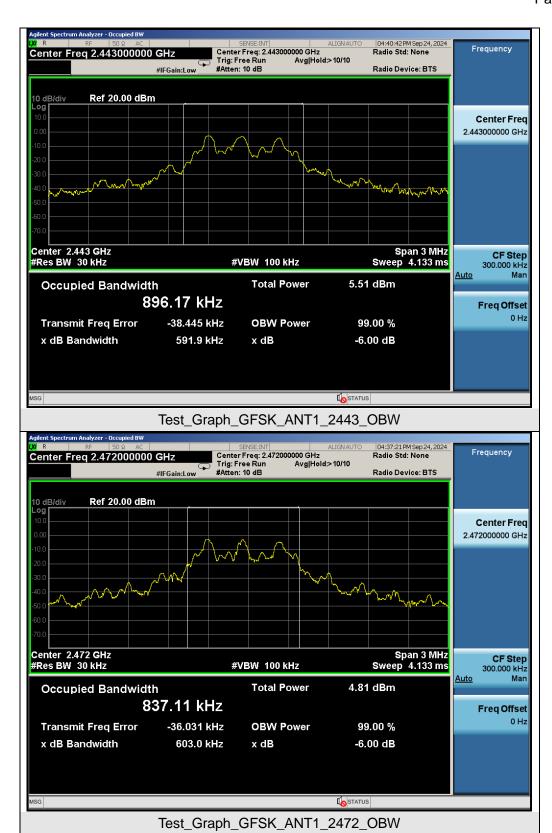



Page 19 of 42

8. Field Strength of Fundamental and Radiated Spurious Emission

8.1 Measurement Limit

15.249 Limit in the below table has to be followed:

Fraguency Bongo	Field Strength of Fundamental	Field Strength of Harmonics	
Frequency Range	(millivolts/meter)	(microvolts/meter)	
900-928MHz	50	500	
2400-2483.5MHz	50	500	
5725-5875MHz	50	500	
24.0-24.25GHz	250	2500	

15.209 Limit in the below table has to be followed:

Frequency Range	Distance	Field Strengths Limit		
(MHz)	Meters	μV/m	dB(μV)/m	
0.009 ~ 0.490	300	2400/F(kHz)		
0.490 ~ 1.705	30	24000/F(kHz)		
1.705 ~ 30	30	30		
30 ~ 88	3	100	40.0	
88 ~ 216	3	150	43.5	
216 ~ 960	3	200	46.0	
960 ~ 1000	3	500	54.0	
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average		

Remark:

- 1) Emission level dB μ V = 20 log Emission level μ V/m.
- 2) The smaller limit shall apply at the cross point between two frequency bands.
- 3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.



Report No.: AGC15705240914FR01 Page 20 of 42

8.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 21 of 42

■ The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start ~Stop i requency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP

- The following is the test setup of Field Strength of Fundamental:
 - > Peak detection: RBW is greater than the main frequency OBW, VBW=50MHz / Sweep=AUTO
 - Average detection: RBW is greater than the main frequency OBW, VBW=50MHz / Sweep=AUTO
- The following is the test setup of Band Edge:

The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

- Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - Peak detection: RBW=1MHz, VBW=3MHz / Sweep=AUTO
 - > Average detection: RBW=1MHz; VBW=1/T / Sweep=AUTO (Duty cycle is less than 98%)
 - Average detection: RBW=1MHz; VBW=3M / Sweep=AUTO
 - Other procedures refer to clause 7.2.



Page 22 of 42

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


• Average Measurements above 1GHz (Method VB)

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW $\ge 1/T$. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




8.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

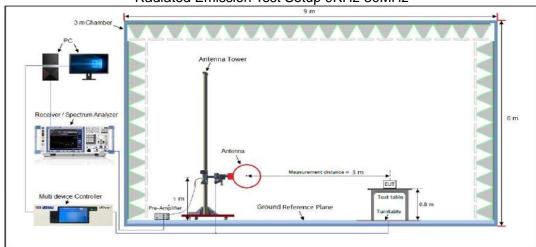

Radiated Emission Test Setup 30MHz-1000MHz

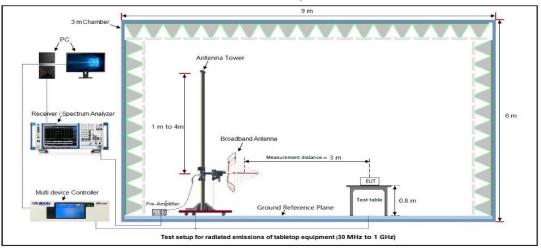

Radiated Emission Test Setup Above 1000MHz

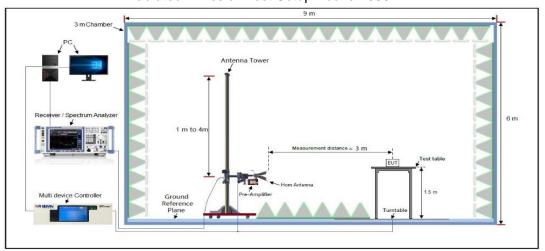

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 24 of 42

8.4 Measurement Result

Field Strength of Fundamental

EUT Name DRONE Model Name W5								
Temperature		25°C		Relative Humio	Relative Humidity		55.4%	
Pressure		960hPa		Test Voltage		DC 3.7V b	y battery	
Test Mode		Mode 1		Antenna Polar	ity	Horizontal	/ Vertical	
			Pea	k Value				
Frequency (MHz)		ured Level@3m (dBµV/m)	Correction Factor dB/m	Field Strength (dBµV/m)		it @3m sµV/m)	Polarity	
2408		54.48	34.05	88.53	11	14.00	Horizontal	
2408		46.12	34.05	80.17	11	14.00	Vertical	
2443		42.68	34.21	76.89	11	14.00	Horizontal	
2443		40.01	34.21	74.22	11	14.00	Vertical	
2472		51.88	34.62	86.50	11	14.00	Horizontal	
2472		44.33	34.62	78.95	11	14.00	Vertical	
			Avera	ge Value				
Frequency (MHz)		ured Level@3m (dBµV/m)	Correction Factor dB/m	Field Strength (dBµV/m)		it @3m sµV/m)	Polarity	
2408		41.04	34.05	75.09	9	4.00	Horizontal	
2408		41.42	34.05	75.47	9	4.00	Vertical	
2443		41.15	34.21	75.36	9	4.00	Horizontal	
2443		36.90	34.21	71.11	9	4.00	Vertical	
2472		46.62	34.62	81.24	9	4.00	Horizontal	
2472		38.90	34.62	73.52	9	4.00	Vertical	

RESULT: Pass

Note: Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)




Report No.: AGC15705240914FR01 Page 25 of 42


Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	DRONE	Model Name	W5			
Temperature	25 ℃	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	DC 3.7V by battery			
Test Mode	Mode 1	Antenna Polarity	Horizontal			
	•		-			

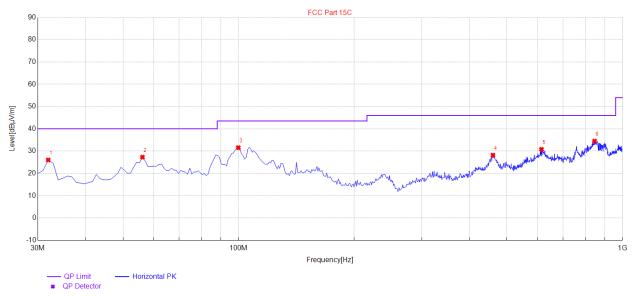

Final I	Final Data List										
NO. Freq. [MHz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	31.94	26.01	12.70	40.00	13.99	100	340	Horizontal			
2	56.19	27.29	16.86	40.00	12.71	100	100	Horizontal			
3	99.84	31.54	17.03	43.50	11.96	100	350	Horizontal			
4	459.71	28.19	24.69	46.00	17.81	100	110	Horizontal			
5	614.91	30.80	25.36	46.00	15.20	100	90	Horizontal			
6	845.77	34.50	29.51	46.00	11.50	100	180	Horizontal			




Polarity

Vertical



	Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	DRONE	Model Name	W5			
Temperature	25 ℃	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	DC 3.7V by battery			
Test Mode	Mode 1	Antenna Polarity	Vertical			

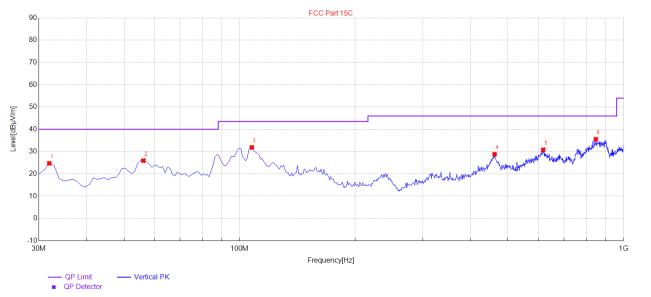

·········	Julu Liot						
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]
1	31.94	24.74	12.70	40.00	15.26	100	80
2	56.19	25.95	16.86	40.00	14.05	100	0

2	56.19	25.95	16.86	40.00	14.05	100	0	Vertical
3	107.6	31.88	16.68	43.50	11.62	100	120	Vertical
4	461.65	28.81	24.36	46.00	17.19	100	150	Vertical
5	617.82	30.84	25.68	46.00	15.16	100	340	Vertical
6	846.74	35.55	29.55	46.00	10.45	100	100	Vertical

RESULT: Pass

Final Data List

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



Report No.: AGC15705240914FR01 Page 27 of 42

Radiated Emissions Test Results for Above 1GHz

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4816.000	50.13	0.08	50.21	74.00	-23.79	peak
4816.000	39.85	0.08	39.93	54.00	-14.07	AVG
7224.000	49.37	2.21	51.58	74.00	-22.42	peak
7224.000	38.63	2.21	40.84	54.00	-13.16	AVG
Domark:				•		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
49.63	80.0	49.71	74.00	-24.29	peak
40.12	80.0	40.20	54.00	-13.80	AVG
49.63	2.21	51.84	74.00	-22.16	peak
39.58	2.21	41.79	54.00	-12.21	AVG
	(dBµV) 49.63 40.12 49.63	Reading (dBµV) (dB) 49.63 0.08 40.12 0.08 49.63 2.21	Reading Level (dBμV) (dB) (dBμV/m) 49.63 0.08 49.71 40.12 0.08 40.20 49.63 2.21 51.84	Reading Level (dBμV) (dB) (dBμV/m) (dBμV/m) 49.63 0.08 49.71 74.00 40.12 0.08 40.20 54.00 49.63 2.21 51.84 74.00	Reading Level (dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 49.63 0.08 49.71 74.00 -24.29 40.12 0.08 40.20 54.00 -13.80 49.63 2.21 51.84 74.00 -22.16

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 28 of 42

Radiated Emissions Test Results for Above 1GHz

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4886.000	50.11	0.14	50.25	74.00	-23.75	peak
4886.000	39.12	0.14	39.26	54.00	-14.74	AVG
7329.000	49.74	2.36	52.10	74.00	-21.90	peak
7329.000	38.55	2.36	40.91	54.00	-13.09	AVG
	_					

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4886.000	49.86	0.14	50.00	74.00	-24.00	peak
4886.000	38.89	0.14	39.03	54.00	-14.97	AVG
7329.000	48.96	2.36	51.32	74.00	-22.68	peak
7329.000	39.12	2.36	41.48	54.00	-12.52	AVG
Domorke						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 29 of 42

Radiated Emissions Test Results for Above 1GHz

EUT Name	DRONE	Model Name	W5
emperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4944.000	49.85	0.22	50.07	74.00	-23.93	peak
4944.000	39.70	0.22	39.92	54.00	-14.08	AVG
7416.000	48.52	2.64	51.16	74.00	-22.84	peak
7416.000	40.15	2.64	42.79	54.00	-11.21	AVG
Pamark:		•	_	_	_	

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4816.000	49.96	0.22	50.18	74.00	-23.82	peak
4816.000	39.12	0.22	39.34	54.00	-14.66	AVG
7224.000	49.58	2.64	52.22	74.00	-21.78	peak
7224.000	39.61	2.64	42.25	54.00	-11.75	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 40 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




Report No.: AGC15705240914FR01 Page 30 of 42


Band Edge Emission Test Results for Restricted Bands

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

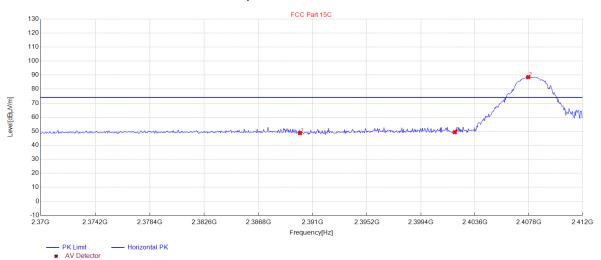


1	NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
	1	2390.012012	48.64	34.40	74.00	25.36	150	256	Horizontal
	2	2402.036036	49.28	34.43	74.00	24.72	150	28	Horizontal
	3	2407.753754	88.53	34.45	74.00	-14.53	150	57	Horizontal





Test Graph for Average Measurement

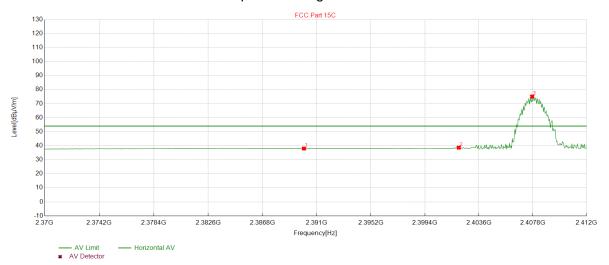

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.012012	37.98	34.40	54.00	16.02	150	48	Horizontal
2	2402.036036	38.62	34.43	54.00	15.38	150	251	Horizontal
3	2407.753754	75.09	34.45	54.00	-21.09	150	273	Horizontal

RESULT: Pass




Report No.: AGC15705240914FR01 Page 32 of 42


Band Edge Emission Test Results for Restricted Bands

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa Test Voltage		DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

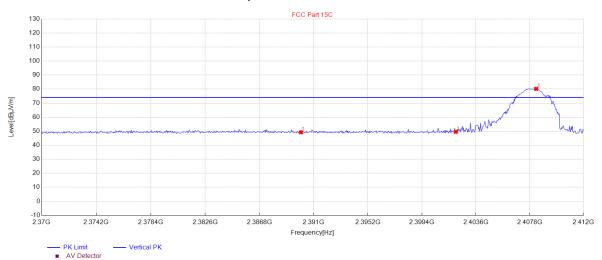


N	Ο.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
•	1	2390.012012	49.21	34.40	74.00	24.79	150	274	Vertical
2	2	2402.036036	49.55	34.43	74.00	24.45	150	5	Vertical
	3	2408.3003	80.17	34.45	74.00	-6.17	150	265	Vertical





Test Graph for Average Measurement

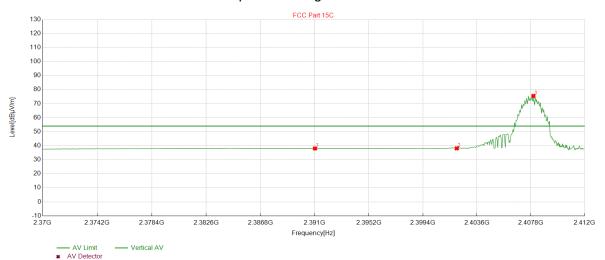

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2391.021021	38.02	34.40	54.00	15.98	150	0	Vertical
2	2402.036036	38.11	34.43	54.00	15.89	150	219	Vertical
3	2408.006006	75.47	34.45	54.00	-21.47	150	261	Vertical

RESULT: Pass




Page 34 of 42


Band Edge Emission Test Results for Restricted Bands

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

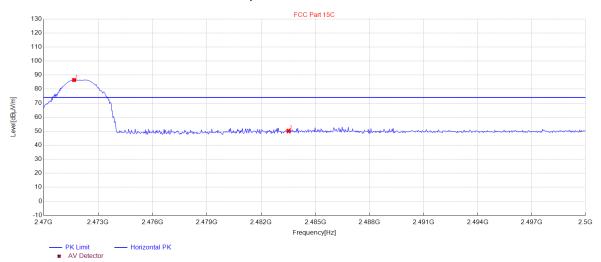


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2471.681682	86.50	34.63	74.00	-12.50	150	66	Horizontal
2	2483.513514	50.19	34.66	74.00	23.81	150	197	Horizontal





Test Graph for Average Measurement

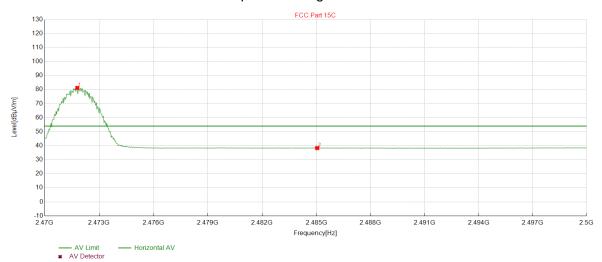

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2471.801802	81.24	34.63	54.00	-27.24	150	60	Horizontal
2	2485.045045	38.29	34.67	54.00	15.71	150	303	Horizontal

RESULT: Pass




Page 36 of 42

Band Edge Emission Test Results for Restricted Bands

EUT Name	DRONE	Model Name	W5
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

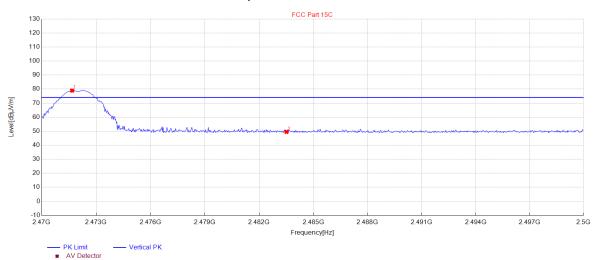


ı	NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
	1	2471.681682	78.95	34.63	74.00	-4.95	150	315	Vertical
	2	2483.513514	49.54	34.66	74.00	24.46	150	201	Vertical



Report No.: AGC15705240914FR01 Page 37 of 42

Test Graph for Average Measurement

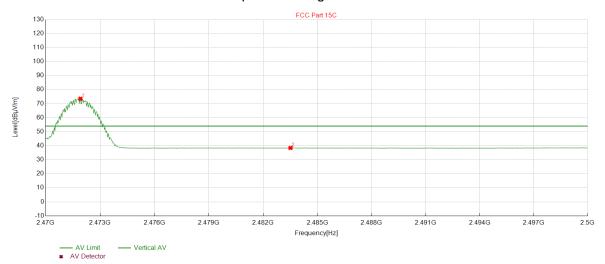

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2471.921922	73.52	34.63	54.00	-19.52	150	320	Vertical
2	2483.513514	38.39	34.66	54.00	15.61	150	358	Vertical

RESULT: Pass

Note:

- 1) Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2) The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.



Page 38 of 42

9. AC Power Line Conducted Emission


9.1 Measurement Limit

Francisco	Maximum RF Line Voltage				
Frequency	Q.P. (dBμV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

9.2 Measurement Setup (Block Diagram of Configuration)

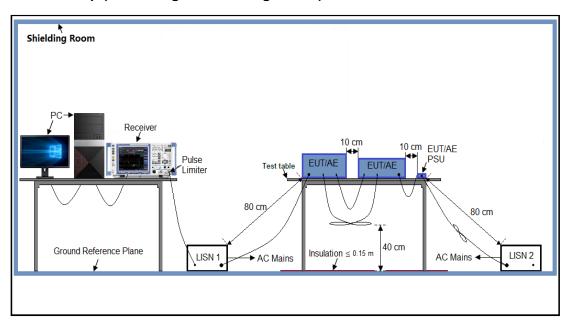



Page 39 of 42

9.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

9.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

9.5 Measurement Resul



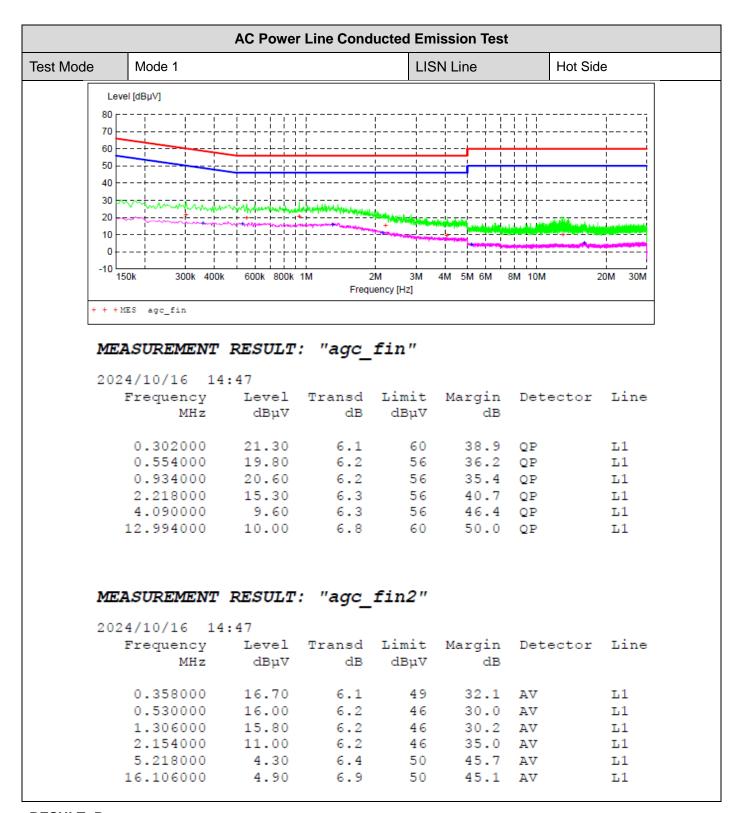

RESULT: Pass

QP

QP

QP

QP

Ν

Ν

Ν

Ν


35.2

34.9

42.8

43.4



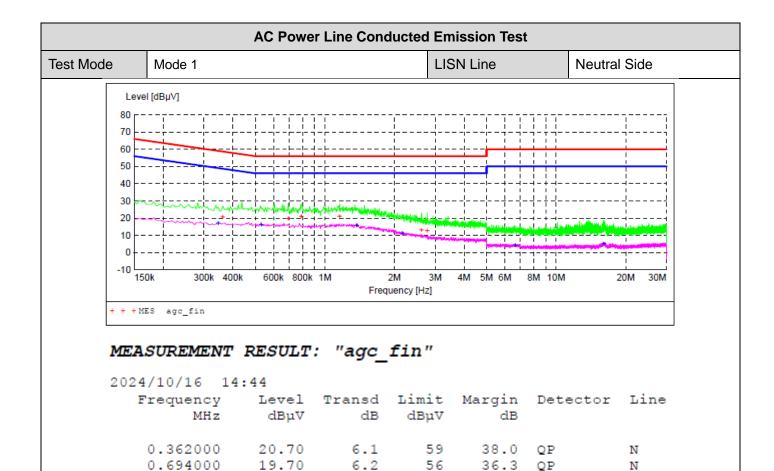

20.80

21.10

13.20

12.60

0.790000

1.158000

2.618000

2.774000

2024/10/16 14:44								
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line		
0.346000	16.80	6.1	49	32.3	AV	N		
0.530000	16.00	6.2	46	30.0	AV	N		
1.374000	15.70	6.2	46		AV	N		
2.158000	11.30	6.2	46	34.7	AV	N		
6.646000	4.30	6.5		45.7	AV	N		
16.018000	5.20	6.9	5.0	44.8	ΔV	N		

6.2

6.2

6.3

6.3

56

56

56

56

RESULT: PASS



Page 42 of 42

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC15705240914AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC15705240914AP02

----End of Report-----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.