



L C I E Test Report No.: RF160530N002-2



TEST REPORT

Applicant	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO., LTD
Address	NO.2 WEST XINGYE ROAD LAIMEI INDUSTRIAL AREA CHENGHAI SHANTOU GUANGDONG CHINA

Manufacturer or Supplier	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO., LTD
Address	NO.2 WEST XINGYE ROAD LAIMEI INDUSTRIAL AREA CHENGHAI SHANTOU GUANGDONG CHINA
Product	WIFI CAMERA
Brand Name	N/A
Model	X8HW WIFI
Additional Model & Model Difference	S026G, S102G, S105G, S107G, etc., See items 3.1
Date of tests	Sep. 18, 2016 ~ Sep. 28, 2016

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Breeze Jiang Project Engineer / EMC Department	Approved by Glyn He Supervisor / EMC Department
	
	Date: Oct. 12, 2016

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT.....	6
3.2 DESCRIPTION OF TEST MODES.....	8
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.4 DESCRIPTION OF SUPPORT UNITS.....	12
4 TEST TYPES AND RESULTS.....	13
4.1 RADIATED EMISSION MEASUREMENT	13
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	13
4.1.2 TEST INSTRUMENTS.....	14
4.1.3 TEST PROCEDURES	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	16
4.1.6 EUT OPERATING CONDITIONS	16
4.1.7 TEST RESULTS	17
4.2 6dB BANDWIDTH MEASUREMENT	31
4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	31
4.2.2 TEST INSTRUMENTS.....	31
4.2.3 TEST PROCEDURE.....	31
4.2.4 DEVIATION FROM TEST STANDARD	32
4.2.5 TEST SETUP	32
4.2.6 EUT OPERATING CONDITIONS	32
4.2.7 TEST RESULTS	33
4.3 CONDUCTED OUTPUT POWER	37
4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	37
4.3.2 TEST SETUP.....	37
4.3.3 TEST INSTRUMENTS.....	37
4.3.4 TEST PROCEDURES	38
4.3.5 DEVIATION FROM TEST STANDARD	38
4.3.6 EUT OPERATING CONDITIONS	38



L C I E

Test Report No.: RF160530N002-2

4.3.7	TEST RESULTS	39
4.3.7.1	MAXIMUM PEAK OUTPUT POWER	39
4.3.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	40
4.4	POWER SPECTRAL DENSITY MEASUREMENT	41
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	41
4.4.2	TEST SETUP	41
4.4.3	TEST INSTRUMENTS.....	41
4.4.4	TEST PROCEDURE.....	41
4.4.5	DEVIATION FROM TEST STANDARD	41
4.4.6	EUT OPERATING CONDITION	42
4.4.7	TEST RESULTS	42
4.5	OUT OF BAND EMISSION MEASUREMENT	46
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	46
4.5.2	TEST SETUP	46
4.5.3	TEST INSTRUMENTS.....	46
4.5.4	TEST PROCEDURE.....	46
4.5.5	DEVIATION FROM TEST STANDARD	47
4.5.6	EUT OPERATING CONDITION	47
4.5.7	TEST RESULTS	48
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	54
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	55



L C I E Test Report No.: RF160530N002-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160530N002-2	Original release	Oct. 12, 2016



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered by Battery
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.83dB
	1GHz ~ 18GHz	4.93dB
	18GHz ~ 40GHz	4.80dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WIFI CAMERA
MODEL NO.	X8HW WIFI
ADDITIONAL MODELS	S026G, S102G, S105G, S107G, S108G, S109G, S111G, S5, S8, 5F625DE, 5F60A91, 5F62508, 5F62D96, 5F62D95, X3, X3S, X4, X4S, X5, X5, X5A, X5A-1, X5S, X5SC, X5SW, X5HC, X5HW, X51, X52C, X53HC, X53HW, X54HC, X54HW, X5UC, X5UW, X5UW(720P), X5G, X14, X14C, X14W, X14W(720P), X15, X15C, X15W, X6, X8W, X8W-1, X8C, X8C-1, X8S, X8SW, X8G, X8G-1, X8HW-1, X8HW(720P), X8HW(720P)-1, X8HC, X8HC-1, X8HG, X8HG-1, X9, X9S, X11, X11C, X12, X12S, X13, X16, X17, X18, X19, X20, X21W, X22W, K3, D2100WH, HD-8500WH, D1U, D1W, D1W (720P)
FCC ID	QV7-SYMA20160721
NOMINAL VOLTAGE	DC 5V by host unit
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
PEAK POWER	WLAN: 22.96dBm (Maximum peak Power)
ANTENNA TYPE	Wire Antenna, 2.0dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (20MHz)	1TX/1RX
802.11n (40MHz)	1TX/1RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



L C I E Test Report No.: RF160530N002-2

4. Please refer to the EUT photo document (Reference No.: 160530N002-2) for detailed product photo.
5. Additional models (see above table) are identical in circuitry and electrical, mechanical and physical construction with the test model X8HW WIFI except the appearance and model no. for trading purpose.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	Powered by DC 5V with WIFI function

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by host unit.

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1	OFDM	BPSK	6.0	X



RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0	X
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5	X

BANDEDGE MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5



ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 51%RH	DC 5V	Eric Fang
RE≥1G	25deg. C, 51%RH	DC 5V	Eric Fang
PLC	N/A	N/A	N/A
APCM	20deg. C, 55%RH	DC 5V	Robert Cheng



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v03r05

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m



4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 16	Aug. 07, 17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 08,16	Aug. 07,17

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 494399.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

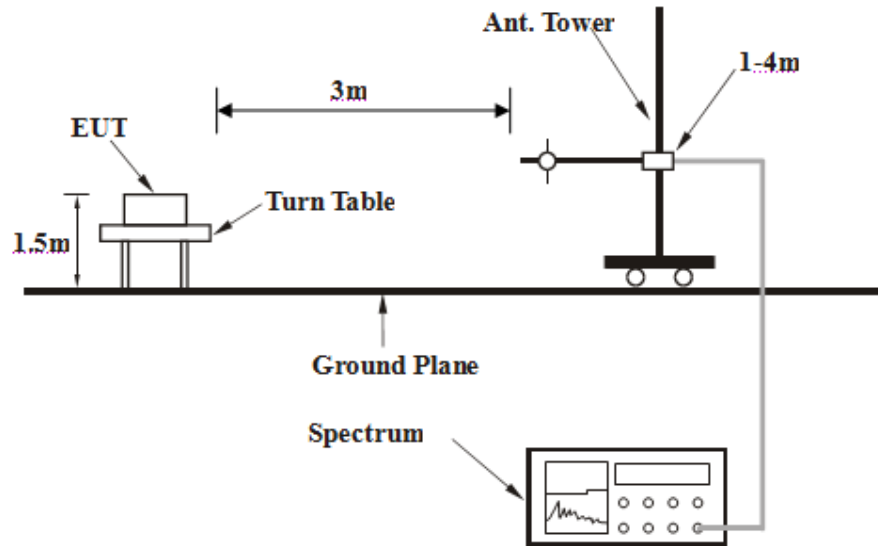

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11b

CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	191.67	39.50	43.50	-4.00	200	0	59.58	-20.08
2	215.57	41.66	43.50	-1.84	200	0	60.76	-19.10
3	287.26	44.07	46.00	-1.93	200	0	58.98	-14.91
4	323.81	44.92	46.00	-1.08	200	0	58.36	-13.44
5	575.45	44.68	46.00	-1.32	200	0	50.00	-5.32
6	648.55	42.92	46.00	-3.08	200	0	47.57	-4.65

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

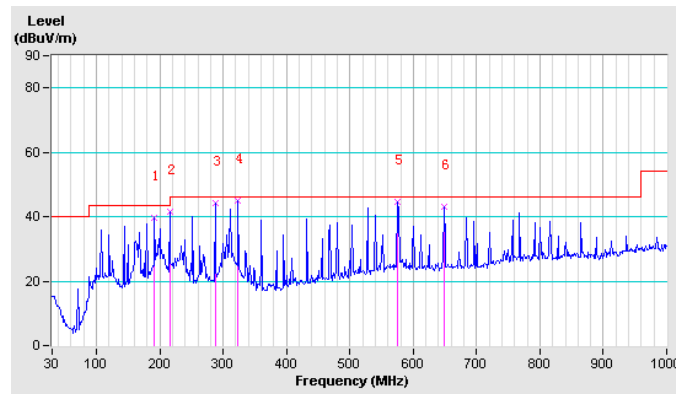




CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	287.26	35.29	46.00	-10.71	100	0	50.20	-14.91
2	311.16	35.49	46.00	-10.51	100	0	49.26	-13.77
3	323.81	39.08	46.00	-6.92	100	0	52.52	-13.44
4	527.65	32.79	46.00	-13.21	100	0	40.04	-7.25
5	575.45	38.40	46.00	-7.60	100	0	43.72	-5.32
6	648.55	35.01	46.00	-10.99	100	0	39.66	-4.65

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

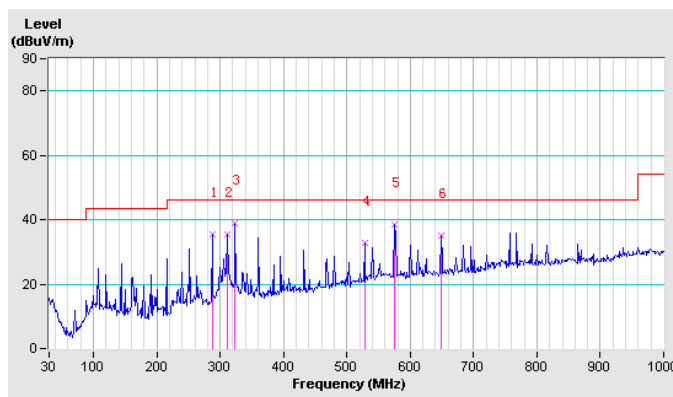



ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.6 PK	74.0	-27.4	1.38 H	205	44.03	2.53
2	2390.00	34.9 AV	54.0	-19.1	1.38 H	205	32.39	2.53
3	*2412.00	100.9 PK			1.38 H	205	98.30	2.59
4	*2412.00	97.9 AV			1.38 H	205	95.26	2.59
5	4824.00	42.8 PK	74.0	-31.2	1.00 H	125	35.00	7.78
6	4824.00	30.3 AV	54.0	-23.7	1.00 H	125	22.51	7.78
7	#7236.00	48.3 PK	80.9	-32.6	1.39 H	201	34.81	13.45
8	#7236.00	35.0 AV	77.9	-42.9	1.39 H	201	21.53	13.45
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.8 PK	74.0	-25.2	1.45 V	208	46.26	2.53
2	2390.00	39.6 AV	54.0	-14.4	1.45 V	208	37.10	2.53
3	*2412.00	103.9 PK			1.45 V	208	101.30	2.59
4	*2412.00	100.3 AV			1.45 V	208	97.66	2.59
5	4824.00	43.2 PK	74.0	-30.8	1.56 V	120	35.42	7.78
6	4824.00	34.2 AV	54.0	-19.8	1.56 V	120	26.39	7.78
7	#7236.00	47.4 PK	83.9	-36.5	1.25 V	203	33.91	13.45
8	#7236.00	34.9 AV	80.3	-45.4	1.25 V	203	21.42	13.45

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



L C I E Test Report No.: RF160530N002-2

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.5 PK			1.29 H	125	95.81	2.65
2	*2437.00	95.6 AV			1.29 H	125	92.93	2.65
3	4874.00	41.1 PK	74.0	-32.9	1.05 H	203	33.29	7.85
4	4874.00	31.0 AV	54.0	-23.0	1.05 H	203	23.13	7.85
5	7311.00	47.5 PK	74.0	-26.5	1.25 H	251	33.85	13.61
6	7311.00	34.5 AV	54.0	-19.5	1.25 H	251	20.89	13.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.5 PK			1.25 V	201	98.85	2.65
2	*2437.00	98.4 AV			1.25 V	201	95.75	2.65
3	4874.00	43.2 PK	74.0	-30.8	1.28 V	206	35.35	7.85
4	4874.00	31.2 AV	54.0	-22.8	1.28 V	206	23.35	7.85
5	7311.00	47.5 PK	74.0	-26.5	1.95 V	201	33.89	13.61
6	7311.00	34.5 AV	54.0	-19.5	1.95 V	201	20.89	13.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.8 PK			1.05 H	252	104.04	2.71
2	*2462.00	103.7 AV			1.05 H	252	100.99	2.71
3	2483.50	50.1 PK	74.0	-23.9	1.05 H	252	47.28	2.77
4	2483.50	37.1 AV	54.0	-16.9	1.05 H	252	34.37	2.77
5	4924.00	42.5 PK	74.0	-31.5	1.23 H	209	34.61	7.92
6	4924.00	31.6 AV	54.0	-22.4	1.23 H	209	23.63	7.92
7	7386.00	47.7 PK	74.0	-26.3	1.96 H	148	33.96	13.78
8	7386.00	34.5 AV	54.0	-19.5	1.96 H	148	20.72	13.78
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.0 PK			1.02 V	312	98.31	2.71
2	*2462.00	98.1 AV			1.02 V	312	95.42	2.71
3	2483.50	49.5 PK	74.0	-24.5	1.02 V	312	46.73	2.77
4	2483.50	35.7 AV	54.0	-18.3	1.02 V	312	32.90	2.77
5	4924.00	42.2 PK	74.0	-31.8	1.00 V	203	34.32	7.92
6	4924.00	31.4 AV	54.0	-22.6	1.00 V	203	23.46	7.92
7	7386.00	48.7 PK	74.0	-25.3	1.05 V	291	34.92	13.78
8	7386.00	34.5 AV	54.0	-19.5	1.05 V	291	20.70	13.78

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.17 H	238	66.36	2.53
2	2390.00	50.4 AV	54.0	-3.6	1.17 H	238	47.89	2.53
3	*2412.00	109.4 PK			1.17 H	238	106.83	2.59
4	*2412.00	100.2 AV			1.17 H	238	97.62	2.59
5	4824.00	42.3 PK	74.0	-31.7	1.09 H	182	34.51	7.78
6	4824.00	29.6 AV	54.0	-24.4	1.09 H	182	21.86	7.78
7	#7236.00	47.6 PK	89.4	-41.8	1.95 H	201	34.18	13.45
8	#7236.00	34.2 AV	80.2	-46.0	1.95 H	201	20.78	13.45
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.25 V	78	58.15	2.53
2	2390.00	41.0 AV	54.0	-13.0	1.25 V	78	38.48	2.53
3	*2412.00	103.9 PK			1.25 V	78	101.29	2.59
4	*2412.00	94.3 AV			1.25 V	78	91.71	2.59
5	4824.00	42.4 PK	74.0	-31.6	1.36 V	184	34.64	7.78
6	4824.00	29.7 AV	54.0	-24.3	1.36 V	184	21.96	7.78
7	#7236.00	47.3 PK	83.9	-36.6	1.25 V	301	33.82	13.45
8	#7236.00	34.2 AV	74.3	-40.1	1.25 V	301	20.74	13.45

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



L C I E Test Report No.: RF160530N002-2

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.8 PK			1.52 H	238	106.13	2.65
2	*2437.00	99.4 AV			1.52 H	238	96.75	2.65
3	4874.00	41.6 PK	74.0	-32.4	1.63 H	215	33.78	7.85
4	4874.00	28.7 AV	54.0	-25.3	1.63 H	215	20.83	7.85
5	7311.00	47.8 PK	74.0	-26.2	1.53 H	201	34.21	13.61
6	7311.00	35.6 AV	54.0	-18.4	1.53 H	201	22.02	13.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.3 PK			1.59 V	203	101.60	2.65
2	*2437.00	94.9 AV			1.59 V	203	92.20	2.65
3	4874.00	42.3 PK	74.0	-31.7	1.24 V	306	34.45	7.85
4	4874.00	28.9 AV	54.0	-25.1	1.24 V	306	21.06	7.85
5	7311.00	48.1 PK	74.0	-25.9	1.42 V	249	34.49	13.61
6	7311.00	33.6 AV	54.0	-20.4	1.42 V	249	20.03	13.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.6 PK			2.01 H	288	104.89	2.71
2	*2462.00	97.9 AV			2.01 H	288	95.23	2.71
3	2483.50	62.8 PK	74.0	-11.2	1.02 H	282	60.03	2.77
4	2483.50	45.8 AV	54.0	-8.2	1.02 H	282	43.03	2.77
5	4924.00	42.8 PK	74.0	-31.2	1.18 H	54	34.88	7.92
6	4924.00	29.1 AV	54.0	-24.9	1.18 H	54	21.18	7.92
7	7386.00	47.8 PK	74.0	-26.2	1.05 H	222	34.02	13.78
8	7386.00	33.8 AV	54.0	-20.2	1.05 H	222	20.02	13.78
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.9 PK			1.01 V	284	101.19	2.71
2	*2462.00	94.1 AV			1.01 V	284	91.43	2.71
3	2483.50	58.0 PK	74.0	-16.0	1.02 V	63	55.19	2.77
4	2483.50	41.9 AV	54.0	-12.1	1.02 V	63	39.11	2.77
5	4924.00	43.3 PK	74.0	-30.7	1.00 V	214	35.38	7.92
6	4924.00	30.1 AV	54.0	-23.9	1.00 V	214	22.18	7.92
7	7386.00	48.6 PK	74.0	-25.4	1.02 V	47	34.82	13.78
8	7386.00	33.9 AV	54.0	-20.1	1.02 V	47	20.13	13.78

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	1.02 H	317	69.27	2.53
2	2390.00	51.2 AV	54.0	-2.8	1.02 H	317	48.67	2.53
3	*2412.00	107.6 PK			1.62 H	222	105.01	2.59
4	*2412.00	97.1 AV			1.62 H	222	94.51	2.59
5	4824.00	43.6 PK	74.0	-30.4	1.00 H	122	35.82	7.78
6	4824.00	29.9 AV	54.0	-24.1	1.00 H	122	22.12	7.78
7	#7236.00	48.1 PK	87.6	-39.5	1.02 H	236	34.65	13.45
8	#7236.00	33.7 AV	77.1	-43.4	1.02 H	236	20.25	13.45
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.04 V	347	57.77	2.53
2	2390.00	39.6 AV	54.0	-14.4	1.04 V	347	37.10	2.53
3	*2412.00	104.6 PK			1.09 V	294	102.01	2.59
4	*2412.00	93.9 AV			1.09 V	294	91.29	2.59
5	4824.00	43.6 PK	74.0	-30.4	1.05 V	217	35.82	7.78
6	4824.00	30.1 AV	54.0	-23.9	1.05 V	217	22.33	7.78
7	#7236.00	48.7 PK	84.6	-35.9	1.01 V	223	35.21	13.45
8	#7236.00	34.4 AV	73.9	-39.5	1.01 V	223	20.96	13.45

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.2 PK			1.53 H	289	107.54	2.65
2	*2437.00	100.7 AV			1.53 H	289	98.05	2.65
3	4874.00	42.7 PK	74.0	-31.3	1.57 H	203	34.88	7.85
4	4874.00	28.9 AV	54.0	-25.1	1.57 H	203	21.04	7.85
5	7311.00	46.8 PK	74.0	-27.2	1.29 H	207	33.22	13.61
6	7311.00	34.7 AV	54.0	-19.3	1.29 H	207	21.08	13.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.6 PK			1.28 V	231	100.98	2.65
2	*2437.00	93.9 AV			1.28 V	231	91.28	2.65
3	4874.00	41.7 PK	74.0	-32.3	1.00 V	154	33.87	7.85
4	4874.00	29.4 AV	54.0	-24.6	1.00 V	154	21.52	7.85
5	7311.00	48.6 PK	74.0	-25.4	1.85 V	201	35.00	13.61
6	7311.00	34.6 AV	54.0	-19.4	1.85 V	201	20.99	13.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.2 PK			1.33 H	264	104.53	2.71
2	*2462.00	97.6 AV			1.33 H	264	94.87	2.71
3	2483.50	72.7 PK	74.0	-1.3	1.08 H	228	69.89	2.77
4	2483.50	52.9 AV	54.0	-1.1	1.08 H	228	50.14	2.77
5	4924.00	48.3 PK	74.0	-25.7	1.00 H	225	40.41	7.92
6	4924.00	30.3 AV	54.0	-23.7	1.00 H	225	22.36	7.92
7	7386.00	49.1 PK	74.0	-24.9	1.12 H	308	35.36	13.78
8	7386.00	34.9 AV	54.0	-19.1	1.12 H	308	21.07	13.78
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.7 PK			1.24 V	262	100.95	2.71
2	*2462.00	94.2 AV			1.24 V	262	91.47	2.71
3	2483.50	64.4 PK	74.0	-9.6	1.02 V	36	61.59	2.77
4	2483.50	45.6 AV	54.0	-8.4	1.02 V	36	42.87	2.77
5	4924.00	43.6 PK	74.0	-30.4	1.12 V	308	35.66	7.92
6	4924.00	30.1 AV	54.0	-23.9	1.12 V	308	22.19	7.92
7	7386.00	50.0 PK	74.0	-24.0	1.05 V	202	36.19	13.78
8	7386.00	34.3 AV	54.0	-19.7	1.05 V	202	20.50	13.78

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.28 H	248	66.12	2.53
2	2390.00	52.7 AV	54.0	-1.3	1.28 H	248	50.17	2.53
3	*2422.00	104.7 PK			1.41 H	208	102.08	2.61
4	*2422.00	94.2 AV			1.41 H	208	91.61	2.61
5	4844.00	43.4 PK	74.0	-30.6	1.02 H	111	35.55	7.81
6	4844.00	30.3 AV	54.0	-23.7	1.02 H	111	22.52	7.81
7	7266.00	49.5 PK	74.0	-24.5	1.01 H	258	35.96	13.51
8	7266.00	34.5 AV	54.0	-19.5	1.01 H	258	20.97	13.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	1.01 V	339	59.83	2.53
2	2390.00	47.9 AV	54.0	-6.1	1.01 V	339	45.35	2.53
3	*2422.00	97.8 PK			1.42 V	274	95.23	2.61
4	*2422.00	88.1 AV			1.42 V	274	85.53	2.61
5	4844.00	44.1 PK	74.0	-29.9	1.02 V	258	36.30	7.81
6	4844.00	31.1 AV	54.0	-22.9	1.02 V	258	23.29	7.81
7	7266.00	46.9 PK	74.0	-27.1	1.01 V	214	33.43	13.51
8	7266.00	33.1 AV	54.0	-20.9	1.01 V	214	19.63	13.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.8 PK			1.54 H	208	101.15	2.65
2	*2437.00	94.4 AV			1.54 H	208	91.77	2.65
3	4874.00	42.5 PK	74.0	-31.5	1.86 H	239	34.67	7.85
4	4874.00	30.4 AV	54.0	-23.6	1.86 H	239	22.54	7.85
5	7311.00	47.8 PK	74.0	-26.2	1.68 H	214	34.22	13.61
6	7311.00	35.6 AV	54.0	-18.4	1.68 H	214	21.97	13.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.8 PK			1.68 V	194	97.19	2.65
2	*2437.00	90.6 AV			1.68 V	194	87.94	2.65
3	4874.00	43.7 PK	74.0	-30.3	1.53 V	72	35.85	7.85
4	4874.00	29.8 AV	54.0	-24.2	1.53 V	72	21.95	7.85
5	7311.00	48.6 PK	74.0	-25.4	2.05 V	316	35.01	13.61
6	7311.00	34.8 AV	54.0	-19.2	2.05 V	316	21.14	13.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.6 PK			1.03 H	314	101.95	2.68
2	*2452.00	93.6 AV			1.03 H	314	90.96	2.68
3	2483.50	66.5 PK	74.0	-7.5	1.02 H	224	63.70	2.77
4	2483.50	48.2 AV	54.0	-5.8	1.02 H	224	45.43	2.77
5	4904.00	48.6 PK	74.0	-25.4	1.02 H	224	40.70	7.90
6	4904.00	30.1 AV	54.0	-23.9	1.02 H	224	22.24	7.90
7	7356.00	48.1 PK	74.0	-25.9	1.02 H	66	34.40	13.71
8	7356.00	34.3 AV	54.0	-19.7	1.02 H	66	20.54	13.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.3 PK			1.02 V	114	93.62	2.68
2	*2452.00	86.7 AV			1.02 V	114	84.06	2.68
3	2483.50	61.2 PK	74.0	-12.8	1.01 V	223	58.43	2.77
4	2483.50	44.4 AV	54.0	-9.6	1.01 V	223	41.59	2.77
5	4904.00	43.3 PK	74.0	-30.7	1.01 V	222	35.43	7.90
6	4904.00	30.1 AV	54.0	-23.9	1.01 V	222	22.21	7.90
7	7356.00	48.4 PK	74.0	-25.6	1.01 V	258	34.65	13.71
8	7356.00	33.4 AV	54.0	-20.6	1.01 V	258	19.71	13.71

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 04,16	May 03,17
Power Sensor	Keysight	U2021XA	MY55060018	May 04,16	May 03,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05, 16	Sep. 04,17
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28,15	Nov. 27,16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 09,15	Nov. 08,16
Agile Signal Generator	Agilent	8645A	Agilent	Aug.08, 16	Aug.07, 17
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug.08, 16	Aug.07, 17

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.

4.2.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

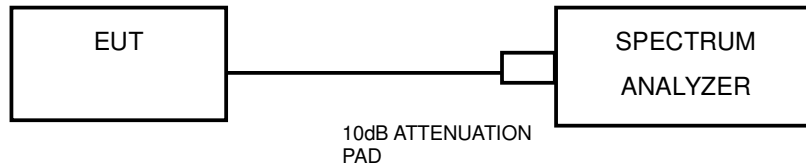

4.2.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.2.7 TEST RESULTS

802.11b


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.12	0.5	PASS
6	2437	10.12	0.5	PASS
11	2462	10.12	0.5	PASS

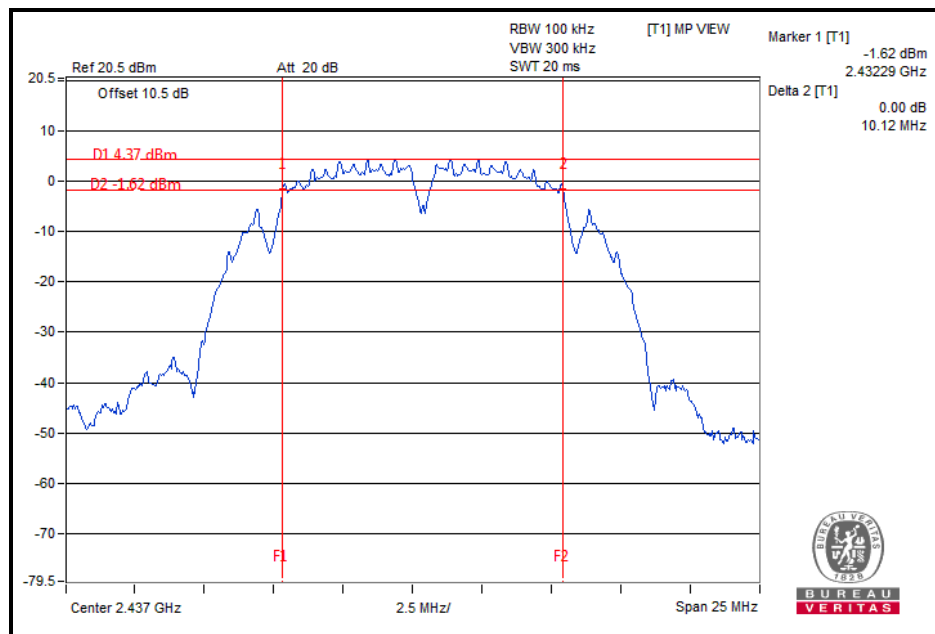



802.11g


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.63	0.5	PASS
6	2437	16.63	0.5	PASS
11	2462	16.62	0.5	PASS

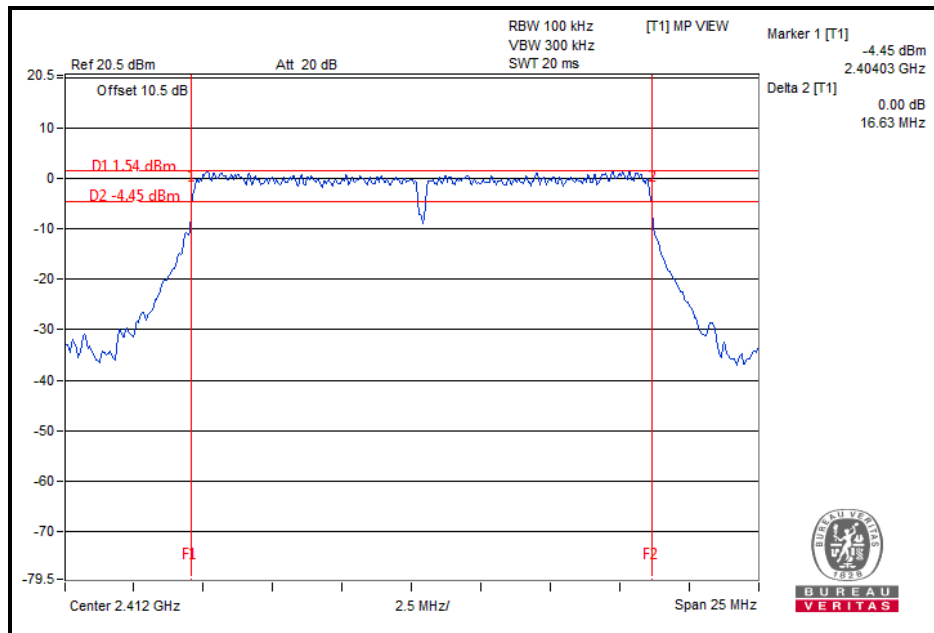



802.11n (20MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.70	0.5	PASS
6	2437	17.68	0.5	PASS
11	2462	17.68	0.5	PASS

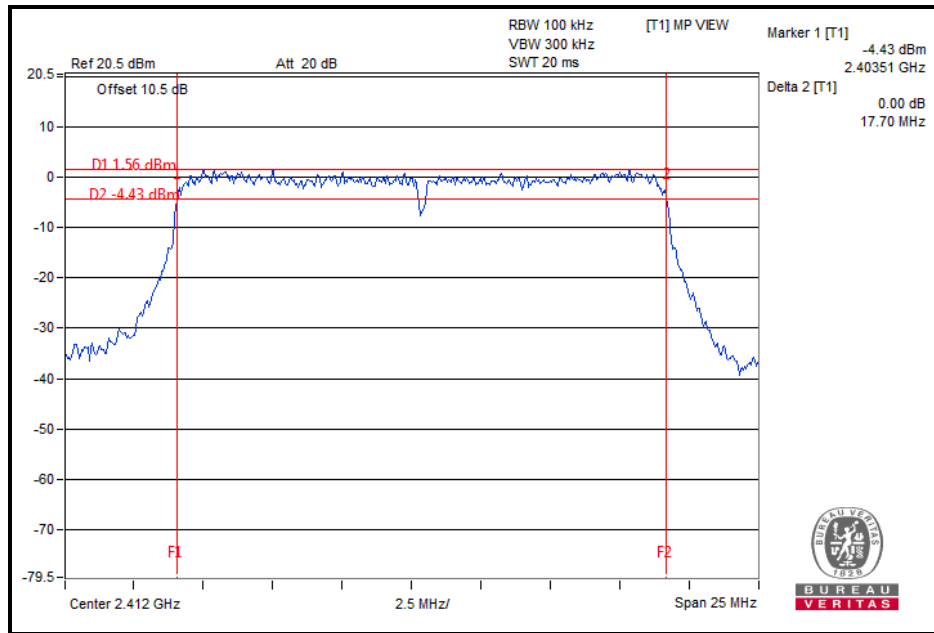



802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.50	0.5	PASS
6	2437	36.48	0.5	PASS
9	2452	36.47	0.5	PASS

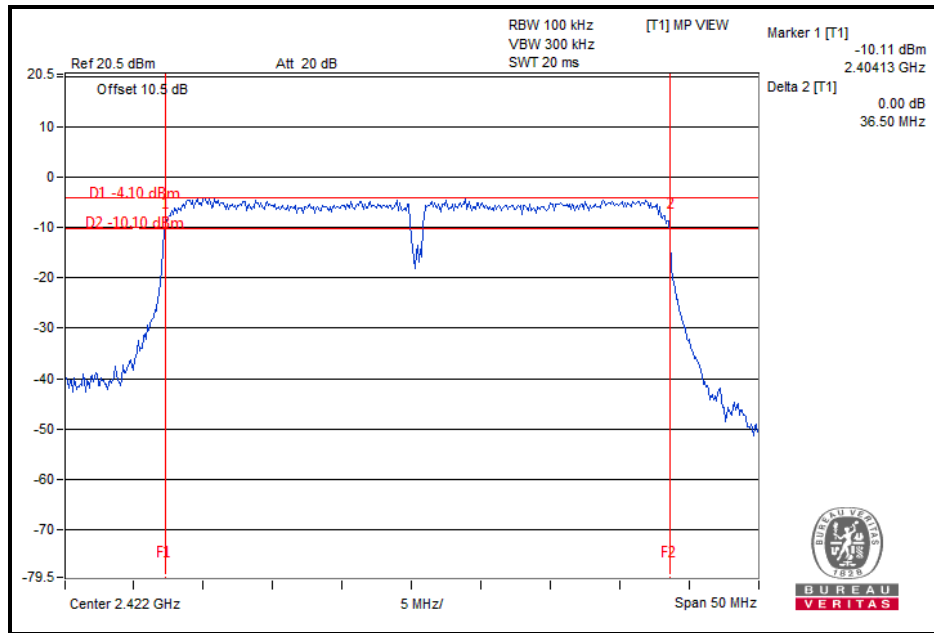




4.3 CONDUCTED OUTPUT POWER

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.3.2 TEST SETUP

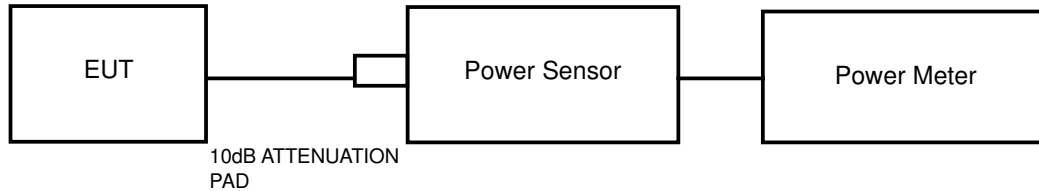

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 04, 16	May 03, 17
Power Sensor	Keysight	U2021XA	MY55060018	May 04, 16	May 03, 17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct. 11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep. 05, 16	Sep. 04, 17
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28, 15	Nov. 27, 16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 09, 15	Nov. 08, 16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 09, 15	Nov. 08, 16
Agile Signal Generator	Agilent	8645A	Agilent	Aug. 08, 16	Aug. 07, 17
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 08, 16	Aug. 07, 17

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.3.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

4.3.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	18.12	64.863	1	PASS
6	2437	18.04	63.680	1	PASS
11	2462	18.05	63.826	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	22.93	196.336	1	PASS
6	2437	22.89	194.536	1	PASS
11	2462	22.77	189.234	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	22.96	197.697	1	PASS
6	2437	21.56	143.219	1	PASS
11	2462	22.60	181.97	1	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
3	2422	20.58	114.288	1	PASS
6	2437	19.03	79.983	1	PASS
7	2452	18.85	76.736	1	PASS

**4.3.7.2 Average Output Power (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
1	2412	15.61	36.392
6	2437	15.47	35.237
11	2462	15.37	34.435

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
1	2412	15.87	38.637
6	2437	15.85	38.459
11	2462	15.69	37.068

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
1	2412	15.95	39.355
6	2437	14.84	30.479
11	2462	15.57	36.058

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
3	2422	13.50	22.387
6	2437	11.94	15.631
7	2452	11.75	14.962




4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.4.4 TEST PROCEDURE

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: 3 kHz
- Set VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Use the peak marker function to determine the maximum amplitude level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.




4.4.6 EUT OPERATING CONDITION

Same as item 4.3.6

4.4.7 TEST RESULTS

802.11b


Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-13.76	8	PASS
6	2437	-13.88	8	PASS
11	2462	-14.01	8	PASS

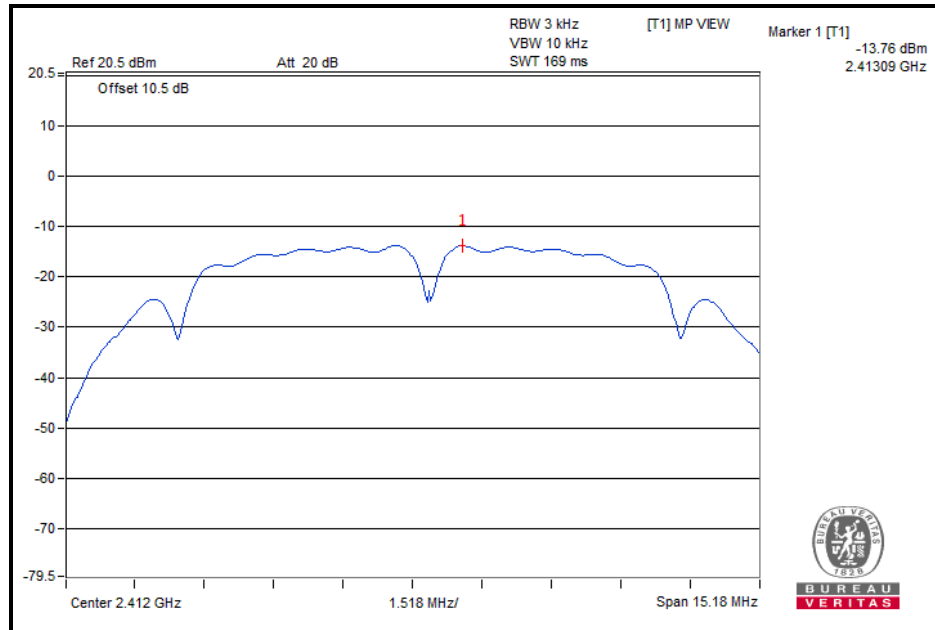



802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-12.71	8	PASS
6	2437	-12.94	8	PASS
11	2462	-13.25	8	PASS

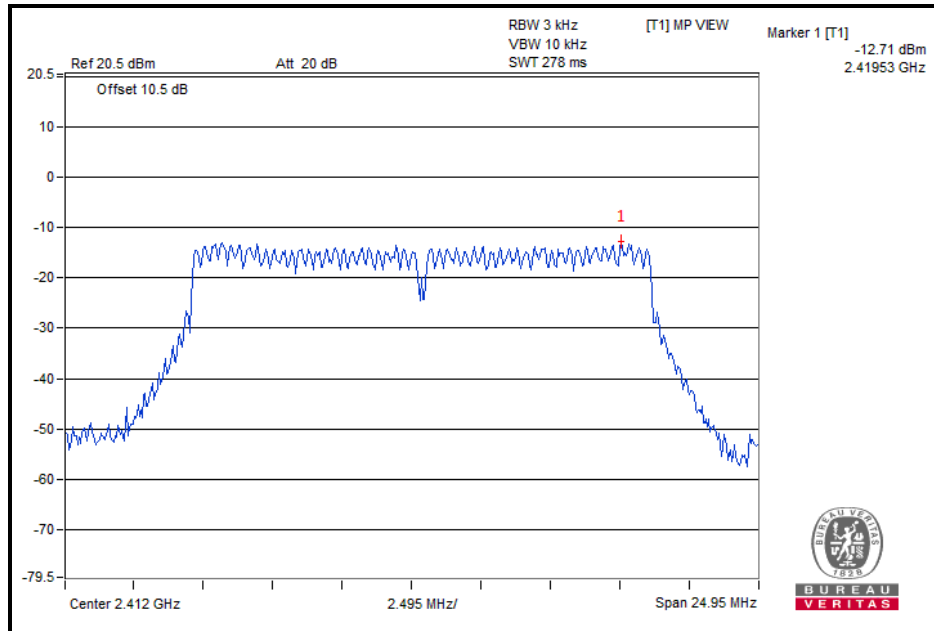




L C I E Test Report No.: RF160530N002-2

802.11n (20MHz)


Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.82	8	PASS
6	2437	-13.35	8	PASS
11	2462	-12.04	8	PASS

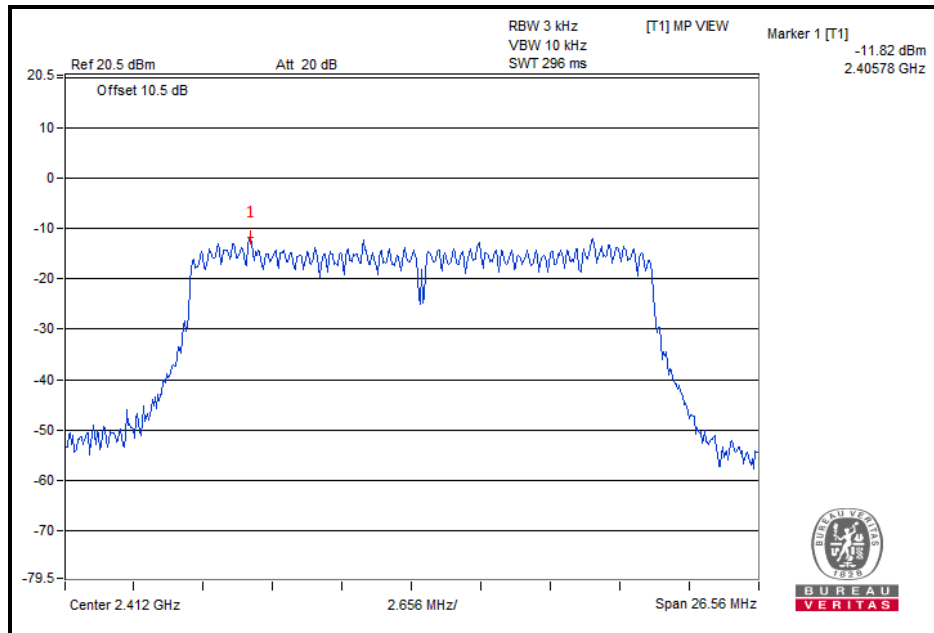



802.11n (40MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-16.05	8	PASS
6	2437	-19.06	8	PASS
7	2452	-18.80	8	PASS

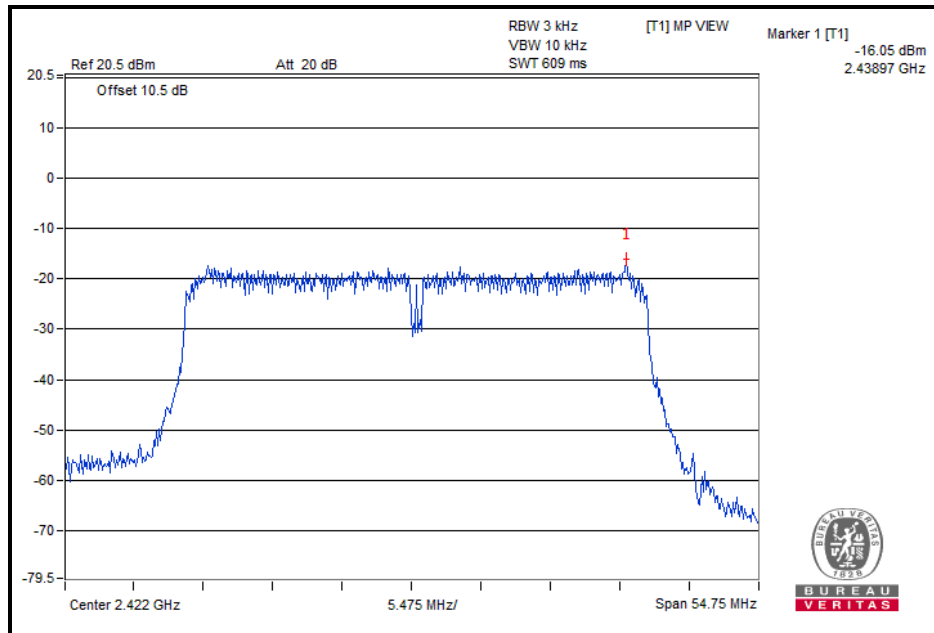




4.5 OUT OF BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST SETUP

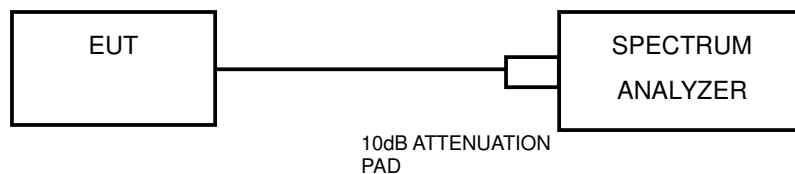

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.


4.5.6 EUT OPERATING CONDITION

Same as item 4.2.6




4.5.7 TEST RESULTS

802.11b

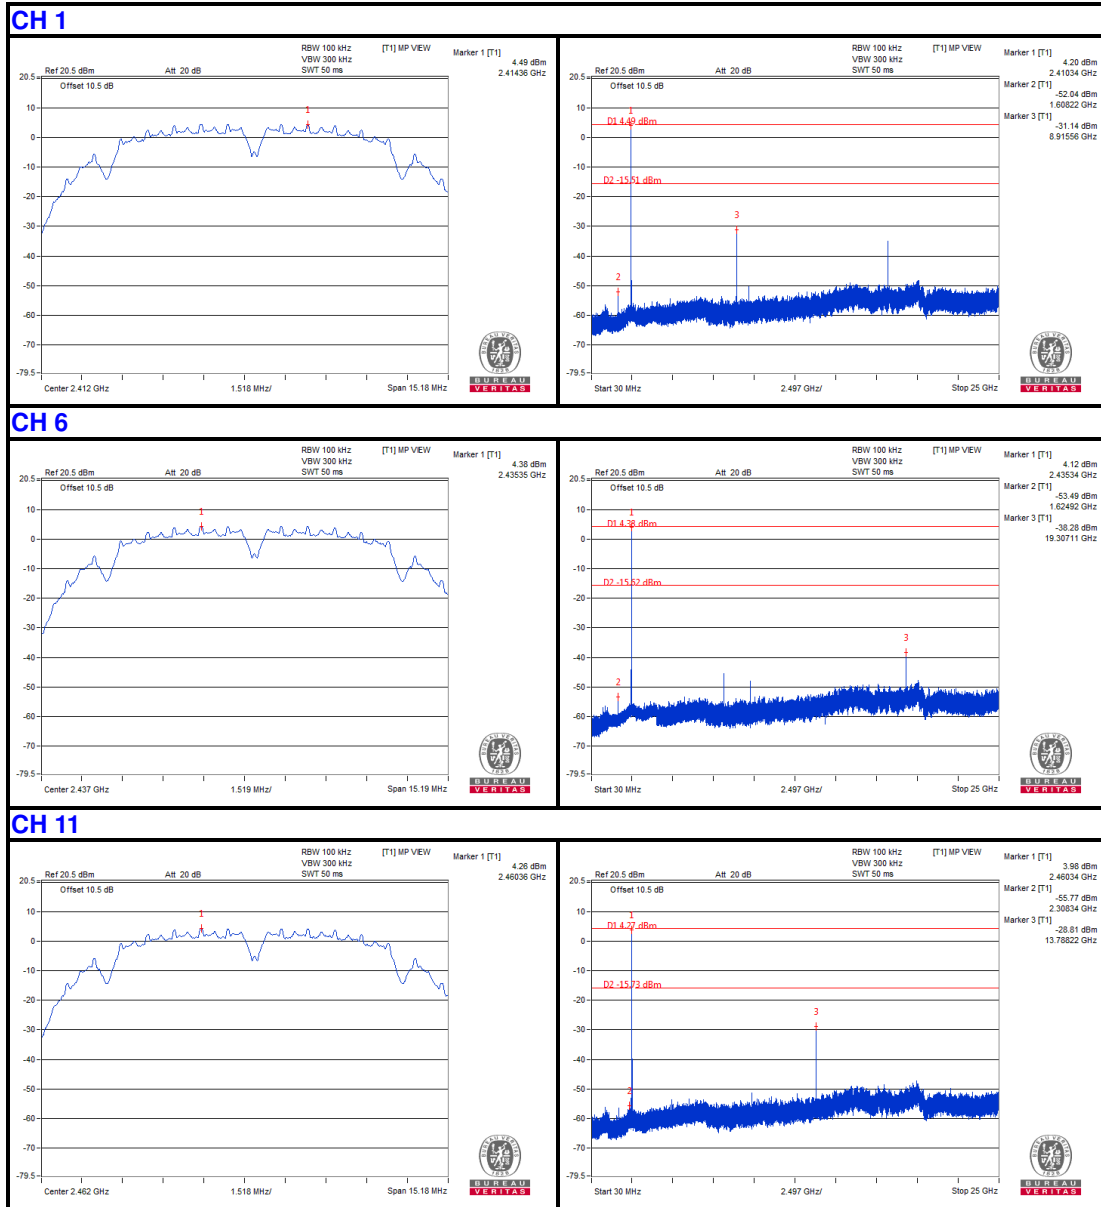




802.11g

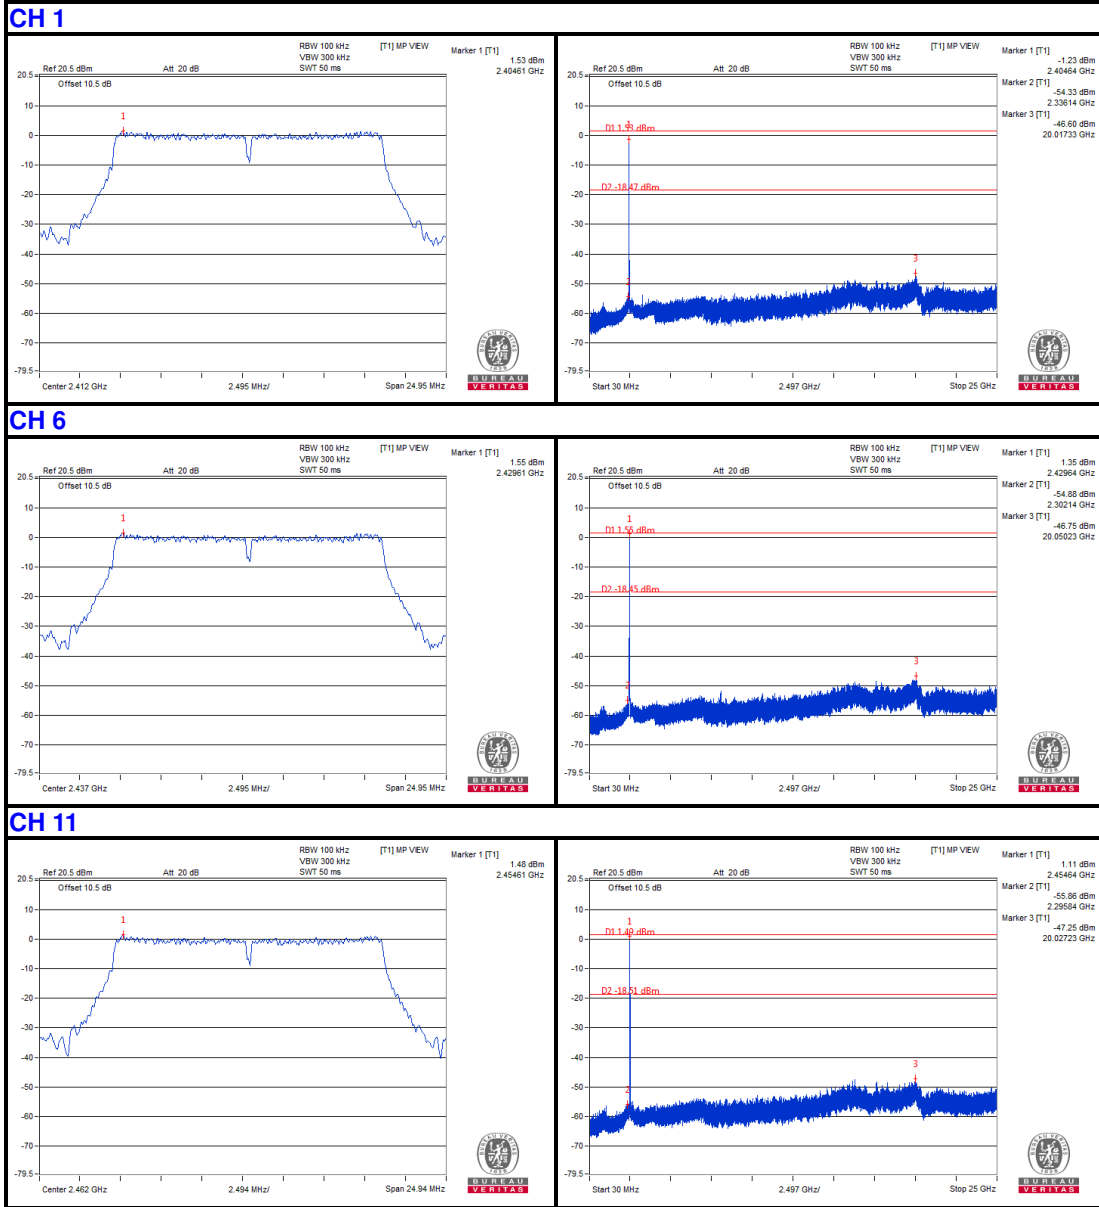




802.11n (20MHz)

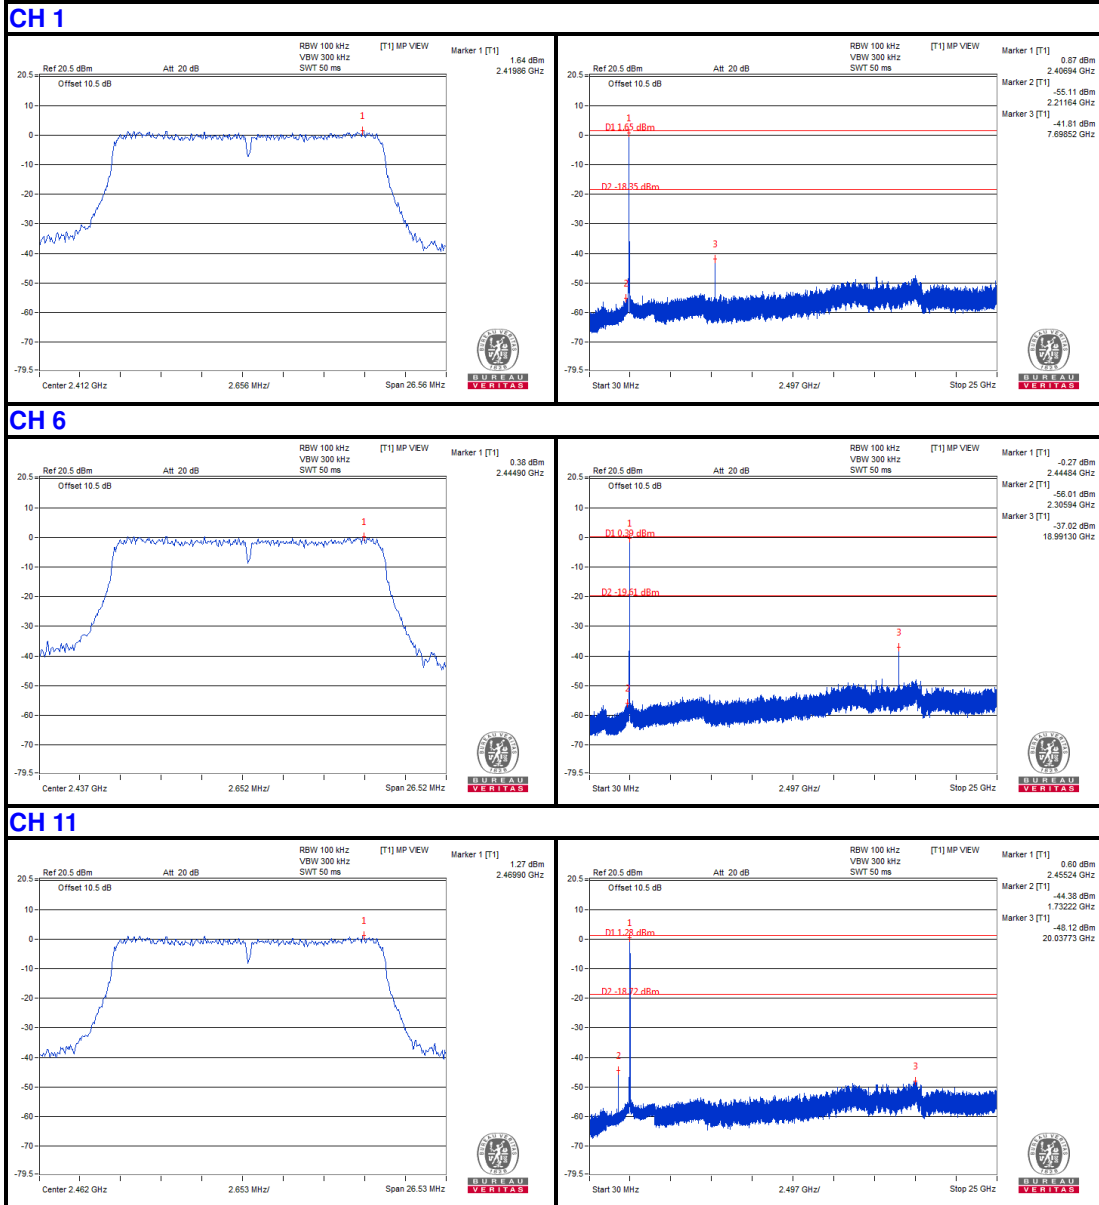




802.11n (40MHz)

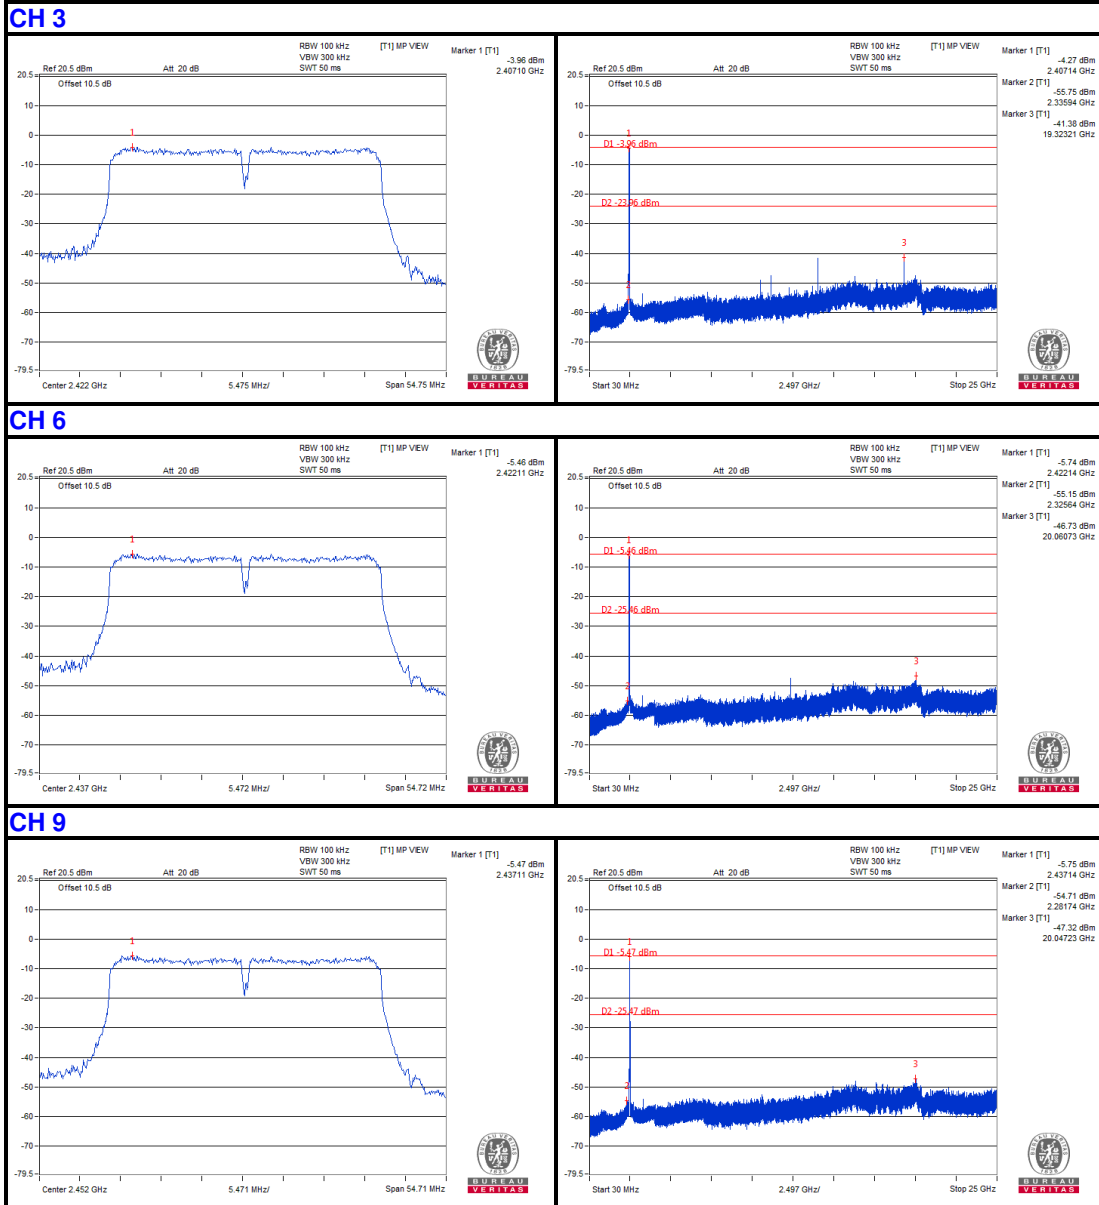




802.11b

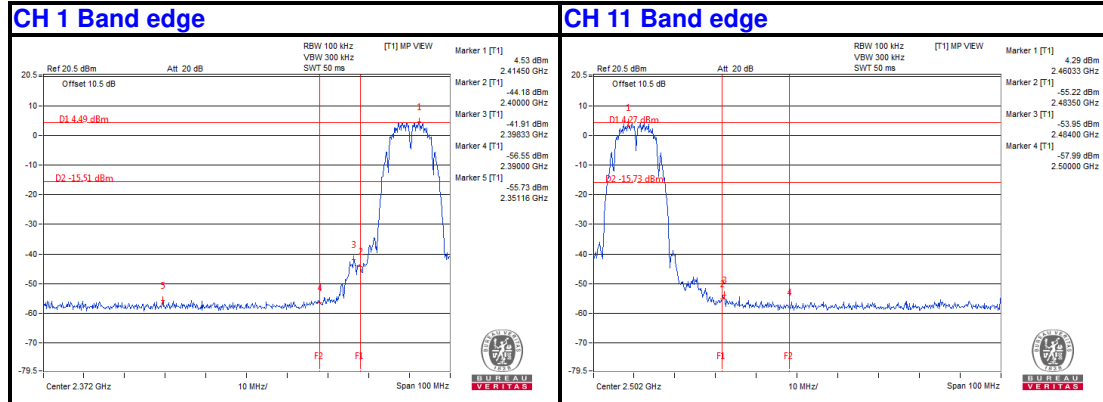


802.11g

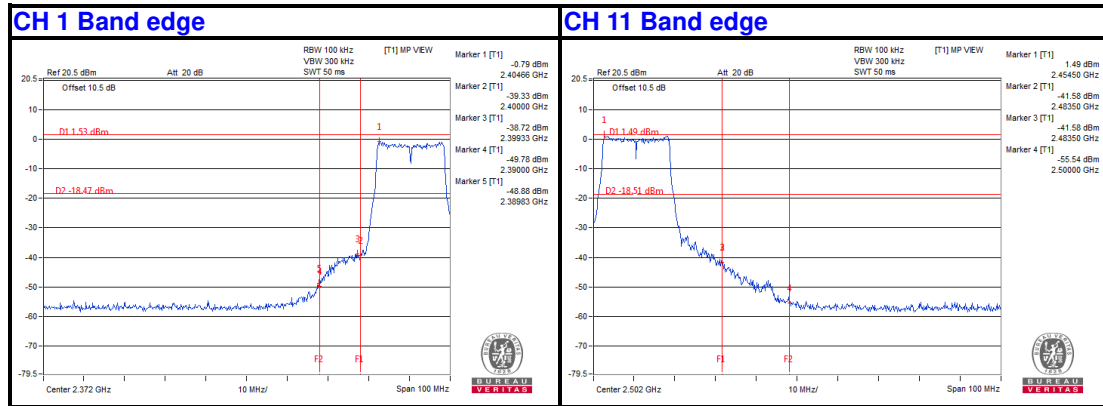




802.11n (20MHz)

CH 1 Band edge

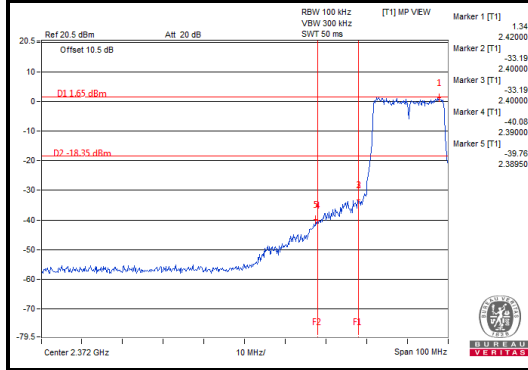


CH 11 Band edge

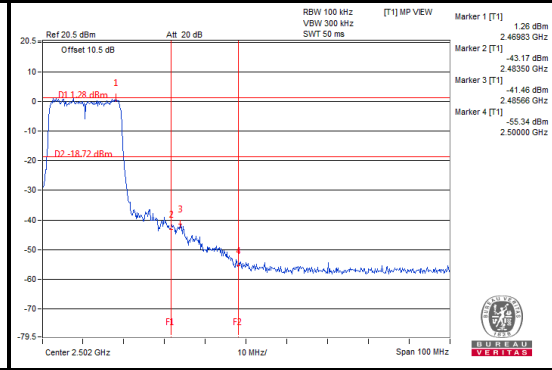


802.11n (40MHz)

CH 3 Band edge

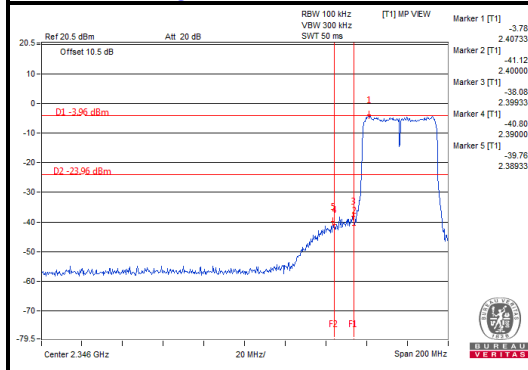

CH 9 Band edge

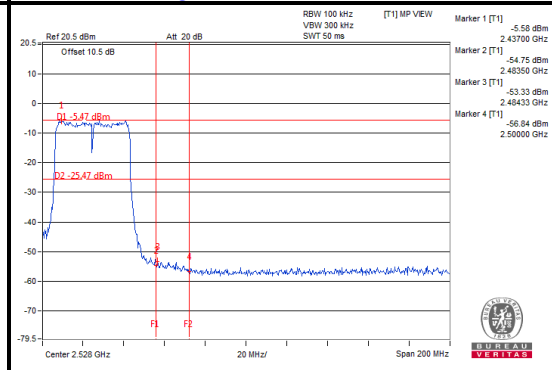



5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



L C I E Test Report No.: RF160530N002-2

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

Modifications are made to the EUT by the lab during the test.
See material declaration.

---END---