



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ10040000
Report No. : ER03-09-015FRF
Page 1 of 45



TEST REPORT

Product Name : Bluetooth Printer Adapter

Model Number : MBT-6401

Applicant : Microlink Communications Inc.

Address : 6F, NO. 30, Raykuang Rd., Neihu, Taipei 114, Taiwan R.O.C.

Received Date : Sept. 08, 2003

Tested Date : Sept. 08~Oct. 01, 2003

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as seperately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ10040000
Report No. : ER03-09-015FRF
Page 2 of 45

Test Report Certification

Product Name : Bluetooth Printer Adapter
Model Number : MBT-6401
Applicant : Microlink Communications Inc.


Measurement Standard :

47 CFR Part 15, Subpart B and Subpart C (Section 15.247),
ANSI C63.4-2001

Tested By : Alan Fan , **Date** : Oct. 06, 2003
(Alan Fan)

Reviewed By : Roger Shen , **Date** : Oct. 06, 2003
(Roger Shen)

Approved By : Chieh-De , **Date** : Oct. 06, 2003
(Chieh-De Tsai, Manager)



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

| TITLE | PAGE NO. |
|--|----------|
| 1. GENERAL INFORMATION | 5 |
| 1.1 DESCRIPTION OF EUT & POWER..... | 5 |
| 1.2 DESCRIPTION OF PERIPHERALS..... | 6 |
| 1.3 EUT & PERIPHERALS SETUP DIAGRAM..... | 7 |
| 1.4 DESCRIPTION OF TEST SITE | 8 |
| 1.5 SUMMARY OF TEST RESULTS..... | 8 |
| 2. CONDUCTED POWERLINE TEST | 9 |
| 2.1 TEST EQUIPMENTS..... | 9 |
| 2.2 TEST SETUP..... | 9 |
| 2.3 CONDUCTED POWER LINE EMISSION LIMIT..... | 10 |
| 2.4 TEST PROCEDURE..... | 10 |
| 2.5 UNCERTAINTY OF CONDUCTED EMISSION..... | 10 |
| 2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT..... | 11 |
| 2.7 PHOTOS OF CONDUCTION TEST..... | 13 |
| 3. 20dB Bandwidth for hopping..... | 14 |
| 3.1 TEST EQUIPMENTS..... | 14 |
| 3.2 TEST SETUP..... | 14 |
| 3.3 LIMITS OF 20dB BANDWIDTH MEASUREMENT | 14 |
| 3.4 TEST PROCEDURE..... | 14 |
| 3.5 UNCERTAINTY OF CONDUCTED EMISSION..... | 15 |
| 3.6 TEST RESULTS..... | 15 |
| 3.7 PHOTO OF 20dB BANDWIDTH MEASUREMENT..... | 16 |
| 4. MAXIMUM PEAK OUTPUT POWER..... | 17 |
| 4.1 TEST EQUIPMENTS..... | 17 |
| 4.2 TEST SETUP..... | 17 |
| 4.3 LIMITS OF MAXIMUM PEAK OUTPUT POWER | 17 |
| 4.4 TEST PROCEDURE..... | 18 |
| 4.5 UNCERTAINTY OF CONDUCTED EMISSION..... | 18 |
| 4.6 TEST RESULTS..... | 18 |
| 4.7 PHOTO OF MAXIMUM PEAK OUTPUT POWER | 19 |
| 5. HOPPING CHANNEL SEPARATION | 20 |
| 5.1 TEST EQUIPMENTS..... | 20 |
| 5.2 TEST SETUP..... | 20 |
| 5.3 LIMITS OF HOPPING CHANNEL SEPARATION..... | 20 |
| 5.4 TEST PROCEDURE..... | 21 |
| 5.5 UNCERTAINTY OF CONDUCTED EMISSION..... | 21 |
| 5.6 TEST RESULTS..... | 21 |
| 5.7 PHOTO OF HOPPING CHANNEL SEPARATION..... | 21 |
| 6. NUMBER OF HOPPING FREQUENCY USED..... | 22 |
| 6.1 TEST EQUIPMENTS..... | 22 |
| 6.2 TEST SETUP..... | 22 |
| 6.3 LIMITS OF NUMBER OF HOPPING FREQUENCY USED | 22 |
| 6.4 TEST PROCEDURE..... | 23 |
| 6.5 UNCERTAINTY OF CONDUCTED EMISSION..... | 23 |
| 6.6 TEST RESULTS..... | 23 |
| 6.7 PHOTO OF NUMBER OF HOPPING FREQUENCY USED | 23 |



TABLE OF CONTENTS

| TITLE | PAGE NO. |
|--|----------|
| 7. DWELL TIME ON EACH CHANNEL | 24 |
| 7.1 TEST EQUIPMENTS..... | 24 |
| 7.2 TEST SETUP..... | 24 |
| 7.3 LIMITS OF DWELL TIME ON EACH CHANNEL..... | 24 |
| 7.4 TEST PROCEDURE..... | 25 |
| 7.5 UNCERTAINTY OF CONDUCTED EMISSION..... | 25 |
| 7.6 TEST RESULTS..... | 25 |
| 7.7 PHOTO OF DWELL TIME ON EACH CHANNEL..... | 26 |
| 8. Out of Band Spurious Emissions -Conducted Measurements | 27 |
| 8.1 TEST EQUIPMENTS..... | 27 |
| 8.2 TEST SETUP..... | 27 |
| 8.3 LIMITS OF Out of Band Measurements..... | 27 |
| 8.4 TEST PROCEDURE..... | 28 |
| 8.5 UNCERTAINTY OF CONDUCTED EMISSION..... | 28 |
| 8.6 TEST RESULTS..... | 29 |
| 9. Out of Band Spurious Emissions -Radiated Measurements | 31 |
| 9.1 TEST EQUIPMENTS..... | 31 |
| 9.2 TEST SETUP..... | 31 |
| 9.3 RADIATION LIMIT | 32 |
| 9.4 TEST PROCEDURES..... | 33 |
| 9.5 UNCERTAINTY OF RADIATED EMISSION..... | 33 |
| 9.6 RADIATED RF NOISE MEASUREMENT | 34 |
| 9.7 PHOTOS OF OPEN SITE..... | 41 |
| 10. ANTENNA REQUIREMENT..... | 43 |
| 10.1 STANDARD APPLICABLE | 43 |
| 10.2 ANTENNA CONNECTED CONSTRUCTION | 43 |
| 11. RF EXPOSURE EVALUATION | 44 |
| 11.1 Friis Formula | 44 |
| 11.2 EUT Operating Condition..... | 44 |
| 11.3 Test Result of RF Exposure Evaluation..... | 45 |
| 11.3.1 Antenna Gain | 45 |
| 11.3.2 Output Power into Antenna & RF Exposure Evaluation Distance | 45 |



1. GENERAL INFORMATION

1.1 DESCRIPTION OF EUT & POWER

MANUFACTURER : Microlink Communications Inc.
SAMPLE NAME : Bluetooth Printer Adapter
MODEL NO : MBT-6401
EUT DESCRIPTION : 2.4GHz Frequency Hopping Spread Spectrum
Data Transceiver for Bluetooth Printer Adapter
FREQUENCY RANGE : 2402 MHz TO 2480MHz
CHANNEL NUMBER : 79
CHANNEL Spacing : 1MHz
AIR DATA RATE : 723Kbps
TYPE OF MODULATION : Frequency Hopping Spread Spectrum
FREQUENCY SELECTION : BY SOFTWARE
ANTENNA TYPE : Printed Antenna on PCB
POWER SOURCE : 5VDC (From Power Adapter)
POWER ADAPTER (1)
MANUFACTURER : FOXLINK Corp.
MODEL NUMBER : FD-0510SA
INPUT POWER : 100 ~ 240VAC , 50/60Hz , 13mA
OUTPUT POWER : 5VDC , 1.0A
POWER ADAPTER (2)
MANUFACTURER : ADAPTER TECH.
MODEL NUMBER : STD-0502
INPUT POWER : 100 ~ 240VAC , 47 ~ 63 Hz , 0.26A Max.
OUTPUT POWER : 5VDC , 2.0A , 10W Max.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ10040000
Report No. : ER03-09-015FRF
Page 6 of 45

Data apply to (1) :

MANUFACTURER : ANUBIS Electronic GmbH
ADDRESS : Am Langfeld 38 66130 Saarbrucken Germany
SAMPLE NAME : Bluetooth Printer Adapter
MODEL NO : 20005

Data apply to (2) :

MANUFACTURER : Amigo Technology Co., Ltd
ADDRESS : No. 6, Lane 35, Jihu Rd., Neihu, Taipei, Taiwan 114, R.O.C.
SAMPLE NAME : Bluetooth Printer Adapter
MODEL NO : AMB-6401

1.2 DESCRIPTION OF PERIPHERALS

(1) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : EV0N800
SERIAL NUMBER : 470052-787
F.C.C. : DOC
POWER CORD : Unshielded, Detachable, 1.8m

Adapter

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : PPP009H
SERIAL NUMBER : -----


(2) Printer

MANUFACTURER : HP CORP.
MODEL NUMBER : C8952D
SERIAL NUMBER : CN29B181H7
FCC ID : DOC
POWER SOURCE : 100-240VAC, 50/60Hz, 0.7A
SIGNAL CABLE : Shielded , Undetachable , 1.8m

(3) Modem

MANUFACTURER : ZYXEL communication Corp.
MODEL NUMBER : Omni 56K
SERIAL NUMBER : S1Z4107729
FCC ID : 1880MN156K
POWER SOURCE : 9VAC(From Power Adapter)
SIGNAL CABLE : Shielded , Undetachable , 1.8m

1.3 EUT & PERIPHERALS SETUP DIAGRAM

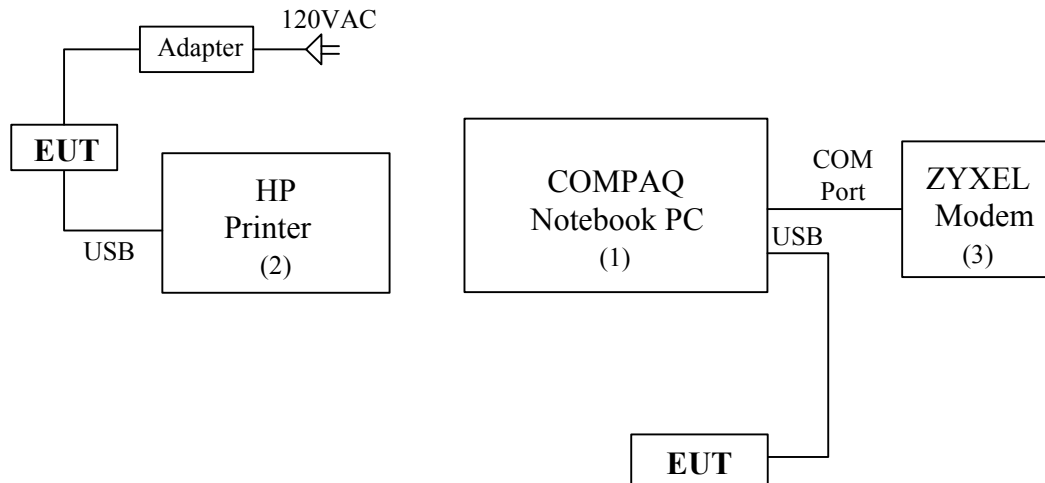

1. HCI Terminal – Brighton Technologies
2. Commands → Brighton Special Commands
 - Performance Test
 - Test Parameters
3. Performance Test Settings
 - BD Address of DUT 0 × 111111111111
 - Packet Type : DH5 Packets
 - File Height (in Bytes) 999999
 - Max Packet Length (1~339) 339
 - Packet format PRBS9
 - Air Attenuation in dB (10-255) 70
4. Performance Test results



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : QVZ10040000
Report No. : ER03-09-015FRF
Page 8 of 45

1.4 DESCRIPTION OF TEST SITE

SITE DESCRIPTION : FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1229, C-1250

NAME OF SITE : Ecom Sertech Corp. Hsinchu
(Spin-off from ITRI / ERSO on Apr. 01, 2003)

SITE LOCATION : Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

1.5 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications :

| APPLIED STANDARD : 47 CFR Part 15, Subpart B and Subpart C | | | |
|--|--|--------|-------------------------------|
| Standard Section | Test Type and Limit | Result | REMARK |
| 15.107 15.207 | AC Power Conducted Emission Limit : Sec1.5.107 | PASS | Meet the requirement of limit |
| 15.109 15.205 15.209 | Transmitter Radiated Emissions Limit : Table 15.209 | PASS | Meet the requirement of limit |
| 15.247(a) (1)(i)-(ii) | Transmitter 20dB Bandwidth Limit < 1MHz | PASS | Meet the requirement of limit |
| 15.247(b)(1) | Maximum Peak Output Power Limit : max. 30dBm | PASS | Meet the requirement of limit |
| 15.247(a)(1) | Carrier Frequency Separation | PASS | Meet the requirement of limit |
| 15.247(a) (1)(ii) | Number of Hopping Frequency | PASS | Meet the requirement of limit |
| 15.247(a) (1)(ii) | Time of Occupancy (dwell time) | PASS | Meet the requirement of limit |
| 15.247(c) | Band Edge Compliens | PASS | Meet the requirement of limit |
| 15.247(c) | Out of Band Measurements | PASS | Meet the requirement of limit |



2. CONDUCTED POWERLINE TEST


For intentional device, according to § 15.207(a) Line Conducted Emission Limit is required to verify the EUT.

2.1 TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests :

| Manufacturer or Type | Model No | Serial No. | Date of Calibration | Calibration Period | Remark |
|-----------------------------|--------------|------------------------|---|--------------------|---------|
| SPECTRUM ANALYZER & DISPLAY | HP 8568A | 2235A02320 | APR. 01, 2003 | 1 Year | PRETEST |
| QUASI-PEAK ADAPTER | HP 85650 A | 2341A00672 | APR. 01, 2003 | 1 Year | PRETEST |
| ISOLATION TRANSFORMER | SOLAR 7032-1 | N/A | N/A | N/A | FINAL |
| L.I.S.N. | EMCO 3850/2 | 9311-1025 9401-1028 | JAN. 08, 2003 For Characteristic impedance | 1 Year | FINAL |
| | | | MAY 18, 2003 For Insertion loss | | |
| TEST RECEIVER | R/S ESHS30 | 838550/003 | JUN. 07, 2003 | 1 Year | FINAL |
| SHIELDED ROOM | KEENE 5983 | NO.1 | N/A | N/A | FINAL |
| PULSE LIMIT | R/S EHS3Z2 | 357.8810.52 | JUL. 10, 2003 | 1 Year | FINAL |
| N TYPE COAXIAL CABLE | ----- | ----- | JUL. 10, 2003 | 1 Year | FINAL |
| 50Ω TERMINATOR | ----- | ----- | JUL. 10, 2003 | 1 Year | FINAL |

2.2 TEST SETUP

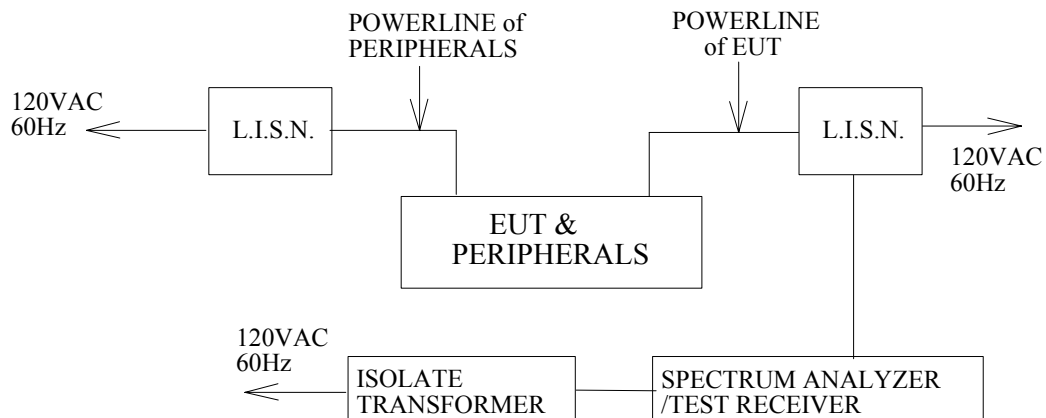



2.3 CONDUCTED POWER LINE EMISSION LIMIT

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

| Frequency (MHz) | Maximum RF Line Voltage (dB μ V) | | | |
|--------------------|--------------------------------------|------|---------|-------|
| | CLASS A | | CLASS B | |
| | Q.P. | Ave. | Q.P. | Ave. |
| 0.15 - 0.50 | 79 | 66 | 66-56 | 56-46 |
| 0.50 - 5.00 | 73 | 60 | 56 | 46 |
| 5.00 - 30.0 | 73 | 60 | 60 | 50 |

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 TEST PROCEDURE

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is ± 1.36 dB.



2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

| Frequency (MHz) | Loss(dB) | | MEASUREMENT | | | | L1 Emission (dBμV) | | L2 Emission (dBμV) | | LIMITS (dBμV) | |
|-----------------|----------|------|-------------|-------|----------|-------|--------------------|-------|--------------------|-------|---------------|-------|
| | | | L1(dBμV) | | L2(dBμV) | | Q.P. | A.V. | Q.P. | A.V. | Q.P. | A.V. |
| | L1 | L2 | Q.P. | A.V. | Q.P. | A.V. | | | | | | |
| 0.150 | 0.1 | 0.2 | * | * | 54.40 | 35.10 | * | * | 54.60 | 35.30 | 66.00 | 56.00 |
| 0.153 | 0.1 | 0.2 | 56.80 | 43.30 | * | * | 56.90 | 43.40 | * | * | 65.84 | 55.84 |
| 0.333 | 0.1 | 0.2 | * | * | 41.10 | 28.60 | * | * | 41.30 | 28.80 | 59.38 | 49.38 |
| 0.402 | 0.1 | 0.2 | 42.00 | 32.20 | * | * | 42.10 | 32.30 | * | * | 57.81 | 47.81 |
| 0.580 | 0.1 | 0.2 | * | * | 39.80 | 26.20 | * | * | 40.00 | 26.40 | 56.00 | 46.00 |
| 0.930 | 0.1 | 0.2 | 35.20 | 26.10 | * | * | 35.30 | 26.20 | * | * | 56.00 | 46.00 |
| 1.530 | 0.1 | 0.2 | 40.60 | 29.30 | * | * | 40.70 | 29.40 | * | * | 56.00 | 46.00 |
| 2.040 | 0.1 | 0.2 | * | * | 32.30 | 20.10 | * | * | 32.50 | 20.30 | 56.00 | 46.00 |
| 2.210 | 0.12 | 0.2 | 36.40 | 22.80 | * | * | 36.52 | 22.92 | * | * | 56.00 | 46.00 |
| 3.530 | 0.2 | 0.2 | * | * | 27.50 | 16.20 | * | * | 27.70 | 16.40 | 56.00 | 46.00 |
| 4.330 | 0.2 | 0.2 | * | * | 29.90 | 17.80 | * | * | 30.10 | 18.00 | 56.00 | 46.00 |
| 4.910 | 0.2 | 0.2 | 33.90 | 21.10 | * | * | 34.10 | 21.30 | * | * | 56.00 | 46.00 |
| 8.850 | 0.4 | 0.39 | * | * | 39.40 | 20.60 | * | * | 39.79 | 20.99 | 60.00 | 50.00 |
| 9.600 | 0.46 | 0.46 | 45.10 | 29.70 | * | * | 45.56 | 30.16 | * | * | 60.00 | 50.00 |
| 15.700 | 0.7 | 0.7 | * | * | 36.90 | 20.40 | * | * | 37.57 | 21.07 | 60.00 | 50.00 |
| 16.100 | 0.7 | 0.7 | 40.90 | 24.60 | * | * | 41.60 | 25.30 | * | * | 60.00 | 50.00 |
| 30.000 | 1.4 | 1.8 | * | * | * | * | * | * | * | * | 60.00 | 50.00 |

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.
 2. The EUT is in TX mode.
 3. For Power Adapter 1 (FD-0510SA)
 4. The EUT can be operated in TX, and stand-by mode.
 After a preliminary scan, we found the EUT in TX mode has highest RF emission. The TX mode test results are recorded and listed in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : QVZ10040000
 Report No. : ER03-09-015FRF
 Page 12 of 45

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

| Frequency (MHz) | Loss(dB) | | MEASUREMENT | | | | L1 Emission (dBμV) | | L2 Emission (dBμV) | | LIMITS (dBμV) | |
|-----------------|----------|-----|-------------|-------|----------|-------|--------------------|-------|--------------------|-------|---------------|-------|
| | | | L1(dBμV) | | L2(dBμV) | | Q.P. | A.V. | Q.P. | A.V. | Q.P. | A.V. |
| | L1 | L2 | Q.P. | A.V. | Q.P. | A.V. | | | | | | |
| 0.150 | 0.1 | 0.2 | * | * | * | * | * | * | * | 66.00 | 56.00 | |
| 0.246 | 0.1 | 0.2 | 37.00 | 23.30 | * | * | 37.10 | 23.40 | * | * | 61.89 | 51.89 |
| 0.252 | 0.1 | 0.2 | * | * | 44.50 | 39.50 | * | * | 44.70 | 39.70 | 61.69 | 51.69 |
| 0.498 | 0.1 | 0.2 | 29.00 | 9.20 | 36.10 | 16.30 | 29.10 | 9.30 | 36.30 | 16.50 | 56.03 | 46.03 |
| 0.510 | 0.1 | 0.2 | 38.80 | 34.80 | 40.90 | 36.00 | 38.90 | 34.90 | 41.10 | 36.20 | 56.00 | 46.00 |
| 0.516 | 0.1 | 0.2 | * | * | 41.50 | 31.90 | * | * | 41.70 | 32.10 | 56.00 | 46.00 |
| 0.517 | 0.1 | 0.2 | 38.90 | 32.10 | * | * | 39.00 | 32.20 | * | * | 56.00 | 46.00 |
| 1.290 | 0.1 | 0.2 | 33.10 | 25.70 | * | * | 33.20 | 25.80 | * | * | 56.00 | 46.00 |
| 1.529 | 0.1 | 0.2 | * | * | 35.40 | 26.50 | * | * | 35.60 | 26.70 | 56.00 | 46.00 |
| 2.800 | 0.18 | 0.2 | 29.40 | 21.30 | * | * | 29.58 | 21.48 | * | * | 56.00 | 46.00 |
| 3.062 | 0.2 | 0.2 | * | * | 32.10 | 19.60 | * | * | 32.30 | 19.80 | 56.00 | 46.00 |
| 4.600 | 0.2 | 0.2 | 25.20 | 10.90 | * | * | 25.40 | 11.10 | * | * | 56.00 | 46.00 |
| 4.843 | 0.2 | 0.2 | * | * | 27.50 | 15.10 | * | * | 27.70 | 15.30 | 56.00 | 46.00 |
| 14.450 | 0.55 | 0.6 | 34.10 | 18.90 | * | * | 34.65 | 19.45 | * | * | 60.00 | 50.00 |
| 15.400 | 0.6 | 0.6 | * | * | 33.60 | 17.20 | * | * | 34.24 | 17.84 | 60.00 | 50.00 |
| 20.900 | 0.9 | 1.0 | 35.40 | 17.20 | * | * | 36.30 | 18.10 | * | * | 60.00 | 50.00 |
| 26.400 | 1.2 | 1.4 | * | * | 37.40 | 20.20 | * | * | 38.82 | 21.62 | 60.00 | 50.00 |
| 30.000 | 1.4 | 1.8 | * | * | * | * | * | * | * | * | 60.00 | 50.00 |

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.
 2. The EUT is in TX mode.
 3. For Power Adapter 2 (STD-0502)
 4. The EUT can be operated in TX, and stand-by mode.
 After a preliminary scan, we found the EUT in TX mode has highest RF emission. The TX mode test results are recorded and listed in final test report.

2.7 PHOTOS OF CONDUCTION TEST



3. 20dB Bandwidth for hopping

Test Requirement: 15.247(a)(1)(ii)


3.1 TEST EQUIPMENTS

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration |
|-----------------------------------|-----------|-------------|---------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | JUN. 17, 2003 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7750A | 725A 852141 | N/A |

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3.2 TEST SETUP



3.3 LIMITS OF 20dB BANDWIDTH MEASUREMENT

Limit: 20dB band width < 1MHz

3.4 TEST PROCEDURE

The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ10040000
Report No. : ER03-09-015FRF
Page 15 of 45

3.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is ± 10 KHz.

3.6 TEST RESULTS


Refer to attached spectrum analyzer data chart.

| | | | |
|-----------------------------|----------------------|---------------------------------|-------------|
| Input Power (System) | 5VDC (For Adapter) | Environmental Conditions | 26°C, 55%RH |
| Tested By | Alan Fan | | |


| Channel | Channel Frequency (MHz) | 20dB Bandwidth (MHz) | Maximum Limit (MHz) | Pass / Fail |
|----------------|--------------------------------|-----------------------------|----------------------------|--------------------|
| 01 (Low) | 2402 | 0.95190 | <1 | PASS |
| 40 (Mid) | 2441 | 0.97194 | <1 | PASS |
| 79 (High) | 2480 | 0.97695 | <1 | PASS |




3.7 PHOTO OF 20dB BANDWIDTH MEASUREMENT

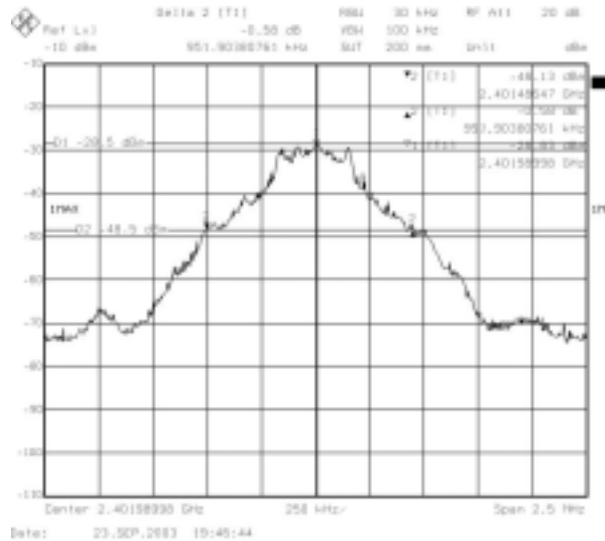

Channel Low

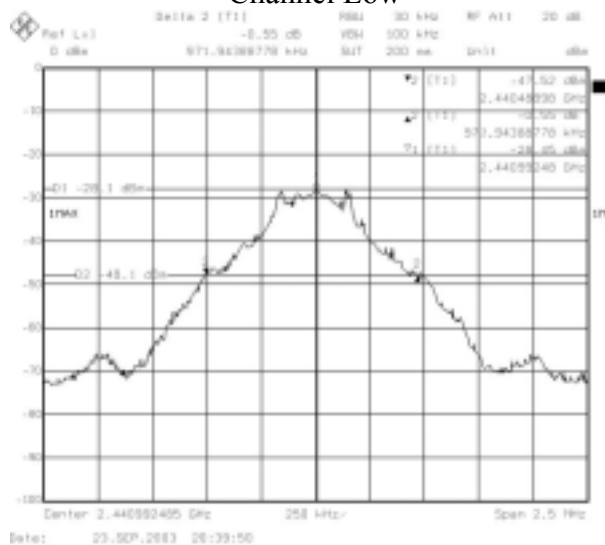

Channel Middle

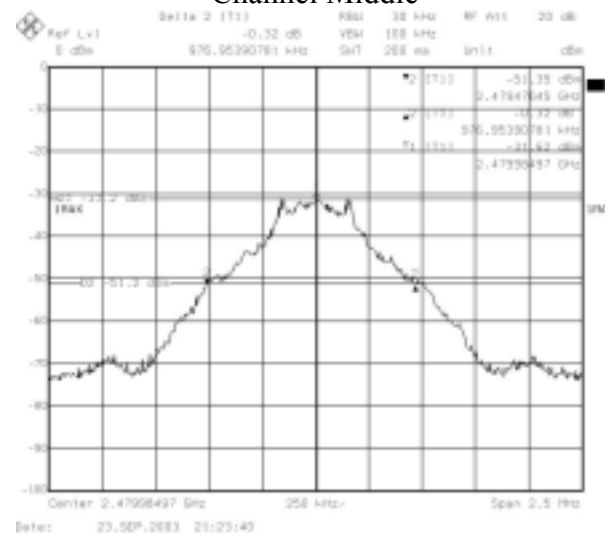

Channel High



4. MAXIMUM PEAK OUTPUT POWER

Test Requirement: 15.247(b)(1)

4.1 TEST EQUIPMENTS

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration |
|-----------------------------------|-----------|-------------|---------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | JUN. 17, 2003 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7750A | 725A 852141 | N/A |

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 TEST SETUP



4.3 LIMITS OF MAXIMUM PEAK OUTPUT POWER

The Maximum Peak Output Power Measurement is 1W(30dBm) for frequency hopping systems operating in 2400~2483.5 MHz employing at least 75 hopping channels.



4.4 TEST PROCEDURE

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal see 4.7 for the measurement set up.

4.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

4.6 TEST RESULTS

| | | | |
|-----------------------------|----------------------|---------------------------------|-------------|
| Input Power (System) | 5VDC (For Adapter) | Environmental Conditions | 26°C, 55%RH |
| Tested By | Alan Fan | | |

Cable loss = 1dB


| Channel | Channel Frequency (MHz) | Peak Power Output (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|----------------|--------------------------------|--------------------------------|-------------------------------|--------------------|
| 01 (Low) | 2402 | -1.02 | 30 | PASS |
| 40 (Mid) | 2441 | -1.72 | 30 | PASS |
| 79 (High) | 2480 | -2.48 | 30 | PASS |

Note :


1. At final test to get the worst-case emission at 1Mbps.
2. The result basic equation calculation as follow :
Peak Power Output = Peak Power Reading + Cable loss




4.7 PHOTO OF MAXIMUM PEAK OUTPUT POWER

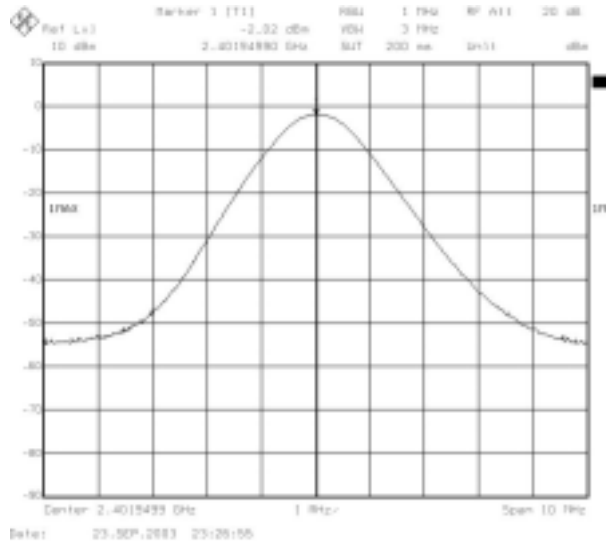

Channel Low

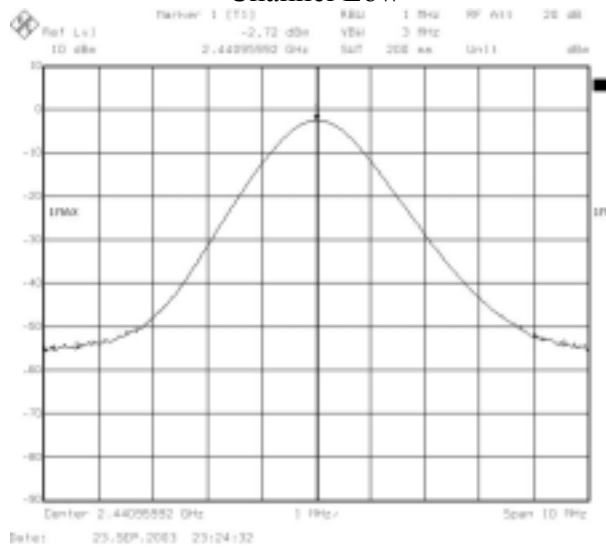

Channel Middle

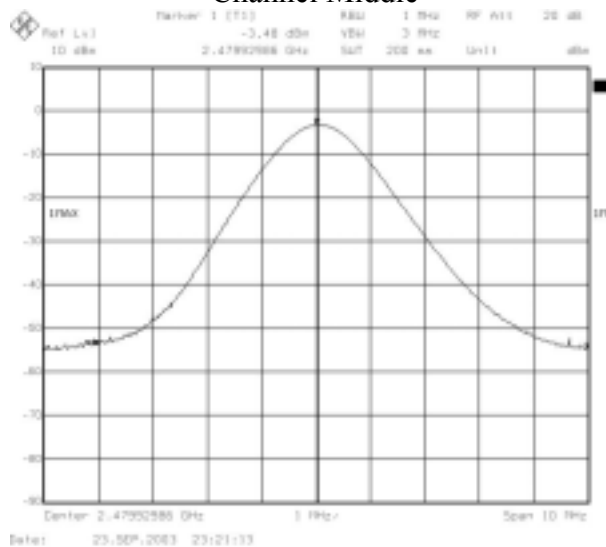

Channel High



5. HOPPING CHANNEL SEPARATION

Test Requirement: 15.247(a)(1)


5.1 TEST EQUIPMENTS

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration |
|-----------------------------------|-----------|-------------|---------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | JUN. 17, 2003 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7750A | 725A 852141 | N/A |

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 TEST SETUP



5.3 LIMITS OF HOPPING CHANNEL SEPARATION

According to 15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

5.4 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Because of the property of test software and hardware, the TX signal can not be modulated while test.
4. By using the MaxHold function record the separation of adjacent channels.
5. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.

Repeat above procedures until all frequencies measured were complete.

5.5 UNCERTAINTY OF CONDUCTED EMISSION


The uncertainty of conducted emission is ± 10 KHz.

5.6 TEST RESULTS

Refer to section 3, 20dB bandwidth measurement, the measured channel separation should be greater than 20dB bandwidth or Minimum bandwidth.

| Channel | Adjacent Hopping Channel Separation (kHz) | 20dB bandwidth (kHz) | Minimum Bandwidth | Result |
|---------------|---|----------------------|-------------------|--------|
| 2441MHz (Mid) | 1004 kHz | 971.94 kHz | 25 kHz | Pass |

5.7 PHOTO OF HOPPING CHANNEL SEPARATION

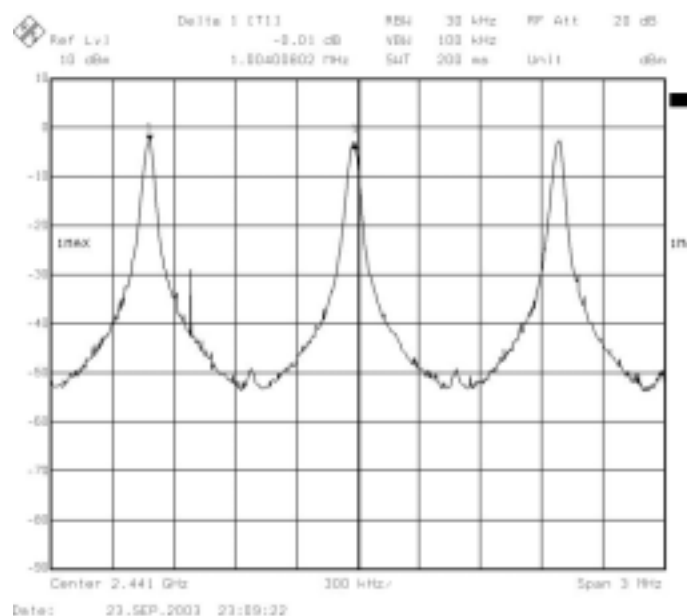



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ10040000
Report No. : ER03-09-015FRF
Page 22 of 45

Channel (Mid)

6. NUMBER OF HOPPING FREQUENCY USED

Test Requirement: 15.247(a)(1)(ii)


6.1 TEST EQUIPMENTS

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration |
|-----------------------------------|-----------|-------------|---------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | JUN. 17, 2003 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7750A | 725A 852141 | N/A |

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 TEST SETUP



6.3 LIMITS OF NUMBER OF HOPPING FREQUENCY USED

According to 15.247(a)(1)(ii), for frequency hopping system operating in the 2400-2483.5MHz and 5725-5850 MHz bands shall use at least 75 hopping frequencies

6.4 TEST PROCEDURE

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the spectrum analyzer on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the spectrum analyzer on View mode and then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.

6.5 UNCERTAINTY OF CONDUCTED EMISSION


The uncertainty is not applicable.

6.6 TEST RESULTS

Refer to attached graph.

There are 79 hopping frequencies in a hopping sequence.

6.7 PHOTO OF NUMBER OF HOPPING FREQUENCY USED

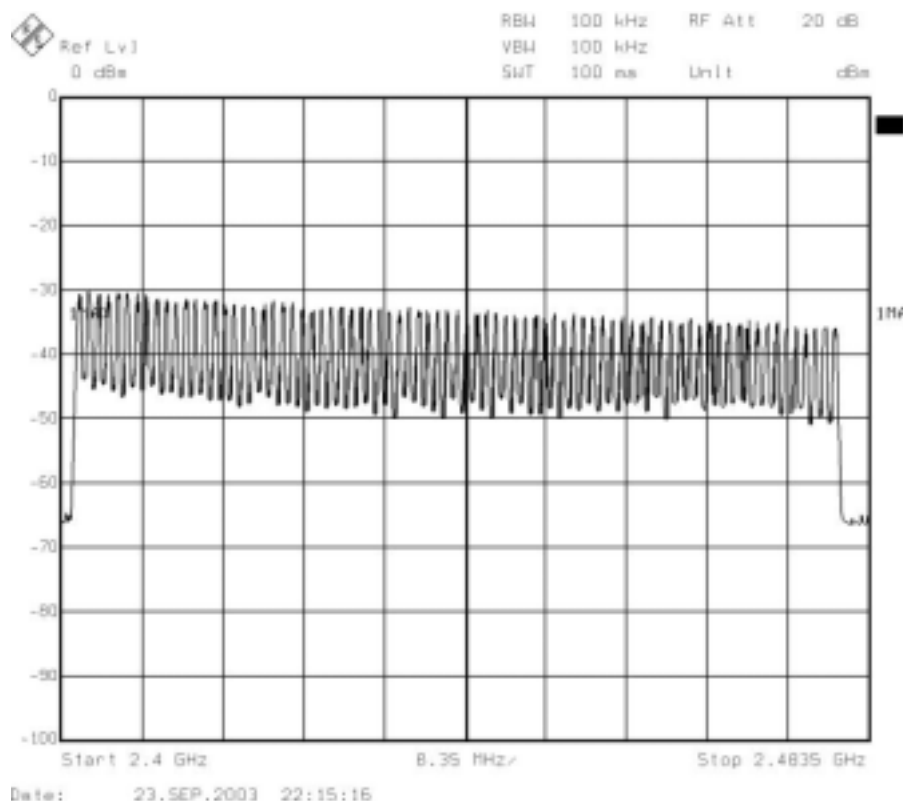

7. DWELL TIME ON EACH CHANNEL

Test Requirement: 15.247(a)(1)(ii)


7.1 TEST EQUIPMENTS

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration |
|-----------------------------------|-----------|-------------|---------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | JUN. 17, 2003 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7750A | 725A 852141 | N/A |

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 TEST SETUP



7.3 LIMITS OF DWELL TIME ON EACH CHANNEL

According to 15.247(a)(1)(ii), for frequency hopping system operating in the 2400-2483.5MHz and 5725-5850 MHz band, the average time of occupancy on any frequency shall not be greater than **0.4** second within a 30-second period



7.4 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth Printer Adapter has 3 type of payload, DH1, DH3 and DH5. The hopping rates differ with different payloads. The longer the payload is, the slower the hopping rate is.

7.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of time is $\pm 5.25\text{ms}$.

7.6 TEST RESULTS

Dwell time = time domain slot length \times hop rate \div number of hop per channel $\times 30$

Refer to attached graph.

The hopping rates Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

| Transmitting Frequency | Packet type | Hops/30sec | Dwell time (ms) | Time of occupancy on the TX channel in 30sec (ms) | Limit for Time of occupancy on the TX channel in 30sec (ms) | Results |
|------------------------|-------------|------------|-----------------|---|---|---------|
| 2441MHz | DH1 | 27 | 0.400 | 243.04 | 400 | Pass |
| 2441MHz | DH3 | 183 | 1.663 | 336.81 | 400 | Pass |
| 2441MHz | DH5 | 339 | 2.9062 | 353.16 | 400 | Pass |


DH1 Dwell time = $400 \mu s \times 1600 \div 79 \times 30 = 0.2430379746 \text{ (Sec)}$

DH3 Dwell time = $1.663 \text{ ms} \times (1600 \div 3) \div 79 \times 30 = 0.3368101263 \text{ (Sec)}$


DH5 Dwell time = $2.9062 \text{ ms} \times (1600 \div 5) \div 79 \times 30 = 0.3531584808 \text{ (Sec)}$




7.7 PHOTO OF DWELL TIME ON EACH CHANNEL

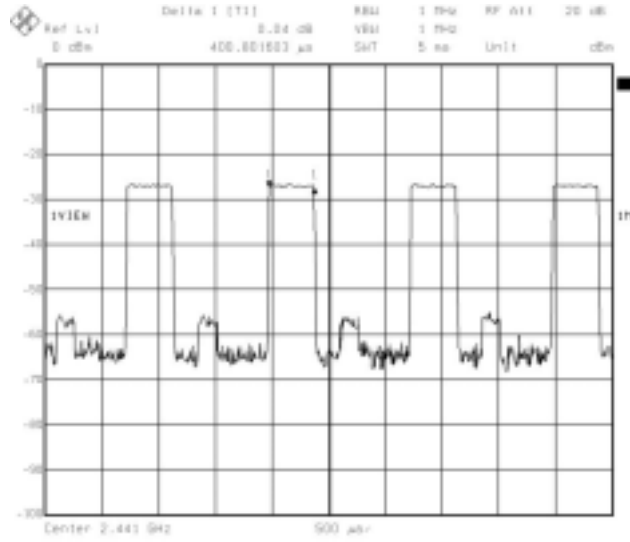

DH1 2441MHz

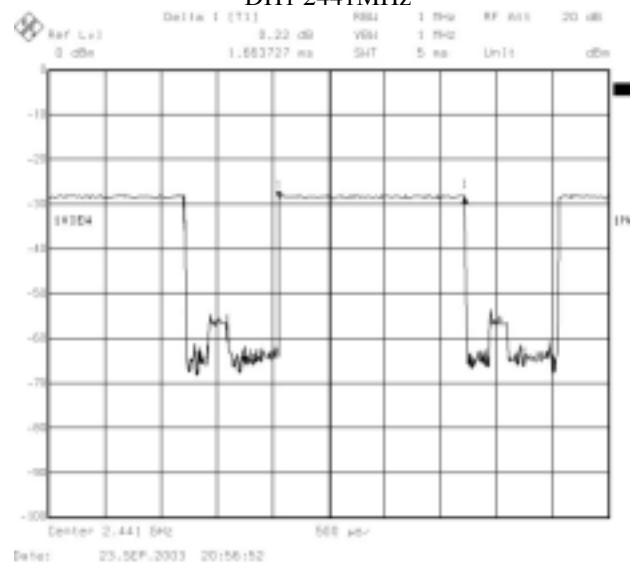

DH3 2441MHz

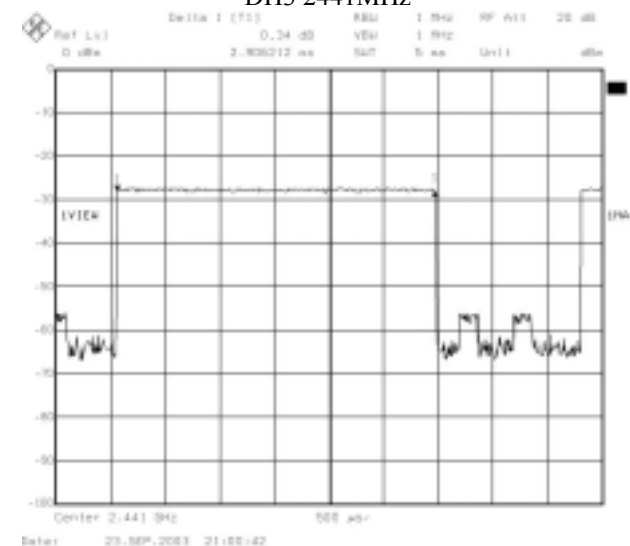

DH5 2441MHz

8. Out of Band Spurious Emissions -Conducted Measurements

Test Requirement: 15.247(c)


8.1 TEST EQUIPMENTS

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration |
|-----------------------------------|-----------|-------------|---------------------|
| ROHDE & SCHWARZ SPECTRUM ANALYZER | FSEK30 | 835253/002 | JUN. 17, 2003 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7750A | 725A 852141 | N/A |

NOTE :

3. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
4. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

8.2 TEST SETUP



8.3 LIMITS OF Out of Band Measurements

According to Section 15.247(c), all harmonic/spurious must be 20dB down from the highest emission level within the authorized band.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ10040000
Report No. : ER03-09-015FRF
Page 28 of 45

8.4 TEST PROCEDURE

Section 15.247(c): Spurious emissions. The following tests are required:

RF antenna conducted test: Set RBW= 100kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW.


8.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of Frequency : $\pm 100\text{kHz}$.

The uncertainty of Amplitude : $\pm 2\text{dB}$.


8.6 TEST RESULTS

Band-edge Compliance of RF Conducted Emissions

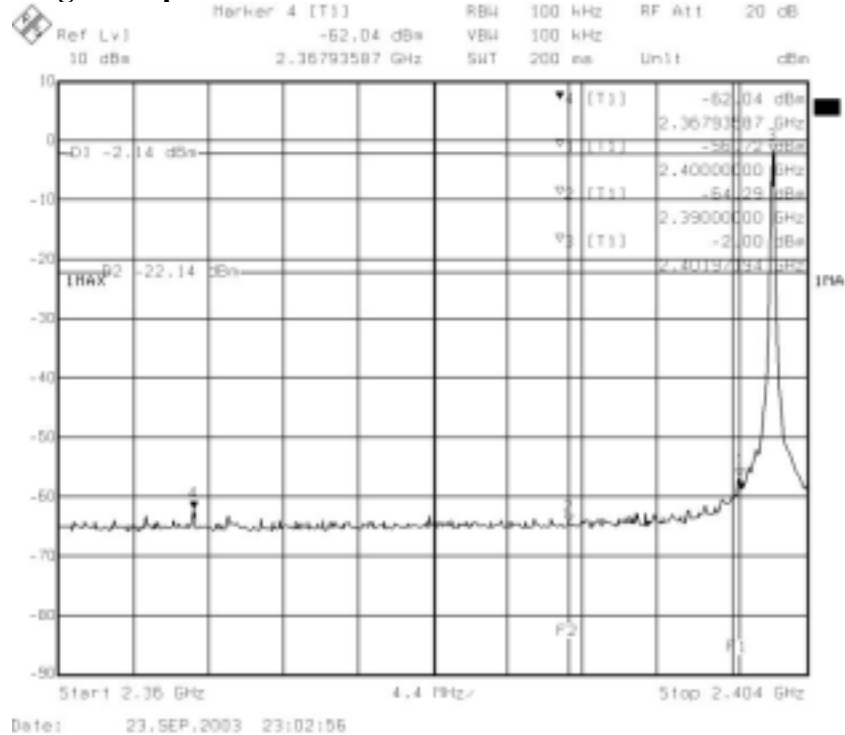

Front

The highest emission in restricted band outside of the ISM band is -62.04dBm. The marker-delta value 59.90dB now displayed complies with the spurious limit in 15.247(c).

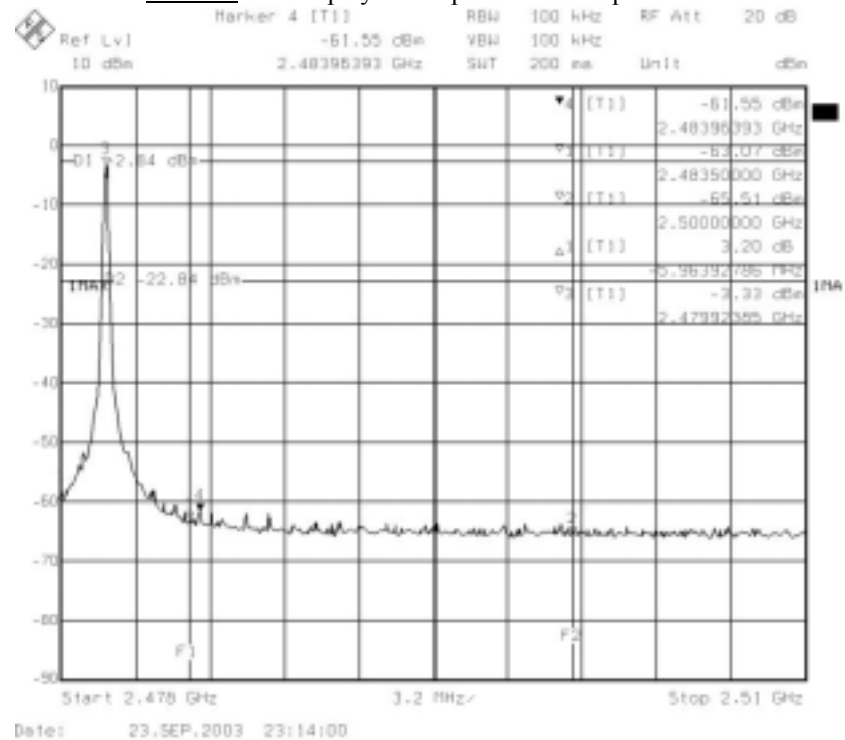

End

The highest emission in restricted band outside of the ISM band is -61.55dBm. The marker-delta value 58.71dB now displayed complies with the spurious limit in 15.247(c).





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ10040000
Report No. : ER03-09-015FRF
Page 30 of 45

Spurious RF Conducted Emissions

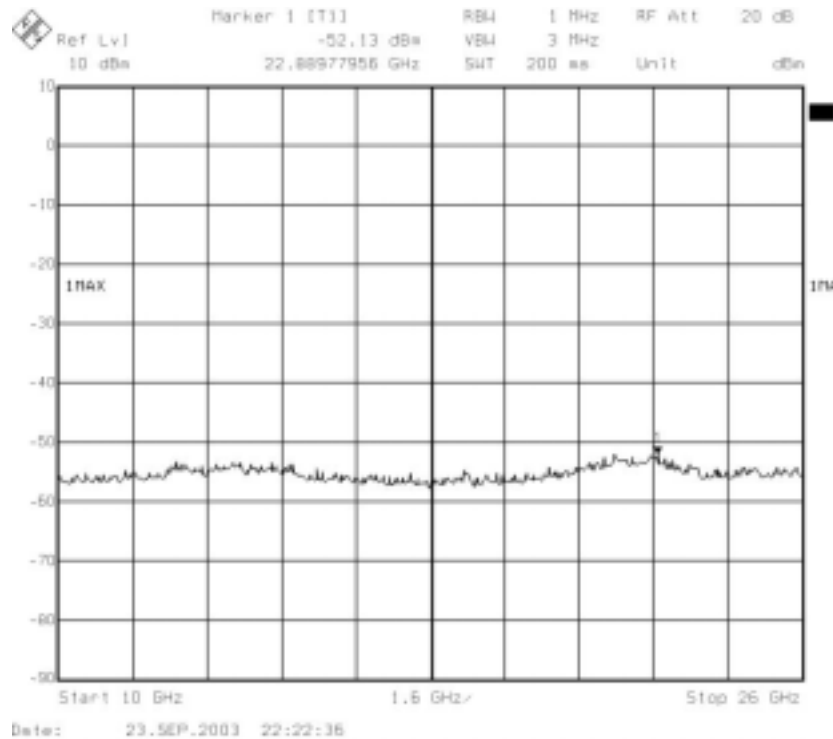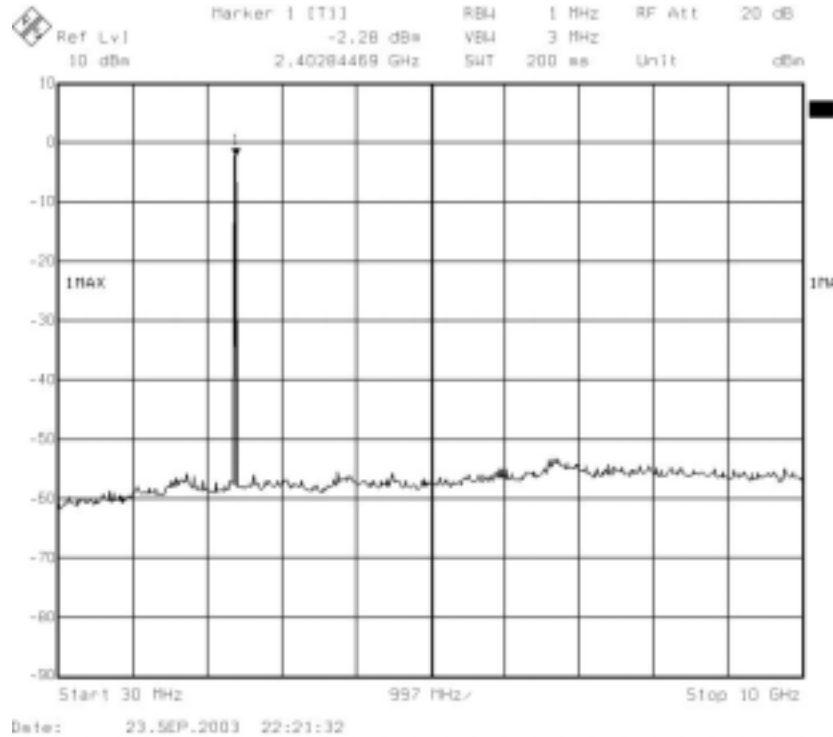

9. Out of Band Spurious Emissions -Radiated Measurements

Test Requirement: 15.247(c)


9.1 TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.


| Manufacturer or Type | Model No | Serial No | Date of Calibration | Calibration Period | Remark |
|-----------------------|-------------|------------|---------------------|--------------------|--------|
| CHASE BI-LOG ANTENNA | CBL6112B | 2421 | MAY 07, 2003 | 1 Year | FINAL |
| R/S SPECTRUM ANALYZER | FSEK30 | 835253/002 | JUN. 17, 2003 | 1 Year | FINAL |
| OPEN SITE | ----- | No.2 | JAN. 10, 2003 | 1 Year | FINAL |
| N TYPE COAXIAL CABLE | CHA9525 | 4 | JUL. 13, 2003 | 1 Year | FINAL |
| Horn Antenna | AH-118 | 10089 | FEB. 25, 2003 | 1 Year | FINAL |
| HP Pre-amplifier | 8449B | 3008A01471 | OCT. 11, 2002 | 1 Year | FINAL |
| HP High pass filter | 84300/80038 | 011 | cal. on use | 1 Year | FINAL |
| Horn Antenna | AH-840 | 03077 | FEB. 25, 2003 | 1 Year | FINAL |

9.2 TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

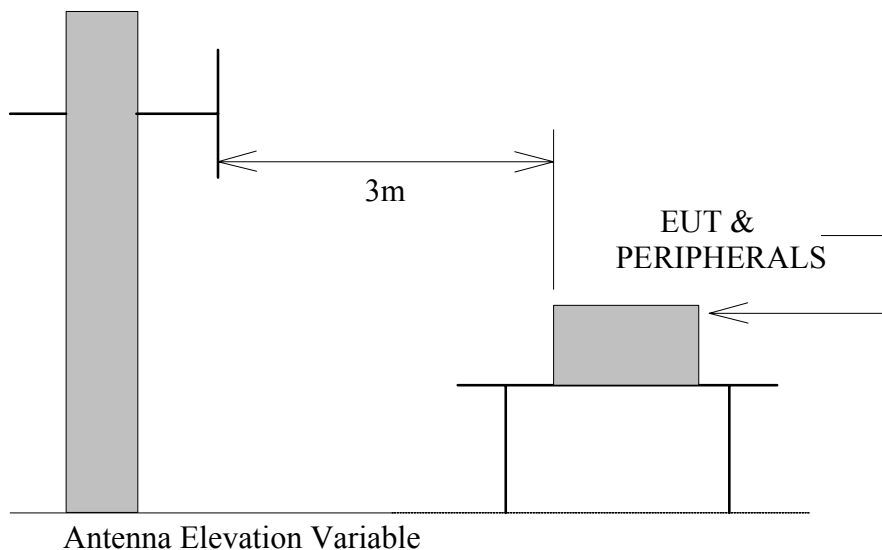

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

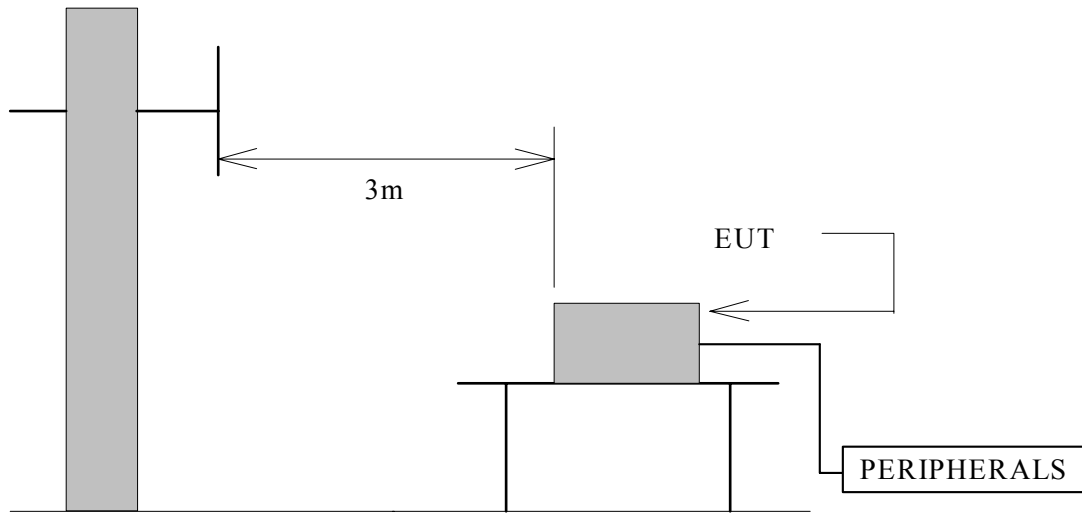

Antenna Elevation Variable

9.3 RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class B digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (METERS) | Radiated (dBµV/M) | Radiated (µV/M) |
|--------------------|----------------------|----------------------|--------------------|
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.



9.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

9.5 UNCERTAINTY OF RADIATED EMISSION

The uncertainty of radiated emission is ± 2.72 dB.



9.6 RADIATED RF NOISE MEASUREMENT

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 35 °C

Humidity : 41 % RH

| Frequency (MHz) | Antenna Factor (dB) | Cable Loss (dB) | Meter Reading at 3m(dBμV/M) | | Limits at 3m (dBμV/M) | Emission Level at 3m(dBμV/M) | |
|-----------------|---------------------|-----------------|-----------------------------|----------|-----------------------|------------------------------|----------|
| | | | Horizontal | Vertical | | Horizontal | Vertical |
| 30.00 | 21.39 | 0.90 | * | * | 40.00 | * | * |
| 157.35 | 11.48 | 2.45 | 10.70 | 12.90 | 43.50 | 24.63 | 26.83 |
| 221.20 | 11.53 | 2.97 | 15.10 | 19.50 | 46.00 | 29.60 | 34.00 |
| 479.09 | 18.09 | 4.75 | 13.40 | 9.00 | 46.00 | 36.25 | 31.85 |
| 575.99 | 19.25 | 5.28 | 8.20 | 8.80 | 46.00 | 32.73 | 33.33 |
| 701.58 | 19.45 | 5.91 | 8.70 | 8.60 | 46.00 | 34.06 | 33.96 |
| 767.98 | 20.18 | 6.24 | 6.90 | 8.30 | 46.00 | 33.32 | 34.72 |
| 863.98 | 20.86 | 6.53 | 7.20 | 6.30 | 46.00 | 34.58 | 33.68 |
| 799.94 | 20.53 | 6.40 | 6.80 | 7.70 | 46.00 | 33.73 | 34.63 |
| 1000.00 | 21.58 | 7.00 | * | * | 54.00 | * | * |

REMARKS : 1. * Undetectable

2. Emission level (dB μ V/M) =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dB μ V).

3. The EUT is in TX mode.

4. The EUT can be operated in TX, and stand-by mode.

After a preliminary scan, we found the EUT in TX mode has highest RF emission.

The TX mode test results are recorded and listed in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : QVZ10040000
 Report No. : ER03-09-015FRF
 Page 35 of 45

Test Requirement: 15.205
 The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

| | | | |
|--------------|---------------------------|------------------|--------------|
| Company | Microlink | Test Date : | 2003/09/15 |
| Product Name | Bluetooth Printer Adapter | Test By: | Alan Fan |
| Model Name | MBT-6401 | Temp& Humidity : | 25.9°C , 65% |

| CH01 (2402 MHz) TX (Low) | | | | Measurement Distance at 1m | | | | Horizontal polarity | | | |
|--------------------------|---------|--|-------|----------------------------|------|--------|----------|-----------------------|--------|---------|---------|
| Freq. | Reading | AF | Closs | Pre-amp | Dist | Filter | Level | Limit | Margin | Mark | Height |
| (MHz) | (dBuV) | (dBuV) | (dB) | (dB) | dB | dB | (dBuV/m) | (dBuV/m) | (dB) | (P/Q/A) | (Meter) |
| * 2367.93 | 59.90 | (delta between carrier and local max emission) | | | | | 32.80 | 74 | -41.20 | P | 1.00 |
| * 2367.93 | 59.90 | (delta between carrier and local max emission) | | | | | 32.62 | 54 | -21.38 | A | 1.00 |
| 2401.99 | 66.66 | 31.80 | 3.74 | 0.00 | 9.50 | 0.00 | 92.70 | Fundamental Frequency | | P | 1.00 |
| 2401.99 | 66.48 | 31.80 | 3.74 | 0.00 | 9.50 | 0.00 | 92.52 | | | A | 1.00 |
| * 4803.99 | 49.05 | 34.31 | 2.85 | 35.14 | 9.50 | 2.08 | 43.65 | 74 | -30.35 | P | 1.00 |
| * 4803.99 | 43.61 | 34.31 | 2.85 | 35.14 | 9.50 | 2.08 | 38.21 | 54 | -15.79 | A | 1.00 |
| 7205.94 | 47.29 | 39.82 | 4.78 | 35.66 | 9.50 | 2.00 | 48.73 | 74 | -25.27 | P | 1.00 |
| 7205.94 | 39.67 | 39.82 | 4.78 | 35.66 | 9.50 | 2.00 | 41.11 | 54 | -12.89 | A | 1.00 |
| 9607.94 | 47.50 | 38.54 | 5.90 | 36.37 | 9.50 | 0.64 | 46.70 | 74 | -27.30 | P | 1.00 |
| 9607.94 | 39.52 | 38.54 | 5.90 | 36.37 | 9.50 | 0.64 | 38.72 | 54 | -15.28 | A | 1.00 |
| * 12009.95 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14411.94 | ----- | ----- | ----- | ----- | 9.50 | 0.59 | ----- | ----- | ----- | ----- | 1.00 |
| 16813.93 | ----- | ----- | ----- | ----- | 9.50 | 0.63 | ----- | ----- | ----- | ----- | 1.00 |
| * 19215.92 | ----- | ----- | ----- | ----- | 9.50 | 2.42 | ----- | ----- | ----- | ----- | 1.00 |
| 21617.91 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 24019.90 | ----- | ----- | ----- | ----- | 9.50 | 2.27 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means that Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level=Reading+AF+Closs-Preamp+Filter-Dist, Margin=Level-Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : QVZ10040000
 Report No. : ER03-09-015FRF
 Page 36 of 45

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

| | | | |
|--------------|---------------------------|------------------|--------------|
| Company | Microlink | Test Date : | 2003/09/15 |
| Product Name | Bluetooth Printer Adapter | Test By: | Alan Fan |
| Model Name | MBT-6401 | Temp& Humidity : | 25.9°C , 65% |

| CH01 (2402 MHz) TX (Low) | | | | Measurement Distance at 1m | | | | Vertical polarity | | | |
|--------------------------|---------|--|-------|----------------------------|------|--------|----------|-----------------------|--------|---------|---------|
| Freq. | Reading | AF | Closs | Pre-amp | Dist | Filter | Level | Limit | Margin | Mark | Height |
| (MHz) | (dBuV) | (dBuV) | (dB) | (dB) | dB | dB | (dBuV/m) | (dBuV/m) | (dB) | (P/Q/A) | (Meter) |
| 2367.93 | 59.90 | (delta between carrier and local max emission) | | | | | 29.82 | 74 | -44.18 | P | 1.00 |
| * 2367.93 | 59.90 | (delta between carrier and local max emission) | | | | | 29.69 | 54 | -24.31 | A | 1.00 |
| 2401.98 | 63.68 | 31.80 | 3.74 | 0.00 | 9.50 | 0.00 | 89.72 | Fundamental Frequency | | P | 1.00 |
| 2401.98 | 63.55 | 31.80 | 3.74 | 0.00 | 9.50 | 0.00 | 89.59 | | | A | 1.00 |
| * 4803.95 | 48.90 | 34.31 | 2.85 | 35.14 | 9.50 | 2.08 | 43.50 | 74 | -30.50 | P | 1.00 |
| * 4803.95 | 43.46 | 34.31 | 2.85 | 35.14 | 9.50 | 2.08 | 38.06 | 54 | -15.94 | A | 1.00 |
| 7205.89 | 46.68 | 39.82 | 4.78 | 35.66 | 9.50 | 2.00 | 48.12 | 74 | -25.88 | P | 1.00 |
| 7205.89 | 40.19 | 39.82 | 4.78 | 35.66 | 9.50 | 2.00 | 41.63 | 54 | -12.37 | A | 1.00 |
| 9607.93 | 49.66 | 38.54 | 5.90 | 36.37 | 9.50 | 0.64 | 48.86 | 74 | -25.14 | P | 1.00 |
| 9607.93 | 44.24 | 38.54 | 5.90 | 36.37 | 9.50 | 0.64 | 43.44 | 54 | -10.56 | A | 1.00 |
| * 12009.90 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14411.88 | ----- | ----- | ----- | ----- | 9.50 | 0.59 | ----- | ----- | ----- | ----- | 1.00 |
| 16813.86 | ----- | ----- | ----- | ----- | 9.50 | 0.63 | ----- | ----- | ----- | ----- | 1.00 |
| * 19215.84 | ----- | ----- | ----- | ----- | 9.50 | 2.42 | ----- | ----- | ----- | ----- | 1.00 |
| 21617.82 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 24019.80 | ----- | ----- | ----- | ----- | 9.50 | 2.27 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means that Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level=Reading+AF+Closs-Preamp+Filter-Dist, Margin=Level-Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : QVZ10040000
 Report No. : ER03-09-015FRF
 Page 37 of 45

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

| | | | |
|--------------|---------------------------|------------------|--------------|
| Company | Microlink | Test Date : | 2003/09/15 |
| Product Name | Bluetooth Printer Adapter | Test By: | Alan Fan |
| Model Name | MBT-6401 | Temp& Humidity : | 25.9°C , 65% |

| CH40 (2441 MHz) TX (Mid) | | | | Measurement Distance at 1m | | | | Horizontal polarity | | | |
|--------------------------|---------|--------|-------|----------------------------|------|--------|----------|-----------------------|--------|---------|---------|
| Freq. | Reading | AF | Closs | Pre-amp | Dist | Filter | Level | Limit | Margin | Mark | Height |
| (MHz) | (dBuV) | (dBuV) | (dB) | (dB) | dB | dB | (dBuV/m) | (dBuV/m) | (dB) | (P/Q/A) | (Meter) |
| 2440.98 | 64.39 | 31.76 | 3.45 | 0.00 | 9.50 | 0.00 | 90.10 | Fundamental Frequency | | P | 1.00 |
| 2440.98 | 64.30 | 31.76 | 3.45 | 0.00 | 9.50 | 0.00 | 90.01 | | | A | 1.00 |
| * 4881.93 | 48.04 | 34.82 | 2.71 | 35.21 | 9.50 | 1.77 | 42.64 | 74 | -31.36 | P | 1.00 |
| * 4881.93 | 43.18 | 34.82 | 2.71 | 35.21 | 9.50 | 1.77 | 37.78 | 54 | -16.22 | A | 1.00 |
| * 7322.96 | 49.10 | 39.77 | 4.83 | 35.64 | 9.50 | 2.00 | 50.56 | 74 | -23.44 | P | 1.00 |
| * 7322.96 | 42.87 | 39.77 | 4.83 | 35.64 | 9.50 | 2.00 | 44.33 | 54 | -9.67 | A | 1.00 |
| 9763.89 | 47.96 | 38.52 | 5.90 | 36.62 | 9.50 | 0.54 | 46.80 | 74 | -27.20 | P | 1.00 |
| 9763.89 | 39.75 | 38.52 | 5.90 | 36.62 | 9.50 | 0.54 | 38.59 | 54 | -15.41 | A | 1.00 |
| * 12204.90 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14645.88 | ----- | ----- | ----- | ----- | 9.50 | 0.58 | ----- | ----- | ----- | ----- | 1.00 |
| 17086.86 | ----- | ----- | ----- | ----- | 9.50 | 0.77 | ----- | ----- | ----- | ----- | 1.00 |
| * 19527.84 | ----- | ----- | ----- | ----- | 9.50 | 2.88 | ----- | ----- | ----- | ----- | 1.00 |
| 21968.82 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 24409.80 | ----- | ----- | ----- | ----- | 9.50 | 1.73 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means that Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level=Reading+AF+Closs-Preamp+Filter-Dist, Margin=Level-Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : QVZ10040000
 Report No. : ER03-09-015FRF
 Page 38 of 45

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

| | | | |
|--------------|---------------------------|------------------|--------------|
| Company | Microlink | Test Date : | 2003/09/15 |
| Product Name | Bluetooth Printer Adapter | Test By: | Alan Fan |
| Model Name | MBT-6401 | Temp& Humidity : | 25.9°C , 65% |

| CH40 (2441 MHz) TX (Mid) | | | | Measurement Distance at 1m | | | | Vertical polarity | | | |
|--------------------------|---------|--------|-------|----------------------------|------|--------|----------|-----------------------|--------|---------|---------|
| Freq. | Reading | AF | Closs | Pre-amp | Dist | Filter | Level | Limit | Margin | Mark | Height |
| (MHz) | (dBuV) | (dBuV) | (dB) | (dB) | dB | dB | (dBuV/m) | (dBuV/m) | (dB) | (P/Q/A) | (Meter) |
| 2440.99 | 59.92 | 31.76 | 3.45 | 0.00 | 9.50 | 0.00 | 85.63 | Fundamental Frequency | | P | 1.00 |
| 2440.99 | 59.77 | 31.76 | 3.45 | 0.00 | 9.50 | 0.00 | 85.48 | | | A | 1.00 |
| * 4881.95 | 46.42 | 34.82 | 2.71 | 35.21 | 9.50 | 1.77 | 41.02 | 74 | -32.98 | P | 1.00 |
| * 4881.95 | 40.90 | 34.82 | 2.71 | 35.21 | 9.50 | 1.77 | 35.50 | 54 | -18.50 | A | 1.00 |
| * 7322.93 | 48.29 | 39.77 | 4.83 | 35.64 | 9.50 | 2.00 | 49.75 | 74 | -24.25 | P | 1.00 |
| * 7322.93 | 42.56 | 39.77 | 4.83 | 35.64 | 9.50 | 2.00 | 44.02 | 54 | -9.98 | A | 1.00 |
| 9763.89 | 50.67 | 38.52 | 5.90 | 36.62 | 9.50 | 0.54 | 49.51 | 74 | -24.49 | P | 1.00 |
| 9763.89 | 43.97 | 38.52 | 5.90 | 36.62 | 9.50 | 0.54 | 42.81 | 54 | -11.19 | A | 1.00 |
| * 12204.95 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14645.94 | ----- | ----- | ----- | ----- | 9.50 | 0.58 | ----- | ----- | ----- | ----- | 1.00 |
| 17086.93 | ----- | ----- | ----- | ----- | 9.50 | 0.77 | ----- | ----- | ----- | ----- | 1.00 |
| * 19527.92 | ----- | ----- | ----- | ----- | 9.50 | 2.88 | ----- | ----- | ----- | ----- | 1.00 |
| 21968.91 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 24409.90 | ----- | ----- | ----- | ----- | 9.50 | 1.73 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means that Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level=Reading+AF+Closs-Preamp+Filter-Dist, Margin=Level-Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : QVZ10040000
 Report No. : ER03-09-015FRF
 Page 39 of 45

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

| | | | |
|--------------|---------------------------|------------------|--------------|
| Company | Microlink | Test Date : | 2003/09/15 |
| Product Name | Bluetooth Printer Adapter | Test By: | Alan Fan |
| Model Name | MBT-6401 | Temp& Humidity : | 25.9°C , 65% |

| CH79 (2480 MHz) TX (High) | | | | Measurement Distance at 1m | | | | Horizontal polarity | | | |
|---------------------------|---------|--|-------|----------------------------|------|--------|----------|-----------------------|--------|---------|---------|
| Freq. | Reading | AF | Closs | Pre-amp | Dist | Filter | Level | Limit | Margin | Mark | Height |
| (MHz) | (dBuV) | (dBuV) | (dB) | (dB) | dB | dB | (dBuV/m) | (dBuV/m) | (dB) | (P/Q/A) | (Meter) |
| 2479.97 | 61.62 | 31.72 | 3.15 | 0.00 | 9.50 | 0.00 | 86.99 | Fundamental Frequency | | P | 1.00 |
| 2479.97 | 61.37 | 31.72 | 3.15 | 0.00 | 9.50 | 0.00 | 86.74 | | | A | 1.00 |
| * 2483.96 | 58.71 | (delta between carrier and local max emission) | | | | | 28.28 | 74 | -45.72 | P | 1.00 |
| * 2483.96 | 58.71 | (delta between carrier and local max emission) | | | | | 28.03 | 54 | -25.97 | A | 1.00 |
| * 4959.96 | 48.53 | 35.34 | 2.57 | 35.27 | 9.50 | 1.46 | 43.13 | 74 | -30.87 | P | 1.00 |
| * 4959.96 | 42.98 | 35.34 | 2.57 | 35.27 | 9.50 | 1.46 | 37.58 | 54 | -16.42 | A | 1.00 |
| * 7439.89 | 48.89 | 39.72 | 4.88 | 35.61 | 9.50 | 2.00 | 50.38 | 74 | -23.62 | P | 1.00 |
| * 7439.89 | 43.40 | 39.72 | 4.88 | 35.61 | 9.50 | 2.00 | 44.89 | 54 | -9.11 | A | 1.00 |
| 9919.88 | 49.00 | 38.51 | 5.90 | 36.87 | 9.50 | 0.45 | 47.48 | 74 | -26.52 | P | 1.00 |
| 9919.88 | 40.74 | 38.51 | 5.90 | 36.87 | 9.50 | 0.45 | 39.22 | 54 | -14.78 | A | 1.00 |
| * 12399.85 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14879.82 | ----- | ----- | ----- | ----- | 9.50 | 0.40 | ----- | ----- | ----- | ----- | 1.00 |
| 17359.79 | ----- | ----- | ----- | ----- | 9.50 | 0.99 | ----- | ----- | ----- | ----- | 1.00 |
| * 19839.76 | ----- | ----- | ----- | ----- | 9.50 | 4.91 | ----- | ----- | ----- | ----- | 1.00 |
| * 22319.73 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 24799.70 | ----- | ----- | ----- | ----- | 9.50 | 1.54 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means that Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level=Reading+AF+Closs-Preamp+Filter-Dist, Margin=Level-Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : QVZ10040000
 Report No. : ER03-09-015FRF
 Page 40 of 45

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

| | | | |
|--------------|---------------------------|------------------|--------------|
| Company | Microlink | Test Date : | 2003/09/15 |
| Product Name | Bluetooth Printer Adapter | Test By: | Alan Fan |
| Model Name | MBT-6401 | Temp& Humidity : | 25.9°C , 65% |

| CH79 (2480 MHz) TX (High) | | | | Measurement Distance at 1m | | | | Vertical polarity | | | |
|---------------------------|---------|--|-------|----------------------------|------|--------|----------|-----------------------|--------|---------|---------|
| Freq. | Reading | AF | Closs | Pre-amp | Dist | Filter | Level | Limit | Margin | Mark | Height |
| (MHz) | (dBuV) | (dBuV) | (dB) | (dB) | dB | dB | (dBuV/m) | (dBuV/m) | (dB) | (P/Q/A) | (Meter) |
| 2479.97 | 57.44 | 31.72 | 3.15 | 0.00 | 9.50 | 0.00 | 82.81 | Fundamental Frequency | | P | 1.00 |
| 2479.97 | 57.24 | 31.72 | 3.15 | 0.00 | 9.50 | 0.00 | 82.61 | | | A | 1.00 |
| * 2483.96 | 58.71 | (delta between carrier and local max emission) | | | | | 24.10 | 74 | -49.90 | P | 1.00 |
| * 2483.96 | 58.71 | (delta between carrier and local max emission) | | | | | 23.90 | 54 | -30.10 | A | 1.00 |
| * 4959.96 | 45.38 | 35.34 | 2.57 | 35.27 | 9.50 | 1.46 | 39.98 | 74 | -34.02 | P | 1.00 |
| * 4959.96 | 38.25 | 35.34 | 2.57 | 35.27 | 9.50 | 1.46 | 32.85 | 54 | -21.15 | A | 1.00 |
| * 7439.92 | 49.99 | 39.72 | 4.88 | 35.61 | 9.50 | 2.00 | 51.48 | 74 | -22.52 | P | 1.00 |
| * 7439.92 | 45.11 | 39.72 | 4.88 | 35.61 | 9.50 | 2.00 | 46.60 | 54 | -7.40 | A | 1.00 |
| 9919.86 | 49.27 | 38.51 | 5.90 | 36.87 | 9.50 | 0.45 | 47.75 | 74 | -26.25 | P | 1.00 |
| 9919.86 | 43.31 | 38.51 | 5.90 | 36.87 | 9.50 | 0.45 | 41.79 | 54 | -12.21 | A | 1.00 |
| * 12399.85 | ----- | ----- | ----- | ----- | 9.50 | 0.80 | ----- | ----- | ----- | ----- | 1.00 |
| 14879.82 | ----- | ----- | ----- | ----- | 9.50 | 0.40 | ----- | ----- | ----- | ----- | 1.00 |
| 17359.79 | ----- | ----- | ----- | ----- | 9.50 | 0.99 | ----- | ----- | ----- | ----- | 1.00 |
| * 19839.76 | ----- | ----- | ----- | ----- | 9.50 | 4.91 | ----- | ----- | ----- | ----- | 1.00 |
| * 22319.73 | ----- | ----- | ----- | ----- | 9.50 | 0.70 | ----- | ----- | ----- | ----- | 1.00 |
| 24799.70 | ----- | ----- | ----- | ----- | 9.50 | 1.54 | ----- | ----- | ----- | ----- | 1.00 |

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means that Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level=Reading+AF+Closs-Preamp+Filter-Dist, Margin=Level-Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.

9.7 PHOTOS OF OPEN SITE







10. ANTENNA REQUIREMENT

10.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna. The antenna connector is directly soldered on PCB. And the maximum Gain of this antenna is only 2dBi MAX.



11. RF EXPOSURE EVALUATION

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)
LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Average Time |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------|
| (A) Limits for Occupational / Control Exposures | | | | |
| 300-1,500 | -- | -- | F/300 | 6 |
| 1,500-100,000 | -- | -- | 5 | 6 |
| (B) Limits for General Population / Uncontrol Exposures | | | | |
| 300-1,500 | -- | -- | F/1500 | 6 |
| 1,500-100,000 | -- | -- | 1 | 30 |

11.1 Friis Formula

Friis transmission formula : $Pd = (Pout * G) / (4 * pi * r^2)$

Where

Pd = power density in mW/cm²

Pout = output power to antenna in mW

G = gain of antenna in linear scale

Pi = 3.1416

R = distance between observation point and center of the radiator in cm

Pd is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

11.2 EUT Operating Condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.



11.3 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

11.3.1 Antenna Gain

Antenna Gain : The maximum Gain measured in fully anechoic chamber is 2dBi linear scale.

11.3.2 Output Power into Antenna & RF Exposure Evaluation Distance

| Channel | Channel Frequency (MHz) | Output Power to Antenna (dBm) | Antenna Gain | Power Density at 20cm (mW/cm ²) | LIMITS (mW/cm ²) |
|-------------|-------------------------|-------------------------------|--------------|---|------------------------------|
| CH01 (Low) | 2402.00 | -1.02 | 2 | 0.000249 | 1 |
| CH40 (Mid) | 2441.00 | -1.72 | 2 | 0.000212 | 1 |
| CH79 (High) | 2480.00 | -2.48 | 2 | 0.000178 | 1 |

The power density Pd (4th column) at a distance of 20cm calculated from the friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.