

Report on the Radio Testing  
For  
Cambium Networks Ltd  
on  
PMP 450m  
Report no. TRA-029590-47-11B  
29<sup>th</sup> March 2017

Report Number: TRA-029590-47-11B  
Issue: B

REPORT ON THE RADIO TESTING OF A  
Cambium Networks Ltd  
PMP 450m  
WITH RESPECT TO SPECIFICATION  
FCC 47CFR Subpart E

TEST DATE: 30th January - 3rd March 2017

Written by: D Winstanley

D Winstanley  
Radio Senior Test Engineer

Approved by:

J Charters  
Department Manager - Radio

Date: 29<sup>th</sup> March 2017

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

## 1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	15 <sup>th</sup> March 2017	Original
A	29 <sup>th</sup> March 2017	Corrections

## 2 Summary

TEST REPORT NUMBER: TRA-029590-47-11B

WORKS ORDER NUMBER TRA-029590-21

PURPOSE OF TEST: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.

TEST SPECIFICATION: 47CFR15 Subpart E

EQUIPMENT UNDER TEST (EUT): PMP 450m

FCC IDENTIFIER: QWP-50450M

MANUFACTURER/AGENT: Cambium Networks Ltd

ADDRESS: Unit B2  
Linhay Business Park  
Eastern Road  
Ashburton  
Devon  
TQ13 7UP  
United Kingdom

CLIENT CONTACT: Don Reid  
☎ 01364 655667  
✉ don.reid@cambiumnetworks.com

TEST DATE: 30th January - 3rd March 2017

TESTED BY: A Tosif, D Winstanley  
Element

## 2.1 Test Summary

Test Method and Description		Requirement Clause	Applicable to this equipment	Result / Note
		47CFR15		
Radiated spurious emissions (restricted bands of operation and cabinet radiation)		15.205	<input checked="" type="checkbox"/>	Pass
AC power line conducted emissions		15.207	<input checked="" type="checkbox"/>	Pass
Occupied bandwidth		15.407(e)	<input checked="" type="checkbox"/>	Pass
Output power	EIRP	15.407(a)	<input checked="" type="checkbox"/>	Pass
	PSD		<input checked="" type="checkbox"/>	
	RPE		<input checked="" type="checkbox"/>	
Conducted / radiated RF power out-of-band		15.407(b)	<input checked="" type="checkbox"/>	Pass
Duty cycle		15.35(c)	<input type="checkbox"/>	Note 1
TPC and DFS		15.407(h)	<input type="checkbox"/>	Note 1
U-NII detection bandwidth		15.407(h)(2)	<input type="checkbox"/>	Note 1
CAC		15.407(h)(2)(ii)	<input type="checkbox"/>	Note 1
In-service monitoring		15.407(h)(2)(iii) & 15.407(h)(2)(iv)	<input type="checkbox"/>	Note 1
Statistical performance check		-	<input type="checkbox"/>	Note 1

### Notes:

Note 1 This report covers RF operation only in the 5150 MHz – 5250 MHz band and 5250 MHz – 5350 MHz, For DFS parameters see test report TRA-029590-21-45-00A.

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set-up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

### 3 Contents

1	Revision Record .....	3
2	Summary .....	4
2.1	Test Summary .....	5
3	Contents .....	6
4	Introduction .....	7
5	Test Specifications .....	8
5.1	Normative References .....	8
5.2	Deviations from Test Standards .....	8
5.3	Minimisation of reflections .....	8
5.4	Open area test site information .....	9
6	Glossary of Terms .....	10
7	Equipment Under Test .....	11
7.1	EUT Identification .....	11
7.2	System Equipment .....	11
7.3	EUT Mode of Operation .....	12
7.3.1	Transmission .....	12
7.4	EUT Radio Frequency Parameters .....	14
7.4.1	General .....	14
7.4.2	Antennas .....	14
7.4.3	Product specific declarations .....	14
7.5	EUT Description .....	15
8	Modifications .....	16
9	EUT Test Setup .....	17
9.1	Block Diagram .....	17
9.2	General Set-up Photograph .....	18
10	General Technical Parameters .....	20
10.1	Normal Conditions .....	20
10.2	Varying Test Conditions .....	20
11	Radiated emissions .....	21
11.1	Definitions .....	21
11.2	Test Parameters .....	21
11.3	Test Method .....	22
11.4	Test Equipment .....	23
11.5	Test Results .....	24
12	AC power-line conducted emissions .....	36
12.1	Definition .....	36
12.2	Test Parameters .....	36
12.3	Test Method .....	36
12.4	Test Equipment .....	37
12.5	Test Results .....	38
13	Emission Bandwidth .....	40
13.1	Definition .....	40
13.2	Test Parameters .....	40
13.3	Test Method .....	40
13.4	Test Equipment .....	41
13.5	Test Results .....	42
14	Maximum conducted output power .....	48
14.1	Definition .....	48
14.2	Test Parameters .....	48
14.3	Test Method .....	50
14.4	Test Equipment .....	51
14.5	Test Results – U-NII-Band 1 .....	52
14.6	Test Results – U-NII-Band 2a .....	59
15	Power spectral density .....	66
15.1	Definition .....	66
15.2	Test Parameters .....	66
15.3	Test Method .....	68
15.4	Test Equipment .....	68
15.5	Test Results – U-NII-Band 1 .....	69
15.6	Test Results – U-NII-Band 2a .....	76
16	Out-of-band spurious emissions .....	83
16.1	Definition .....	83
16.2	Test Parameters .....	83
16.3	Test Method .....	84
16.4	Test Equipment .....	84
16.5	Test Results .....	85
17	Measurement Uncertainty .....	86

## 4 Introduction

This report TRA-029590-47-11B presents the results of the Radio testing on a Cambium Networks Ltd, PMP 450m to specification 47CFR15 Radio Frequency Devices

The testing was carried out for Cambium Networks Ltd by Element, at the address(es) detailed below.

- |   |  |
|---|--|
| <input type="checkbox"/> Element Hull<br>Unit E<br>South Orbital Trading Park<br>Hedon Road<br>Hull<br>HU9 1NJ<br>UK                              | <input checked="" type="checkbox"/> Element Skelmersdale<br>Unit 1<br>Pendle Place<br>Skelmersdale<br>West Lancashire<br>WN8 9PN<br>UK |
| <input checked="" type="checkbox"/> 30 Meter Open Area Test Site<br>Pershore Airfield,<br>Long Lane,<br>Throckmorton,<br>Worcs,<br>WR10 2JH<br>UK |  |

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

### FCC Site Listing:

The test laboratory is accredited for the above sites under the US-EU MRA, Designation number UK0009.

### ISED Registration Number(s):

Element Skelmersdale	3930B
Element Hull	3483A

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## 5 Test Specifications

### 5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- FCC KDB Publication 905462 D02 v01r02 – Compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5150-5725 MHz bands incorporating dynamic frequency selection.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- KDB 789033 D02 General UNII Test Procedures
- KDB 662911 D01 Multiple Transmitter Output

### 5.2 Deviations from Test Standards

Maximum conducted output power

Due to the nature of the equipment it is not possible to measure the power conducted so a radiated measurement was performed. This measurement was performed at 30m to ensure the measurement was made in the antenna far field.

Spectral Power Density

Due to the nature of the equipment it is not possible to measure the power conducted so a radiated measurement was performed. This measurement was performed at 30m to ensure the measurement was made in the antenna far field.

### 5.3 Minimisation of reflections

Due to the use of a 30 meter open area test site with no RF absorbing material for the measurement of the fundamental attempts were made to minimise the influence of reflections.

To minimise the reflections the following precautions were taken.

Test performed over a grassed area to try and ensure no sub surface artefacts produce reflections.


The EUT was raised to a height of 4 meters above the ground plane to help reduce the effects of any reflected paths at 30 meters

The EUTs antennas are set with a 2 degree down tilt, and an 8 degree beam width, to negate this down tilt the EUT was rotated 180 degrees though the vertical plane (i.e. turned upside down to normal operation) and the EUT was angled so the bore sight was parallel to the grassed area.

Due to the increased height of the EUT the measurement antenna was varied between 1 and 6 meters to encompass the height of the EUT and its potential bandwidth



### 5.4 Open area test site information

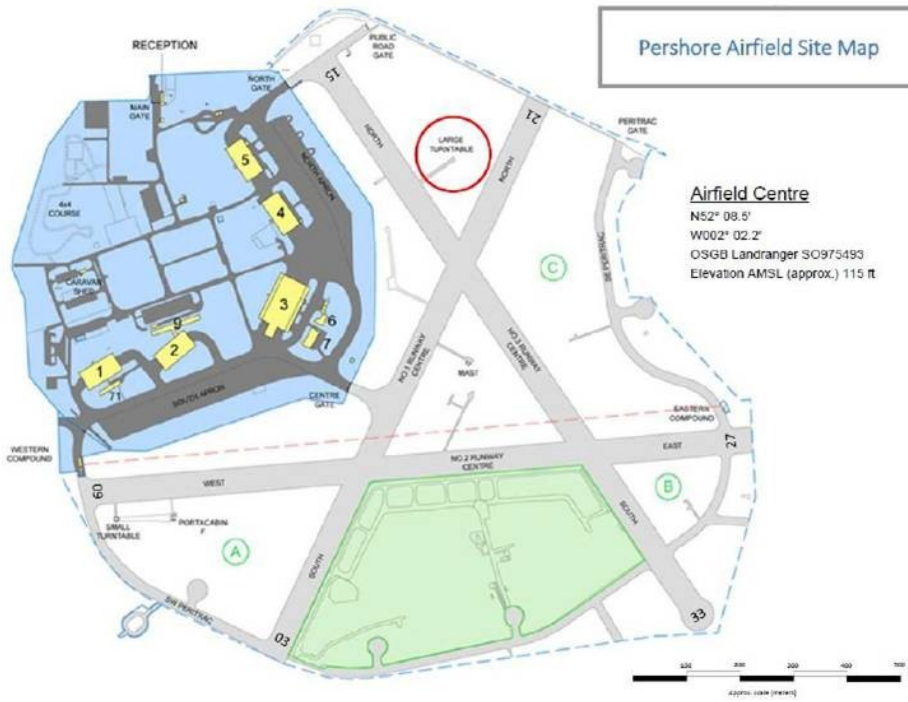

## 6 Glossary of Terms

<b>§</b>	denotes a section reference from the standard, not this document
<b>AC</b>	Alternating Current
<b>ANSI</b>	American National Standards Institute
<b>BW</b>	bandwidth
<b>C</b>	Celsius
<b>CAC</b>	Channel Availability Check
<b>CFR</b>	Code of Federal Regulations
<b>CW</b>	Continuous Wave
<b>dB</b>	decibel
<b>dBm</b>	dB relative to 1 milliwatt
<b>DC</b>	Direct Current
<b>DFS</b>	Dynamic Frequency Selection
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>EIRP</b>	Equivalent Isotropically Radiated Power
<b>ERP</b>	Effective Radiated Power
<b>EUT</b>	Equipment Under Test
<b>FCC</b>	Federal Communications Commission
<b>FHSS</b>	Frequency Hopping Spread Spectrum
<b>Hz</b>	hertz
<b>IC</b>	Industry Canada (now ISED)
<b>ISED</b>	Innovation, Science and Economic Development Canada
<b>ITU</b>	International Telecommunication Union
<b>LBT</b>	Listen Before Talk
<b>LE-LAN</b>	Licence-Exempt Local Area Network
<b>m</b>	metre
<b>max</b>	maximum
<b>MIMO</b>	Multiple Input and Multiple Output
<b>min</b>	minimum
<b>MRA</b>	Mutual Recognition Agreement
<b>MU-MIMO</b>	Multiuser Multiple Input and Multiple Output
<b>N/A</b>	Not Applicable
<b>PCB</b>	Printed Circuit Board
<b>PDF</b>	Portable Document Format
<b>Pt-mpt</b>	Point-to-multipoint
<b>Pt-pt</b>	Point-to-point
<b>PSD</b>	Power Spectral Density
<b>RF</b>	Radio Frequency
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	receiver
<b>s</b>	second
<b>SVSWR</b>	Site Voltage Standing Wave Ratio
<b>TPC</b>	Transmitter Power Control
<b>Tx</b>	transmitter
<b>UKAS</b>	United Kingdom Accreditation Service
<b>U-NII</b>	Unlicensed-National Information Infrastructure
<b>V</b>	volt
<b>W</b>	watt
<b>Ω</b>	ohm

## 7 Equipment Under Test

### 7.1 EUT Identification

- Name: PMP 450m
- MAC Address: 0a-00-3e-60-31-83
- Model Number: C050045A102A
- Software Revision: CANOPY 15.1 (W) 02/21/2017 17:09 AP-None
- Build Level / Revision Number: P5

### 7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

- Name: Cambium Networks Power Injector AC + DC
- Serial Number: 1644035834
- Model Number: E100109C G
- Build Level / Revision Number: 00
  
- Name: Netgear 5 port 10/100/1000M switch
- Serial Number: 2N211B3D00F3C
- Model Number: GS605 v4
  
- Name: Dell Latitude Laptop PC
- Serial Number:
- Model Number: E6440

## **7.3 EUT Mode of Operation**

### **7.3.1 Transmission**

The mode of operation for Tx tests was as follows...

EUT is set to permanently transmit on the required frequency, modulation type, operational mode and MIMO mode

#### **Operating Frequencies**

Operating frequencies tested 5152.5 MHz / 5159 MHz / 5200 MHz / 5247.5 MHz / 5252.5 MHz / 5330 MHz / 5343 MHz / / 5347 MHz / 5347.5 MHz

#### **Operating modes**

There are three unique operating modes. These only affect the antenna radiation pattern.

#### **Sector Mode**

This mode produces a broad antenna radiation beam.

#### **Beamforming Mode**

This produces a narrow, focused antenna beam.

#### **MU-MIMO mode**

This produces several narrow, focused antenna beams.

#### **Modulation Modes**

Supported modulation modes are QPSK, 16QAM, 64QAM and 256QAM. Each of these four modulation mode can be configured to be MIMO A or MIMO B. The differences between these MIMO modes are described below.

#### **MIMO A**

The data streams transmitted in both horizontal and vertical antenna polarisations are identical.

#### **MIMO B**

The data streams transmitted in the horizontal and vertical polarisations are independent.

Test modes are selected through a manufactures test GUI; cambium networks regulatory RF control V4.3

<b>Software GUI Power Setting for EIRP / PSD Recorded Levels</b>			
<b>Test Frequency (MHz)</b>	<b>EUT Operating Mode</b>		
	<b>SECTOR</b>	<b>BEAMFORMING</b>	<b>MU-MIMO</b>
<b>U-NII BAND 1</b>			
5152.5	28.5	32.5	32.5
5159.0	28.5	32.5	32.5
5200.0	28.0	32.0	32.0
5247.5	27.5	31.5	31.5
<b>U-NII BAND 2A</b>			
5252.5	21.5	25.5	25.5
5300.0	20.5	25.5	25.5
5343.0	21.5	25.5	25.5
5347.5	21.0	26.0	26.0

<b>Software GUI Power Setting for all other measurements</b>		
<b>Test Frequency (MHz)</b>	<b>EUT Operating Mode</b>	
	<b>SECTOR</b>	<b>BEAMFORMING / MU-MIMO</b>
5152.5	28.5	32.5
5247.5	27.5	31.5
5347.0	21.0	26.0

## 7.4 EUT Radio Frequency Parameters

### 7.4.1 General

<b>Frequency Band of operation:</b>	5150 – 5350 MHz
<b>Highest/Lowest Centre Frequencies:</b>	5152.5 – 5347.5 MHz
<b>Modulation type(s):</b>	QPSK, 16QAM, 64QAM, 256QAM
<b>Modulation Mode(s):</b>	MIMO A, MIMO B
<b>Occupied channel bandwidth(s):</b>	5 MHz
<b>Channel spacing:</b>	2.5 MHz increments
<b>Declared output power(s):</b>	+30 dBm eirp +36 dBm eirp
<b>Warning against use of alternative antennas in user manual (yes/no):</b>	Not applicable
<b>Nominal Supply Voltage:</b>	-48 Vdc (POE)
<b>Location of notice for license exempt use:</b>	Label / user manual / both.
<b>Method of prevention of use on non-US frequencies:</b>	Digitally signed software / licence key

### 7.4.2 Antennas

<b>Type:</b>	Integrated dual polarised seven-element adaptive array smart antenna
<b>Frequency range:</b>	5150 MHz – 5925 MHz
<b>Impedance:</b>	Not Applicable
<b>SWR:</b>	Not Applicable
<b>Gain:</b>	15 dBi
<b>Polarisation:</b>	Dual polarised
<b>Beam width:</b>	8° in Elevation 90° in azimuth
<b>Connector type:</b>	Integral
<b>Length:</b>	Not applicable
<b>Weight:</b>	14.2 Kg (fully assembled unit)
<b>Environmental limits:</b>	-40°C to +60°C
<b>Mounting:</b>	Pole mount

### 7.4.3 Product specific declarations

<b>Multiple antenna configuration(s), e.g. MIMO:</b>	MIMO, Beamforming, Sector
<b>Fixed pt-pt operations (yes/no):</b>	Yes
<b>Software security description:</b>	See PMP-10088.PDF
<b>TDWR interference information in user's manual (yes/no):</b>	Yes

## **7.5 EUT Description**

The EUT is a point to multipoint access point with a seven-element dual-polarised adaptive array smart antenna and multi-user MIMO (MU-MIMO) capabilities

## **8 Modifications**


Shielded cables used for radiated emissions measurements in the range 30MHz – 1GHz



## 9 EUT Test Setup


### 9.1 Block Diagram

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

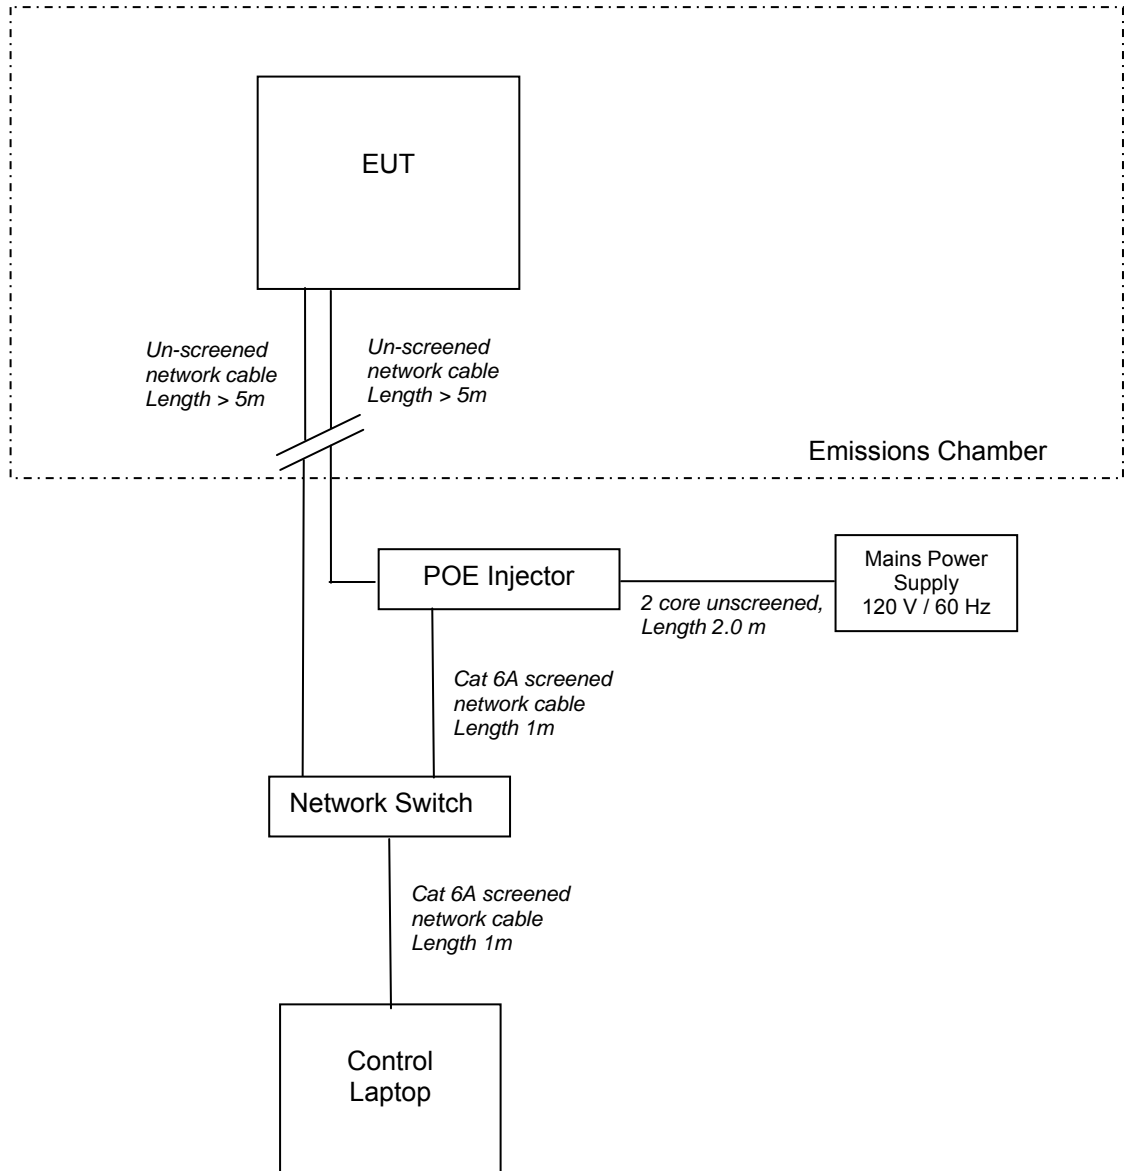

## 9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:

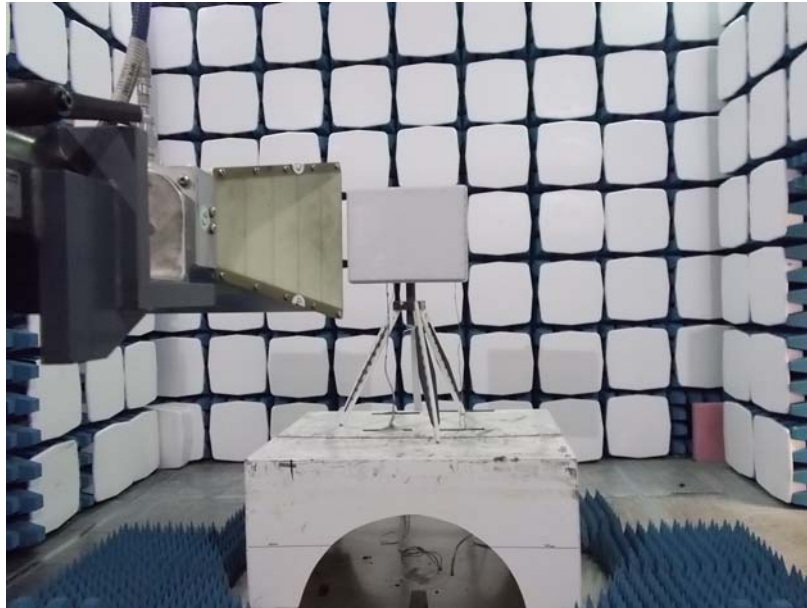



## 10 General Technical Parameters

### 10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was approx. 48 V dc from the POE.

### 10.2 Varying Test Conditions

Variation of supply voltage is required to ensure stability of the declared output power and frequency. During carrier power testing the following variations were made:

	<b>Category</b>	<b>Nominal</b>	<b>Variation</b>
<input type="checkbox"/>	Mains		85% and 115%
<input type="checkbox"/>	Battery	New battery	N/A
<input checked="" type="checkbox"/>	Other	-48Vdc	POE

## 11 Radiated emissions

### 11.1 Definitions

#### *Spurious emissions*

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

#### *Restricted bands*

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

### 11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber (REF940)
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6 KDB 789033 D02 II G
EUT Channels / Frequencies Measured:	5155 MHz / 5247.5 MHz / 5347 MHz
EUT Channel Bandwidths:	5 MHz
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Det:	Up to 1 GHz: quasi-peak Above 1 GHz: RMS average and Peak

#### Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 48 %RH	20%RH to 75%RH (as declared)
Supply: -48 Vdc POE	-48 Vdc POE

#### Test Limits

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

#### General Field Strength Limits for License-Exempt Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3m)
30-88	100
88-216	150
216-960	200
Above 960	500

### 11.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak Det and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak Det and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and Det type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB $\mu$ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB $\mu$ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. where average Det on pulsed harmonic understates the power);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

#### Figure i Test Setup

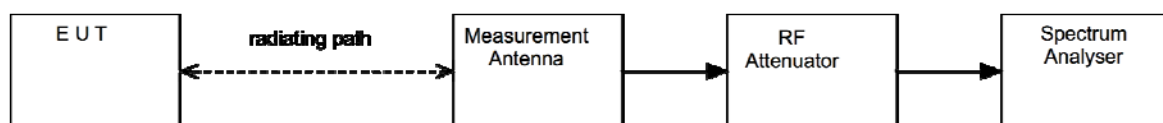


Measurements are made at 5155 MHz, 5247.5 and at 5347 MHz.

Measurement made at 5155 MHz; 5247.5 and at 5347 MHz are at a power setting lower than the setting used for maximum EIRP and are set to the highest level whilst still achieving compliance with the requirements.

These frequencies are determined as the lowest middle and highest high power operating frequencies based on power setting required to achieve compliance with the requirements.

## Test Setup Photograph(s)

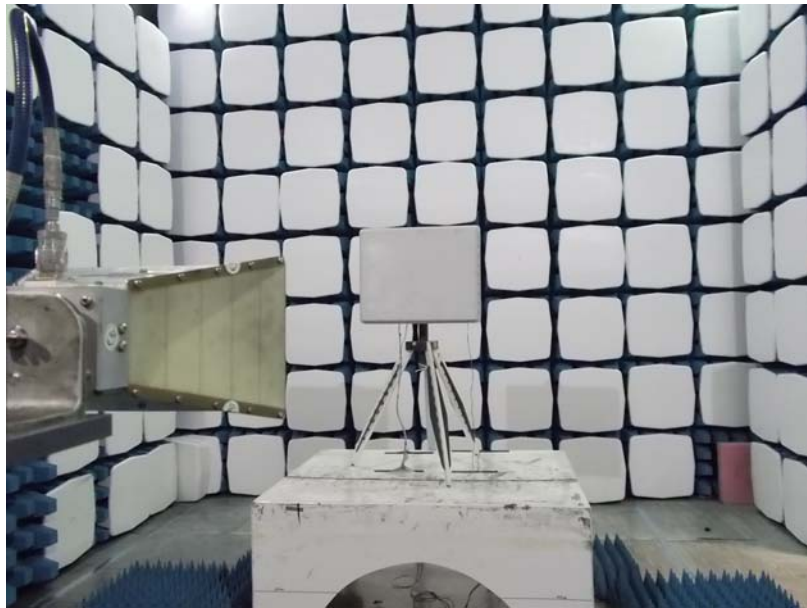


### 11.4 Test Equipment


<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Bilog	Chase	CBL611/A	L290	02/12/2014	24	12/12/2018
ESVS10	R&S	ESVS10	L352	18/07/2016	12	18/07/2017
Spectrum Analyser	R&S	FSU46	U281	07/06/2016	12	07/06/2017
Horn Antenna	EMCO	3115	L139	25/09/2015	24	25/09/2017
Pre-Amplifier	Agilent	8449B	L572	07/02/2017	12	07/02/2018
Horn Antenna	Flann	20240-20	L300	07/04/2016	24	07/04/2018
Horn Antenna	Flann	22240-20	L301	11/07/2016	12	11/07/2017
6 dB Attenuator	Bird	8304-060-N	U376	Calibrate in Use		
10 dB Attenuator	Bird	8304-100-N	L222	Calibrate in Use		
High Pass Filter	Atlantic Microwave Ltd	AFH-0700	U558	Calibrate in Use		

### 11.5 Test Results

#### Channel: 5155 MHz, Sector Mode; 256QAM; MIMO A

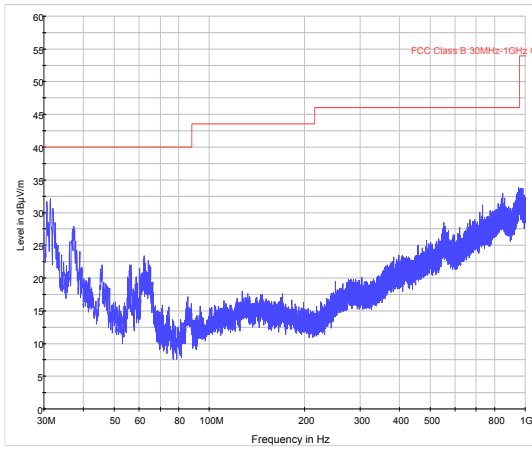


30 MHz – 1 GHz

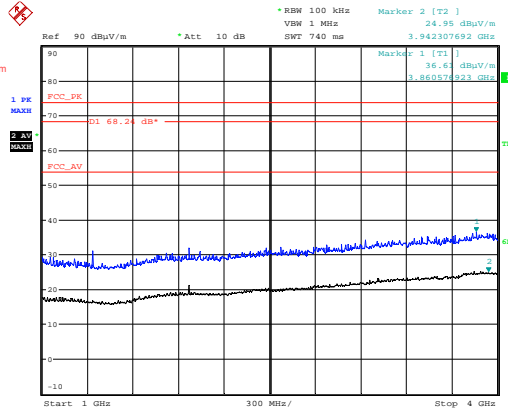


Date: 20.FEB.2017 17:36:08

1 GHz – 4 GHz

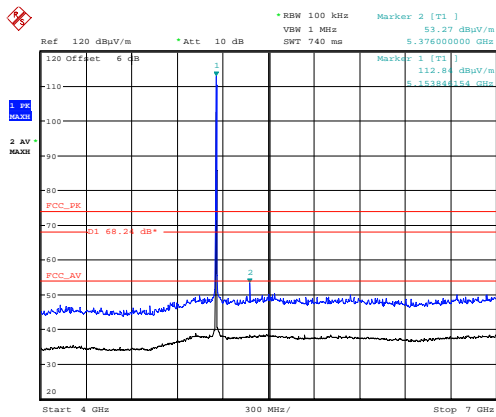

Date: 20.FEB.2017 15:55:57


4 GHz – 7 GHz

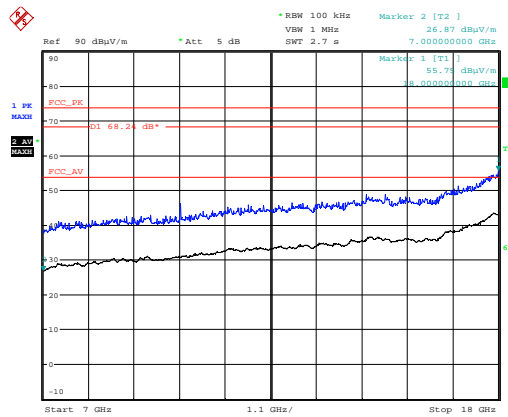

Date: 20.FEB.2017 18:01:23


7 GHz – 18 GHz



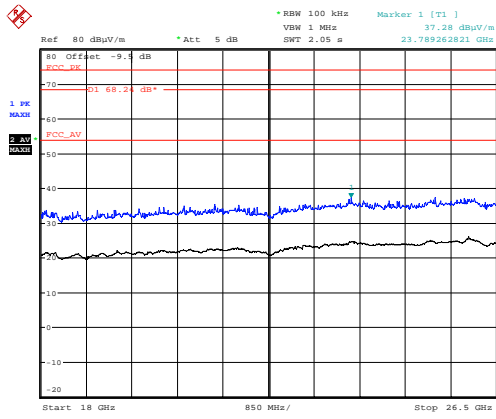

Date: 21.FEB.2017 12:08:50

18 GHz – 26.5 GHz

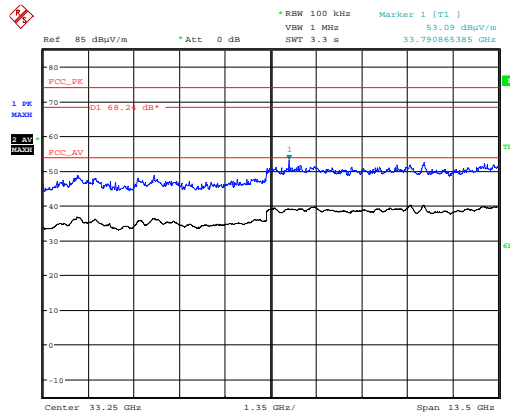


Date: 21.FEB.2017 17:25:36

26.5 GHz – 40 GHz

Channel: 5155 MHz, Beamforming & MU-Mimo Mode; 256QAM; MIMO A										
Det	Freq. (MHz)	Meas'd Emission (dBµV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Field Strength (dBµV/m)	Distance Extrap'n Factor (dB)	Field Strength (µV/m)	Limit (µV/m)
QP	31.45	9.80	0.80	18.28	N/A	0.00	0.00	28.88	27.80	100
QP	37.40	10.50	0.80	15.20	N/A	0.00	0.00	26.50	21.13	100
QP	62.25	15.60	1.00	6.08	N/A	0.00	0.00	22.68	13.61	100
Pk	5376.00	55.56	4.50	34.30	35.97	0.00	0.00	58.39	830.81	5000
Av	5376.00	43.63	4.50	34.30	35.97	0.00	0.00	46.46	210.38	500


Channel: 5155 MHz, Sector Mode; 256QAM; MIMO A										
Det	Freq. (MHz)	Meas'd Emission (dBµV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Field Strength (dBµV/m)	Distance Extrap'n Factor (dB)	Field Strength (µV/m)	Limit (µV/m)
QP	31.45	9.80	0.80	18.28	N/A	0.00	0.00	28.88	27.80	100
QP	37.40	10.50	0.80	15.20	N/A	0.00	0.00	26.50	21.13	100
QP	62.25	15.60	1.00	6.08	N/A	0.00	0.00	22.68	13.61	100
Pk	5376.00	55.67	4.50	34.30	35.97	0.00	0.00	58.50	841.40	5000
Av	5376.00	43.97	4.50	34.30	35.97	0.00	0.00	46.80	218.78	500

Emissions below 1GHz noted are present regardless of EUT transmit state of operation  
 Variation in 5376MHz Emission Level due to variation in output power setting

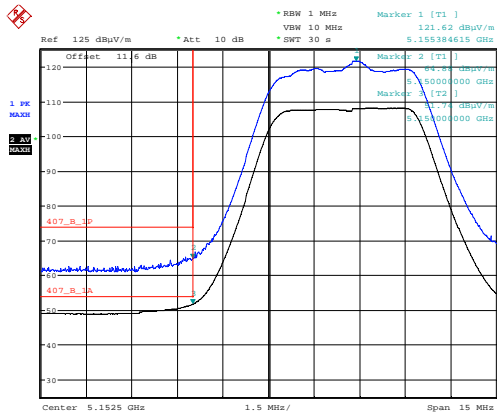

Date: 16.FEB.2017 12:46:01


MIMO A

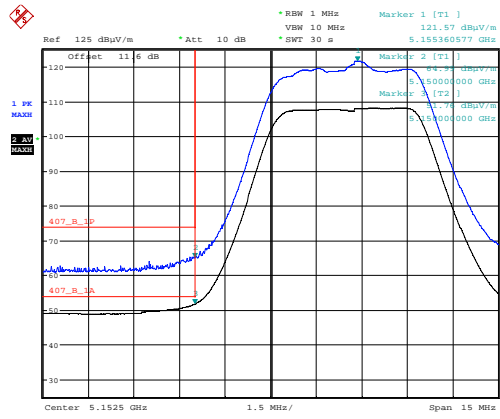

Date: 16.FEB.2017 12:44:02


SECTOR QPSK

MIMO B

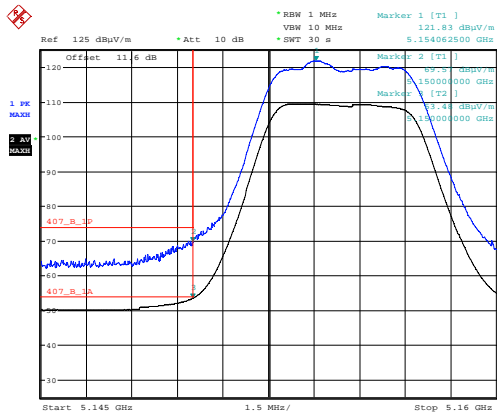

Date: 16.FEB.2017 12:21:59


MIMO A

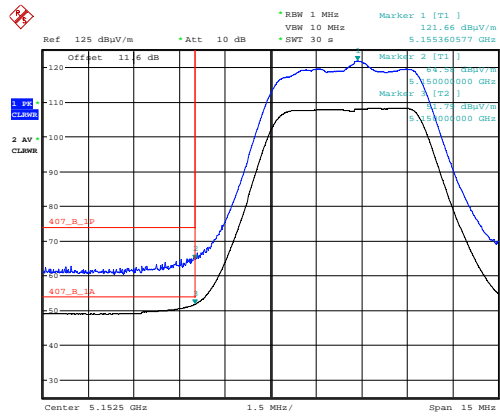

Date: 16.FEB.2017 12:39:47

SECTOR 256QAM


MIMO B

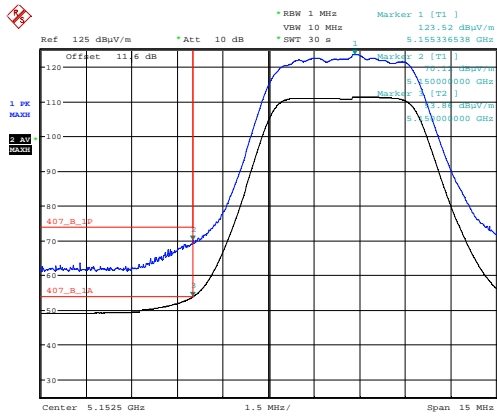

Date: 16.FEB.2017 13:19:59


MIMO A

BEAMFORMING QPSK

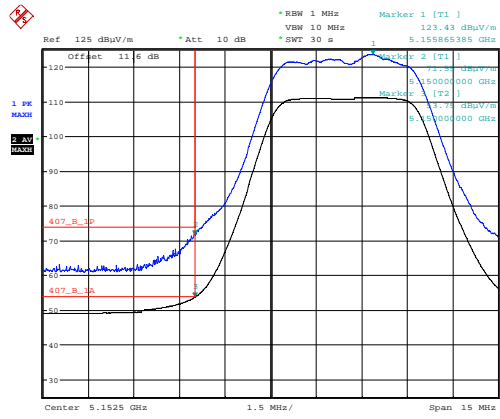

Date: 16.FEB.2017 13:16:05


MIMO B

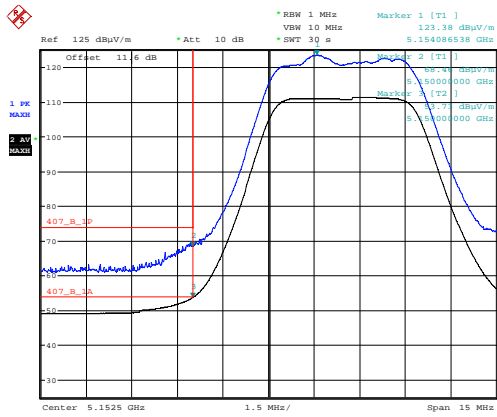

Date: 16.FEB.2017 13:18:20

MIMO A



BEAMFORMING 256QAM

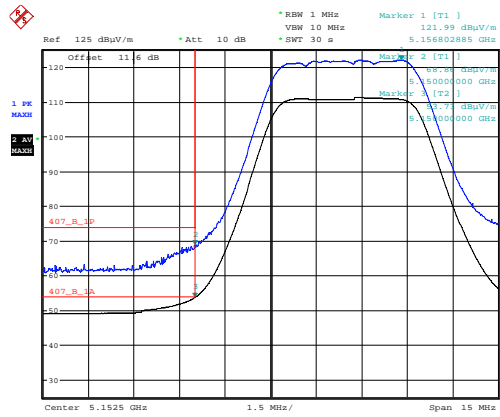

Date: 16.FEB.2017 13:17:09

MIMO B


Channel: 5247.5 MHz, Sector Mode; 256QAM; MIMO A

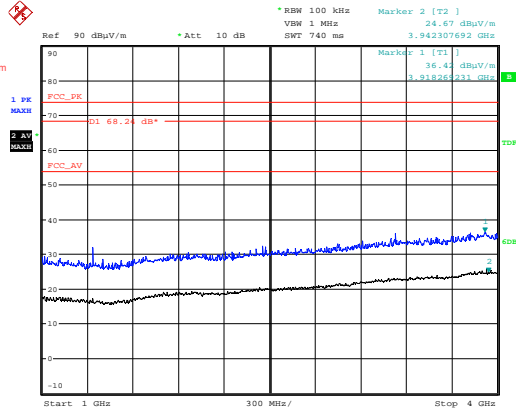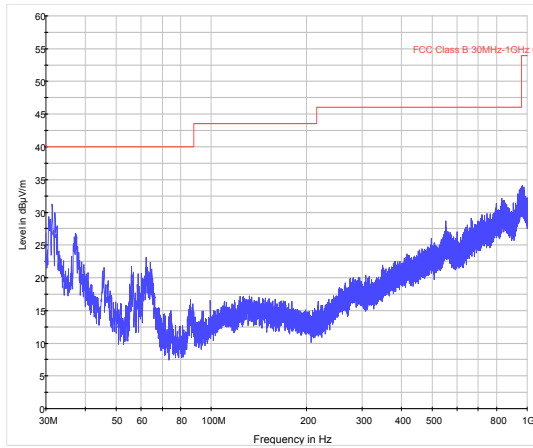

Date: 20.FEB.2017 17:19:04


30 MHz – 1 GHz

1 GHz – 4 GHz

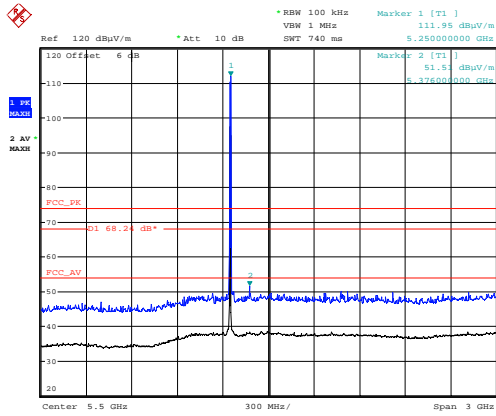


Date: 20.FEB.2017 16:56:53

4 GHz – 7 GHz

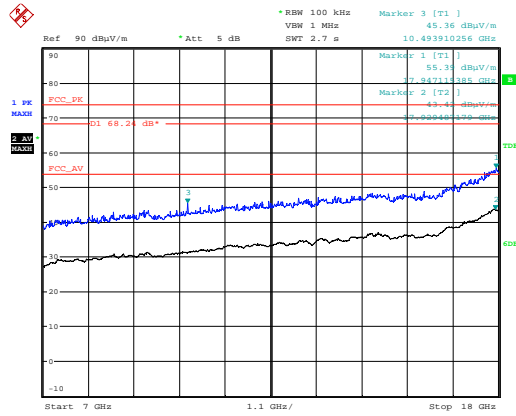


Date: 21.FEB.2017 10:13:09

13 GHz – 18 GHz

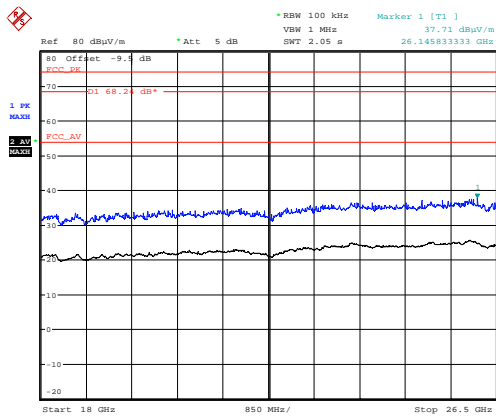

Date: 21.FEB.2017 11:41:01

18 GHz – 26.5 GHz

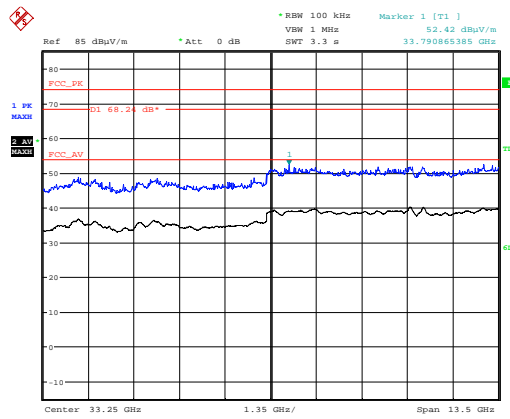

Date: 21.FEB.2017 17:49:43

26.5 GHz – 40 GHz

**Channel: 5247.5 MHz, Beamforming & MU-Mimo Mode; 256QAM; MIMO A**

Det	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Field Strength (dBμV/m)	Distance Extrap'n Factor (dB)	Field Strength (μV/m)	Limit (μV/m)
QP	31.45	9.80	0.80	18.28	N/A	0.00	0.00	28.88	27.80	100
QP	37.40	10.50	0.80	15.20	N/A	0.00	0.00	26.50	21.13	100
QP	62.25	15.60	1.00	6.08	N/A	0.00	0.00	22.68	13.61	100
Pk	5376.00	54.67	4.50	34.30	35.97	0.00	0.00	57.50	749.89	5000
Av	5376.00	43.81	4.50	34.30	35.97	0.00	0.00	46.64	214.78	500

**Channel: 5247.5 MHz, Sector Mode; QPSK; MIMO A**


Det	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Field Strength (dBμV/m)	Distance Extrap'n Factor (dB)	Field Strength (μV/m)	Limit (μV/m)
QP	31.45	9.80	0.80	18.28	N/A	0.00	0.00	28.88	27.80	100
QP	37.40	10.50	0.80	15.20	N/A	0.00	0.00	26.50	21.13	100
QP	62.25	15.60	1.00	6.08	N/A	0.00	0.00	22.68	13.61	100
Pk	5376.00	55.09	4.50	34.30	35.97	0.00	0.00	57.92	787.05	5000
Av	5376.00	43.09	4.50	34.30	35.97	0.00	0.00	45.92	197.70	500

**Channel: 5247.5 MHz, Sector Mode; 256QAM; MIMO A**


Det	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Field Strength (dBμV/m)	Distance Extrap'n Factor (dB)	Field Strength (μV/m)	Limit (μV/m)
QP	31.45	9.80	0.80	18.28	N/A	0.00	0.00	28.88	27.80	100
QP	37.40	10.50	0.80	15.20	N/A	0.00	0.00	26.50	21.13	100
QP	62.25	15.60	1.00	6.08	N/A	0.00	0.00	22.68	13.61	100
Pk	5376.00	55.45	4.50	34.30	35.97	0.00	0.00	58.28	820.35	5000
Av	5376.00	43.18	4.50	34.30	35.97	0.00	0.00	46.01	199.76	500

Emissions below 1GHz noted are present regardless of EUT transmit state of operation  
 Variation in 5376MHz Emission Level due to variation in output power setting

Channel: 5347 MHz, Sector Mode; 256QAM; MIMO A

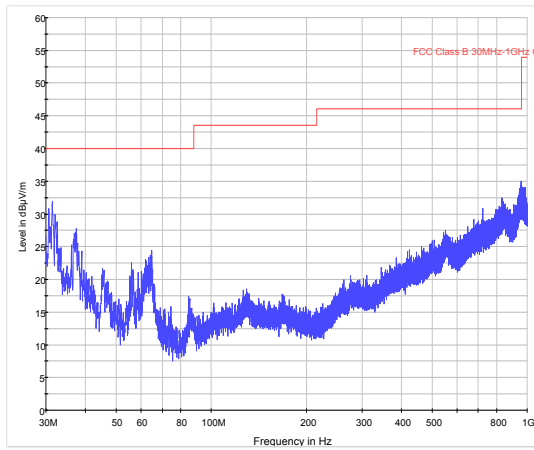


30 MHz – 1 GHz

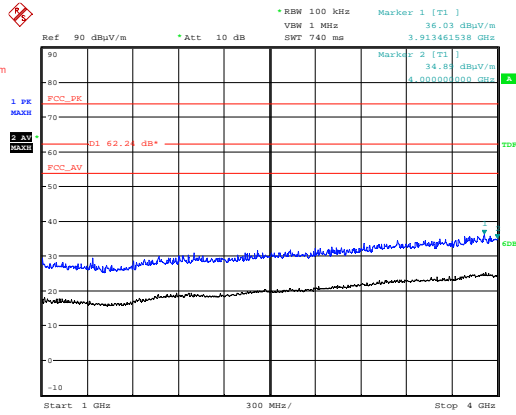


1 GHz – 4 GHz

Date: 22.FEB.2017 18:09:41

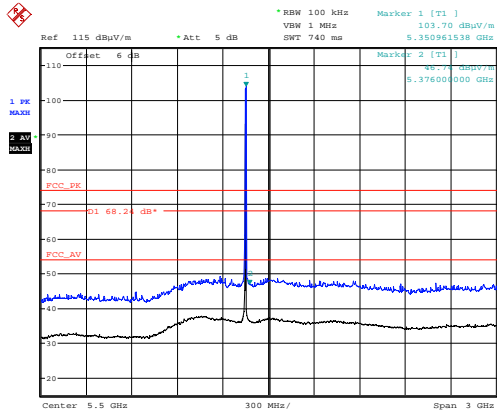


4 GHz – 7 GHz

Date: 22.FEB.2017 17:54:24

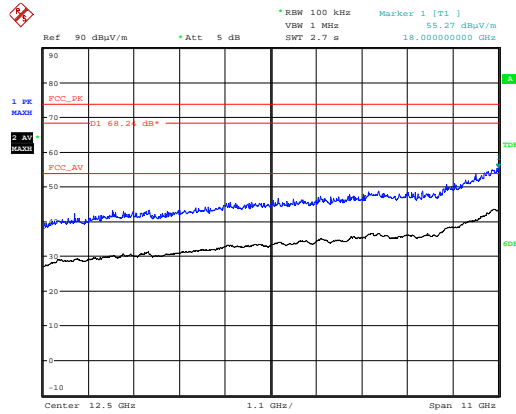


7 GHz – 18 GHz

Date: 24.FEB.2017 12:15:20

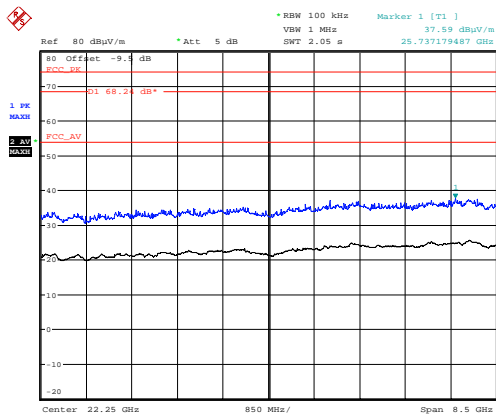

Date: 22.FEB.2017 11:25:16

18 GHz – 26.5 GHz

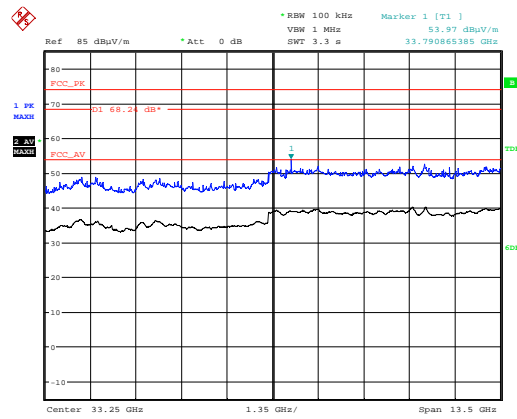

Date: 22.FEB.2017 10:43:32

26.5 GHz – 40 GHz

<b>Channel: 5347 MHz, Beamforming &amp; MU-Mimo Mode; 256QAM; MIMO A</b>										
<b>Det</b>	<b>Freq. (MHz)</b>	<b>Meas'd Emission (dBμV)</b>	<b>Cable Loss (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Pre-amp Gain (dB)</b>	<b>Duty Cycle Corr'n (dB)</b>	<b>Field Strength (dBμV/m)</b>	<b>Distance Extrap'n Factor (dB)</b>	<b>Field Strength (μV/m)</b>	<b>Limit (μV/m)</b>
QP	31.45	9.80	0.80	18.28	N/A	0.00	0.00	28.88	27.80	100
QP	37.40	10.50	0.80	15.20	N/A	0.00	0.00	26.50	21.13	100
QP	62.25	15.60	1.00	6.08	N/A	0.00	0.00	22.68	13.61	100
Pk	5376.00	56.54	4.50	34.30	35.97	0.00	0.00	59.37	930.04	5000
Av	5376.00	45.01	4.50	34.30	35.97	0.00	0.00	47.84	246.60	500



<b>Channel: 5347 MHz, Sector Mode; 256QAM; MIMO A</b>										
<b>Det</b>	<b>Freq. (MHz)</b>	<b>Meas'd Emission (dBμV)</b>	<b>Cable Loss (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Pre-amp Gain (dB)</b>	<b>Duty Cycle Corr'n (dB)</b>	<b>Field Strength (dBμV/m)</b>	<b>Distance Extrap'n Factor (dB)</b>	<b>Field Strength (μV/m)</b>	<b>Limit (μV/m)</b>
QP	31.45	9.80	0.80	18.28	N/A	0.00	0.00	28.88	27.80	100
QP	37.40	10.50	0.80	15.20	N/A	0.00	0.00	26.50	21.13	100
QP	62.25	15.60	1.00	6.08	N/A	0.00	0.00	22.68	13.61	100
Pk	5376.00	56.87	4.50	34.30	35.97	0.00	0.00	59.70	966.05	5000
Av	5376.00	45.30	4.50	34.30	35.97	0.00	0.00	48.13	254.98	500

Emissions below 1 GHz noted are present regardless of EUT transmit state of operation

Variation in 5376MHz Emission Level due to variation in output power setting

SECTOR

MIMO A

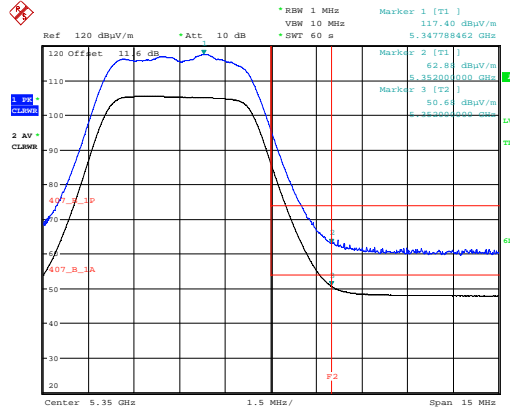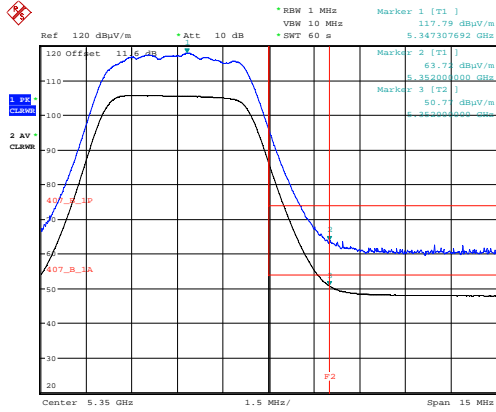



Date: 16.FEB.2017 14:09:44

Date: 16.FEB.2017 14:11:18

QPSK

> 2 MHz from Bandedge

256 QAM

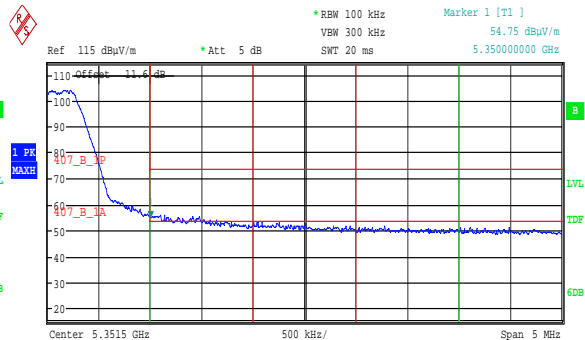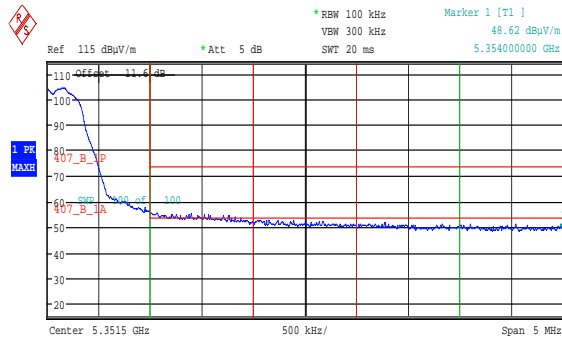



Parameter	Value
Tx Channel Bandwidth	1 MHz
Power	60.77 dBuV/m
Adjacent Channel Bandwidth	1 MHz
Lower	63.21 dBuV/m
Upper	59.67 dBuV/m

Parameter	Value
Tx Channel Bandwidth	1 MHz
Power	60.68 dBuV/m
Adjacent Channel Bandwidth	1 MHz
Lower	63.05 dBuV/m
Upper	59.46 dBuV/m

QPSK

Integration Method - Peak Level

256QAM

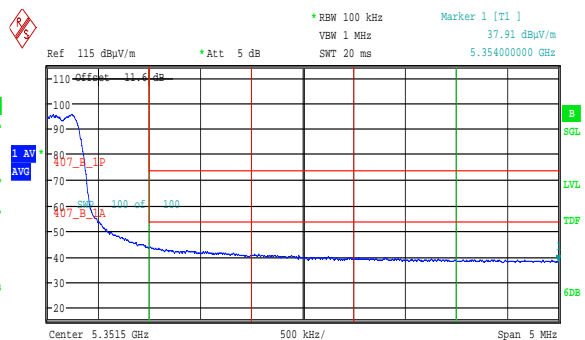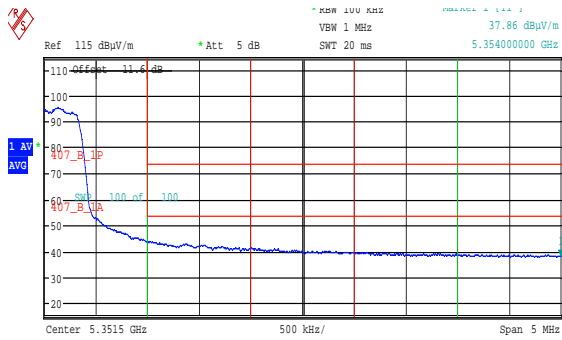

Parameter	Value
Tx Channel Bandwidth	1 MHz
Power	49.32 dBuV/m
Adjacent Channel Bandwidth	1 MHz
Lower	51.34 dBuV/m
Upper	48.15 dBuV/m

Parameter	Value
Tx Channel Bandwidth	1 MHz
Power	49.09 dBuV/m
Adjacent Channel Bandwidth	1 MHz
Lower	51.05 dBuV/m
Upper	48.08 dBuV/m

QPSK



Integration Method - Average Level

256QAM



SECTOR

MIMO B

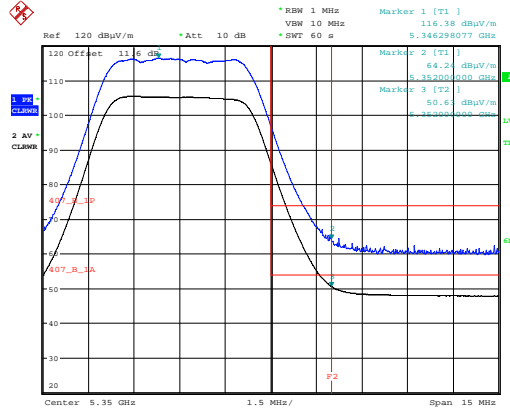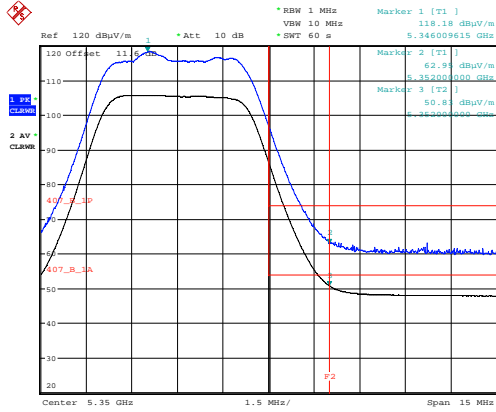


Date: 16.FEB.2017 14:05:07

Date: 16.FEB.2017 14:15:35


QPSK

> 2 MHz from Bandedge

256 QAM

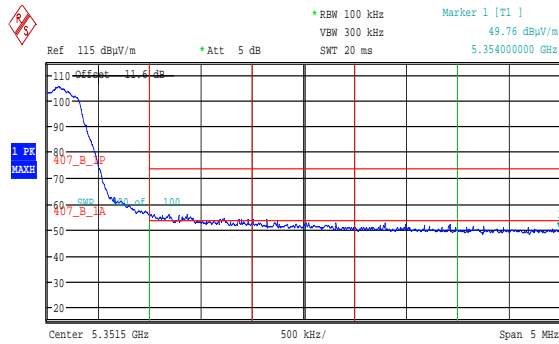

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	60.91 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	63.18 dBuV/m
Spacing	1 MHz	Upper	59.68 dBuV/m

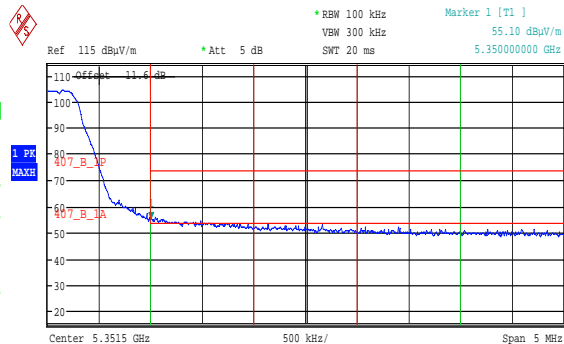


<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	60.78 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	63.00 dBuV/m
Spacing	1 MHz	Upper	59.61 dBuV/m


QPSK

Integration Method - Peak Level

256QAM

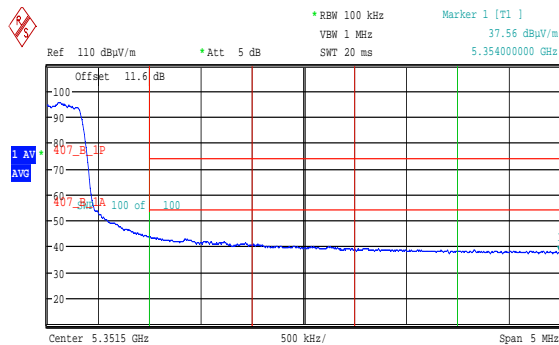

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	49.13 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	51.28 dBuV/m
Spacing	1 MHz	Upper	47.91 dBuV/m

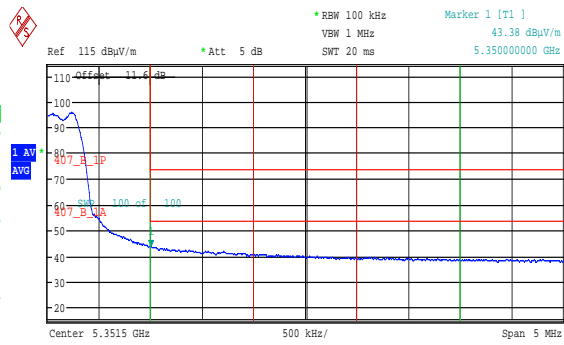

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	49.07 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	51.05 dBuV/m
Spacing	1 MHz	Upper	48.06 dBuV/m



QPSK

Integration Method - Average Level

256QAM

BEAMFORMING

MIMO A

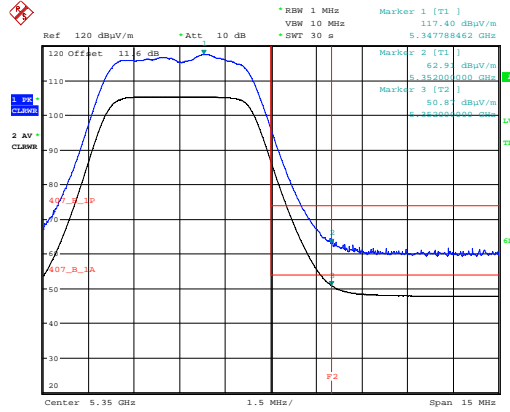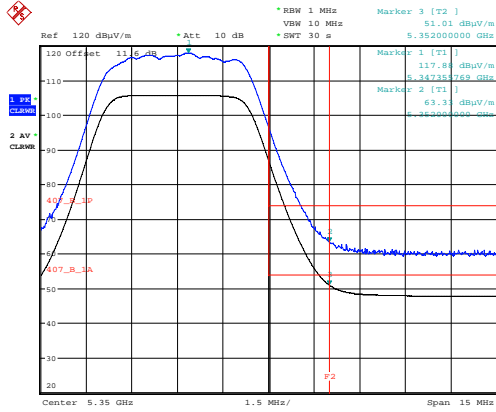


Date: 16.FEB.2017 14:57:48

Date: 16.FEB.2017 14:59:21


QPSK

> 2 MHz from Bandedge

256 QAM

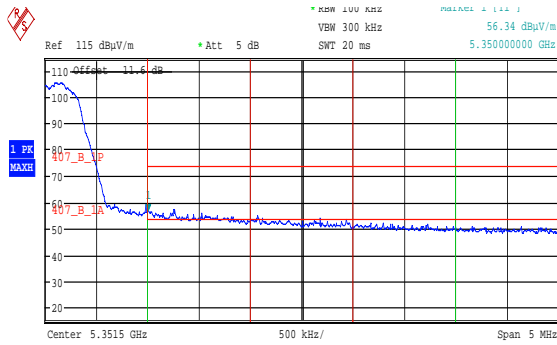

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	61.62 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	63.81 dBuV/m
Spacing	1 MHz	Upper	59.85 dBuV/m

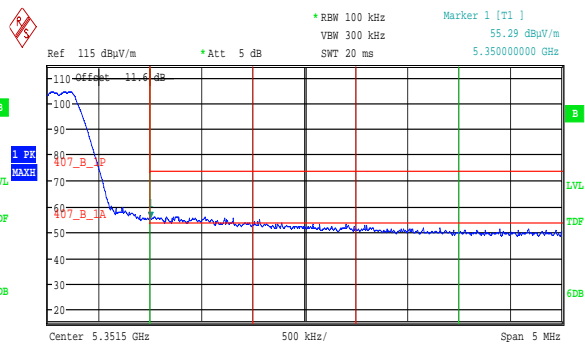


<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	61.48 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	63.92 dBuV/m
Spacing	1 MHz	Upper	59.91 dBuV/m


QPSK

Integration Method - Peak Level

256QAM

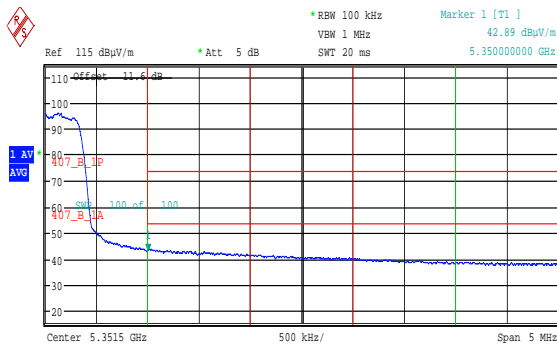

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	49.90 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	51.72 dBuV/m
Spacing	1 MHz	Upper	48.42 dBuV/m

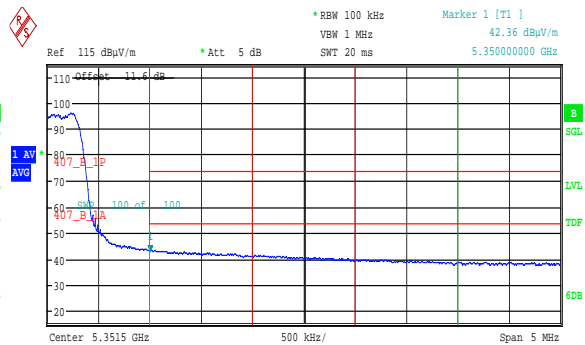

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	49.69 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	51.44 dBuV/m
Spacing	1 MHz	Upper	48.29 dBuV/m



QPSK

Integration Method - Average Level

256QAM

BEAMFORMING

MIMO B

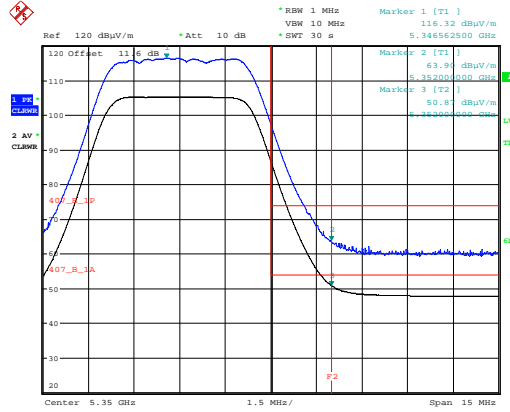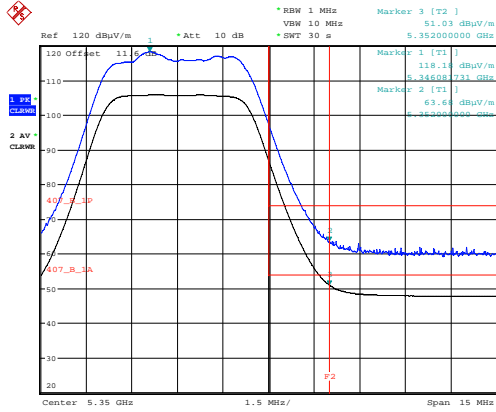



Date: 16.FEB.2017 14:45:36

Date: 16.FEB.2017 15:05:25

QPSK

> 2 MHz from Bandedge

256 QAM

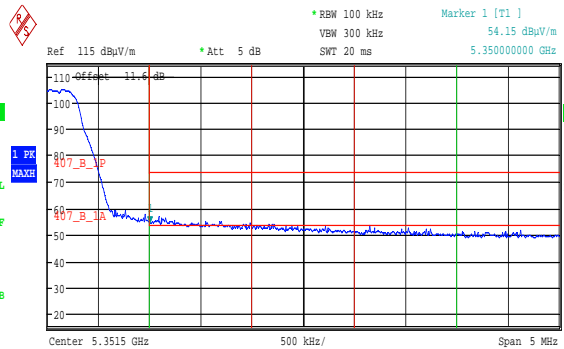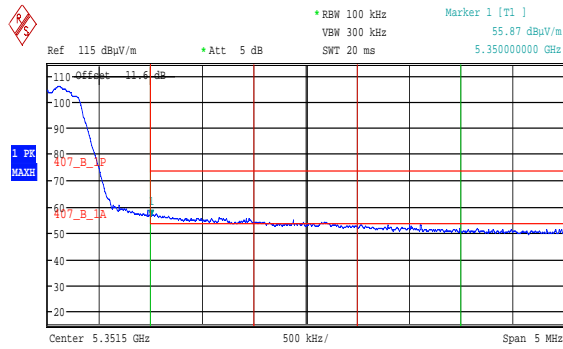



<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	62.75 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	64.65 dBuV/m
Spacing	1 MHz	Upper	61.05 dBuV/m

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	61.66 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	63.54 dBuV/m
Spacing	1 MHz	Upper	60.23 dBuV/m

QPSK

Integration Method - Peak Level

256QAM

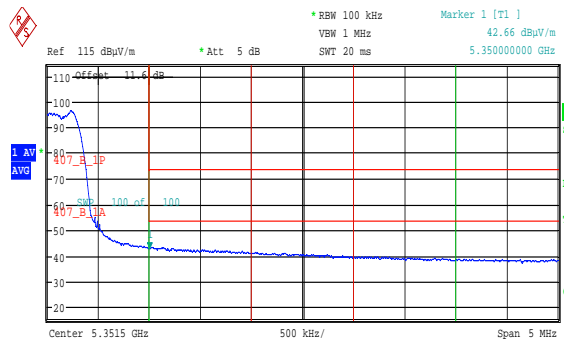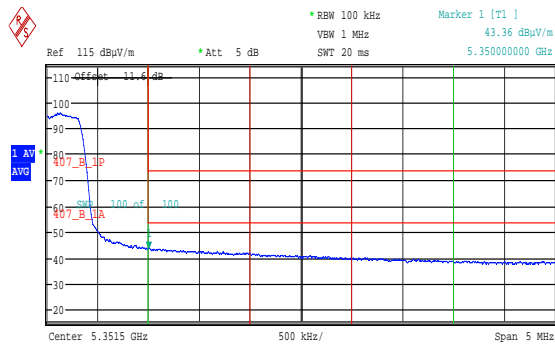

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	49.86 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	51.66 dBuV/m
Spacing	1 MHz	Upper	48.45 dBuV/m

<b>Tx Channel</b>			
Bandwidth	1 MHz	Power	49.61 dBuV/m
<b>Adjacent Channel</b>			
Bandwidth	1 MHz	Lower	51.40 dBuV/m
Spacing	1 MHz	Upper	48.25 dBuV/m

QPSK

Integration Method - Average Level

256QAM

## 12 AC power-line conducted emissions

### 12.1 Definition

Line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network.

### 12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Transient Lab (U390)
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.2
EUT Channels / Frequencies Measured:	5515 MHz
EUT Channel Bandwidths:	5 MHz
EUT Modulation:	QPSK MIMO A
Deviations From Standard:	None
Measurement BW:	10 kHz
Measurement Detectors:	Quasi-Peak and Average, RMS

### Environmental Conditions (Normal Environment)

Temperature: 18 °C	+15 °C to +35 °C (as declared)
Humidity: 40 %RH	20%RH to 75%RH (as declared)
Supply: -48Vdc POE	-48Vdc POE

### Test Limits

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in Table 3.

**Table 3 – AC Power Line Conducted Emission Limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-Peak	Average**
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5.0	56	46
5.0 – 30.0	60	50

\* The level decreases linearly with the logarithm of the frequency.

\*\* A linear average detector is required.


### 12.3 Test Method

With the EUT setup in a screened room, as per section 9 of this report and connected as per Figure ii, the power line emissions were measured on a spectrum analyzer / EMI receiver.

AC power line conducted emissions from the EUT are checked first by preview scans with peak and average detectors covering both live and neutral lines. A spectrum analyzer is used to determine if any periodic emissions are present.

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans. Final measurements were performed with EUT set at its maximum duty in transmit mode.

Figure ii Test Setup

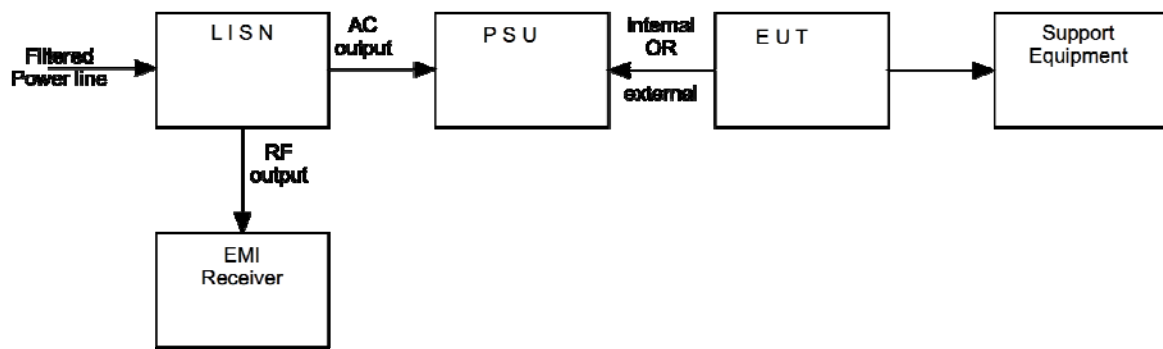

Test Setup Photograph(s)




12.4 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Lisn	R&S	ESH3-Z5.831.5	U195	25/05/2016	12	25/05/2017
Receiver	R&S	ESHS10	U003	25/06/2016	12	25/06/2017
Pulse Limiter	R&S	ESH3-Z2	U559	28/07/2015	24	28/07/2017

### 12.5 Test Results

Conducted emissions on Mains 9kHz-30MHz ESHS10 + UH195 +UH559

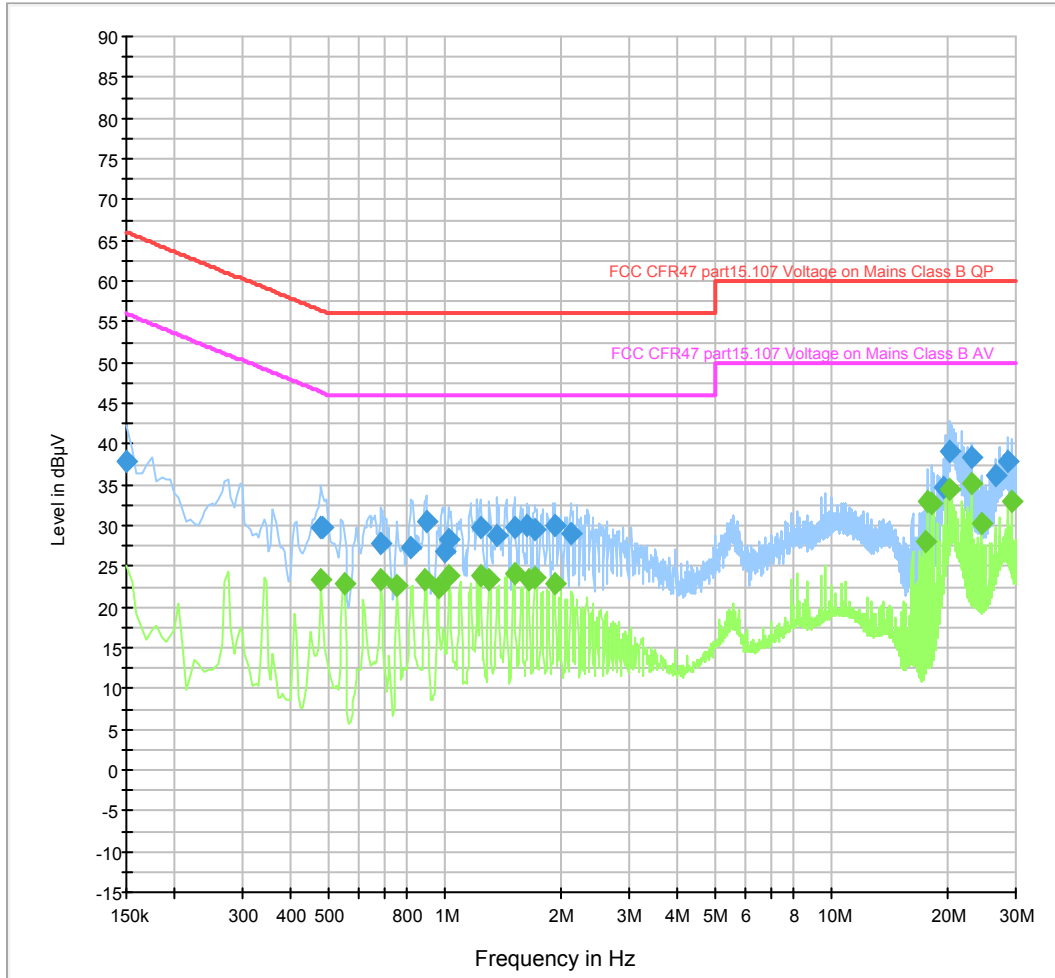

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	37.9	2000.0	10.000	GND	N	10.1	28.1	66.0
0.480000	29.8	2000.0	10.000	GND	N	10.1	26.5	56.3
0.485000	29.7	2000.0	10.000	GND	N	10.1	26.6	56.3
0.685000	27.7	2000.0	10.000	GND	N	10.2	28.3	56.0
0.815000	27.2	2000.0	10.000	GND	N	10.2	28.8	56.0
0.895000	30.4	2000.0	10.000	GND	N	10.2	25.6	56.0
1.000000	26.8	2000.0	10.000	GND	L1	10.2	29.2	56.0
1.025000	28.4	2000.0	10.000	GND	N	10.2	27.6	56.0
1.235000	29.6	2000.0	10.000	GND	N	10.2	26.4	56.0
1.365000	28.8	2000.0	10.000	GND	L1	10.2	27.2	56.0
1.515000	29.8	2000.0	10.000	GND	L1	10.2	26.2	56.0
1.640000	30.0	2000.0	10.000	GND	N	10.2	26.0	56.0
1.720000	29.4	2000.0	10.000	GND	L1	10.2	26.6	56.0
1.925000	29.9	2000.0	10.000	GND	N	10.2	26.1	56.0
2.125000	29.1	2000.0	10.000	GND	N	10.2	26.9	56.0
19.585000	34.7	2000.0	10.000	GND	L1	11.2	25.3	60.0
20.260000	39.2	2000.0	10.000	GND	L1	11.2	20.8	60.0
23.130000	38.3	2000.0	10.000	GND	L1	11.5	21.7	60.0
26.610000	36.1	2000.0	10.000	GND	L1	11.6	23.9	60.0
28.685000	37.8	2000.0	10.000	GND	L1	11.6	22.2	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.480000	23.3	2000.0	10.000	GND	N	10.1	23.1	46.3
0.550000	22.8	2000.0	10.000	GND	N	10.2	23.2	46.0
0.685000	23.3	2000.0	10.000	GND	N	10.2	22.7	46.0
0.755000	22.7	2000.0	10.000	GND	N	10.2	23.3	46.0
0.890000	23.4	2000.0	10.000	GND	N	10.2	22.6	46.0
0.960000	22.3	2000.0	10.000	GND	N	10.2	23.7	46.0
1.030000	23.8	2000.0	10.000	GND	N	10.2	22.2	46.0
1.235000	23.9	2000.0	10.000	GND	N	10.2	22.1	46.0
1.305000	23.3	2000.0	10.000	GND	N	10.2	22.7	46.0
1.515000	24.1	2000.0	10.000	GND	N	10.2	21.9	46.0
1.650000	23.4	2000.0	10.000	GND	N	10.2	22.6	46.0
1.720000	23.6	2000.0	10.000	GND	N	10.2	22.4	46.0
1.925000	23.0	2000.0	10.000	GND	N	10.2	23.0	46.0
17.570000	28.1	2000.0	10.000	GND	L1	11.1	21.9	50.0
17.695000	33.0	2000.0	10.000	GND	L1	11.1	17.0	50.0
18.245000	32.7	2000.0	10.000	GND	L1	11.1	17.3	50.0
20.260000	34.3	2000.0	10.000	GND	L1	11.2	15.7	50.0
23.130000	35.2	2000.0	10.000	GND	L1	11.5	14.8	50.0
24.350000	30.2	2000.0	10.000	GND	L1	11.6	19.8	50.0
29.235000	33.1	2000.0	10.000	GND	L1	11.6	16.9	50.0

## 13 Emission Bandwidth

### 13.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

### 13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber (REF940)
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.9
EUT Channels / Frequencies Measured:	5155 MHz / 5247.5 MHz / 5347 MHz
EUT Channel Bandwidths:	5 MHz
EUT Test Modulations:	QPSK / 16 QAM / 64QAM / 256QAM
EUT Data Mode:	MIMO A / MIMO B
Deviations From Standard:	None
Measurement BW:	50kHz
(FCC requirement: 100 kHz)	
Spectrum Analyzer Video BW:	200 kHz
(requirement at least 3x RBW)	
Measurement Span:	10MHz
(requirement 2 to 5 times OBW)	
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 21 °C	+15 °C to +35 °C (as declared)
Humidity: 35 %RH	20%RH to 75%RH (as declared)
Supply: -48Vdc POE	-48Vdc POE

### Test Limits

*Emission bandwidth.* The emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier centre frequency and one above the carrier centre frequency, that are 26 dB down relative to the maximum level of the modulated carrier.


### 13.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.



Figure iii Test Setup

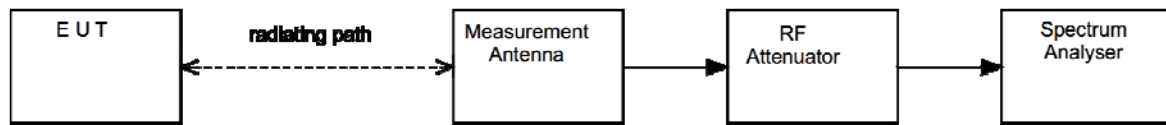


### 13.4 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU46	U281	07/06/2016	12	07/06/2017
Horn Antenna	EMCO	3115	L139	25/09/2015	24	25/09/2017


### 13.5 Test Results

5155 MHz					
Modulation Mode	MIMO Mode	$F_L$ (MHz)	$F_H$ (MHz)	26dB Bandwidth (MHz)	Result
QPSK	A	5152.564103	5157.435897	4871.794	PASS
16QAM	A	5152.532051	5157.435897	4903.846	PASS
64QAM	A	5152.564103	5157.403846	4839.743	PASS
256QAM	A	5152.564103	5157.435897	4871.794	PASS
QPSK	B	5152.580128	5157.435897	4855.769	PASS
16QAM	B	5152.580128	5157.419872	4839.744	PASS
64QAM	B	5152.580128	5157.419872	4839.744	PASS
256QAM	B	5152.580128	5157.435897	4855.769	PASS

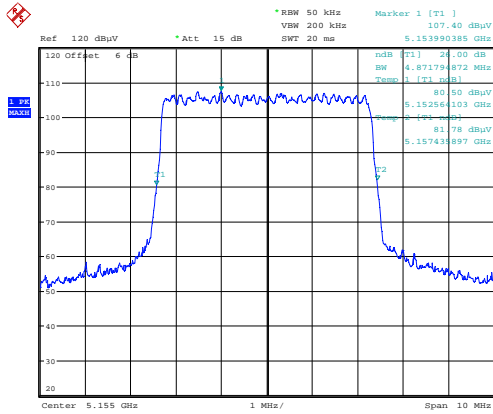

Date: 17.FEB.2017 16:27:14


MIMO A

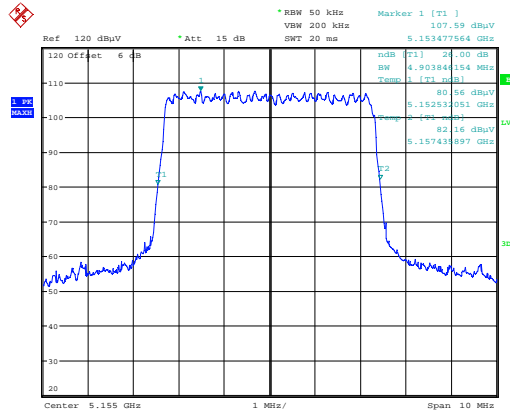

Date: 17.FEB.2017 16:28:40


QPSK 5155 MHz

MIMO B

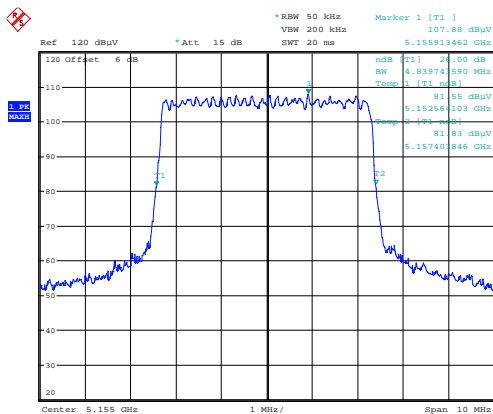

Date: 17.FEB.2017 16:29:50


MIMO A

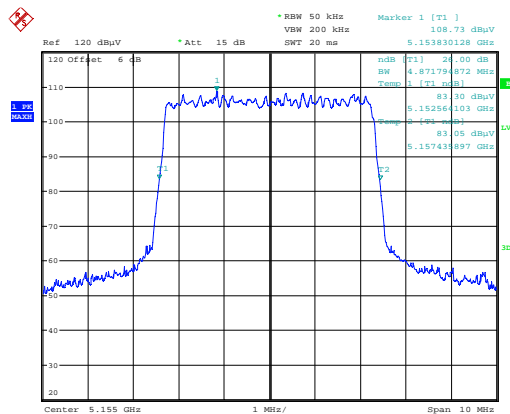

Date: 17.FEB.2017 16:30:55


16QAM 5155 MHz

MIMO B

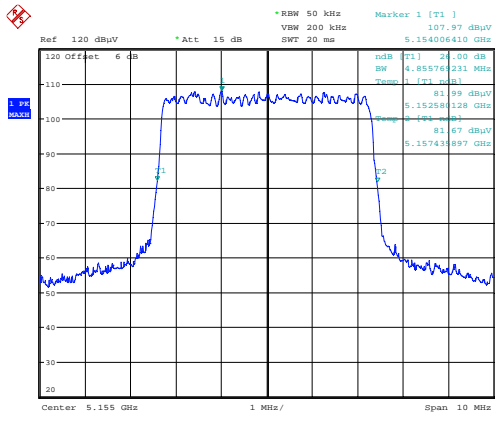

Date: 17.FEB.2017 16:34:33


MIMO A

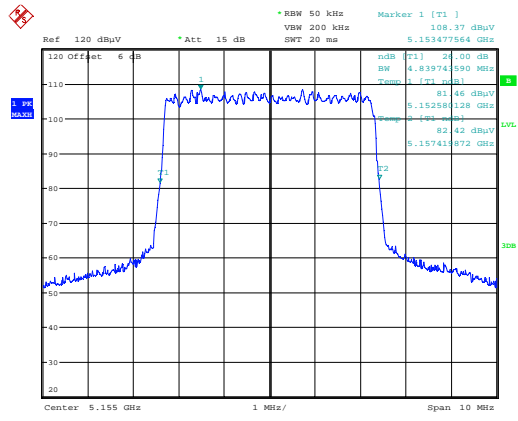

Date: 17.FEB.2017 16:35:10


MIMO B

64QAM 5155 MHz

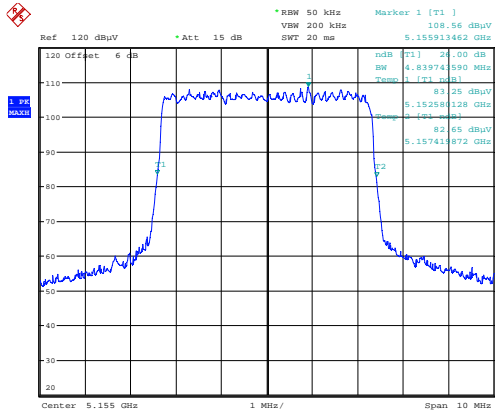

Date: 17.FEB.2017 16:35:43

MIMO A

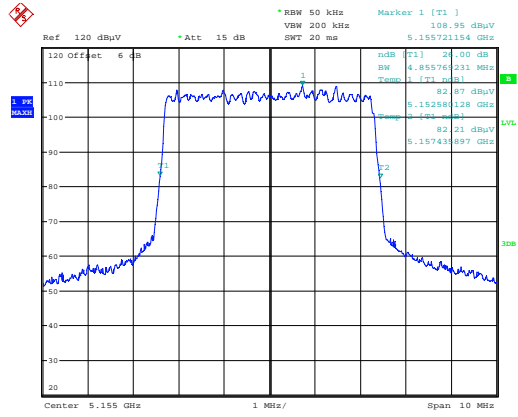


Date: 17.FEB.2017 16:36:39

MIMO B


256QAM 5155 MHz

5247.5 MHz					
Modulation Mode	MIMO Mode	$F_L$ (MHz)	$F_H$ (MHz)	26dB Bandwidth (kHz)	Result
QPSK	A	5245.096154	5249.935897	4839.743	PASS
16QAM	A	5245.048077	5249.951923	4903.846	PASS
64QAM	A	5245.048077	5249.919872	4871.795	PASS
256QAM	A	5245.064103	5249.935897	4871.794	PASS
QPSK	B	5245.064103	5249.935897	4871.794	PASS
16QAM	B	5245.080128	5249.919872	4839.744	PASS
64QAM	B	5245.080128	5249.903846	4823.718	PASS
256QAM	B	5245.080128	5249.935897	4855.769	PASS

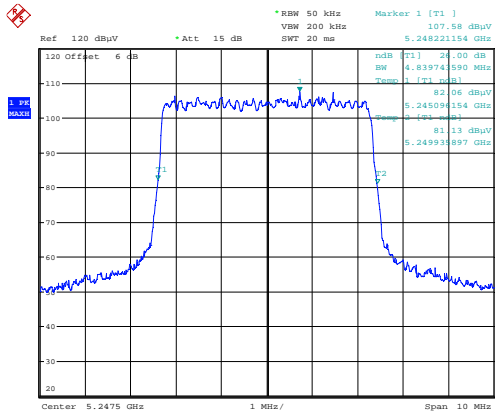

Date: 17.FEB.2017 16:15:54


MIMO A

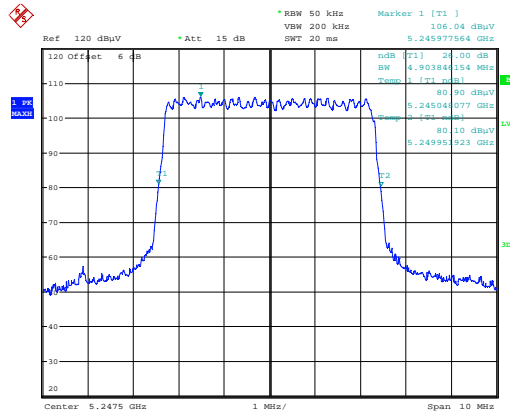

Date: 17.FEB.2017 16:17:04


QPSK 5247.5 MHz

MIMO B

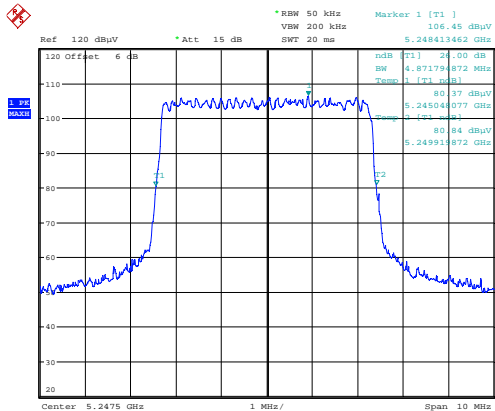

Date: 17.FEB.2017 16:18:00


MIMO A

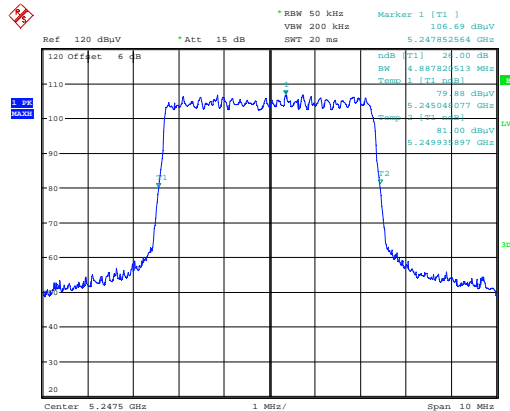

Date: 17.FEB.2017 16:18:50


16QAM 5247.5 MHz

MIMO B

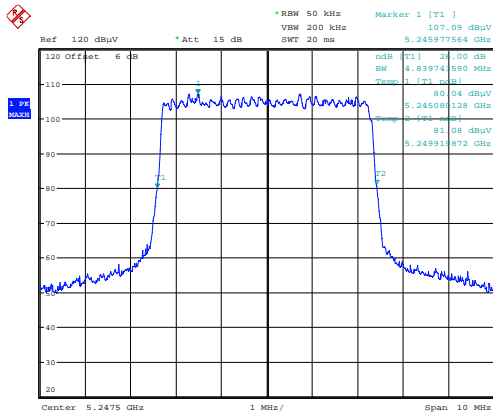

Date: 17.FEB.2017 16:21:03


MIMO A

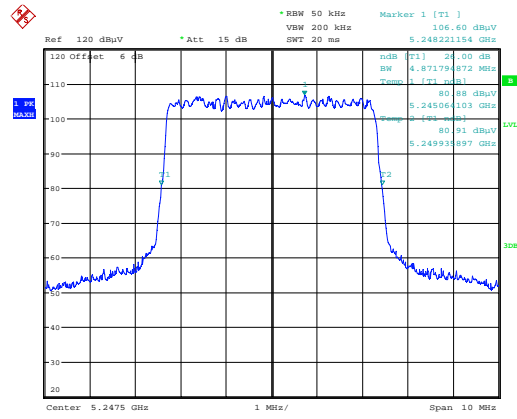

Date: 17.FEB.2017 16:20:00


64QAM 5247.5 MHz

MIMO B

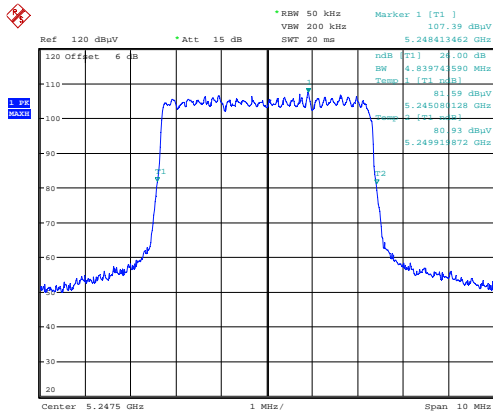

Date: 17.FEB.2017 16:22:02

MIMO A

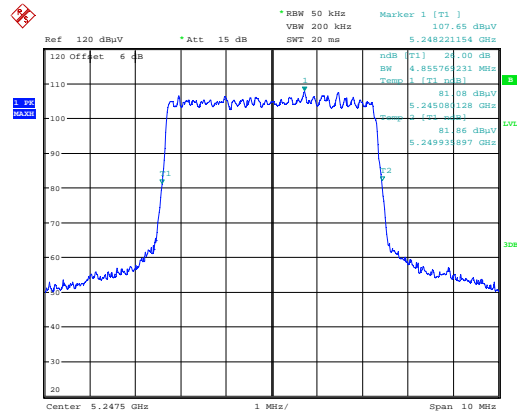


Date: 17.FEB.2017 16:22:55

256QAM 5247.5 MHz


MIMO B

Modulation Mode: 5347 MHz					
Modulation Mode	MIMO Mode	$F_L$ (MHz)	$F_H$ (MHz)	26dB Bandwidth (kHz)	Result
QPSK	A	5344.548077	5349.419872	4871.795	PASS
16QAM	A	5344.548077	5349.419872	4871.795	PASS
64QAM	A	5344.532051	5349.403846	4871.795	PASS
256QAM	A	5344.564103	5349.419872	4855.769	PASS
QPSK	B	5344.564103	5349.419872	4855.769	PASS
16QAM	B	5344.564103	5349.403846	4839.743	PASS
64QAM	B	5344.532051	5349.403846	4871.795	PASS
256QAM	B	5344.548077	5349.419872	4871.795	PASS

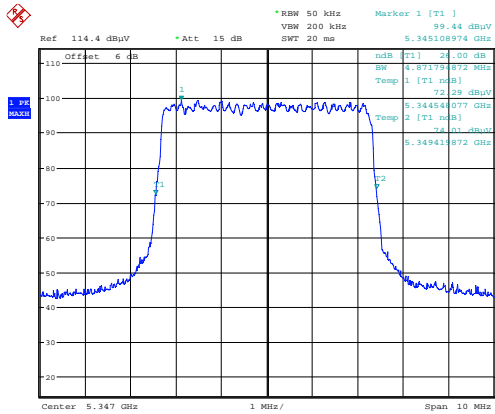

Date: 17.FEB.2017 16:04:49


MIMO A

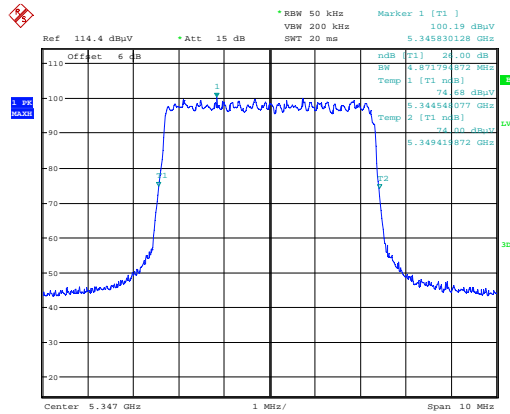

Date: 17.FEB.2017 16:03:53


QPSK 5347 MHz

MIMO B

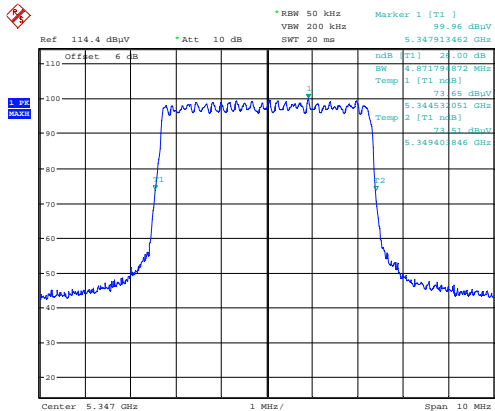

Date: 17.FEB.2017 16:01:31


MIMO A

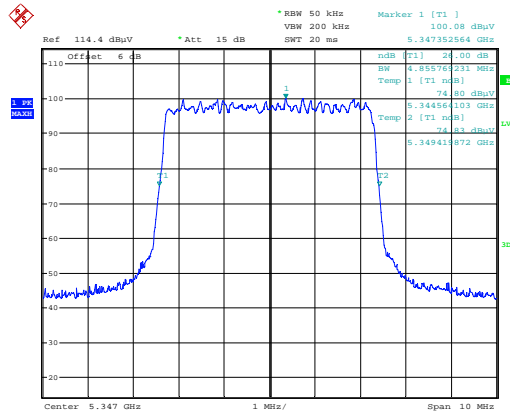

Date: 17.FEB.2017 16:02:21

16QAM 5347 MHz


MIMO B

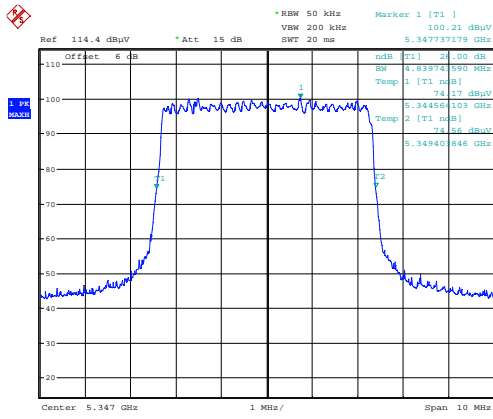

Date: 17.FEB.2017 16:06:49


MIMO A

64QAM 5347 MHz

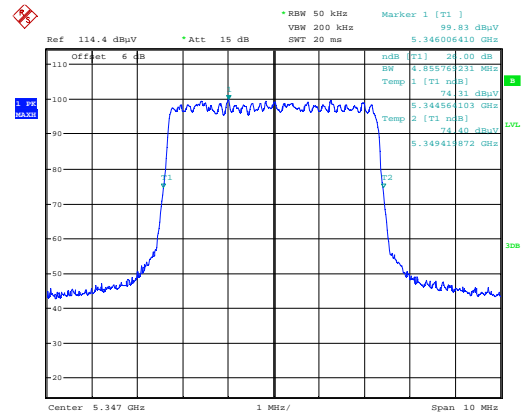

Date: 17.FEB.2017 16:05:59


MIMO B

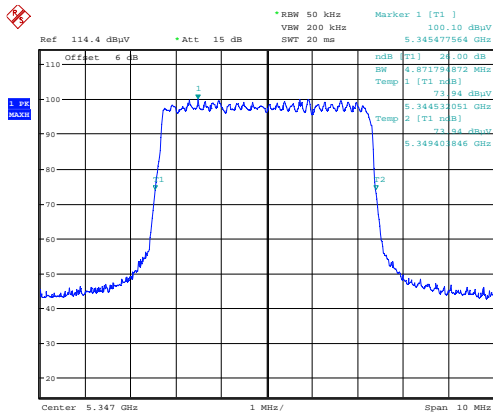

Date: 17.FEB.2017 16:07:38

MIMO A

256QAM 5347 MHz

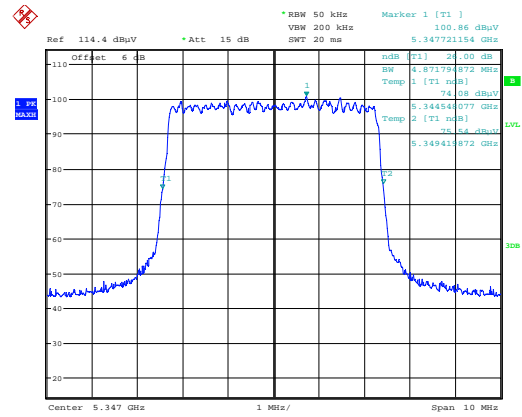

Date: 17.FEB.2017 16:08:54

MIMO B

## 14 Maximum conducted output power

### 14.1 Definition

The maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

### 14.2 Test Parameters

Test Location:	30 Meter Open Area Test Site
Test Chamber:	Not Applicable
Test Standard and Clause:	ANSI C63.10-2013, Clause 12.3 KDB 789033 D02 Clauses II A1 and E3 KDB 662911 D01 Clause E
EUT Channels / Frequencies Measured:	5152.5 MHz / 5159 MHz / 5200 MHz / 5247.5 MHz 5252.5 MHz / 5330 MHz / 5343 MHz / 5347.5 MHz
EUT Occupied Bandwidths:	5 MHz
EUT Duty Cycle:	100%
Deviations From Standard:	None
Measurement BW:	Not Applicable
Measurement Span:	Not Applicable
Measurement Points:	Not Applicable
Measurement Detector:	RMS
Measurement Distance:	30 meters
Voltage Extreme Environment Test Range:	-48 Vdc POE

### Environmental Conditions (Normal Environment)

Temperature: 8 °C	+15 °C to +35 °C (as declared)
Humidity: 42 %RH	20%RH to 75%RH (as declared)



## Test Limits

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 14.3 Test Method

The EUT was setup as per section 9 of this report and, as per Figure iv, once maximised for a particular polarisation the power meter was used to measure each polarisation in turn.

The results were summed to determine total power for both polarisations at the maximised angle as shown in the tables below to ensure compliance with the limit.

The measurement was repeated by maximising in the other polarisation and summing

The measurements were performed with EUT set at its maximum duty cycle.

All modulation schemes, data rates and EUT operating modes were used on one frequency to determine worst case.


Worst case modes used on all frequencies

Results recorded for highest total power orientation only

EIRP was determined using substitution method.

<b>Software GUI Power Setting for Recorded Levels</b>			
<b>Test Frequency (MHz)</b>	<b>EUT Operating Mode</b>		
	<b>SECTOR</b>	<b>BEAMFORMING</b>	<b>MU-MIMO</b>
<b>U-NII BAND 1</b>			
5152.5	28.5	32.5	32.5
5159.0	28.5	32.5	32.5
5200.0	28.0	32.0	32.0
5247.5	27.5	31.5	31.5
<b>U-NII BAND 2A</b>			
5252.5	21.5	25.5	25.5
5300.0	20.5	25.5	25.5
5343.0	21.5	25.5	25.5
5347.5	21.0	26.0	26.0

Figure iv Test Setup

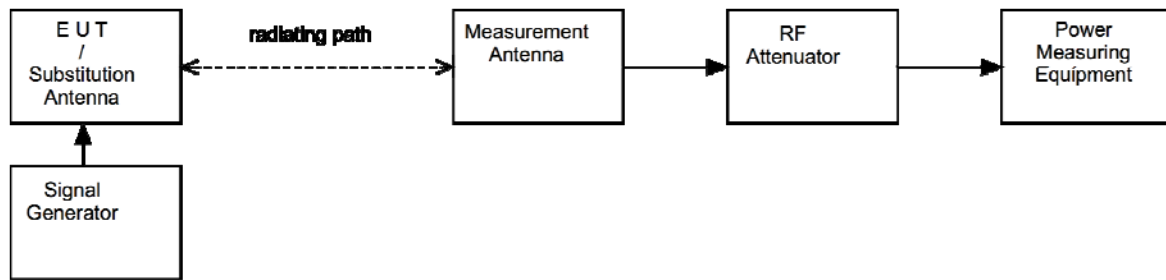

#### 14.4 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Signal Generator	Agilent	E4438C	REF844	13/01/16	24	13/01/18
Spectrum Analyser	R&S	FSU46	REF910	05/07/16	12	05/07/17
Power Meter	Dare	RPR3006W	REF2112	22/03/16	12	22/03/17
Pre Amp	Agilent	8449B	L572	07/02/17	12	07/02/18
1-18GHz Horn	EMCO	3115	L138	13/04/16	24	13/04/18
Octave Horn Antenna	EMCO	3161-03	N/A*	18/02/15	36	18/02/18

\* Not applicable, hired equipment

## 14.5 Test Results – U-NII-Band 1

<b>Channel: 5152.5 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	774.46	28.89	30.96
H	472.06	26.74	
<b>Result:</b>		PASS	

<b>Channel: 5152.5 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	774.46	28.89	30.96
H	472.06	26.74	
<b>Result:</b>		PASS	

<b>Channel: 5152.5 MHz ; Modulation: 256QAM A ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	554.63	27.44	31.01
V	706.32	28.49	
<b>Result:</b>		PASS	

<b>Channel: 5159 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	524.81	27.20	29.30
H	326.59	25.14	
<b>Result:</b>		PASS	

<b>Channel: 5159 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	549.54	27.40	29.74
H	392.64	25.94	
<b>Result:</b>		PASS	

<b>Channel: 5159 MHz ; Modulation: 256QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	472.06	26.74	29.99
V	524.81	27.20	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	539.51	27.32	29.67
H	386.37	25.87	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	509.33	27.07	29.37
V	356.45	25.52	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 64 QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	509.33	27.07	29.37
V	356.45	25.52	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	497.74	26.97	29.32
V	356.45	25.52	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	571.48	27.57	29.60
V	340.41	25.32	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	545.76	27.37	29.48
V	340.41	25.32	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 64 QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	545.76	27.37	29.48
V	340.41	25.32	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	558.47	27.47	29.54
V	340.41	25.32	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: QPSK; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	480.84	26.82	29.17
H	344.35	25.37	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 16QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	480.84	26.82	29.17
V	344.35	25.37	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 64QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	386.37	25.87	29.16
V	438.53	26.42	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 256QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	386.37	25.87	29.22
V	448.75	26.52	
<b>Result:</b>		PASS	



<b>Channel: 5200 MHz; Modulation: QPSK; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	423.64	26.27	29.56
V	480.84	26.82	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 16QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	423.64	26.27	29.51
V	469.89	26.72	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 64QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	423.64	26.27	29.51
V	469.89	26.72	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 256QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	423.64	26.27	29.56
V	480.84	26.82	
<b>Result:</b>		PASS	

<b>Channel: 5247.5 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	478.63	26.80	29.17
V	347.54	25.41	
<b>Result:</b>		PASS	

<b>Channel: 5247.5 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	338.84	25.30	29.25
V	502.34	27.01	
<b>Result:</b>		PASS	

<b>Channel: 5247.5 MHz ; Modulation: 256QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	468.81	26.71	29.11
H	346.74	25.40	
<b>Result:</b>		PASS	

## 14.6 Test Results – U-NII-Band 2a

<b>Channel: 5252.5 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	123.03	20.90	23.36
V	93.97	19.73	
<b>Result:</b>		PASS	

<b>Channel: 5252.5 MHz ; Modulation: 64QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	85.11	19.30	23.32
V	129.72	21.13	
<b>Result:</b>		PASS	

<b>Channel: 5252.5 MHz ; Modulation: 64QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	93.33	19.70	23.37
V	123.88	20.93	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	123.31	20.91	23.12
V	82.04	19.14	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	112.46	20.51	22.81
V	78.34	18.94	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	117.76	20.71	22.92
V	78.34	18.94	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	112.46	20.51	22.81
V	78.34	18.94	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	115.08	20.61	22.82
V	76.56	18.84	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	117.76	20.71	22.89
V	76.56	18.84	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	115.08	20.61	22.82
V	76.56	18.84	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	115.08	20.61	22.82
V	76.56	18.84	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: QPSK; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	127.06	21.04	23.31
H	87.30	19.41	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 16QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	124.17	20.94	23.29
H	89.33	19.51	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 64QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	121.34	20.84	23.24
H	89.33	19.51	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 256QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	124.17	20.94	23.29
H	89.33	19.51	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: QPSK; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	95.72	19.81	23.48
V	127.06	21.04	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 16QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	121.34	20.84	23.24
H	89.33	19.51	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 64QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	121.34	20.84	23.24
H	89.33	19.51	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 256QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	89.33	19.51	23.29
V	124.17	20.94	
<b>Result:</b>		PASS	

<b>Channel: 5343 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	123.59	20.92	23.26
H	88.10	19.45	
<b>Result:</b>		PASS	

<b>Channel: 5343 MHz ; Modulation: 64QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	110.15	20.42	22.80
H	80.35	19.05	
<b>Result:</b>		PASS	

<b>Channel: 5343 MHz ; Modulation: 64QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	120.78	20.82	23.42
H	98.86	19.95	
<b>Result:</b>		PASS	



<b>Channel: 5347.5 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	122.18	20.87	23.02
V	78.34	18.94	
<b>Result:</b>		PASS	

<b>Channel: 5347.5 MHz ; Modulation: 16QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
V	118.58	20.74	23.34
H	97.05	19.87	
<b>Result:</b>		PASS	

<b>Channel: 5347.5 MHz ; Modulation: 16QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>EIRP (mW)</b>	<b>EIRP (dBm)</b>	<b>Total EIRP (dBm)</b>
H	106.41	20.27	23.37
V	110.66	20.44	
<b>Result:</b>		PASS	

## 15 Power spectral density

### 15.1 Definition

The power spectral density is the total energy output per unit bandwidth from a pulse or sequence of pulses for which the transmit power is at its maximum level, divided by the total duration of the pulses.

### 15.2 Test Parameters

Test Location:	30 Meter Open Area Test Site
Test Chamber:	Not Applicable
Test Standard and Clause:	ANSI C63.10-2013, Clause 12.5 KDB 789033 D02 Clauses II A1 and F KDB 662911 D01 Clause E
EUT Channels / Frequencies Measured:	5152.5 MHz / 5159 MHz / 5200 MHz / 5247.5 MHz 5252.5 MHz / 5330 MHz / 5343 MHz / 5347.5 MHz
EUT Channel Bandwidths:	5 MHz
Deviations From Standard:	None
Measurement BW:	1 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	2MHz
Measurement Span: (requirement 1.5 times Channel BW)	>30MHz
Measurement Detector:	RMS

### Environmental Conditions (Normal Environment)

Temperature: 8 °C	+15 °C to +35 °C (as declared)
Humidity: 42 %RH	20%RH to 75%RH (as declared)
Supply: +48 Vdc POE	+48 Vdc POE

**Test Limits**

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 15.3 Test Method

The EUT was setup as per section 9 of this report and, as per Figure iv, once maximised for a particular polarisation the spectrum analyser was used to measure each polarisation in turn. The results were summed to determine total power for both polarisations at the maximised angle as shown in the tables below to ensure compliance with the limit.

The measurement was repeated by maximising in the other polarisation and summing

The measurements were performed with EUT set at its maximum duty cycle.


All modulation schemes, data rates and EUT operating modes were used on one frequency to determine worst case.

Worst case modes used on all frequencies

Results recorded for highest PSD orientation only

PSD was determined using substitution method.

**Figure v Test Setup**

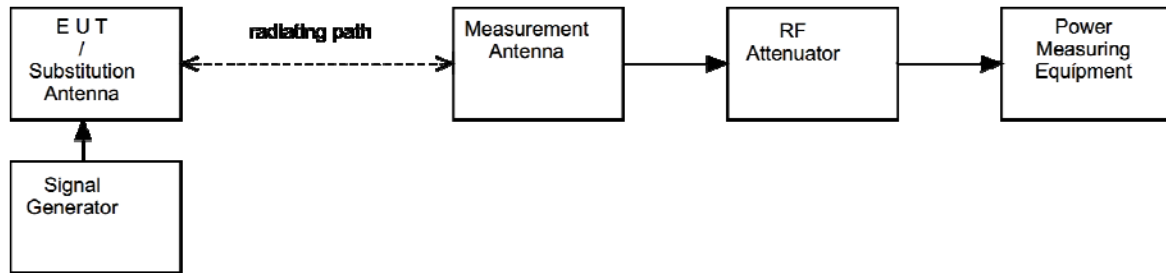

### 15.4 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Signal Generator	Agilent	E4438C	REF844	13/01/16	24	13/01/18
Spectrum Analyser	R&S	FSU46	REF910	05/07/16	12	05/07/17
Power Meter	Dare	RPR3006W	REF2112	22/03/16	12	22/03/17
Pre Amp	Agilent	8449B	L572	07/02/17	12	07/02/18
1-18GHz Horn	EMCO	3115	L138	13/04/16	24	13/04/18
Octave Horn Antenna	EMCO	3161-03	N/A*	18/02/15	36	18/02/18

\* Not applicable, hired equipment

## 15.5 Test Results – U-NII-Band 1

<b>Channel: 5152.5 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	122.18	20.87	22.96
H	75.51	18.78	
<b>Result:</b>		PASS	

<b>Channel: 5152.5 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	117.49	20.70	22.83
H	74.30	18.71	
<b>Result:</b>		PASS	

<b>Channel: 5152.5 MHz ; Modulation: 256QAM A ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	87.30	19.41	22.96
V	110.41	20.43	
<b>Result:</b>		PASS	

<b>Channel: 5159 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	107.65	20.32	22.41
H	66.68	18.24	
<b>Result:</b>		PASS	

<b>Channel: 5159 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	81.47	19.11	22.81
H	109.65	20.40	
<b>Result:</b>		PASS	

<b>Channel: 5159 MHz ; Modulation: 256QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	92.68	19.67	22.99
V	106.38	20.27	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	115.61	20.63	22.94
H	81.28	19.10	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	109.14	20.38	22.70
V	77.27	18.88	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 64 QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	106.41	20.27	22.64
V	77.27	18.88	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	107.15	20.30	22.70
V	79.07	18.98	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	121.62	20.85	22.92
V	74.30	18.71	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	116.95	20.68	22.85
V	75.86	18.80	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 64 QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	116.41	20.66	22.80
V	74.30	18.71	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	116.68	20.67	22.83
V	75.16	18.76	
<b>Result:</b>		PASS	



<b>Channel: 5200 MHz; Modulation: QPSK; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	105.93	20.25	22.61
H	76.56	18.84	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 16QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	83.18	19.20	22.53
V	95.94	19.82	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 64QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	82.60	19.17	22.56
V	97.50	19.89	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 256QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	83.75	19.23	22.56
V	96.61	19.85	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: QPSK; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	89.95	19.54	22.84
V	102.57	20.11	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 16QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	107.15	20.30	22.81
V	83.75	19.23	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 64QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	89.33	19.51	22.84
V	102.80	20.12	
<b>Result:</b>		PASS	

<b>Channel: 5200 MHz; Modulation: 256QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	90.57	19.57	22.86
V	102.80	20.12	
<b>Result:</b>		PASS	

<b>Channel: 5247.5 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	102.33	20.10	22.60
V	79.62	19.01	
<b>Result:</b>		PASS	

<b>Channel: 5247.5 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	116.95	20.68	22.77
V	72.11	18.58	
<b>Result:</b>		PASS	

<b>Channel: 5247.5 MHz ; Modulation: 256QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	105.93	20.25	22.66
H	78.52	18.95	
<b>Result:</b>		PASS	

## 15.6 Test Results – U-NII-Band 2a

<b>Channel: 5252.5 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	28.12	14.49	16.96
V	21.58	13.34	
<b>Result:</b>		PASS	

<b>Channel: 5252.5 MHz ; Modulation: 64QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	19.50	12.90	16.93
V	29.85	14.75	
<b>Result:</b>		PASS	

<b>Channel: 5252.5 MHz ; Modulation: 64QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	21.33	13.29	16.95
V	28.25	14.51	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	27.73	14.43	16.71
V	19.10	12.81	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	25.18	14.01	16.31
V	17.58	12.45	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	25.88	14.13	16.34
V	17.18	12.35	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	25.29	14.03	16.31
V	17.50	12.43	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	25.76	14.11	16.32
V	17.06	12.32	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	26.42	14.22	16.38
V	16.98	12.30	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	25.76	14.11	16.34
V	17.34	12.39	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	25.64	14.09	16.30
V	16.98	12.30	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: QPSK; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	28.05	14.48	16.78
H	19.54	12.91	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 16QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	27.67	14.42	16.74
H	19.59	12.92	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 64QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	27.42	14.38	16.72
H	19.54	12.91	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 256QAM; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	28.18	14.50	16.80
H	19.68	12.94	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: QPSK; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	20.99	13.22	16.96
V	28.71	14.58	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 16QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	27.61	14.41	16.79
H	20.18	13.05	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 64QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	27.73	14.43	16.79
H	20.00	13.01	
<b>Result:</b>		PASS	

<b>Channel: 5300 MHz; Modulation: 256QAM; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	19.91	12.99	16.79
V	27.80	14.44	
<b>Result:</b>		PASS	



<b>Channel: 5343 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	28.25	14.51	16.81
H	19.68	12.94	
<b>Result:</b>		PASS	

<b>Channel: 5343 MHz ; Modulation: 64QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	25.47	14.06	16.40
H	18.16	12.59	
<b>Result:</b>		PASS	

<b>Channel: 5343 MHz ; Modulation: 64QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	27.80	14.44	16.98
H	22.08	13.44	
<b>Result:</b>		PASS	

<b>Channel: 5347.5 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	29.17	14.65	16.80
V	18.66	12.71	
<b>Result:</b>		PASS	

<b>Channel: 5347.5 MHz ; Modulation: 16QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
V	27.23	14.35	16.93
H	22.13	13.45	
<b>Result:</b>		PASS	

<b>Channel: 5347.5 MHz ; Modulation: 16QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A</b>			
<b>Antenna Pol</b>	<b>PSD (mW)</b>	<b>PSD (dBm)</b>	<b>Total PSD (dBm)</b>
H	24.10	13.82	16.97
V	25.70	14.10	
<b>Result:</b>		PASS	

## 16 Out-of-band spurious emissions

### 16.1 Definition

*Out-of-band emission.*

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

*Spurious emission.*

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

### 16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 12.7.3 KDB 789033 D02 II G
EUT Channels / Frequencies Measured: (requirement as close to upper and lower frequency band edges as the design of the equipment permits).	5155 MHz / 5247.5 MHz / 5347 MHz
EUT Channel Bandwidths:	5 MHz
Deviations From Standard:	None
Measurement BW:	1 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	3 MHz
Measurement Detector:	Peak
Measurement Range:	1 GHz to 40 GHz
Antenna Gain: (required if conducted measurement made)	Not Applicable

### Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 48 %RH	20%RH to 75%RH (as declared)
Supply: +48 Vdc POE	+48 Vdc POE

### Test Limits

15.407(b):

- (1) For transmitters operating in the 5.15–5.25 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: All emissions outside of the 5.47–5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4)(i) For transmitters operating in the 5.725–5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


The provisions of §15.205 apply to intentional radiators operating under this section

### 16.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vii, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure vii Test Setup

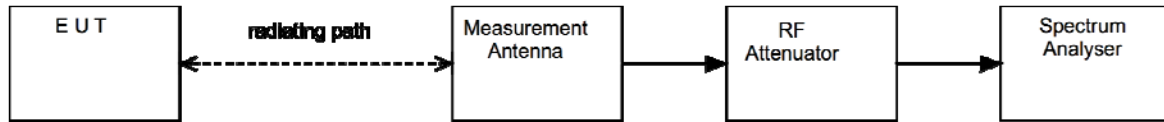

### 16.4 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Last Cal Calibration	Calibration Period	Due For Calibration
Spectrum Analyser	R&S	FSU46	U281	07/06/2016	12	07/06/2017
Horn Antenna	EMCO	3115	L139	25/09/2015	24	25/09/2017
Pre Amplifier	Agilent	8449B	L572	07/02/2017	12	07/02/2018
6 dB Attenuator	Bird	8304-060-N	U376	Calibrate in Use		
10 dB Attenuator	Bird	8304-100-N	L222	Calibrate in Use		

Conversion from field strength to eirp is as follows:

$$\text{EIRP} = E + 20\log(d) - 104.77, \text{ where}$$

EIRP is the equivalent isotropically radiated power in dBm;  
 E is field strength in dB $\mu$ V/m;  
 d is the measurement distance in meters.

Measurements are made at 5155 MHz, 5247.5 and at 5347 MHz.

Measurement made at 5155 MHz; 5247.5 and at 5347 MHz are at a power setting used for maximum EIRP and are set to the highest level whilst still achieving compliance with the requirements.

These frequencies are determined as the lowest middle and highest high power operating frequencies based on power setting required to achieve compliance with the requirements.

## 16.5 Test Results

<b>Channel: 5155 MHz</b>						
<b>Emission Frequency (MHz)</b>	<b>Peak Field Strength (dB<math>\mu</math>V/m)</b>	<b>Distance (m)</b>	<b>Power (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>	<b>Result</b>
*The provisions of §15.205 apply in restricted bands (See Section 11)						PASS
No Significant Emissions >10 MHz from Band edge						PASS

<b>Channel: 5247.5 MHz</b>						
<b>Emission Frequency (MHz)</b>	<b>Peak Field Strength (dB<math>\mu</math>V/m)</b>	<b>Distance (m)</b>	<b>Power, eirp (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>	<b>Result</b>
*The provisions of §15.205 apply in restricted bands (See Section 11)						PASS
10495	56.21	3	-39.02	-27	-12.02	PASS

<b>Channel: 5347 MHz</b>						
<b>Emission Frequency (MHz)</b>	<b>Peak Field Strength (dB<math>\mu</math>V/m)</b>	<b>Distance (m)</b>	<b>Power, eirp (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>	<b>Result</b>
*The provisions of §15.205 apply in restricted bands (See Section 11)						PASS
No Significant Emissions >10 MHz from Band edge						PASS

\* Emissions close to the Bandedges fall into restricted bands (4.5-5.15 GHz and 5.35 – 5.46 GHz) listed in 15.205 and are therefore subject to the general radiated spurious emission limits of 15.209

## 17 Measurement Uncertainty

### Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence:

#### [1] Radiated spurious emissions

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,  
Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

#### [2] AC power line conducted emissions

Uncertainty in test result = **3.4dB**

#### [3] Occupied bandwidth

Uncertainty in test result = **15.5%**

#### [4] Conducted carrier power

Uncertainty in test result (Power Meter) = **1.08dB**

#### [5] Conducted / radiated RF power out-of-band

Uncertainty in test result – Up to 8.1GHz = **3.31dB**  
Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**  
Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,  
Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

#### [6] Power spectral density

Uncertainty in test result (Spectrum Analyser) = **2.48dB**