

PARTIAL Test Report

20-1-0060701T49a



Number of pages: 25 **Date of Report:** 2021-May-25

Testing company: CETECOM GmbH
Im Teelbruch 116
45219 Essen Germany
Tel. + 49 (0) 20 54 / 95 19-0
Fax: + 49 (0) 20 54 / 95 19-150

Applicant: VALEO Telematik und Akustik GmbH

Product: Telematic Device
Model: ATM-02-ROW-R1

FCC ID: QWY-ATM2-R-13 **IC:** --

Testing has been carried out in accordance with: Title 47 CFR, Chapter I
FCC Regulations, Subchapter B
Part 22 Subpart H, Part 24 Subpart E

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".

Tested Technology: GSM (2G)

Test Results: **The EUT complies with the requirements in respect of selected parameters subject to the test.**
The test results relate only to devices specified in this document

Signatures:

Dipl.-Ing. Ninovic Perez Team and Test Lab Manager Authorization of test report	B.Sc. Mohamed Ahmed Test manager Responsible of test report
---	---

Table of Contents

Table of Annex.....2

1.1 Disclaimer and Notes.....3

1.2 Summary of Test Results4

1.3 Summary of Test Methods5

2.1 Identification of the Testing Laboratory6

2.2 General limits for environmental conditions.....6

2.3 Test Laboratories sub-contracted.....6

2.4 Organizational Items6

2.5 Applicant’s details6

2.6 Manufacturer’s details6

2.7 EUT: Type, S/N etc. and short descriptions used in this test report7

2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions7

2.9 Connected cables7

2.10 Software7

2.11 EUT set-ups7

2.12 EUT operation modes.....8

3.1 General Data of Main EUT as Declared by Applicant.....9

3.2 Detailed Technical data of Main EUT as Declared by Applicant10

3.3 Worst case identification.....10

3.4 Modifications on Test sample.....10

4.1 Conducted RF output power11

4.2 Peak to Average ratio (PAPR)13

4.3 Radiated field strength emissions below 30 MHz14

4.4 Radiated spurious emissions18

4.5 Radiated Band Edge.....20

4.6 Results from external laboratory.....22

4.7 Opinions and interpretations22

4.8 List of abbreviations22

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	CETECOM_TR20-1-0060701T49a_A1	11
Annex 2	Internal photographs of EUT	To be supplied by applicant/manufacture	
Annex 3	External photographs of EUT	CETECOM_TR20-1-0060701T49a_A3	8
Annex 4	Test set-up photographs	CETECOM_TR20-1-0060701T49a_A4	5
The listed attachments are separate documents.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.2 Summary of Test Results

Test case in GSM850 band	Reference Clause FCC ☒	Reference Clause ISED ☒	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen Issue 5:§8.8	--	N/A	--
Conducted RF output power	§2.1046(a)	RSS-132: 5.4 + SRSP 503 :5.1.3		--	PASSED
Radiated RF output power	§22.913(a)	4.4		calculated	PASSED
Occupied Channel Bandwidth 99%	§22.917(b), §2.202(a), §2.1049(h)	RSS-Gen, Issue 4: §6.7	--	NP	See modules initial report
26dB Emission bandwidth	§22.917(b), §2.202(a), §2.1049(h)	RSS-Gen, Issue 4: §6.7	--	NP	See modules initial report
Radiated Band Edge	§2.1053(a), §2.1057(a)(1) §22.917(a)(b)	RSS-132, Issue 3: 5.5(i)(ii)		--	PASSED
Conducted RF Band Edge	§22.917(a)(b)(c)(d) §2.1051, §2.1057(a)(1)	RSS-132, Issue 3: 5.5(i)(ii)	--	--	See modules initial report
Peak to Average ratio (PAPR)	§2.1046(a)	RSS-132: 5.4 + SRSP 503 :5.1.3		--	PASSED
Radiated field strength emissions below 30 MHz	§15.205, §15.209	RSS-Gen: Issue 5:		--	PASSED
Spurious emissions at antenna terminals	§22.917(a)(b)(c)(d) §2.1051, §2.1057(a)(1)	RSS-132, Issue 3: 5.5(i)(ii)	--	NP	See modules initial report
Radiated spurious emissions	§2.1053(a), §2.1057(a)(1) §22.917(a)(b)	RSS-132, Issue 3: 5.5(i)(ii)		--	PASSED
Frequency stability, temperature variation	§22.355, §2.1055(a)(1) (d)	RSS-Gen, Issue 5 RSS-132: 5.3	--	NP	See modules initial report
Frequency stability, voltage variation	§22.355, §2.1055(a)(1) (d)	RSS-Gen, Issue 5 RSS-132: 5.3	--	NP	See modules initial report
Test case in GSM1900 band	Reference Clause FCC	Reference Clause ISED	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen Issue 5:§8.8	--	N/A	--
Conducted RF output power	§2.1046(a)	RSS-133 4.1/6.4 + SRSP-510 :5.1.2		--	PASSED
Radiated RF output power	§24.232(b)	6.4	--	calculated	PASSED
Occupied Channel Bandwidth 99%	§24.238(b), §2.202(a), §2.1049(h)	RSS-Gen, Issue 4: §6.7	--	NP	See modules initial report
26dB Emission bandwidth	§24.238(b), §2.202(a), §2.1049(h)	RSS-Gen, Issue 4: §6.7	--	NP	See modules initial report
Radiated Band Edge	§2.1053(a), §2.1057(a)(1) §24.238(a)(b)	RSS-133, Issue 6: 6.5.1(i)(ii)		--	PASSED
Conducted RF Band Edge	§24.238(a)(b)(c)(d) §2.1051, §2.1057(a)(1)	RSS-133, Issue 6: 6.5.1(i)(ii)	--	NP	See modules initial report
Peak to Average ratio (PAPR)	§2.1046(a)	RSS-133 4.1/6.4 + SRSP-510 :5.1.2		--	PASSED
Radiated field strength emissions below 30 MHz	§15.205, §15.209	RSS-Gen: Issue 5:		--	PASSED

Spurious emissions at antenna terminals	§24.238(a)(b)(c)(d) §2.1051, §2.1057(a)(1)	RSS-133, Issue 6: 6.5.1(i)(ii)	--	NP	See modules initial report
Radiated spurious emissions	§2.1053(a), §2.1057(a)(1) §24.238(a)(b)	RSS-133, Issue 6: 6.5.1(i)(ii)		--	PASSED
Frequency stability, temperature variation	§24.235, §2.1055(a)(1) (d)	RSS-Gen, Issue 5 RSS-133: 6.3	--	NP	See modules initial report
Frequency stability, voltage variation	§24.235, §2.1055(a)(1) (d)	RSS-Gen, Issue 5 RSS-133: 6.3	--	NP	See modules initial report

PASSED The EUT complies with the essential requirements in the standard.
 FAILED The EUT does not comply with the essential requirements in the standard.
 NP The test was not performed by the CETECOM Laboratory.

*The calculation of the measurement uncertainty shows compliance with the "maximum measurement uncertainties" of the tested standard and therefore for result evaluation the stated uncertainties will not be additionally added to the measured results.

Modules report 16-1-0050601T34a for telematics row-module V1233-0 with FCC-ID: QWY-V1233-0

1.3 Summary of Test Methods

Test case	Test method
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 § 7, ANSI C63.10-2013 § 6.2
Conducted RF output power	ANSI C63.26:2015, §5.2, KDB 971168 D01 v03r01
Radiated RF output power	ANSI C63.26:2015, §5.2.7, KDB 971168 D01 v03r01
Occupied Channel Bandwidth 99%	ANSI C63.26:2015, §5.4.4, KDB 971168 D01 v03r01
26dB Emission bandwidth	ANSI C63.26:2015, §5.4.3, KDB 971168 D01 v03r01
Modulation characteristics	ANSI C63.26:2015, §5.3
Radiated Band Edge	ANSI C63.26:2015, §5.5, KDB 971168 D01 v03r01
Conducted RF Band Edge	ANSI C63.26:2015, §5.7, KDB 971168 D01 v03r01
Peak to Average ratio (PAPR)	ANSI C63.26:2015, §5.2.6 Result calculated with measured conducted RF-power value and stated/measured antenna gain for band of interest
Radiated field strength emissions below 30 MHz	ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1
Spurious emissions at antenna terminals	ANSI C63.26:2015, §5.7, KDB 971168 D01 v03r01
Radiated spurious emissions	ANSI C63.26:2015, §5.5, KDB 971168 D01 v03r01, ANSI C63.26.1:2018
Frequency stability, temperature variation	ANSI C63.26:2015, §5.6, KDB 971168 D01 v03r01
Frequency stability, voltage variation	ANSI C63.26:2015, §5.6, KDB 971168 D01 v03r01

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Ninovic Perez
Accreditation scope:	DAkkS Webpage
Test location:	CETECOM GmbH; Im Teelbruch 116; 45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:

2.4 Organizational Items

Order No.:	
Responsible test manager:	Al-Amin, Hossain
Receipt of EUT:	2021-Feb-11
Date(s) of test:	2021-Mar-05 – 2021-Mar-18
Version of template:	14.6

2.5 Applicant's details

Applicant's name:	VALEO Telematik und Akustik GmbH
Address:	Max-Planck-Str. 28-32 61381 Friedrichsdorf Germany
Contact Person:	Martin Fleckenstein
Contact Person's Email:	martin.fleckenstein@VALEO.com

2.6 Manufacturer's details

Manufacturer's name:	VALEO Telematik und Akustik GmbH
Address:	Max-Planck-Str. 28-32 61381 Friedrichsdorf Deutschland

2.7 EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	PMT Sample No.	Product	Model	Type	S/N	HW status	SW status
EUT 01	20-1-00607S223_C01	Telematic Device	ATM-02-ROW-R1	N/A	1140644	103.006.006	010.003.042
EUT 02	20-1-00607S17_C01	Antenna	Da Wave Low 5G Row	N/A	0822	AI04	--

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

Short description*)	PMT Sample No.	Auxiliary Equipment	Type	S/N	HW status	SW status
AE 01	20-1-00607S53_C01	Metal Plate	N/A	N/A	N/A	N/A
AE 02	21-1-00251S12_C01	EMV Testbox ATM-01 / ATM-02	--	S12	--	--
AE 03	20-1-00607S224_C01	EMC Switchbox	--	97	--	--

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.9 Connected cables

Short description*)	PMT Sample No.	Cable type	Connectors	Length
CAB 01	20-1-00607S125_C01	Cable Harness	N/A	<3m
CAB 02	20-1-00607S169_C01	Power Cable	N/A	<3m

*) CAB short description is used to simplify the identification of the connected cables in this test report.

2.10 Software

Short description*)	PMT Sample No.	Software	Type	S/N	HW status	SW status
	--	--	--	--	--	--

*) SW short description is used to simplify the identification of the used software in this test report.

2.11 EUT set-ups

set-up no.*)	Combination of EUT and AE	Description
	EUT 01 + EUT 02 + AE 01 + AE 02 + AE03 + CAB01 + CAB02	Used for Radiated measurements.
	EUT 01 + AE 02 + AE03 + CAB01 + CAB02	Used for Conducted measurements

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.12 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
Operating mode 1	<p>GPRS 850 TCH mode TCH=128/251</p>	<p>A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). USF_Duty CYCLE set to 100%, coding scheme CS-1 for GMSK modulation, slot 3 active, uplink gamma: 3 (33dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.</p>
Operating mode 2	<p>GPRS 1900 TCH mode TCH=512/810</p>	<p>A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 4; power control level 3). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8PSK modulation, slot 3 active, uplink gamma: 6 (27dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.</p>

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Product name	Telematic device		
Kind of product	ATM-02-ROW-R1		
Firmware	<input checked="" type="checkbox"/> for normal use	<input type="checkbox"/> Special version for test execution	
	<input type="checkbox"/> AC Mains	Wählen Sie ein Element aus.	
	<input checked="" type="checkbox"/> DC Mains	12 V DC	
	<input type="checkbox"/> Battery	-	
Operational conditions	T _{nom} =21 °C	T _{min} =-40 °C	T _{max} =90 °C
EUT sample type	Pre-Production		
Weight	268g		
Size [LxWxH]	--		
Interfaces/Ports	--		
For further details refer Applicants Declaration & following technical documents: <i>[Annex 1 Specification + add tech docs] 11_ATM-02_Test_setup_instruction</i> <i>[Annex 1 Specification + add tech docs] 01_ATM-02_Product specification sheet</i>			

3.2 Detailed Technical data of Main EUT as Declared by Applicant

TX Frequency range	<input checked="" type="checkbox"/> GSM850 824 - 849 MHz (Uplink), 869-894 MHz (Downlink) <input checked="" type="checkbox"/> GSM1900 1850 - 1910 MHz (Uplink), 1930-1990 MHz (Downlink)	
Number of channels	<input checked="" type="checkbox"/> GSM850 TCH range 128 - 251 <input checked="" type="checkbox"/> GSM1900 TCH range 512 - 810	
Type of modulation	GMSK 8-PSK	
Data rates	Downlink Max XX kbps	Uplink Max XX kbps
Emission designator	Nominal CBW	See initial certification of the module:
See modules report 16-1-0050601T34a for telematics row-module V1233-0		
Antenna Type	<input type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input checked="" type="checkbox"/> External, separate RF-connector	
Antenna gain(s)	GSM850: -0.6 to +1.3 dBi GSM1900: 2.8 to 0 dBi	
FCC label attached	No	
Test firmware / software and storage location	EUT 01	
For further details refer Applicants Declaration & following technical documents		
Description of Reference Document (supplied by applicant)	Version	Total Pages
Antenna data sheet: Datasheet_WAVE_ROW_Low_9825130_04_20210125	2021.01.25	32

3.3 Worst case identification

GSM mode	Data rate

3.4 Modifications on Test sample

Additions/deviations or exclusions

4 Measurements


4.1 Conducted RF output power

4.1.1 Description of the general test setup and methodology, see below example:

Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5).

The measurements were performed with the integrated power measurement function of the communication test-unit. (5).

Schematic:

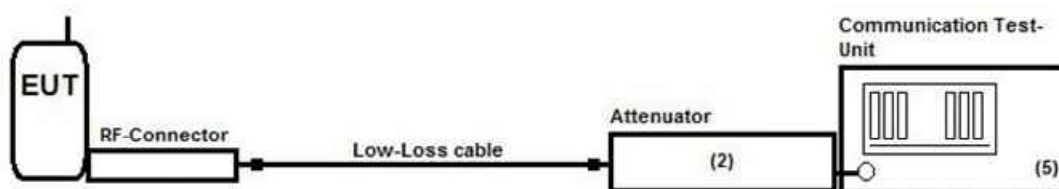

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.
The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band within the designated range within the allowed channel bandwidths. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance

4.1.2 Measurement Location

Test site	Radio lab RF3
-----------	---------------

4.1.3 Limit

Frequency Range [MHz]	Limit [W]	Limit [dBm]
824 – 849	7 ERP	38.5
1850 – 1910	2 EIRP	33

4.1.4 Result

GMSK-Modulation 850MHz Band	GSM ONLY			
	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	PAR Faktor [dB]
Channel 128	824.2	28.90	28.20	0.70
Channel 189	836.4	28.80	28.30	0.50
Channel 251	848.8	28.60	28.10	0.50

GMSK-Modulation 1900MHz Band	GPRS Mode, 1 Slot			
	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	PAR Faktor [dB]
Channel 512	1850.2	27.5	27.1	0.4
Channel 661	1880.0	27.4	26.9	0.5
Channel 810	1909.8	27.3	26.8	0.5

E-GPRS Mode 850MHz Band	EDGE/8PSK			
	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	PAR Faktor [dB]
Channel 128	824.2	25.80	22.60	3.20
Channel 189	836.4	25.70	22.50	3.20
Channel 251	848.8	25.60	22.50	3.10

E-GPRS Mode 1900MHz Band	EDGE			
	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	PAR Faktor [dB]
Channel 512	1850.2	23.40	20.50	2.90
Channel 661	1880.0	23.30	20.50	2.80
Channel 810	1909.8	23.30	20.40	2.90


4.2 Peak to Average ratio (PAPR)

4.2.1 Description of the general test setup and methodology, see below example:

Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5).

The measurements were performed with the integrated power measurement function of the communication test-unit. (5).

Schematic:

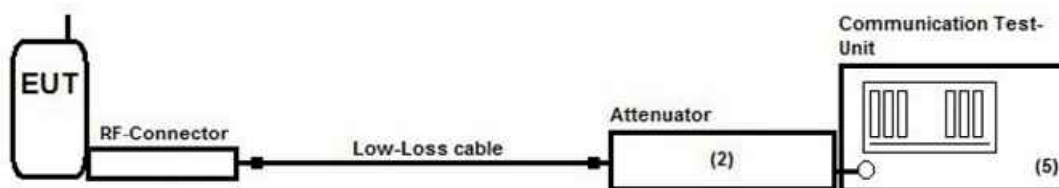

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

EUT settings

The EUT was set to highest transmit power condition.

4.2.2 Measurement Location

Test site	Radio Lab RF3
-----------	---------------

4.2.3 Limit

Peak to average power ratio [dB]
≤ 13

4.2.4 Result

Band	Mode	PAPR [dB]	Result
GSM 850		0.7	Passed
GPRS 1900		0.5	Passed
8PSK 850		3.2	Passed
8PSK 1900		2.9	Passed

Remark: for more information see paragraph 4.1


4.3 Radiated field strength emissions below 30 MHz

4.3.1 Description of the general test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

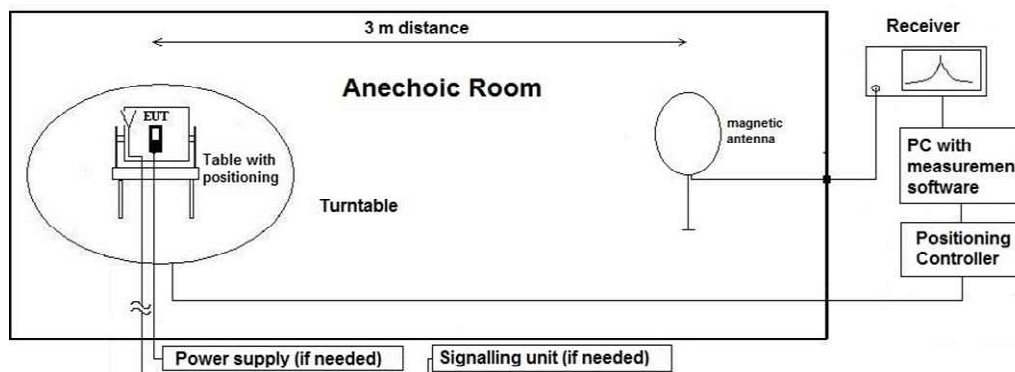

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

Correction factors due to reduced meas. distance (f < 30 MHz):

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

Frequency -Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas < Dnear-field)	2'te Condition (Limit distance bigger dnear-field)	Distance Correction accord. Formula
kHz	9.00E+03	33333.33	5305.17	300	fulfilled	not fulfilled	-80.00
	1.00E+04	30000.00	4774.65		fulfilled	not fulfilled	-80.00
	2.00E+04	15000.00	2387.33		fulfilled	not fulfilled	-80.00
	3.00E+04	10000.00	1591.55		fulfilled	not fulfilled	-80.00
	4.00E+04	7500.00	1193.66		fulfilled	not fulfilled	-80.00
	5.00E+04	6000.00	954.93		fulfilled	not fulfilled	-80.00
	6.00E+04	5000.00	795.78		fulfilled	not fulfilled	-80.00
	7.00E+04	4285.71	682.09		fulfilled	not fulfilled	-80.00
	8.00E+04	3750.00	596.83		fulfilled	not fulfilled	-80.00
	9.00E+04	3333.33	530.52		fulfilled	not fulfilled	-80.00
	1.00E+05	3000.00	477.47		fulfilled	not fulfilled	-80.00
	1.25E+05	2400.00	381.97		fulfilled	not fulfilled	-80.00
	2.00E+05	1500.00	238.73		fulfilled	fulfilled	-78.02
	3.00E+05	1000.00	159.16		fulfilled	fulfilled	-74.49
	4.00E+05	750.00	119.37		fulfilled	fulfilled	-72.00
	4.90E+05	612.24	97.44		fulfilled	fulfilled	-70.23
	5.00E+05	600.00	95.49		fulfilled	not fulfilled	-40.00
	6.00E+05	500.00	79.58		fulfilled	not fulfilled	-40.00
	7.00E+05	428.57	68.21		fulfilled	not fulfilled	-40.00
8.00E+05	375.00	59.68	fulfilled	not fulfilled	-40.00		
9.00E+05	333.33	53.05	fulfilled	not fulfilled	-40.00		
MHz	1.00	300.00	47.75	30	fulfilled	not fulfilled	-40.00
	1.59	188.50	30.00		fulfilled	not fulfilled	-40.00
	2.00	150.00	23.87		fulfilled	fulfilled	-38.02
	3.00	100.00	15.92		fulfilled	fulfilled	-34.49
	4.00	75.00	11.94		fulfilled	fulfilled	-32.00
	5.00	60.00	9.55		fulfilled	fulfilled	-30.06
	6.00	50.00	7.96		fulfilled	fulfilled	-28.47
	7.00	42.86	6.82		fulfilled	fulfilled	-27.13
	8.00	37.50	5.97		fulfilled	fulfilled	-25.97
	9.00	33.33	5.31		fulfilled	fulfilled	-24.95
	10.00	30.00	4.77		fulfilled	fulfilled	-24.04
	10.60	28.30	4.50		fulfilled	fulfilled	-23.53
	11.00	27.27	4.34		fulfilled	fulfilled	-23.21
	12.00	25.00	3.98		fulfilled	fulfilled	-22.45
	13.56	22.12	3.52		fulfilled	fulfilled	-21.39
	15.00	20.00	3.18		fulfilled	fulfilled	-20.51
	15.92	18.85	3.00		fulfilled	fulfilled	-20.00
	17.00	17.65	2.81		not fulfilled	fulfilled	-20.00
	18.00	16.67	2.65		not fulfilled	fulfilled	-20.00
	20.00	15.00	2.39		not fulfilled	fulfilled	-20.00
	21.00	14.29	2.27		not fulfilled	fulfilled	-20.00
23.00	13.04	2.08	not fulfilled	fulfilled	-20.00		
25.00	12.00	1.91	not fulfilled	fulfilled	-20.00		
27.00	11.11	1.77	not fulfilled	fulfilled	-20.00		
29.00	10.34	1.65	not fulfilled	fulfilled	-20.00		
30.00	10.00	1.59	not fulfilled	fulfilled	-20.00		

4.3.2 Measurement Location

Test site	120904 SAC1
-----------	-------------

4.3.3 Limit

Radiated emissions limits, 3 meters					
Frequency Range [MHz]	Limit [$\mu\text{V}/\text{m}$]	Limit [$\text{dB}\mu\text{V}/\text{m}$]	Distance [m]	Detector	RBW [kHz]
0.009 – 0.09	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.09 – 0.11	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Quasi peak	0.2
0.11 – 0.15	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.15 – 0.49	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	9
0.49 – 1.705	24000 / f [kHz]	87.6 – 20Log(f) (kHz)	30	Quasi peak	9
1.705 - 30	30	29.5	30	Quasi peak	9

*Remark: In Canada same limits apply, just unit reference is different

4.3.4 Result

Diagram	Band	Mode	Maximum Level [$\text{dB}\mu\text{V}/\text{m}$] Frequency Range 0.009 – 30 MHz	Result
2.01	GSM850	Operation mode 1	No peaks found	Passed
2.02	GSM850	Operation mode 1	No peaks found	Passed
2.03	GSM1900	Operation mode 2	No peaks found	Passed


Remark: for more information and graphical plot see annex A1 [CETECOM_TR20-1-0060701T49a_A1](#)

4.4 Radiated spurious emissions

4.4.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

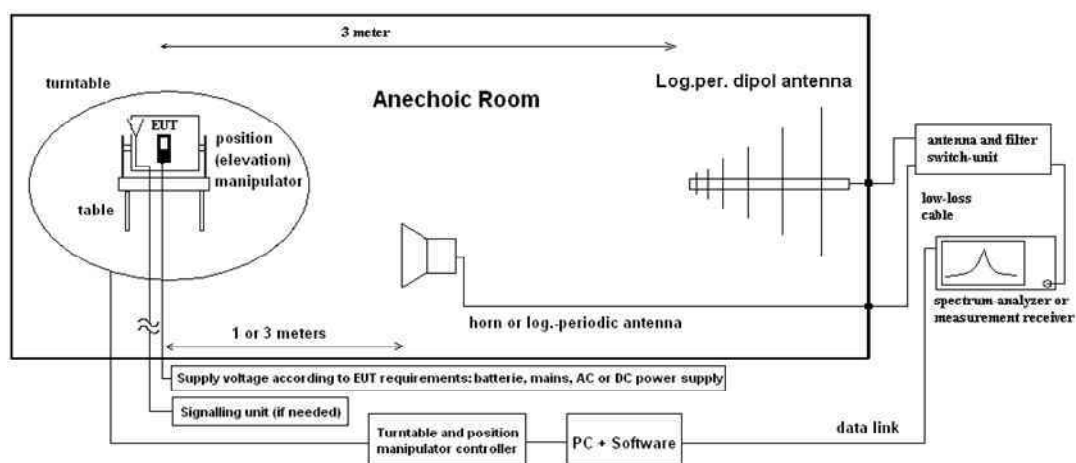

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

Formula:

$$P_{EIRP} = P_{MEAS} + C_L + FSL - G_{PreA} - G_{ANT} \quad (1)$$

P_{MEAS} = measured power at instrument

M = Margin

L_T = Limit

FSL = Free Space loss = Function(frequency, measurement distance)

$$M = L_T - P_{EIRP}$$

C_L = cable loss

G_{PreA} = Gain of pre-amplifier (if used)

G_{ANT} = Gain of antenna in [dBi]

All units are dB-units, positive margin means value is below limit.

4.4.2 Measurement Location

Test site	120904 - FAC1 - Radiated Emissions
------------------	------------------------------------

4.4.3 Limit

Frequency Range [MHz]	Limit [dBm]	Detector [MaxHold]	RBW / VBW [MHz]
30 - 8500	-13	Peak	1 / 3
30 - 19100	-13	Peak	1 / 3

4.4.4 Result

Diagram	Band	Mode	30 to 1000 MHz	1 to 2.8 GHz	2.8 to 19.1 GHz	Result
8.01	GSM850	GSM 850_CH:128	No peaks found	No peaks found	No peaks found	Passed
8.02	GSM1900	GSM 1900_CH:512	No peaks found	No peaks found	No peaks found	Passed


Remark: for more information and graphical plot see annex A1 **CETECOM_TR20-1-0060701T49a_A1**

4.5 Radiated Band Edge

4.5.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT

Schematic:

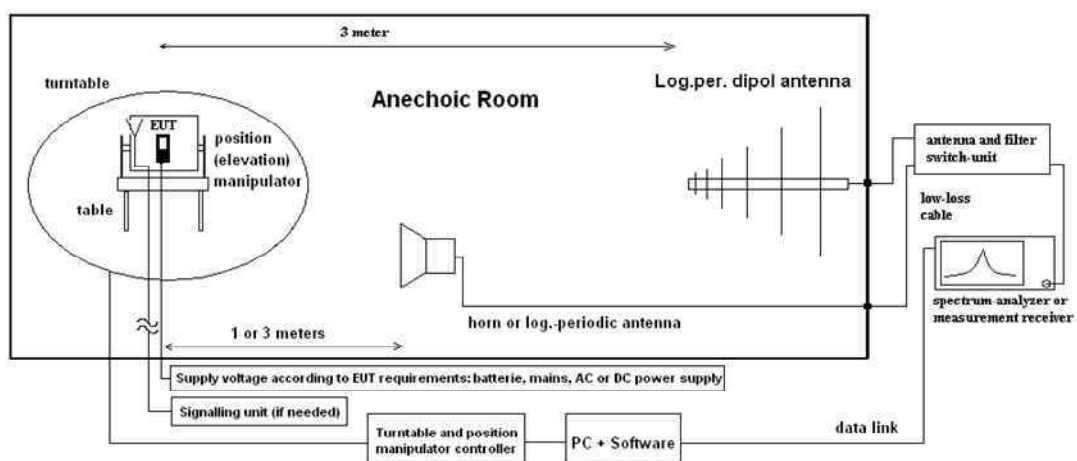

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

See chapter Radiated Spurious Emission for Test method.

4.5.2 Measurement Location

Test site	120904 - FAC1 - Radiated Emissions
-----------	------------------------------------

4.5.3 Limit

Frequency Range [MHz]	Limit [dBm]	Detector [MaxHold]	RBW / VBW [kHz]
Below 824 and above 849	-13	Peak	3 / 3
Below 1850 and above 1910	-13	Peak	3 / 3

4.5.4 Result

Diagram	Band	Mode	Edge [Low / High]	Value [dBm]	Result
9.1900	850	GSM 1900_CH:512	Low	No peaks found	Passed
9.1901	850	GSM 1900_CH:810	High	No peaks found	Passed
9.850	1900	GSM 850_CH:128	Low	No peaks found	Passed
9.851	1900	GSM850_CH_251	High	No peaks found	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM_TR20-1-0060701T49a_A1**

4.6 Results from external laboratory

None

-

4.7 Opinions and interpretations

None

-

4.8 List of abbreviations

None

-

5 Equipment lists

ID	Description	Manufacturer	SerNo	Cal due date
	120904 - FAC1 - Radiated Emissions			2022-April-30
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH	81650455	2022-May-25
20254	High Pass Filter 5HC 2600/12750-1.5KK (GSM1800/1900/DECT)	Trilithic	23042	
20302	Horn Antenna BBHA9170 (Meas 1)	Schwarzbeck Mess-Elektronik OHG	155	2023-Apr-15
20549	Log. Per. Antenna HL025	Rohde & Schwarz Messgerätebau GmbH	1000060	2021-Jul-31
20720	Measurement Software EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	V10.xx	--
20611	Power Supply E3632A	Agilent Technologies Deutschland GmbH	KR 75305854	--
20338	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	--
20484	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	--
20287	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-35-10P	Miteq Inc.	379418	--
20670	Radio Communication Tester CMU200	Rohde & Schwarz Messgerätebau GmbH	106833	2022-Jun-16
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	2021-May-23
20439	Ultrabroadband-Antenna HL562	Rohde & Schwarz Messgerätebau GmbH	100248	2023-Mar-10
20594	Wideband Radio Communication Tester CMW500	Rohde & Schwarz Messgerätebau GmbH	101757	2022-May-25
20725	Wideband Radio Communication Tester CMW500	Rohde & Schwarz Messgerätebau GmbH	158150	2021-Nov-05
20902	Wideband Radio Communication Tester CMW500	Rohde & Schwarz Messgerätebau GmbH	168880	2022-May-13
25386	Wideband Radio Communication Tester CMW500	Rohde & Schwarz Messgerätebau GmbH	100994	2021-Jul-31

ID	Description	Manufacturer	SerNo	Cal due date
20793	Wideband Radio Communication Tester CMW500	Rohde & Schwarz Messgerätebau GmbH	163673	2021-May-22
	120901 - SAC - Radiated Emission <1GHz	Manufacturer	SerNo	Cal due date
				2025-Jul-21
20487	CETECOM Semi Anechoic Chamber < 1GHz	ETS-Lindgren GmbH	-	2021-May-31
20620	EMI Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH	100362	2021-May-13
25038	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH	879824/13	2022-Apr-07
20885	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	--

6 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor k , such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%						Remarks
Conducted emissions (U_{CISPR})	-	9 kHz - 150 kHz	4.0 dB						-
		150 kHz - 30 MHz	3.6 dB						
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB						Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	-
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--	
		12.75 GHz - 26.5 GHz	N/A	0.82	--	N/A	N/A	--	
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable
		2.8 GHz - 12.75 GHz	1.48	N/A	1.51	N/A	1.43	--	
		12.75 GHz - 18 GHz	1.81	N/A	1.83	N/A	1.77	--	
		18 GHz - 26.5 GHz	1.83	N/A	1.85	N/A	1.79	--	
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			1.0 dB						Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			See above: 0.70 dB						Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm						-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.01dB						Magnetic field strength
		30 MHz - 1 GHz	5.83 dB						Electrical Field strength
		1 GHz - 18 GHz	4.91 dB						
		18-26.5 GHz	5.06 dB						

7 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2021-May-25
--	--	--
--	--	--

Test Report