







TEST REPORT  
No.: 17-1-0290002T10a

According to:  
**FCC Regulations**  
Part 18.305

for  
**Peiker acoustic GmbH**

Wireless Mobile Interface  
WMI2-W205

FCC-ID: QWY-WMI2W205

Laboratory Accreditation and Listings		
 <p>Deutsche Akkreditierungsstelle D-PL-12047-01-01</p> <p>Accredited EMC-Test Laboratory</p>	 <p>Industry Canada</p> <p>Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3</p>	 <p>Voluntary Controls for Electromagnetic Emissions</p> <p>Reg. No.: R-20013, C-20009, T-20006, G-20013</p>
 <p>AUTHORIZED RF LABORATORY</p>	 <p>Authorized™ Test Lab</p> <p>Lab Code: 20011130-00</p>	 <p>MRA US-EU 0003</p>
accredited according to DIN EN ISO/IEC 17025		
<p align="center"><b>CETECOM GmbH</b></p> <p align="center">Laboratory Radio Communications &amp; Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com</p>		
Laboratory Accreditation and Listings		

## TABLE OF CONTENTS

<b>1. SUMMARY OF TEST RESULTS</b> .....	<b>3</b>
1.1. Tests overview according CFR47, Part 18 .....	3
<b>2. ADMINISTRATIVE DATA</b> .....	<b>4</b>
2.1. Identification of the testing laboratory .....	4
2.2. Test location .....	4
2.3. Organizational items .....	4
2.4. Applicant's details .....	4
2.5. Manufacturer's details .....	4
<b>3. EQUIPMENT UNDER TEST (EUT)</b> .....	<b>5</b>
3.1. Technical data of main EUT declared by applicant .....	5
3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....	6
3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions .....	6
3.4. EUT set-ups .....	6
3.5. EUT operating modes .....	7
<b>4. DESCRIPTION OF TEST SYSTEM SET-UP'S</b> .....	<b>8</b>
4.1. Test system set-up for radiated magnetic field measurements below 30 MHz .....	8
4.2. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz .....	9
<b>5. MEASUREMENTS</b> .....	<b>10</b>
5.1. General Limit - Radiated field strength emissions.....	10
5.2. RF-Parameter: 99% occupied Bandwidth.....	14
5.3. Measurement uncertainties .....	16
<b>6. ACCREDITATION DETAILS OF CETECOM'S LABORATORIES AND TEST SITES</b> .....	<b>17</b>
<b>7. INSTRUMENTS AND ANCILLARY</b> .....	<b>18</b>
7.1. Used equipment "CTC" .....	18
<b>8. VERSIONS OF TEST REPORTS (CHANGE HISTORY)</b> .....	<b>21</b>

<b>Table of annex</b>	The listed attachments are an integral part of this report	<b>Total pages</b>
Annex 1: Measurement diagrams (separate document) TR17-1-0290002T10a_A1		7
Annex 2: External photographs of EUT (separate document) TR17-1-0290002T10a_A2		5
Annex 3: Internal photographs of EUT (separate document) TR17-1-0290002T10a_A3		6
Annex 4: Test set-up photographs (separate document) TR17-1-0290002T10a_A4		4

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) is a wireless power transfer (WPT) source with nominal operating frequency 125 kHz working in car-environment.

Following tests have been performed to show compliance with applicable FCC Part 18 of the CFR 47 Rules, Edition 2017 standard.

### 1.1. Tests overview according CFR47, Part 18

No. of Diagram group	Test Cases	Port	References, Standards & Limits		EUT set-up	EUT op-mode	Result
			FCC	Limits			
1	Radiated emissions 9 kHz-30 MHz	Cabinet + inter-connecting cables (radiated)	§18.305	<input checked="" type="checkbox"/> Any non ISM frequency	1+2	1+2	Pass
2	Radiated emissions 30 MHz-1 GHz	Cabinet + inter-connecting cables (radiated)	§18.305	<input checked="" type="checkbox"/> Any non ISM frequency	2	2	Pass
3	99% Occupied bandwidth	Antenna coupling (radiated)	§2.202(a) §2.1049	99% Power	1+2	1+2	For information only

.....  
Dipl.-Ing. Ch. Lorenz  
Responsible for test section

.....  
Dipl.-Ing. Ninovic Perez  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Rachid Acharkaoui
Deputy:	Dipl.-Ing. Niels Jeß

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

### 2.3. Organizational items

Responsible for test report :	Dipl.-Ing. N. Perez
Project leader:	Dipl.-Ing N. Perez
Receipt of EUT:	2017-06-28
Date(s) of test:	2017-11-15 to 2017-12-13
Date of report:	2018-04-17
-----	
Version of template:	13.02

### 2.4. Applicant's details

Applicant's name:	Peiker acoustic GmbH
Address:	Max-Planck-Str. 28-32 61381 Friedrichsdorf  Germany
Contact person:	Mr. Uwe Hännig

### 2.5. Manufacturer's details

Manufacturer's name:	please see Applicant's details
Address:	please see Applicant's details

### 3. Equipment under test (EUT)

#### 3.1. Technical data of main EUT declared by applicant

Main function	Wireless Mobile Interface		
Type	WMI2-W205		
Type of modulation (packet types)	ASK (Amplitude Shift Keying) 2 kbps		
Number of channels (USA/Canada -bands)	1 nominal channel at 125 kHz		
Antenna Type	<input checked="" type="checkbox"/> Integrated (coil type) <input type="checkbox"/> External, no RF- connector <input type="checkbox"/> External, separate RF-connector		
Antenna Gain	No information from applicant		
WPC Coil Type	Primary Inductive TX coil		
MAX Field strength (radiated):	10.4 dB $\mu$ V/m Peak@300 m		
99% Occupied bandwidth	5.625kHz (Op.Mode 2: TX/RX)		
Installed options	<input checked="" type="checkbox"/> NFC (not tested within this test report)		
Power supply	<input checked="" type="checkbox"/> DC power only: 12 V DC		
Special EMI components	--		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
Firmware		<input type="checkbox"/> for normal use	<input checked="" type="checkbox"/> Special version for test execution
FCC label attached	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no	

### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	Wireless Mobile Interface	WMI2-W205	6293	2609-090-305-51	E005 8 (17/40 01)

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	VScom USB-CAN Adapter	USB-CAN Plus	380101271	--	--
AE 2	Wireless Charging Receiver	WPR1500-LDO	900-28439	--	--
AE 3	Electronic load	5W/15W	--	--	--
AE 4	Main Harness	--	--	--	--
AE 5	USB cable	--	--	--	--

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
set. 1	EUT A + AE 1 + AE 4 + AE 5	test up without Q-Receiver (Load)
set. 2	EUT A + AE 1 + AE 2 + AE 3 + AE 4 + AE 5	test up, 5W set on electronic load

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
op. 1	Wireless Charging (WPT) Mode TX only	WPT Mode 1: TX-Mode without AE2
op. 2	Wireless Charging (WPT) Mode TX & RX	WPT Mode 2: TX/RX Mode charging at 5 Watt nominal setting with AE2

\*) EUT operating mode no. is used to simplify the test report.

## 4. Description of test system set-up's


### 4.1. Test system set-up for radiated magnetic field measurements below 30 MHz

**Specification:** ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1 , ANSI C63.10-2013 chapter 6.4 (§6.4.4.2)

**General Description:** Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

**Schematic:**

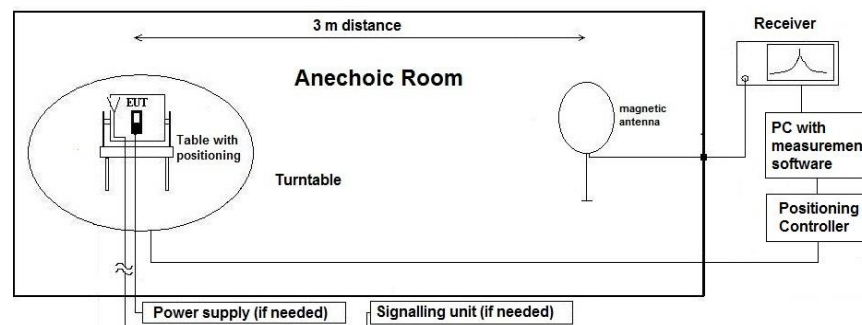

**Testing method:**

#### Exploratory, preliminary measurement

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

#### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C<sub>L</sub> = Cable loss

D<sub>F</sub> = Distance correction factor

E<sub>C</sub> = Electrical field – corrected value

E<sub>R</sub> = Receiver reading

G<sub>A</sub> = Gain of pre-amplifier (if used)

L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**Distance correction:**

Reference for applied correction (extrapolating) factors due to reduced measurement distance:

ANSI C63.10:2013, §6.4.4.2 - Equations (2) + (3) + (4)




## 4.2. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz

**Specification:** ANSI C63.4-2014 chapter 8.2.3, ANSI C63.10-2013 chapter 6.5

**General Description:** Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the regulatory commissions.

**Schematic:**

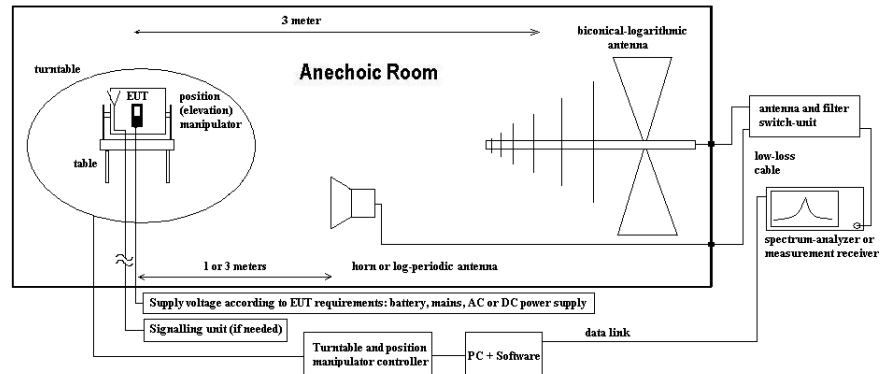

**Testing method:**

### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C<sub>L</sub> = Cable loss

D<sub>F</sub> = Distance correction factor (if used)

E<sub>C</sub> = Electrical field – corrected value

E<sub>R</sub> = Receiver reading

G<sub>A</sub> = Gain of pre-amplifier (if used)

L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

## 5. Measurements

### 5.1. General Limit - Radiated field strength emissions

#### 5.1.1. Test location and equipment

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input checked="" type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input checked="" type="checkbox"/> 001 ESS	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 371 CBT32	<input type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL
DC power	<input type="checkbox"/> 087 EA 3013S	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
line voltage	<input checked="" type="checkbox"/> 12 VDC (for EUT A supplied from AE4)	<input checked="" type="checkbox"/> 060 120 V 60 Hz	via PAS 5000 (for AE4)

#### 5.1.2. Requirements/Limits

FCC		<input checked="" type="checkbox"/> Part 18.305					
other		OET MP-5					
							Radiated emissions limits
Equipment	Operating Frequency [MHz]	RF Power generated by equipment (watts)	[ $\mu$ V/m] @ 300m	[dB $\mu$ V/m] @ 300m	Distance Correction factor 300m to 3m (for frequencies lower 30MHz)	Distance Correction factor 300m-3m (for frequencies higher 30MHz)	
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times$ SQRT(power/500)	27.95 --	See table	20dB/Decade	
	Any non-ISM frequency	Below 500 500 or more	15 $15 \times$ SQRT(power/500)	23.52 --	See table	20dB/Decade	

#### 5.1.3. Operating frequencies accord. §18.301

ISM Frequency	Tolerance
6.78 MHz	$\pm 15.0$ kHz
13.56 MHz	$\pm 7.0$ kHz
27.12 MHz	$\pm 163.0$ kHz
40.68 MHz	$\pm 20.0$ kHz
915 MHz	$\pm 13.0$ MHz
2,450 MHz	$\pm 50.0$ MHz
5,800 MHz	$\pm 75.0$ MHz
24,125 MHz	$\pm 125.0$ MHz
61.25 GHz	$\pm 250.0$ MHz
122.50 GHz	$\pm 500.0$ MHz
245.00 GHz	$\pm 1.0$ GHz

#### 5.1.4. Prohibited frequencies accord. §18.303

	Frequencies
Safety and Rescue bands	490-510 kHz
	2170-2194 kHz
	8354-8374 kHz
	121.4-121.6 MHz
	156.7-156.9 MHz
	242.8-243.2 MHz

### 5.1.5. Test condition and test set-up1: 9kHz to 30MHz

Signal link to test system (if used):		<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input checked="" type="checkbox"/> none
EUT-grounding		<input type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up		<input checked="" type="checkbox"/> table top		<input type="checkbox"/> floor standing
Climatic conditions		Temperature: (22±3°C)		Rel. humidity: (40±20)%
EMI-Receiver or Analyzer Settings	Scan data	<input checked="" type="checkbox"/> 9 – 150 kHz RBW/VBW = 200 Hz Scan step = 80 Hz <input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz Scan step = 4 kHz <input type="checkbox"/> other:		
	Scan-Mode Detector Mode: Sweep-Time	<input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3dB Spectrum analyser Mode Peak (pre-measurement) and Quasi-PK/Average (final if applicable) Repetitive-Scan, max-hold Coupled – calibrated display if continuous signal otherwise adapted to EUT’s individual transmission duty-cycle		
General measurement procedures		Please see chapter “Test system set-up radiated magnetic field measurements below 30 MHz”		

### 5.1.6. Test condition and measurement test set-up2: 30MHz to 1GHz

Signal link to test system (if used):		<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input checked="" type="checkbox"/> none
EUT-grounding		<input type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up		<input checked="" type="checkbox"/> table top 0.8m height		<input type="checkbox"/> floor standing
Climatic conditions		Temperature: (22±3°C)		Rel. humidity: (40±20)%
EMI-Receiver (Analyzer) Settings	Scan frequency range:	<input checked="" type="checkbox"/> 30 – 1000 MHz <input type="checkbox"/> other:		
	Scan-Mode Detector RBW/VBW Mode: Scan step Sweep-Time	<input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB spectrum analyser mode Peak / Quasi-peak 100 kHz/300 kHz Repetitive-Scan, max-hold 80 kHz Coupled – calibrated display if continuous tx-signal otherwise adapted to EUT’s individual duty-cycle		
General measurement procedures		Please see chapter “Test system set-up for electric field measurement in the range 30 MHz to 1 GHz”		

### 5.1.7. Measurement Results

The results are presented below in summary form only. The EUT is put on operation on nominal channel.

Table of measurement results:

Diagram No.	Carrier Channel Range	Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
						PK	AV	QP	
2.01	Nominal	100 kHz – 150 kHz	1	1	§18.305 limits (non-ISM) EUT laying position Carrier field strength <b>-5.21 dBuV/m@300m</b> Correction factor as per chapt. 5.1.7.1 used	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.02	Nominal	100 kHz – 150 kHz	1	1	§18.305 limits (non-ISM) EUT standing position Carrier field strength <b>-0.14 dBuV/m@300m</b> Correction factor as per chapt. 5.1.7.1 used	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.04	Nominal	100 kHz – 150 kHz	2	2	§18.305 limits (non-ISM) EUT laying position Carrier field strength <b>10.40 dBuV/m@300m</b> Correction factor as per chapt. 5.1.7.1 used	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.05	Nominal	100 kHz – 150 kHz	2	2	§18.305 limits (non-ISM) EUT standing position Carrier field strength <b>6.11 dBuV/m@300m</b> Correction factor as per chapt. 5.1.7.1 used	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass

2.06	Nominal	9kHz - 30MHz	1	1	§15.305 limits (non-ISM) 125 kHz carrier on diagram, not relevant for verdict EUT laying position Correction factor as per chapt. 5.1.7.1 used	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.01	Nominal	30 – 1000 MHz	1	1	§15.305 limits (non-ISM) EUT laying-standing 20dB/Decade used as correction factor	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass

**Remark:**

### 5.1.7.1. Correction factors due to reduced meas. distance (f < 30 MHz)

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of  $0.625 \times \lambda$ . Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

Frequency: 9.00 kHz, Correction: -80.00 dB	Frequency: 1100.00 kHz, Correction: -63.21 dB
Frequency: 10.00 kHz, Correction: -80.00 dB	Frequency: 1200.00 kHz, Correction: -62.46 dB
Frequency: 20.00 kHz, Correction: -80.00 dB	Frequency: 1300.00 kHz, Correction: -61.76 dB
Frequency: 30.00 kHz, Correction: -80.00 dB	Frequency: 1400.00 kHz, Correction: -61.12 dB
Frequency: 40.00 kHz, Correction: -80.00 dB	Frequency: 1500.00 kHz, Correction: -60.52 dB
Frequency: 50.00 kHz, Correction: -80.00 dB	Frequency: 1600.00 kHz, Correction: -59.96 dB
Frequency: 60.00 kHz, Correction: -80.00 dB	Frequency: 1700.00 kHz, Correction: -59.43 dB
Frequency: 70.00 kHz, Correction: -80.00 dB	Frequency: 1800.00 kHz, Correction: -58.94 dB
Frequency: 80.00 kHz, Correction: -80.00 dB	Frequency: 1900.00 kHz, Correction: -58.47 dB
Frequency: 90.00 kHz, Correction: -80.00 dB	Frequency: 2000.00 kHz, Correction: -58.02 dB
Frequency: 100.00 kHz, Correction: -80.00 dB	Frequency: 2100.00 kHz, Correction: -57.60 dB
Frequency: 110.00 kHz, Correction: -80.00 dB	Frequency: 2200.00 kHz, Correction: -57.19 dB
Frequency: 125.00 kHz, Correction: -80.00 dB	Frequency: 2300.00 kHz, Correction: -56.81 dB
Frequency: 130.00 kHz, Correction: -80.00 dB	Frequency: 2350.00 kHz, Correction: -56.62 dB
Frequency: 140.00 kHz, Correction: -80.00 dB	Frequency: 2400.00 kHz, Correction: -56.44 dB
Frequency: 150.00 kHz, Correction: -80.00 dB	Frequency: 2500.00 kHz, Correction: -56.08 dB
Frequency: 155.00 kHz, Correction: -80.00 dB	Frequency: 2600.00 kHz, Correction: -55.74 dB
Frequency: 160.00 kHz, Correction: -79.96 dB	Frequency: 2700.00 kHz, Correction: -55.41 dB
Frequency: 165.00 kHz, Correction: -79.69 dB	Frequency: 2850.00 kHz, Correction: -54.94 dB
Frequency: 170.00 kHz, Correction: -79.43 dB	Frequency: 3000.00 kHz, Correction: -54.50 dB
Frequency: 180.00 kHz, Correction: -78.94 dB	Frequency: 3300.00 kHz, Correction: -53.67 dB
Frequency: 190.00 kHz, Correction: -78.47 dB	Frequency: 3500.00 kHz, Correction: -53.16 dB
Frequency: 200.00 kHz, Correction: -78.02 dB	Frequency: 3800.00 kHz, Correction: -52.45 dB
Frequency: 210.00 kHz, Correction: -77.60 dB	Frequency: 4000.00 kHz, Correction: -52.00 dB
Frequency: 220.00 kHz, Correction: -77.19 dB	Frequency: 4200.00 kHz, Correction: -51.58 dB
Frequency: 230.00 kHz, Correction: -76.81 dB	Frequency: 4500.00 kHz, Correction: -50.98 dB
Frequency: 240.00 kHz, Correction: -76.44 dB	Frequency: 4800.00 kHz, Correction: -50.42 dB
Frequency: 250.00 kHz, Correction: -76.08 dB	Frequency: 5000.00 kHz, Correction: -50.06 dB
Frequency: 260.00 kHz, Correction: -75.74 dB	Frequency: 5200.00 kHz, Correction: -49.72 dB
Frequency: 270.00 kHz, Correction: -75.41 dB	Frequency: 5500.00 kHz, Correction: -49.23 dB
Frequency: 280.00 kHz, Correction: -75.10 dB	Frequency: 5800.00 kHz, Correction: -48.77 dB
Frequency: 290.00 kHz, Correction: -74.79 dB	Frequency: 6000.00 kHz, Correction: -48.48 dB
Frequency: 300.00 kHz, Correction: -74.50 dB	Frequency: 6500.00 kHz, Correction: -47.78 dB
Frequency: 310.00 kHz, Correction: -74.21 dB	Frequency: 7000.00 kHz, Correction: -47.14 dB
Frequency: 320.00 kHz, Correction: -73.94 dB	Frequency: 8000.00 kHz, Correction: -45.98 dB
Frequency: 330.00 kHz, Correction: -73.67 dB	Frequency: 9000.00 kHz, Correction: -44.96 dB
Frequency: 340.00 kHz, Correction: -73.41 dB	Frequency: 10000.00 kHz, Correction: -44.04 dB
Frequency: 350.00 kHz, Correction: -73.16 dB	Frequency: 11000.00 kHz, Correction: -43.21 dB
Frequency: 360.00 kHz, Correction: -72.91 dB	Frequency: 12000.00 kHz, Correction: -42.46 dB
Frequency: 370.00 kHz, Correction: -72.68 dB	Frequency: 13000.00 kHz, Correction: -41.76 dB
Frequency: 380.00 kHz, Correction: -72.45 dB	Frequency: 13560.00 kHz, Correction: -41.40 dB
Frequency: 390.00 kHz, Correction: -72.22 dB	Frequency: 14000.00 kHz, Correction: -41.12 dB
Frequency: 400.00 kHz, Correction: -72.00 dB	Frequency: 15000.00 kHz, Correction: -40.52 dB
Frequency: 435.00 kHz, Correction: -71.27 dB	Frequency: 15500.00 kHz, Correction: -40.23 dB
Frequency: 450.00 kHz, Correction: -70.98 dB	Frequency: 15750.00 kHz, Correction: -40.10 dB
Frequency: 475.00 kHz, Correction: -70.51 dB	Frequency: 15920.00 kHz, Correction: -40.00 dB
Frequency: 480.00 kHz, Correction: -70.42 dB	Frequency: 16000.00 kHz, Correction: -40.00 dB
Frequency: 490.00 kHz, Correction: -70.24 dB	Frequency: 17000.00 kHz, Correction: -40.00 dB
Frequency: 490.10 kHz, Correction: -70.23 dB	Frequency: 18000.00 kHz, Correction: -40.00 dB
Frequency: 491.00 kHz, Correction: -70.22 dB	Frequency: 19000.00 kHz, Correction: -40.00 dB
Frequency: 493.00 kHz, Correction: -70.18 dB	Frequency: 20000.00 kHz, Correction: -40.00 dB
Frequency: 495.00 kHz, Correction: -70.15 dB	Frequency: 21000.00 kHz, Correction: -40.00 dB
Frequency: 500.00 kHz, Correction: -70.06 dB	Frequency: 22000.00 kHz, Correction: -40.00 dB
Frequency: 550.00 kHz, Correction: -69.23 dB	Frequency: 23000.00 kHz, Correction: -40.00 dB
Frequency: 600.00 kHz, Correction: -68.48 dB	Frequency: 24000.00 kHz, Correction: -40.00 dB
Frequency: 650.00 kHz, Correction: -67.78 dB	Frequency: 25000.00 kHz, Correction: -40.00 dB
Frequency: 700.00 kHz, Correction: -67.14 dB	Frequency: 26000.00 kHz, Correction: -40.00 dB
Frequency: 750.00 kHz, Correction: -66.54 dB	Frequency: 27000.00 kHz, Correction: -40.00 dB
Frequency: 800.00 kHz, Correction: -65.98 dB	Frequency: 28000.00 kHz, Correction: -40.00 dB
Frequency: 850.00 kHz, Correction: -65.45 dB	Frequency: 29000.00 kHz, Correction: -40.00 dB
Frequency: 900.00 kHz, Correction: -64.96 dB	Frequency: 30000.00 kHz, Correction: -40.00 dB
Frequency: 950.00 kHz, Correction: -64.49 dB	
Frequency: 1000.00 kHz, Correction: -64.04 dB	

## 5.2. RF-Parameter: 99% occupied Bandwidth

### 5.2.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 348 EMI cond.	<input type="checkbox"/> 443 EMI FAR	<input checked="" type="checkbox"/> 347 Radio.lab.	<input type="checkbox"/> 337 OATS	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK	<input type="checkbox"/> 489 ESU	<input checked="" type="checkbox"/> 683 FSU26	<input type="checkbox"/>
attenuator	<input type="checkbox"/> 530 10 dB	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
signalling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU			
DC power	<input checked="" type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 087 EA3013	<input type="checkbox"/> 354 NGPE 40	<input type="checkbox"/> 086 LNG50-10	<input type="checkbox"/>	<input type="checkbox"/>
Power supply voltage	<input checked="" type="checkbox"/> 12 V DC		<input type="checkbox"/> 060 110 V 60 Hz via PAS 5000			
Others	<input type="checkbox"/> 613 20dB Attenuator		<input type="checkbox"/> cable K5			

### 5.2.2. References of occupied and emission bandwidth

#### §15.202(a)

(a) Occupied bandwidth. The frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. In some cases, for example multichannel frequency-division systems, the percentage of 0.5 percent may lead to certain difficulties in the practical application of the definitions of occupied and necessary bandwidth; in such cases a different percentage may prove useful.

### 5.2.3. Test condition and measurement test set-up

Signal link to test system (if used):	<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input checked="" type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top		<input type="checkbox"/> floor standing
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%
General measurement procedures	Please see chapter "Test system set-up for conducted RF-measurement at antenna Port" (W2 Set-up)		

### 5.2.4. EUT Settings:

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions. Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

### 5.2.5. Measurement method:

The **99% emission bandwidth** was measured. Two markers are placed on frequency points such that left to lower f-marker and right to higher f-marker only 1% of the TX-power is contained. Between the markers, 99% of the power is laying. The RBW value is readjusted and the measurement repeated until the RBW/EBW ratio is around 1%.

### 5.2.6. Spectrum-Analyzer settings:

Span	Set as to fully display the emissions + 30%
Scale y display	approximate 30dB below the maximum PEAK level
Resolution Bandwidth (RBW)	<input checked="" type="checkbox"/> ANSI 63.10:2013 Set to initial value approx 1% to 5% of the emission bandwidth, re-adjust and proof that RBW/EBW is between 1% and 5%
Video Bandwidth (VBW)	Minimum 3 times the resolution bandwidth
Sweep time	Auto -coupled
Detector	Peak detector
Sweep mode	Repetitive Mode, MAX-HOLD, trace stabilization

**5.2.7. Results:****99% OCCUPIED BANDWIDTH:**

Set-up no.: 1	99% Bandwidth [MHz]
$T_{\text{NOM}} = 21^{\circ}\text{C}$ , $V_{\text{NOM}} = 12\text{ VDC}$	Nominal channel = 1 (125 kHz)
Measured value (op. 1)	3.75 kHz
Measured value (op. 2)	5.625 kHz

**Remark:****VERDICT:** for information only

### 5.3. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according to its statistical distribution calculated.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%	Remarks
Conducted emissions (U <sub>CISPR</sub> )	CISPR 16-2-1	9 kHz - 150 kHz 150 kHz - 30 MHz	4.0 dB 3.6 dB	-
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz 1 GHz - 18 GHz	4.2 dB 5.1 dB	E-Field
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-	-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB	Substitution
Power Output conducted	-	9 kHz - 20 GHz	1.0 dB	-
Conducted emissions on antenna ports	-	9 kHz - 20 GHz 20 GHz - 40 GHz	1.0 dB	-
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)	Frequency error
			1.0 dB	Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)	Frequency error
			1.0 dB	Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm	-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB	Magnetic field
		30 MHz - 1 GHz	4.2 dB	E-field
		1 GHz - 20 GHz	3.17 dB	Substitution

**Table: measurement uncertainties, valid for conducted/radiated measurements**



## 6. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkkS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	MRA US-EU 0003	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	FCC, Federal Communications Commission Laboratory Division, USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
487 550 348 348	R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan
OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room			

## 7. Instruments and Ancillary

### 7.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

#### 7.1.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
140	Signal Generator	SMHU	831314/006	Firm.= 3.21
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	Power Meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	Spuri 7.2.5 or EMC 32 Ver. 9.15.00
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw..f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr. 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw..f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
598	Spectrum Analyzer	FSEM 30	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2
607	Signal Generator	SMR 20	832033/011	V1.25
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20
670	Univ. Radio Communication Tester	CMU 200	106833	µP1 =V8.50, Firmware = V.20
689	Vector Signal Generator	SMU200	100970	02.20.360.142
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)

#### 7.1.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	16.05.2018
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	15.05.2018
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	17.05.2018
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	15.05.2019
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	30.05.2019
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.07.2017
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.04.2018
030	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	30.04.2018
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	15.05.2019
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	30.06.2017
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299,7810.52	Rohde & Schwarz	36 M	-	30.04.2018
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.04.2018
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	30.05.2019
133	horn antenna 18 GHz (Meas 1)	3115	9012-3629	EMCO	36 M	1c	10.03.2020
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO	36 M	-	10.03.2020
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	30.04.2018
140	Signal Generator	SMHU	831314/006	Rohde & Schwarz	24 M	-	30.05.2018
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	30.05.2018
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	30.05.2018
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	30.05.2019
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	30.05.2018
266	Peak Power Sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	30.05.2018
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	30.06.2017
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	30.06.2017
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	17.05.2018
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	14.03.2020
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	20.03.2020
331	Climatic Test Chamber -40/+180 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	30.10.2018
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	30.05.2018
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	17.05.2019
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
355	Power Meter	URV 5	891310/027	Rohde & Schwarz	24 M	-	30.05.2018
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	24.05.2019
371	Bluetooth Tester	CBT32	100153	R&S	36 M	-	30.05.2019
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	12 M	-	17.05.2018
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	15.05.2018
389	Digital Multimeter	Keithley 2000	0583926	Keithley	24 M	-	30.04.2017
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	18.05.2018
405	Thermo-/Hygrometer	OPUS 10 THI	126.0604.0003.3.3.3.2 2	LUFFT Mess u. Regeltechnik	24 M	-	30.03.2019
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	24.05.2018
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	-	10.03.2020
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR) Cable	-	CETECOM	12 M	5	05.06.2017
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	ETS-Lindgren / CETECOM	12 M	5	30.09.2017

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-	5	Wainwright Instruments GmbH	12 M	1c	30.06.2017
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	30.06.2017
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	16.06.2018
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	30.05.2018
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	36 M	-	30.04.2018
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	36 M	-	30.04.2018
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	16.05.2019
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	30.07.2017
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	31.03.2019
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	18.05.2019
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwright	12 M	1c	30.06.2017
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	18.05.2019
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	30.03.2018
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	05.07.2018
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	31.07.2018
550	System CTC S-VSWR Verification SAR-EMI	System EMI Field SAR S-VSWR	-	ETS Lindgren/CETECOM	24 M	-	30.03.2019
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	30.06.2017
557	System CTC-OTA-2	R&S TS8991	-	Rohde & Schwarz	12 M	5	30.09.2016
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	08.08.2019
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2019
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	
594	Wideband Radio Communication Tester	CMW 500	101757	Rohde & Schwarz	12 M	-	30.04.2017
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	pre-m	-	
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	17.05.2019
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	15.05.2019
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	30.05.2018
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	16.05.2018
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.4 3	G. Lufft GmbH	24 M	-	30.03.2019
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	Kogilink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	12 M	-	24.05.2018
644	Amplifierer	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	30.05.2018
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	
678	Power Meter	NRP	101638	Rohde&Schwarz	pre-m	-	
683	Spectrum Analyzer	FSU 26	200571	Rohde & Schwarz	12 M	-	17.05.2018
686	Field Analyzer	EHP-200A	160WX30702	Narda Safety Test Solutions	24 M	-	29.03.2019
687	Signal Generator	SMF 100A	102073	Rohde&Schwarz	12 M	-	17.05.2018
688	Pre Amp	JS-18004000-40-8P	1750117	Miteq	pre-m	-	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
690	Spectrum Analyzer	FSU	100302/026	Rohde&Schwarz	12 M	-	16.05.2018
691	OSP120 Base Unit	OSP120	101183	Rohde & Schwarz	12 M	-	22.05.2018
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	36 M	-	29.05.2020
693	TS8997	CTC-Radio Lab 1_TS8997	-	Rohde&Schwarz	12 M	5	06.06.2017
697	Power Splitter	ZN4PD-642W-S+	165001445	Mini-Circuits	-	2	
701	CMW500 wide. Radio Comm.	CMW500	158150	Rohde & Schwarz	12 M	-	01.05.2017
703	INNCO Antennen Mast	MA 4010-KT080-XPET-ZSS3	MA4170-KT100-XPET-	INNCO	pre-m	-	
704	INNCON Controller	CO 3000-4port	CO3000/933/38410516/L	INNCO Systems GmbH	pre-m	-	
711	Harmonic Mixer 90 GHz - 140GHz	RPG FS-Z140	101004	RPG	12 M	-	22.02.2018
712	Harmonic Mixer 75 GHz - 110GHz	FS-Z110	101468	Rohde & Schwarz	12 M	-	22.02.2018
713	Harmonic Mixer, 50 GHz - 75GHz	FS-Z75	101022	Rohde & Schwarz	12 M	-	22.05.2018
714	Signal Analyzer 67GHz	FSW67	104023	Rohde & Schwarz	24 M	-	03.03.2019
715	Harmonic Mixer, 140 GHz - 220GHz	FS-Z220	101009	RPG Radiometer Physics	12 M	-	03.08.2018
716	Harmonic Mixer 220 GHz to 325 GHZ	FS-Z325	101005	RPG Radiometer Physics	12 M	-	13.02.2018
747	Spectrum Analyzer	FSU 26	200152	Rohde & Schwarz	12 M	-	18.05.2018
748	Pickett-Potter Horn Antenna	FH-PP 4060	010001	Radiometer Physics	-	-	
749	Pickett-potter Horn Antenna	FH-PP 60-90	010003	Radiometer Physics	-	-	
750	Pickett-Potter Horn Antenna	FH-PP 140-220	010011	Radiometer Physics	-	-	

### 7.1.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No. 443)
	1d	System CTC-SAR-EMI (Ref.-No. 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No. 420)
	1 g	System CTC-FAR-EMS (Ref.-No. 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

## 8. Versions of test reports (change history)

Version	Applied changes	Date of release
--	Final release	2018-04-17