

Date: 2004-04-30 TEST REPORT Page 1 of 18

No.: HM150946

**Applicant:** Toy Century Ind. Co., Ltd.

**Description of Samples:** Model name: Walkie Talkie

Model no.: TC49MHZWT

Brand name: N/A

FCC ID: QXATC49MHZWT

**Date Samples Received:** 2004-02-16

**Date Tested:** 2004-03-19

Investigation Requested: FCC Part 15 Subpart C

**Conclusions:** See the attached sheets for details

Remarks: ----

K C Lee, EMC for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.



No.: HM150946

### **CONTENT:**

	Cover Content Conclusions	Page 1 of 18 Page 2-3 of 18 Page 4 of 18
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 5 of 18
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 5 of 18
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 6 of 18
1.4	Date of Order	Page 6 of 18
1.5	Submitted Samples	Page 6 of 18
1.6	Test Duration	Page 6 of 18
1.7	Country of Origin	Page 6 of 18
1.8	Additional Information of EUT	Page 7 of 18
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 8 of 18
2.2	Test Standards and Results Summary	Page 8 of 18
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 9-13 of 18
3.2	Bandwidth Measurement	Page 14-15 of 18



No.: HM150946

Appendix A

List of Measurement Equipment Page 16 of 18

Appendix B

Photographs Page 17-18 of 18



Date: 2004-04-30 TEST REPORT Page 4 of 18

No.: HM150946

### **CONCLUSIONS**

The submitted product was deemed to have <u>COMPLIED</u> with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.



No.: HM150946

### 1.0 General Details

### 1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

## 1.2 Applicant Details Applicant

TOY CENTURY IND. CO., LTD. Unit 1010-1015, 10/F., Tower B, New Mandarin Plaza, No. 14 Science Museum Road, Tsim Sha Tsui East, Kowloon, Hong Kong

### **HKSTC Code Number for Applicant**

**TOC009** 

#### Manufacturer

TOY CENTURY IND. CO., LTD. Unit 1010-1015, 10/F., Tower B, New Mandarin Plaza, No. 14 Science Museum Road, Tsim Sha Tsui East, Kowloon, Hong Kong



Date: 2004-04-30 TEST REPORT Page 6 of 18

No.: HM150946

## 1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Walkie Talkie

Manufacturer: Toy Century Industrial Co, Ltd.

Brand Name: N/A

Model Number: TC49MHZWT

Input Voltage: 9Vd.c ("6F22" size battery x 1)

### 1.3.1 Description of EUT Operation

The Equipment Under Test(EUT) is an Toy Century Industrial Co, Ltd.., Walkie Talkie. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by Mic and type is frequency modulation.

#### 1.4 Date of Order

2004-02-16

### 1.5 Submitted Sample(s):

1 Sample per model

### 1.6 Test Duration

2004-03-19

### 1.7 Country of Origin

China



No.: HM150946

### 1.8 Additional Information of EUT

	Submitted	Not Available
User Manual	$\boxtimes$	
Part List	$\overline{\boxtimes}$	
Circuit Diagram	$\boxtimes$	
Printed Circuit Board [PCB] Layout	$\boxtimes$	
Block diagram	$\boxtimes$	
FCC ID Label	$\boxtimes$	



No.: HM150946

### 2.0 Technical Details

### 2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Te	est Result	t			
			Severity	Pass	Failed	N/A			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A						
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	Class B	$\boxtimes$					
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	Class B			$\boxtimes$			

Note: N/A - Not Applicable



Date: 2004-04-30 TEST REPORT Page 9 of 18

No.: HM150946

### 3.0 Test Results

### 3.1 Emission

### 3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.109
Test Method: ANSI C63.4:2003
Test Date: 2004-03-19
Mode of Operation: On mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

### **Test Setup:**

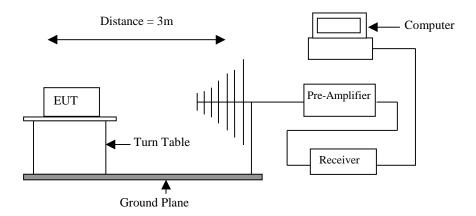



Date: 2004-04-30 **TEST REPORT** Page 10 of 18

No.: HM150946

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[μV/m]	[μV/m]
49.82-49.90	100,000	10,000

**Results: Transmitter** 

Field Strength of Fundamental Emissions Peak Value									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m	·			
49.86	45.5	10.2	55.7	609.5	100,000	Vertical			

Field Strength of Fundamental Emissions Average									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m				
49.86	45.3	10.2	55.5	595.7	10,000	Vertical			

### Remarks:

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth =3MHz Video Bandwidth =1Hz

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Date: 2004-04-30 TEST REPORT Page 11 of 18

No.: HM150946

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

**Results: Transmitter** 

Radiated Emissions Quasi-Peak										
Frequency	Measured Level @3m		Correction Factor	Field Strength				Limit @3m	E-Field Polarity	
MHz	dE	3μV/m	dBμV/m	d	BμV/m		μV/m	μV/m		
99.72	٧	1.0	11.0	٧	12.0	<	4.0	150	Vertical	
149.58	٧	1.0	9.8	٧	10.8	<	3.5	150	Vertical	
199.44	٧	1.0	11.5	٧	12.5	<	4.2	150	Vertical	
249.30	٧	1.0	15.9	٧	16.9	<	7.0	200	Vertical	
299.16	٧	1.0	16.9	٧	17.9	<	7.9	200	Vertical	
349.02	٧	1.0	17.2	٧	18.2	<	8.1	200	Vertical	
398.88	<	1.0	18.8	٧	19.8	<	9.8	200	Vertical	
448.74	<	1.0	19.7	٧	20.7	<	10.8	200	Vertical	
498.60	<	1.0	20.6	٧	21.6	<	12.0	200	Vertical	

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Date: 2004-04-30 **TEST REPORT** Page 12 of 18

No.: HM150946

### Limits for Radiated Emissions [FCC 47 CFR 15.109 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

Results: Receiver

Radiated Emissions Quasi-Peak									
Frequency	Me	easured	Correction	Field		Field		Limit @3m	E-Field
, ,	Lev	el @3m	Factor	s	trength	s	trength		Polarity
MHz	dl	BμV/m	dBμV/m	d	BμV/m		μV/m	μV/m	_
49.86		19.6	10.2		29.8		30.9	100	Vertical
99.72	<	1.0	12.5	<	13.5	<	4.7	150	Vertical
149.58	<	1.0	9.8	<	10.8	<	3.5	150	Vertical
199.44	<	1.0	11.5	<	12.5	<	4.2	150	Vertical
249.30	<	1.0	15.9	<	16.9	<	7.0	200	Vertical
299.16	<	1.0	17.4	<	18.4	<	8.3	200	Vertical
349.02	<	1.0	17.2	<	18.2	<	8.1	200	Vertical
398.88	<	1.0	18.8	<	19.8	<	9.8	200	Vertical
448.74	<	1.0	19.7	<	20.7	<	10.8	200	Vertical
498.60	<	1.0	20.6	<	21.6	<	12.0	200	Vertical

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Date: 2004-04-30 **TEST REPORT** Page 13 of 18

No.: HM150946

### 3.1.1 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.107
Test Method: ANSI C63.4:2003
Test Date: 2004-03-19

Mode of Operation: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



Date: 2004-04-30 **TEST REPORT** Page 14 of 18

No.: HM150946

### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2004-03-19 Mode of Operation: On mode

### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Date: 2004-04-30 **TEST REPORT** Page 15 of 18

No.: HM150946

### Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20B Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
49.86	58.8	within 49.82-49.90

### 20B Bandwidth of Fundamental Emission

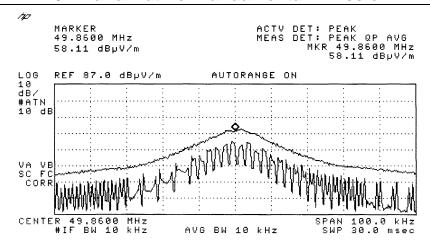



No.: HM150946

### Appendix A

### **Test Equipment Audit**

### **Radiated Emission**

				1	1
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	14/03/03
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	14/03/03
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	14/03/03
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	14/03/03
EM011	ATTENNUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	14/03/03
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	14/03/03
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	СМ
EM020	HORN ANTENNA	EMCO	3115	4032	19/07/00
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	04/08/00
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/11/02
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	18/12/01
EM145	EMI TEST RECEIVER	R&S	ESCS 30	830245/021	02/08/03
EM194	BICONILOG ANTENNA	EMCO	3142B	1795	14/05/02
EM195	ANTENNA POSITIONING MAST	EMCO	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	EMCO	2090	1662	N/A

### **Conducted Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	18/10/02
EM119	LISN	R&S	ESH3-Z5	0831.5518.52	01/10/02
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	СМ
EM142	PULES LIMITER	R&S	ESH3Z2	357.8810.52	03/07/02
EM181	EMI TEST RECEIVER	R&S	ESIB7	100072	28/11/01
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	18/10/02
EM197	LISN	EMCO	4825/2	1193	08/04/03

### Remarks:

CM Corrective Maintenance N/A Not Applicable or Not Available

TBD To Be Determined



No.: HM150946

### Appendix B

### Photographs of EUT


Front View of the product



Rear View of the product



**Inner Circuit Top View** 



**Inner Circuit Bottom View** 





No.: HM150946

### **Photographs of EUT**

Measurement of Radiated Emission Test Set Up

End of Document