



FCC RADIO TEST REPORT

FCC ID : QYL8265BB
Equipment : Notebook
Brand Name : Getac
Model name : B300
Applicant : Getac Technology Corporation.
5F., Building A, No. 209, Sec.1, Nangang
Rd., Nangang Dist., Taipei City 11568, Taiwan, R.O.C.
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jun. 05, 2018 and testing was started from Jun. 15, 2018 and completed on Jul. 14, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 5

 1.3 Testing Location 5

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode 8

 2.3 Connection Diagram of Test System 9

 2.4 Support Unit used in test configuration and system 9

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 Test Result 11

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 11

 3.2 Maximum Conducted Output Power Measurement 14

 3.3 Power Spectral Density Measurement 15

 3.4 Unwanted Emissions Measurement 17

 3.5 AC Conducted Emission Measurement..... 23

 3.6 Automatically Discontinue Transmission 25

 3.7 Antenna Requirements 26

4 List of Measuring Equipment..... 27

5 Uncertainty of Evaluation 29

Appendix A. Conducted Test Results

Appendix B. AC Conducted Emission Test Result

Appendix C. Radiated Spurious Emission

Appendix D. Radiated Spurious Emission Plots

Appendix E. Duty Cycle Plots

Appendix F. Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.407 (a)	Maximum Conducted Output Power	Pass
3.3	15.407 (a)	Power Spectral Density	Pass
3.4	15.407(b)	Unwanted Emissions	Pass
3.5	15.207	AC Conducted Emission	Pass
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass

Reviewed by: Joseph Lin

Report Producer: Polly Tsai



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, and Wi-Fi 5GHz 802.11a/n/ac

Product Specification subjective to this standard	
Integrated WLAN Module	Brand Name: Intel Module Name: 8265NGW
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH13-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
- 2. The above Frequency and Channel in "#" were 802.11ac VHT80.



2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + TF + TC
Remark: 1. TF stands for Test Function, and consists of H-Pattern, Camera, and MPEG4. 2. TC stands for Test Configuration, and consists of SD Card, USB3.0 HD*3, Monitor (VGA out), Monitor (HDMI out), RS-232 Cable*2 (Load), PC Card, Earphone with Mic, RJ-45 Link, Battery, and AC Adapter (A10-090P3A).	

Ch. #	Band IV : 5725-5850 MHz		
	802.11a	802.11n HT40	802.11ac VHT80
L Low	149	151	-
M Middle	157	-	155
H High	165	159	-

2.3 Connection Diagram of Test System

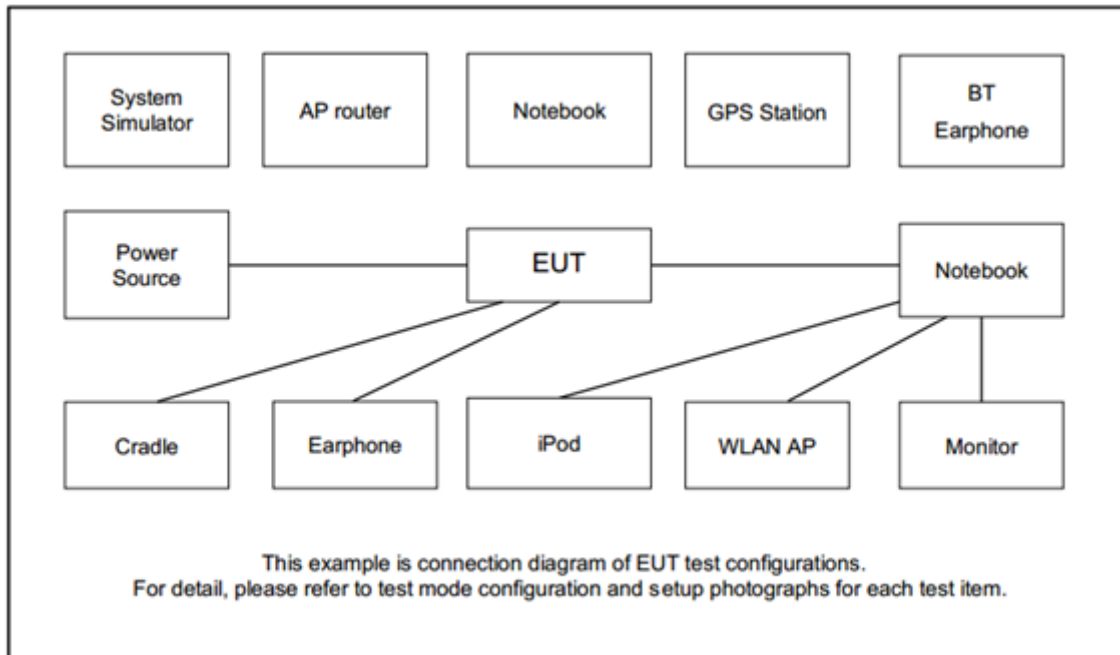

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	iPod Earphone	aibo	IP-E1	N/A	Unshielded, 1.1 m	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	LCD Monitor	DELL	P2715Q	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
6.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
7.	Earphone + Mic	Ergotech	ET-E200	N/A	Unshielded, 1.8 m	N/A
8.	HD USB 3.0	Lenovo	F310S	FCC DoC	Shielded, 0.5 m	N/A
9.	USB HD	PQI	H568V	FCC DoC	Shielded, 0.5 m	N/A
10.	USB HD	Sony	HD-EG5	FCC DoC	Shielded, 0.5 m	N/A
11.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
12.	PC Card	D-Link	DWL650	MXF-WL211F	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “Tool” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

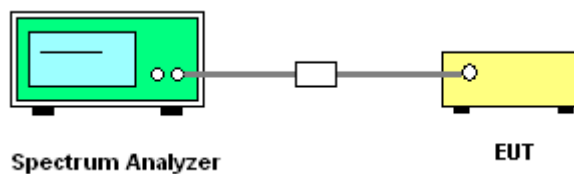

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

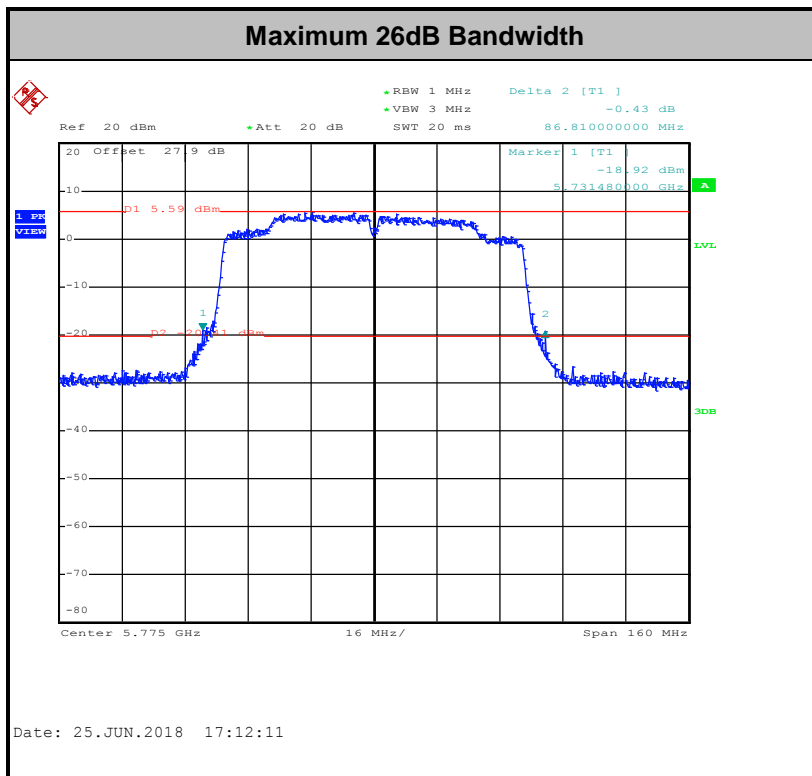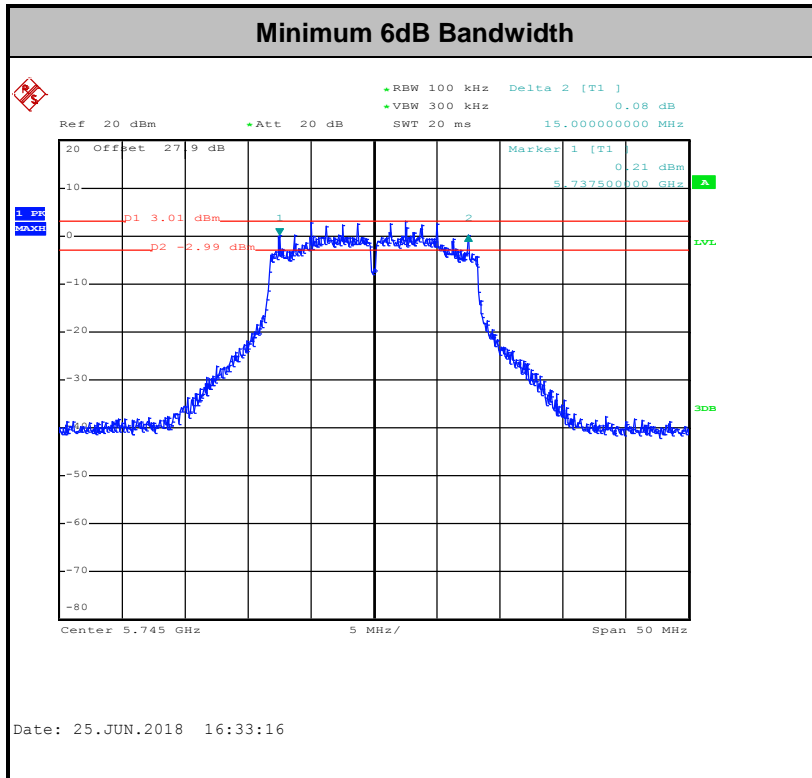

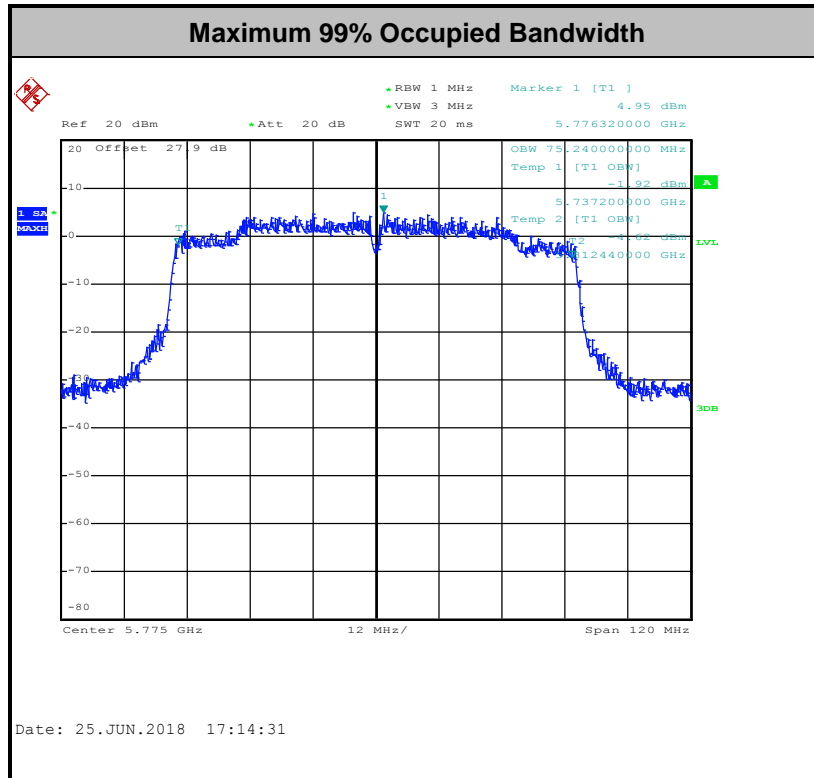

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

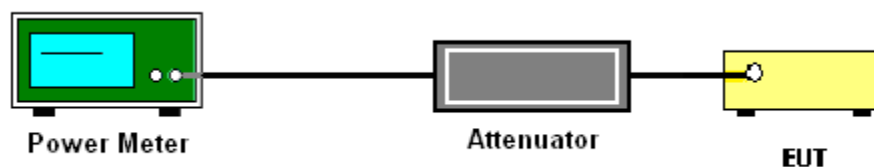

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

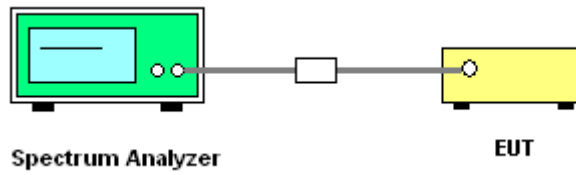

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

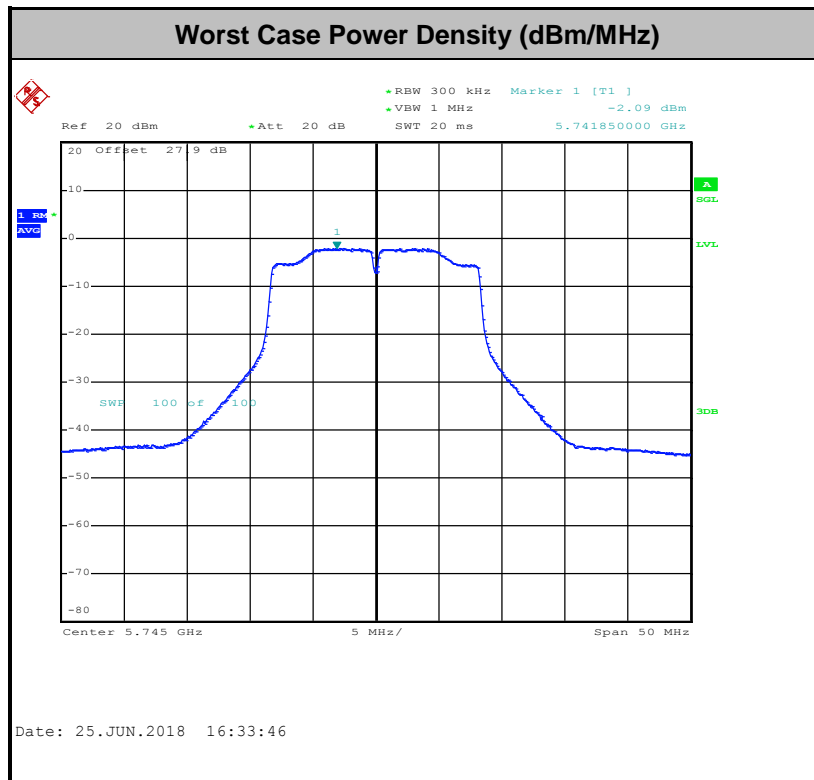



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.



3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

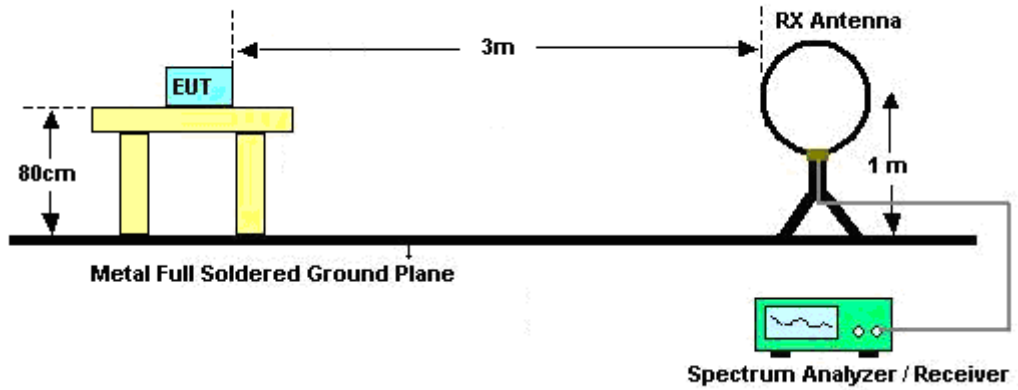

For radiated emissions from 30MHz to 1GHz

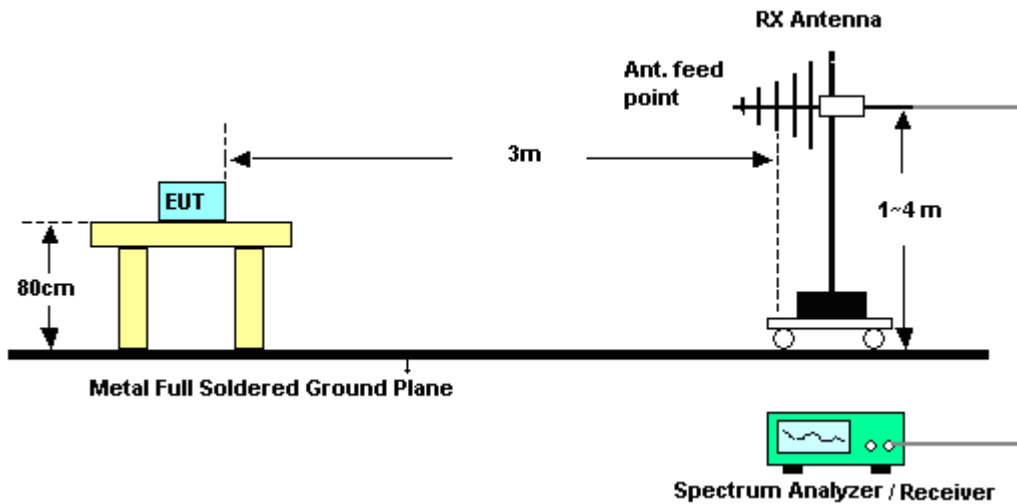

For radiated emissions above 1GHz

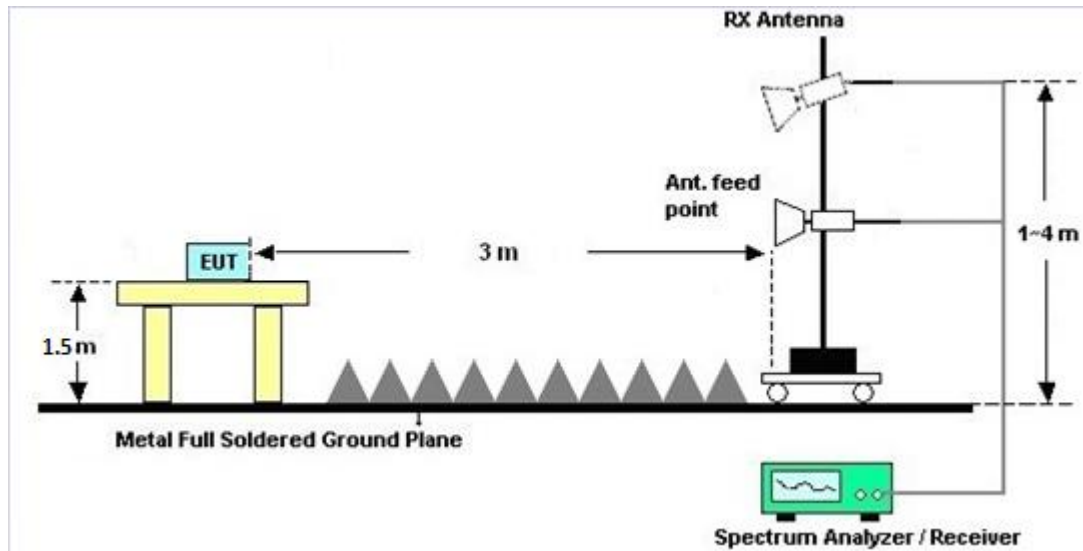

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

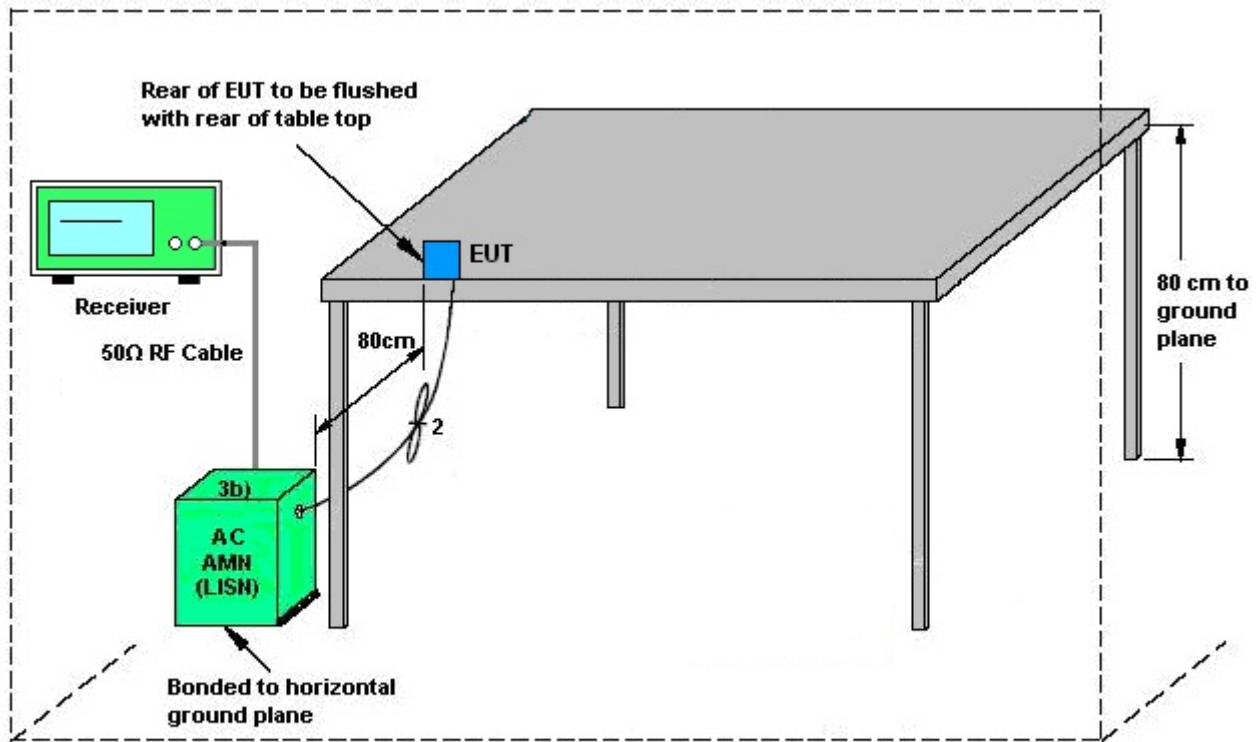

AMN = Artificial mains network (LISN)
 AE = Associated equipment
 EUT = Equipment under test
 ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1240001	N/A	Sep. 07, 2017	Jun. 15, 2018~ Jun. 29, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GHz	Sep. 07, 2017	Jun. 15, 2018~ Jun. 29, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2017	Jun. 15, 2018~ Jun. 29, 2018	Nov. 20, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Mar. 01, 2018	Jun. 15, 2018~ Jun. 29, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 27, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Jun. 27, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Jun. 27, 2018	Nov. 29, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 08, 2017	Jun. 27, 2018	Dec. 07, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 27, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Jun. 27, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Jun. 27, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	Jun. 24, 2018~ Jul. 14, 2018	Nov. 09, 2018	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	40103&07	30MHz to 1GHz	Jan. 10, 2018	Jun. 24, 2018~ Jul. 14, 2018	Jan. 09, 2019	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-121 2	1GHz ~ 18GHz	May 10, 2018	Jun. 24, 2018~ Jul. 14, 2018	May 09, 2019	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 27, 2017	Jun. 24, 2018~ Jul. 14, 2018	Nov. 26, 2018	Radiation (03CH13-HY)
Amplifier	Sonoma-Instrument	310 N	187282	9KHz~1GHz	Jan. 19, 2018	Jun. 24, 2018~ Jul. 14, 2018	Jan. 18, 2020	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 21, 2018	Jun. 24, 2018~ Jul. 14, 2018	May 20, 2019	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532701 47	1GHz~26.5GHz	Feb. 02, 2018	Jun. 24, 2018~ Jul. 14, 2018	Feb. 01, 2019	Radiation (03CH13-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun. 24, 2018~ Jul. 14, 2018	Jul. 17, 2018	Radiation (03CH13-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY532900 53	20Hz to 26.5GHz	Jan. 16, 2018	Jun. 24, 2018~ Jul. 14, 2018	Jan. 15, 2019	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY553705 26	10Hz~44GHz	Mar. 15, 2018	Jun. 24, 2018~ Jul. 14, 2018	Mar. 14, 2019	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Jun. 24, 2018~ Jul. 14, 2018	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jun. 24, 2018~ Jul. 14, 2018	N/A	Radiation (03CH13-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WLKS1200-8 SS	SN3	1.2G Low Pass	Nov. 21, 2017	Jun. 24, 2018~ Jul. 14, 2018	Nov. 20, 2018	Radiation (03CH13-HY)
Filter	Woken	WHKX8-5272. 5-6750-18000 -40ST	SN2	6.75G High pass	Jul. 17, 2017	Jun. 24, 2018~ Jul. 14, 2018	Jul. 16, 2018	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Jan. 22, 2018	Jun. 24, 2018~ Jul. 14, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	335041/4	30M-18G	Jan. 22, 2018	Jun. 24, 2018~ Jul. 14, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/ 4	30M~18GHz	Jan. 22, 2018	Jun. 24, 2018~ Jul. 14, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Oct. 17, 2017	Jun. 24, 2018~ Jul. 14, 2018	Oct. 16, 2018	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Oct. 17, 2017	Jun. 24, 2018~ Jul. 14, 2018	Oct. 16, 2018	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Jun. 24, 2018~ Jul. 14, 2018	N/A	Radiation (03CH13-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Shiang Wang	Temperature:	21~25	°C
Test Date:	2018/6/15~6/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	-	17.30	-	24.90	-	15.00	0.5	Pass
11a	6Mbps	1	157	5785	-	17.35	-	24.40	-	15.30	0.5	Pass
11a	6Mbps	1	165	5825	-	17.20	-	24.90	-	15.15	0.5	Pass
HT20	MCS0	1	149	5745	-	18.35	-	25.65	-	15.05	0.5	Pass
HT20	MCS0	1	157	5785	-	18.35	-	25.50	-	15.05	0.5	Pass
HT20	MCS0	1	165	5825	-	18.35	-	25.65	-	15.00	0.5	Pass
HT40	MCS0	1	151	5755	-	36.50	-	44.82	-	35.08	0.5	Pass
HT40	MCS0	1	159	5795	-	36.40	-	45.36	-	35.05	0.5	Pass
VHT80	MCS0	1	155	5775	-	75.24	-	86.81	-	68.80	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	-	0.08	-	13.46	-	30.00	-	3.20	Pass
11a	6Mbps	1	157	5785	-	0.08	-	13.47	-	30.00	-	3.20	Pass
11a	6Mbps	1	165	5825	-	0.08	-	13.49	-	30.00	-	3.20	Pass
HT20	MCS0	1	149	5745	-	0.07	-	13.38	-	30.00	-	3.20	Pass
HT20	MCS0	1	157	5785	-	0.07	-	13.39	-	30.00	-	3.20	Pass
HT20	MCS0	1	165	5825	-	0.07	-	13.48	-	30.00	-	3.20	Pass
HT40	MCS0	1	151	5755	-	0.11	-	13.43	-	30.00	-	3.20	Pass
HT40	MCS0	1	159	5795	-	0.11	-	13.41	-	30.00	-	3.20	Pass
VHT20	MCS0	1	149	5745	-	0.07	-	13.33	-	30.00	-	3.20	Pass
VHT20	MCS0	1	157	5785	-	0.07	-	13.35	-	30.00	-	3.20	Pass
VHT20	MCS0	1	165	5825	-	0.07	-	13.47	-	30.00	-	3.20	Pass
VHT40	MCS0	1	151	5755	-	0.14	-	13.41	-	30.00	-	3.20	Pass
VHT40	MCS0	1	159	5795	-	0.14	-	13.40	-	30.00	-	3.20	Pass
VHT80	MCS0	1	155	5775	-	0.26	-	13.07	-	30.00	-	3.20	Pass

TEST RESULTS DATA
Power Spectral Density

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	-	0.08	-	2.22	-	-2.01		-	30.00	-	3.20	Pass
11a	6Mbps	1	157	5785	-	0.08	-	2.22	-	-2.50		-	30.00	-	3.20	Pass
11a	6Mbps	1	165	5825	-	0.08	-	2.22	-	-2.37		-	30.00	-	3.20	Pass
HT20	MCS0	1	149	5745	-	0.07	-	2.22	-	-2.45		-	30.00	-	3.20	Pass
HT20	MCS0	1	157	5785	-	0.07	-	2.22	-	-2.81		-	30.00	-	3.20	Pass
HT20	MCS0	1	165	5825	-	0.07	-	2.22	-	-2.70		-	30.00	-	3.20	Pass
HT40	MCS0	1	151	5755	-	0.11	-	2.22	-	-5.63		-	30.00	-	3.20	Pass
HT40	MCS0	1	159	5795	-	0.11	-	2.22	-	-5.83		-	30.00	-	3.20	Pass
VHT80	MCS0	1	155	5775	-	0.26	-	2.22	-	-8.35		-	30.00	-	3.20	Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Arthur Hsieh	Temperature :	21~25°C
		Relative Humidity :	51~55%

EUT Information

Report NO : 372342-17
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

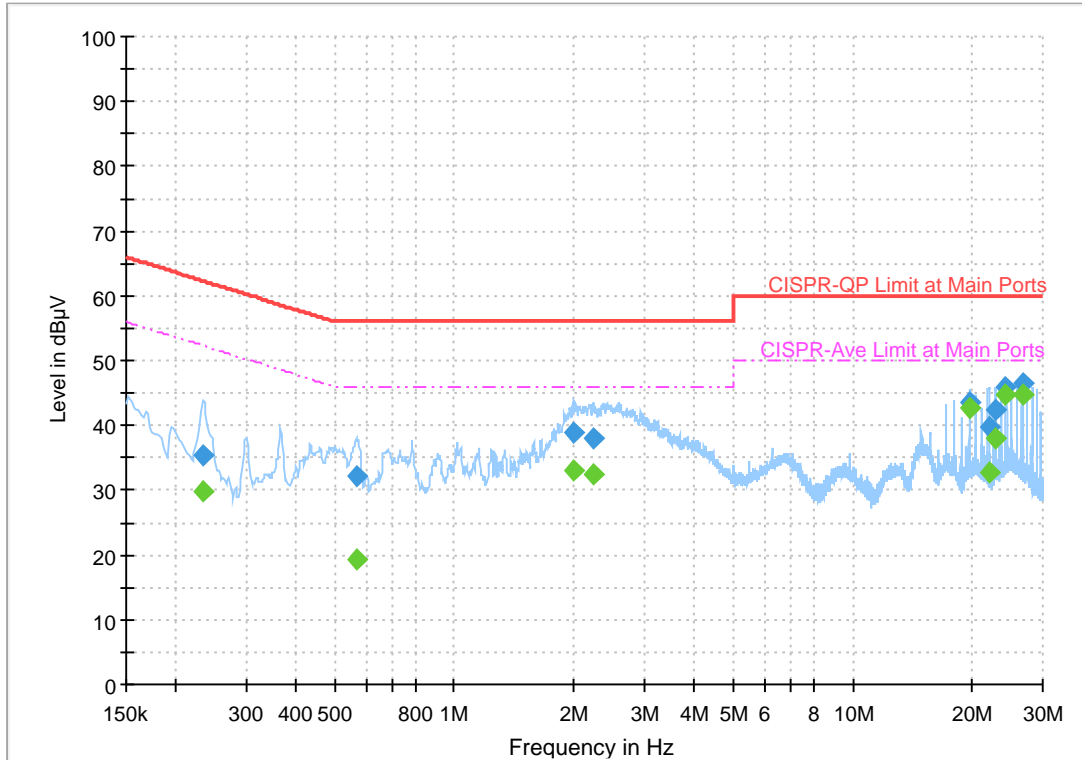


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.233250	---	29.92	52.33	22.41	L1	OFF	19.5
0.233250	35.29	---	62.33	27.04	L1	OFF	19.5
0.566250	---	19.25	46.00	26.75	L1	OFF	19.5
0.566250	32.13	---	56.00	23.87	L1	OFF	19.5
2.001750	---	32.93	46.00	13.07	L1	OFF	19.6
2.001750	38.78	---	56.00	17.22	L1	OFF	19.6
2.229000	---	32.43	46.00	13.57	L1	OFF	19.4
2.229000	37.95	---	56.00	18.05	L1	OFF	19.4
19.581000	---	42.72	50.00	7.28	L1	OFF	19.8
19.581000	43.58	---	60.00	16.42	L1	OFF	19.8
21.939000	---	32.66	50.00	17.34	L1	OFF	19.8
21.939000	39.82	---	60.00	20.18	L1	OFF	19.8
22.719750	---	38.12	50.00	11.88	L1	OFF	19.8
22.719750	42.33	---	60.00	17.67	L1	OFF	19.8
24.279000	---	44.61	50.00	5.39	L1	OFF	19.8
24.279000	45.79	---	60.00	14.21	L1	OFF	19.8
26.630250	---	44.68	50.00	5.32	L1	OFF	19.8
26.630250	46.38	---	60.00	13.62	L1	OFF	19.8

EUT Information

Report NO : 372342-17
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

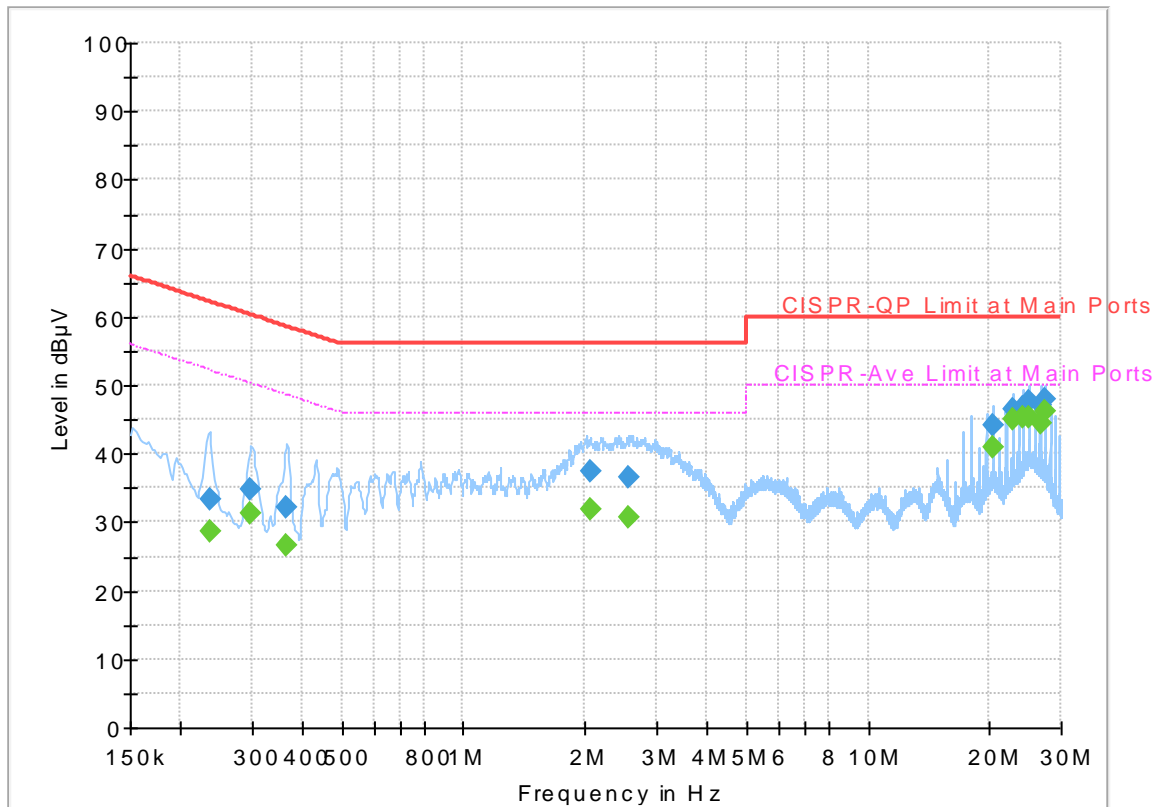

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.235500	---	28.66	52.25	23.59	N	OFF	19.5
0.235500	33.47	---	62.25	28.78	N	OFF	19.5
0.298500	---	31.35	50.28	18.93	N	OFF	19.5
0.298500	34.81	---	60.28	25.47	N	OFF	19.5
0.366000	---	26.58	48.59	22.01	N	OFF	19.5
0.366000	32.18	---	58.59	26.41	N	OFF	19.5
2.060250	---	31.75	46.00	14.25	N	OFF	19.4
2.060250	37.41	---	56.00	18.59	N	OFF	19.4
2.559750	---	30.65	46.00	15.35	N	OFF	19.5
2.559750	36.51	---	56.00	19.49	N	OFF	19.5
20.359500	---	40.80	50.00	9.20	N	OFF	19.9
20.359500	44.18	---	60.00	15.82	N	OFF	19.9
22.715250	---	45.08	50.00	4.92	N	OFF	19.9
22.715250	46.55	---	60.00	13.45	N	OFF	19.9
24.279000	---	45.42	50.00	4.58	N	OFF	20.0
24.279000	46.72	---	60.00	13.28	N	OFF	20.0
25.062000	---	45.29	50.00	4.71	N	OFF	20.0
25.062000	47.60	---	60.00	12.40	N	OFF	20.0
26.628000	---	44.37	50.00	5.63	N	OFF	20.0
26.628000	47.09	---	60.00	12.91	N	OFF	20.0
27.413250	---	46.25	50.00	3.75	N	OFF	20.0

27.413250	47.94	---	60.00	12.06	N	OFF	20.0
-----------	-------	-----	-------	-------	---	-----	------



Appendix C. Radiated Spurious Emission

Test Engineer :	Alex Jheng, Fu Chen, and Wilson Wu	Temperature :	24.5~25°C
		Relative Humidity :	48~50%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11a CH 149 5745MHz		5620.8	52.4	-15.8	68.2	41.27	31.92	8.85	29.64	104	287	P	H	
		5677.6	52.11	-36.55	88.66	40.93	32.01	8.83	29.66	104	287	P	H	
		5720	52.05	-58.75	110.8	40.81	32.1	8.82	29.68	104	287	P	H	
		5724.4	52.46	-68.37	120.83	41.22	32.1	8.82	29.68	104	287	P	H	
	*	5745	102.97	-	-	91.72	32.13	8.81	29.69	104	287	P	H	
	*	5745	94.6	-	-	83.35	32.13	8.81	29.69	104	287	A	H	
														H
														H
			5611	52.64	-15.56	68.2	41.54	31.89	8.85	29.64	296	312	P	V
			5660.8	51.63	-24.59	76.22	40.47	31.98	8.84	29.66	296	312	P	V
			5717	51.48	-58.48	109.96	40.27	32.07	8.82	29.68	296	312	P	V
			5724.8	53.22	-68.52	121.74	41.98	32.1	8.82	29.68	296	312	P	V
	*		5745	103.97	-	-	92.72	32.13	8.81	29.69	296	312	P	V
	*		5745	96.05	-	-	84.8	32.13	8.81	29.69	296	312	A	V
													V	
													V	



WIFI Ant. 2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5627.8	52.42	-15.78	68.2	41.3	31.92	8.84	29.64	107	286	P	H
		5675.8	51.03	-36.3	87.33	39.85	32.01	8.83	29.66	107	286	P	H
		5718.2	52.36	-57.94	110.3	41.12	32.1	8.82	29.68	107	286	P	H
		5720.8	50.26	-62.36	112.62	39.02	32.1	8.82	29.68	107	286	P	H
	*	5785	101.65	-	-	90.37	32.2	8.8	29.72	107	286	P	H
	*	5785	93.98	-	-	82.7	32.2	8.8	29.72	107	286	A	H
		5854.8	51.08	-60.18	111.26	39.62	32.35	8.85	29.74	107	286	P	H
		5865.8	51.37	-56.4	107.77	39.9	32.35	8.87	29.75	107	286	P	H
		5908.2	51.56	-29.04	80.6	39.98	32.44	8.9	29.76	107	286	P	H
		5945.8	50.23	-17.97	68.2	38.57	32.51	8.93	29.78	107	286	P	H
													H
													H
802.11a													
CH 157													
5785MHz		5622.6	52.19	-16.01	68.2	41.06	31.92	8.85	29.64	308	304	P	V
		5654.4	51.68	-19.79	71.47	40.52	31.98	8.84	29.66	308	304	P	V
		5710	51.67	-56.33	108	40.46	32.07	8.82	29.68	308	304	P	V
		5721.2	51.2	-62.34	113.54	39.96	32.1	8.82	29.68	308	304	P	V
	*	5785	102.99	-	-	91.71	32.2	8.8	29.72	308	304	P	V
	*	5785	95.06	-	-	83.78	32.2	8.8	29.72	308	304	A	V
		5853	50.01	-65.35	115.36	38.58	32.32	8.85	29.74	308	304	P	V
		5872.8	50.37	-55.45	105.82	38.87	32.38	8.87	29.75	308	304	P	V
		5904	51.74	-31.96	83.7	40.19	32.41	8.9	29.76	308	304	P	V
		5938.4	51.07	-17.13	68.2	39.44	32.48	8.93	29.78	308	304	P	V
													V
													V



WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	101.09	-	-	89.71	32.29	8.82	29.73	121	308	P	H	
	*	5825	93.46	-	-	82.08	32.29	8.82	29.73	121	308	A	H	
		5851.4	51.19	-67.82	119.01	39.76	32.32	8.85	29.74	121	308	P	H	
		5855.4	53.11	-57.58	110.69	41.65	32.35	8.85	29.74	121	308	P	H	
		5912.6	52.18	-25.17	77.35	40.61	32.44	8.9	29.77	121	308	P	H	
		5947	50.79	-17.41	68.2	39.13	32.51	8.93	29.78	121	308	P	H	
														H
														H
	*	5825	103.26	-	-	91.88	32.29	8.82	29.73	302	306	P	V	
	*	5825	95.44	-	-	84.06	32.29	8.82	29.73	302	306	A	V	
		5850.6	51.34	-69.49	120.83	39.91	32.32	8.85	29.74	302	306	P	V	
		5855.8	51.54	-59.04	110.58	40.08	32.35	8.85	29.74	302	306	P	V	
		5918.8	52.22	-20.55	72.77	40.64	32.44	8.91	29.77	302	306	P	V	
		5930.6	51.83	-16.37	68.2	40.21	32.48	8.91	29.77	302	306	P	V	
														V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	47.58	-26.42	74	56.32	39.91	12.24	61.4	100	0	P	H
		17235	49.98	-18.22	68.2	51.93	40.45	14.47	57.51	100	0	P	H
													H
													H
		11490	47.25	-26.75	74	55.99	39.91	12.24	61.4	100	0	P	V
		17235	49.22	-18.98	68.2	51.17	40.45	14.47	57.51	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	46.21	-27.79	74	55.16	39.76	12.28	61.5	100	0	P	H
		17355	50.24	-17.96	68.2	51.42	40.78	14.52	57.11	100	0	P	H
													H
													H
		11570	46.47	-27.53	74	55.42	39.76	12.28	61.5	100	0	P	V
		17355	49.63	-18.57	68.2	50.81	40.78	14.52	57.11	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	47.6	-26.4	74	56.74	39.62	12.32	61.59	100	0	P	H
		17475	53.08	-15.12	68.2	53.48	41.11	14.58	56.71	100	0	P	H
													H
													H
		11650	47.54	-26.46	74	56.68	39.62	12.32	61.59	100	0	P	V
		17475	52.64	-15.56	68.2	53.04	41.11	14.58	56.71	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5640.6	52.17	-16.03	68.2	41.03	31.95	8.84	29.65	104	286	P	H
		5677.8	52.59	-36.22	88.81	41.41	32.01	8.83	29.66	104	286	P	H
		5718.4	54.19	-56.16	110.35	42.95	32.1	8.82	29.68	104	286	P	H
		5723	54.44	-63.2	117.64	43.2	32.1	8.82	29.68	104	286	P	H
	*	5755	99.62	-	-	88.33	32.17	8.81	29.69	104	286	P	H
	*	5755	92.45	-	-	81.16	32.17	8.81	29.69	104	286	A	H
		5854.8	49.46	-61.8	111.26	38	32.35	8.85	29.74	104	286	P	H
		5859.6	51.25	-58.26	109.51	39.8	32.35	8.85	29.75	104	286	P	H
		5883.6	51.15	-47.66	98.81	39.65	32.38	8.88	29.76	104	286	P	H
		5933.8	50.31	-17.89	68.2	38.67	32.48	8.93	29.77	104	286	P	H
802.11n													H
HT40													H
CH 151		5636.8	52.43	-15.77	68.2	41.29	31.95	8.84	29.65	299	311	P	V
5755MHz		5676	52.64	-34.84	87.48	41.46	32.01	8.83	29.66	299	311	P	V
		5719	53.61	-56.91	110.52	42.37	32.1	8.82	29.68	299	311	P	V
		5722.4	55.54	-60.73	116.27	44.3	32.1	8.82	29.68	299	311	P	V
	*	5755	99.8	-	-	88.51	32.17	8.81	29.69	299	311	P	V
	*	5755	93.1	-	-	81.81	32.17	8.81	29.69	299	311	A	V
		5850.8	49.34	-71.04	120.38	37.91	32.32	8.85	29.74	299	311	P	V
		5861.4	52.32	-56.69	109.01	40.85	32.35	8.87	29.75	299	311	P	V
		5898	51.77	-36.37	88.14	40.22	32.41	8.9	29.76	299	311	P	V
		5947	51.14	-17.06	68.2	39.48	32.51	8.93	29.78	299	311	P	V
													V
													V



WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5614.2	52.08	-16.12	68.2	40.98	31.89	8.85	29.64	105	286	P	H
		5675.2	52.05	-34.84	86.89	40.87	32.01	8.83	29.66	105	286	P	H
		5703.4	51.55	-54.6	106.15	40.33	32.07	8.82	29.67	105	286	P	H
		5723	50.66	-66.98	117.64	39.42	32.1	8.82	29.68	105	286	P	H
	*	5795	99.09	-	-	87.78	32.23	8.8	29.72	105	286	P	H
	*	5795	91.91	-	-	80.6	32.23	8.8	29.72	105	286	A	H
		5852	52.83	-64.81	117.64	41.4	32.32	8.85	29.74	105	286	P	H
		5864.8	51.63	-56.42	108.05	40.16	32.35	8.87	29.75	105	286	P	H
		5923.2	50.99	-18.54	69.53	39.37	32.48	8.91	29.77	105	286	P	H
		5939.6	51.18	-17.02	68.2	39.52	32.51	8.93	29.78	105	286	P	H
802.11n													H
HT40													H
CH 159		5643.6	52.2	-16	68.2	41.06	31.95	8.84	29.65	299	311	P	V
5795MHz		5663.8	50.99	-27.45	78.44	39.84	31.98	8.83	29.66	299	311	P	V
		5717.6	51.23	-58.9	110.13	39.99	32.1	8.82	29.68	299	311	P	V
		5723.8	50.68	-68.78	119.46	39.44	32.1	8.82	29.68	299	311	P	V
	*	5795	99.78	-	-	88.47	32.23	8.8	29.72	299	311	P	V
	*	5795	92.58	-	-	81.27	32.23	8.8	29.72	299	311	A	V
		5855	50.19	-60.61	110.8	38.73	32.35	8.85	29.74	299	311	P	V
		5869	50.68	-56.2	106.88	39.21	32.35	8.87	29.75	299	311	P	V
		5903.8	51.07	-32.78	83.85	39.52	32.41	8.9	29.76	299	311	P	V
		5933.2	50.63	-17.57	68.2	38.99	32.48	8.93	29.77	299	311	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5631.2	51.63	-16.57	68.2	40.52	31.92	8.84	29.65	106	288	P	H
		5695.2	53.16	-48.5	101.66	41.96	32.04	8.83	29.67	106	288	P	H
		5712	55.13	-53.43	108.56	43.92	32.07	8.82	29.68	106	288	P	H
		5724.2	54.68	-65.7	120.38	43.44	32.1	8.82	29.68	106	288	P	H
	*	5775	96.65	-	-	85.36	32.2	8.8	29.71	106	288	P	H
	*	5775	89.57	-	-	78.28	32.2	8.8	29.71	106	288	A	H
		5854.4	52.19	-59.98	112.17	40.73	32.35	8.85	29.74	106	288	P	H
		5860.2	51.42	-57.92	109.34	39.97	32.35	8.85	29.75	106	288	P	H
		5920.6	51.72	-19.72	71.44	40.14	32.44	8.91	29.77	106	288	P	H
		5940.4	52.13	-16.07	68.2	40.47	32.51	8.93	29.78	106	288	P	H
802.11ac													H
VHT80													H
CH 155		5634.6	52.34	-15.86	68.2	41.2	31.95	8.84	29.65	308	305	P	V
5775MHz		5689.2	54.51	-42.73	97.24	43.31	32.04	8.83	29.67	308	305	P	V
		5716.8	55.69	-54.22	109.91	44.48	32.07	8.82	29.68	308	305	P	V
		5721.6	54.43	-60.02	114.45	43.19	32.1	8.82	29.68	308	305	P	V
	*	5775	97.49	-	-	86.2	32.2	8.8	29.71	308	305	P	V
	*	5775	90.13	-	-	78.84	32.2	8.8	29.71	308	305	A	V
		5853.6	51.73	-62.26	113.99	40.27	32.35	8.85	29.74	308	305	P	V
		5863.8	52.44	-55.89	108.33	40.97	32.35	8.87	29.75	308	305	P	V
		5896.4	51.57	-37.76	89.33	40.04	32.41	8.88	29.76	308	305	P	V
		5933	50.61	-17.59	68.2	38.99	32.48	8.91	29.77	308	305	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11a LF		70.23	30.23	-9.77	40	48.83	12.55	1.16	32.31	-	-	P	H	
		192	38.67	-4.83	43.5	54.2	15.01	1.73	32.27	100	0	P	H	
		272.19	32.57	-13.43	46	43.46	19.28	2	32.17	-	-	P	H	
		300.7	37.17	-8.83	46	47.89	19.31	2.1	32.13	-	-	P	H	
		696.2	32.59	-13.41	46	35.13	26.49	3.14	32.17	-	-	P	H	
		743.8	32.91	-13.09	46	33.85	27.92	3.23	32.09	-	-	P	H	
														H
														H
														H
														H
														H
														H
			31.08	32.03	-7.97	40	39.62	23.96	0.79	32.34	-	-	P	V
			70.23	28.89	-11.11	40	47.49	12.55	1.16	32.31	-	-	P	V
			192	37.79	-5.71	43.5	53.32	15.01	1.73	32.27	100	0	P	V
			300.7	28.82	-17.18	46	39.54	19.31	2.1	32.13	-	-	P	V
			528.2	27.51	-18.49	46	32.78	24.13	2.8	32.2	-	-	P	V
			696.2	31.42	-14.58	46	33.96	26.49	3.14	32.17	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Alex Jheng, Fu Chen, and Wilson Wu	Temperature :	24.5~25°C
		Relative Humidity :	48~50%



Note symbol

-L	Low channel location
-R	High channel location

Band 4 - 5725~5850MHz WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 372342-17 Mode : 33</p>	<p>Site : 03CH13-HY Condition : PEAK(FUN) 3m HORN_91200_1212 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 372342-17 Mode : 33</p>

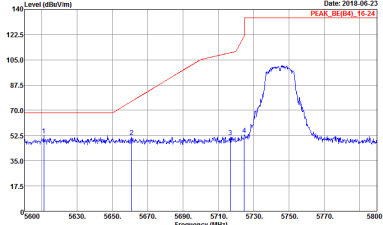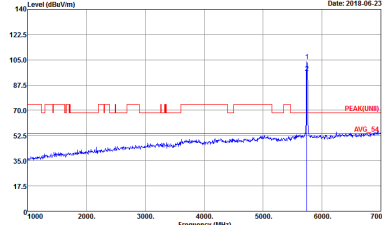

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
2	Vertical	Fundamental
<p>Peak</p>	 <p>Date: 2018-06-23 PEAK_BE(04)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(04)_16-24 3m HORN_91200_1212 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 33</p>	 <p>Date: 2018-06-23 PEAK(04)_16-24</p> <p>Site : 03CH13-HY Condition : PEAK(04)_16-24 3m HORN_91200_1212 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 33</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 34</p>	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 34</p>
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 34</p>	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
2	Vertical	Fundamental
Peak	<p> Date: 2018-06-23 PEAK_BE(84)_16-24 </p> <p> Site : 03CH13-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1212 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 34 </p>	<p> Date: 2018-06-23 PEAK(84)_16-24 </p> <p> Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1212 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 34 </p>
Peak	<p> Date: 2018-06-23 PEAK_BE(84)_16-24 </p> <p> Site : 03CH13-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1212 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 34 </p>	Left blank

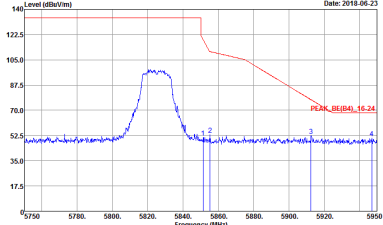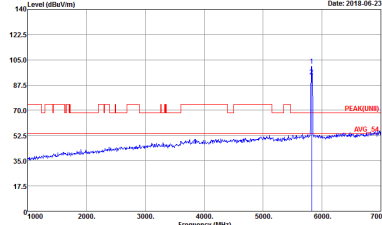

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
2	Horizontal	Fundamental
Peak	 <p> Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 35 </p>	 <p> Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 35 </p>

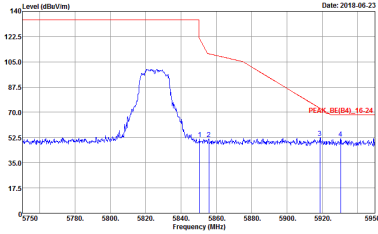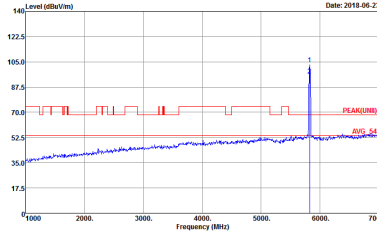




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 35</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1212 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 35</p>



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 2 columns (WIFI, ANT) and 2 rows (Peak, Peak). The table contains spectral analysis plots for 'Horizontal' and 'Fundamental' signals, and a 'Left blank' plot. Each plot shows Level (dBm/Vm) vs Frequency (MHz) with various technical parameters listed below.

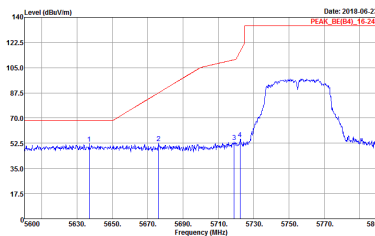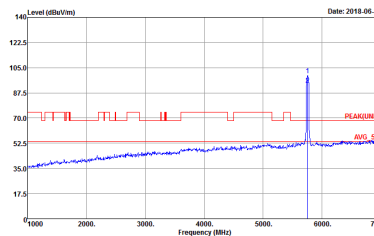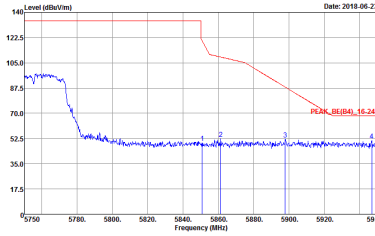

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 39</p>	 <p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 39</p>
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 39</p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH13-4HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 40</p>	<p>Site : 03CH13-4HY Condition : PEAK(UNIT) 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 40</p>
Peak	<p>Site : 03CH13-4HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 40</p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
2	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 40</p>	<p>Site : 03CH13-HY Condition : PEAK(UNB) 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 40</p>
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 40</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

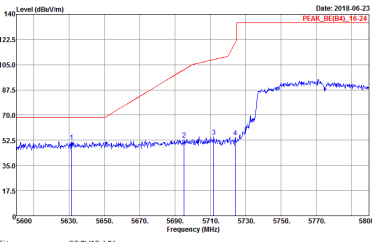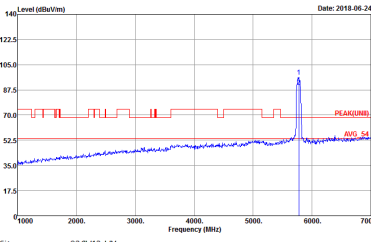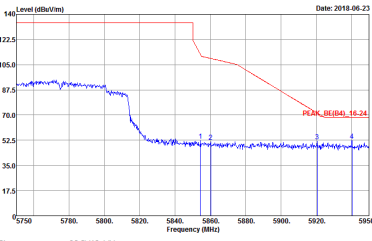WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
2	Horizontal	Fundamental
<p align="center">Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 41</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 41</p>
<p align="center">Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 41</p>	<p align="center">Left blank</p>

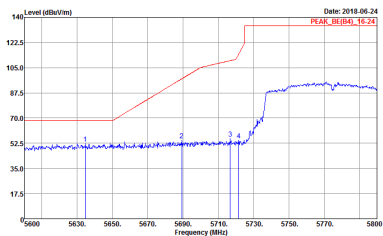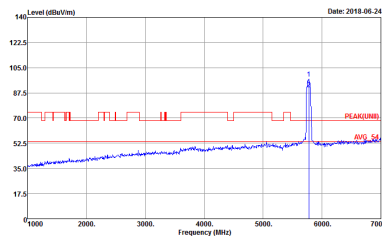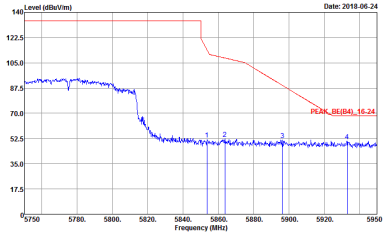

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
2	Vertical	Fundamental
Peak	 <p>Date: 2018.06.24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 41</p>	 <p>Date: 2018.06.24</p> <p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 41</p>
Peak	 <p>Date: 2018.06.24</p> <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1212 VERTICAL Detector : Peak Project : 372342-17 Mode : 41</p>	Left blank




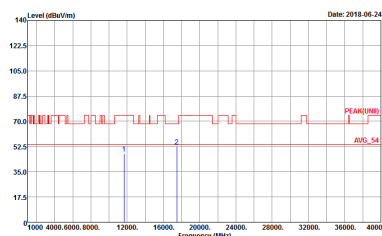
Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(LINEI) 3m SHF_HORN_576 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 33</p>	<p>Site : 03CH13-HY Condition : PEAK(LINEI) 3m SHF_HORN_576 VERTICAL Detector : Peak Project : 372342-17 Mode : 33</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNID) 3m SHF_HORN_576 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 34</p>	<p>Site : 03CH13-HY Condition : PEAK(UNID) 3m SHF_HORN_576 VERTICAL Detector : Peak Project : 372342-17 Mode : 34</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH13-HV Condition : PEAK(UNID) 3m SHF_HORN_576 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 35</p>	 <p>Site : 03CH13-HV Condition : PEAK(UNID) 3m SHF_HORN_576 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 372342-17 Mode : 35</p>



Emission below 1GHz
5GHz WIFI 802.11a (LF)

WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
2	Horizontal	Vertical
QP / Peak	<p>Site : 03CH13-4Y Condition : QP 3m B1LOG_40103 HORIZONTAL Detector : Peak Project : 372342-17 Mode : 43</p>	<p>Site : 03CH13-4Y Condition : QP 3m B1LOG_40103 VERTICAL Detector : Peak Project : 372342-17 Mode : 43</p>




Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
2	802.11a	98.09	2050.00	0.49	10Hz	0.08
2	5GHz 802.11n HT20	98.45	1910.00	0.52	10Hz	0.07
2	5GHz 802.11n HT40	97.41	940.00	1.06	3kHz	0.11
2	5GHz 802.11ac VHT20	98.45	1910.00	0.52	10Hz	0.07
2	5GHz 802.11ac VHT40	96.92	945.00	1.06	3kHz	0.14
2	5GHz 802.11ac VHT80	94.29	462.00	2.16	3kHz	0.26




802.11a

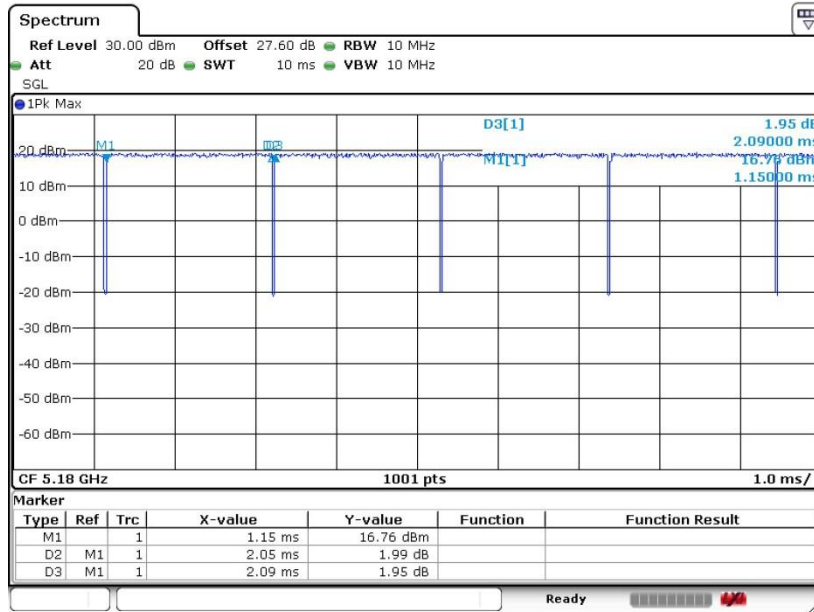

Date: 15.JUN.2018 17:03:58


802.11n HT20

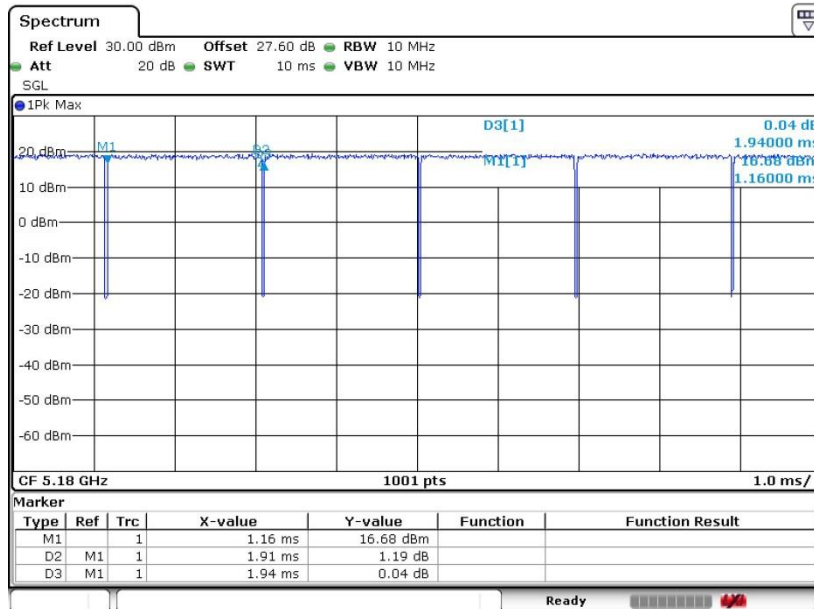

Date: 15.JUN.2018 17:06:55




802.11n HT40

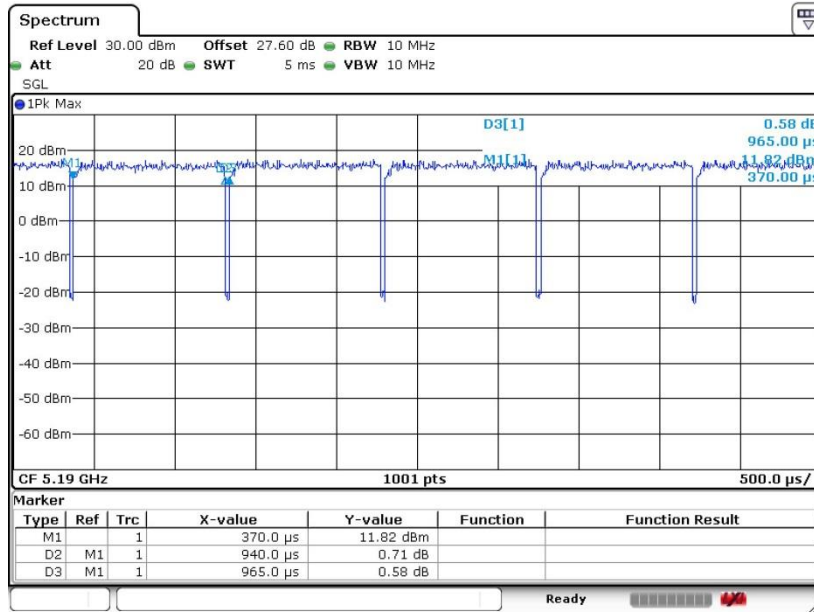

Date: 15.JUN.2018 17:08:37


802.11ac VHT20

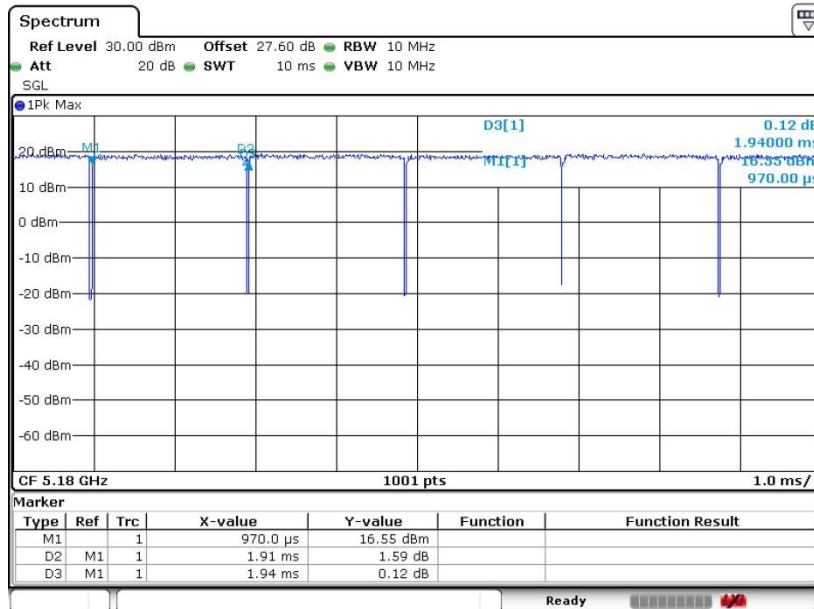

Date: 15.JUN.2018 17:10:19




802.11ac VHT40

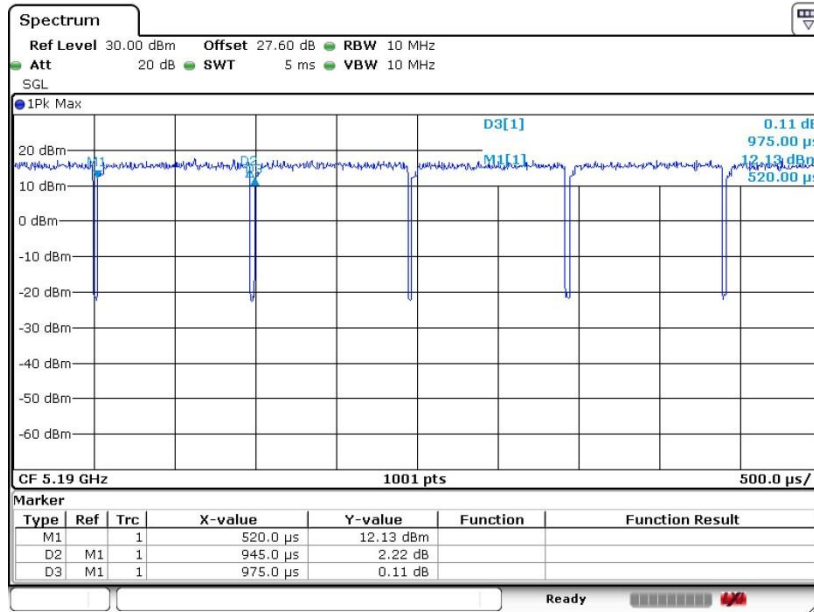

Date: 15.JUN.2018 17:14:40

802.11ac VHT80

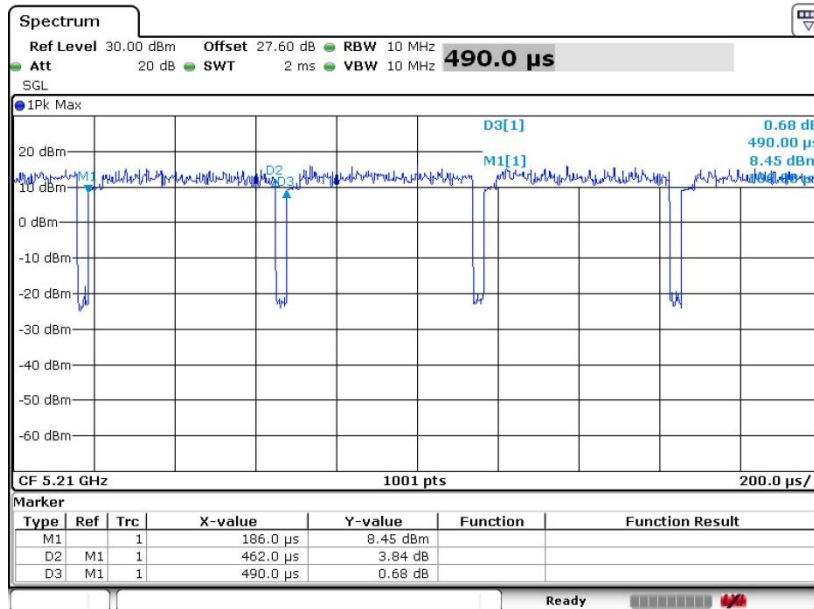

Date: 15.JUN.2018 17:16:15