



TEST REPORT

Test Report No.: 1-8238/19-01-57-B



ENetzA-CAB-02/21-102

Testing Laboratory

CTC advanced GmbH

Untertürkheimer Straße 6 – 10
66117 Saarbrücken/Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAKKS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Applicant

Bury GmbH & Co. KG

Robert-Koch-Str. 1-7
32584 Löhne / Germany
Phone: +49 5732 9706-100
Contact: Johann Dshus
e-mail: dshus@bury.com
Phone: -/-

Manufacturer

Bury Sp. Z o.o.
ul. Wojska Polskiego 4
39-300 Mielec / Poland

Test Standard/s

FCC - Title 47 CFR Part 18	2018-10	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 18 - Industrial, scientific and medical equipment
MP-5	1986	FCC Methods of measurements of radio noise emissions from industrial, scientific and medical equipment

Test Item

Kind of test item: Storage box with wireless charger and USB charger
Model name: Ladestaufach
S/N serial number: 1541816041916301020050400018
HW hardware status: 9180P04
SW software status: X032
Power Supply: DC 12V



This test report is electronically signed and valid without handwritten signature. The public keys can be requested at the test laboratory to verify the electronic signatures.

Test Report authorised:

Test performed:

Jens Hennemann
Radio Communications & EMC

p.o.
Holger Medrow
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer.....	3
2.2	Application details.....	4
3	Test standard/s:	4
4	Test Environment	4
5	Test Laboratories sub-contracted	4
6	Information about Test Conditions	5
6.1	Test Item	5
6.2	EUT: Type, S/N etc. and Short Descriptions Used in this Test Report	5
6.3	Auxiliary Equipment (AE): Type, S/N etc. and Short Descriptions.....	5
6.4	EUT Set-up(s)	5
6.5	EUT Operating Modes	5
7	Summary of Test Results	6
7.1	Emission	6
7.2	Measurement and Test Set-up	7
7.3	Measurement uncertainty	7
7.4	Limits	7
8	Detailed test results - Emission	8
8.1	Electromagnetic radiated emissions (distance 3 m).....	8
8.2	Electromagnetic Radiated Emissions (distance 10 m).....	18
9	Test equipment and ancillaries used for tests	25
10	Observations	26
Annex A	Document history	27
Annex B	Further information	27

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report is a new release and replaces all former versions of this report. Please refer to Annex A "Document history" for further information.

2.2 Application details

Date of receipt of order: 2020-06-02
Date of receipt of test item: 2020-06-02
Start of test: 2020-06-02
End of test: 2020-06-22
Person(s) present during the test: -/-

3 Test standard/s:

Test Standard	Version	Test Standard Description
FCC - Title 47 CFR Part 18	2018-10	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 18 - Industrial, scientific and medical equipment
MP-5	1986	FCC Methods of measurements of radio noise emissions from industrial, scientific and medical equipment

4 Test Environment

Temperature: 20°C – 25°C
Relative humidity content: 30 % - 50 %
Air pressure: 1020 hPa
Power supply: 230 V / 50 Hz

5 Test Laboratories sub-contracted

6 Information about Test Conditions

6.1 Test Item

Kind of test item :	Storage box with wireless charger and USB charger		
Type identification :	Ladestaufach		
Equipment classification:	Equipment for vehicular use		
Environment classification:	Residential, commercial and light industry		
Supply voltage :	DC 12V		
Ports : (maximum cable lengths declared by manufacturer)	Description	Direction	Length
	DC power port	Input	< 3m
	signal/control port: central locking	Input	< 3m
Is mounting position / usual operating position defined?			No
Additional information:			
FCC ID: QZ9-LADESTAUFACH			

6.2 EUT: Type, S/N etc. and Short Descriptions Used in this Test Report

short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	Storage box with wireless charger and USB charger	BMW 1 541 816	154181604191 630102005040 0018	9180P04	X032

*) EUT short description is used to simplify the identification of the EUT in this test report.

6.3 Auxiliary Equipment (AE): Type, S/N etc. and Short Descriptions

AE description*)	Auxiliary equipment	Type	S/N serial number	HW hardware status	SW software status
AE A	USB load	provided by customer	- / -	unknown	- / -
AE B	dummy load	WLC dummy load	2020/006	unknown	- / -

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

6.4 EUT Set-up(s)

EUT set-up no.*)	Combination of EUT and AE	Remarks
set. 1	EUT A + AE B	---
set. 2	EUT A + AE A	---

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

6.5 EUT Operating Modes

EUT operating mode no.*)	Description of operating modes	Additional information
op. 1	wireless charging	load 5W
op. 2	USB load active	load 10W

*) EUT operating mode no. is used to simplify the test report.

7 Summary of Test Results

- No deviations from the technical specifications were ascertained
 There were deviations from the technical specifications ascertained

7.1 Emission

7.1.1 Enclosure

EMI Phenomenon	Frequency range	Basic standard	Result
Radiated Interference Field Strength	9KHz - 30MHz	FCC Part 18	passed
Radiated Interference Field Strength	30MHz - 1GHz	FCC Part 18	passed

7.1.2 AC Mains Power Input/Output Ports

EMI Phenomenon	Frequency range	Basic standard	Result
Conducted interference voltage	0,15– 30 MHz	FCC Part 18	NA7

Remarks:

NA1	Not tested because not required by used standard
NA2	Test not applicable because port does not exists
NA3	Test not applicable because port only for services
NA4	Test not applicable because port lengths not longer than 3m
NA5	Not tested because not required by customer
NA6	Not tested because used frequency < 108 MHz
NA7	Not tested because the device is for vehicular use

7.2 Measurement and Test Set-up

Note: The test configuration is in accordance with the requirements given in the standards in point 3

7.3 Measurement uncertainty

The uncertainty of the measurement equipment fulfils CISPR 16 and the related European and national standards.

The semi anechoic chamber fulfils the requirements of CISPR 16-1 (ANSI C63.4) for a test volume of 4m Ø.

The table below shows the measurement uncertainties for each measurement method. The expended uncertainty (k=2 or 95%) was calculated with worst case values.

Measurement Method	Frequency area Impulse duration time	Description	Expanded uncertainty (k=2 or 95%)
Radiated Emission ANSI C63.4	9KHz – 18 GHz	- / -	± 4.28 dB
Conducted Emission ANSI C63.4	9 kHz – 30 MHz	- / -	± 3.49 dB

7.4 Limits

Equipment	operating frequency	RF power generated by equipment (watts)	field strength limit (µV/m)	distance (meters)
any type unless otherwise specified	any ISM frequency	below 500	25	300
		500 or more	25xSQRT(power/500)	1300
industrial heaters and RF stabilized arc welders	any non ISM frequency	below 500	15	300
	on or below 5,725MHz above 5,725MHz	500 or more	15xSQRT(power/500)	1300
medical diathermy	any ISM frequency	any	10	1600
	any non ISM frequency	any	(²)	(²)
ultrasonic	below 490kHz	any	25	300
		500 and more	15	300
induction cooking ranges	below 490kHz	below 500	2,400/F(kHz)	300
	490 to 1,600kHz above 1,600kHz	500 and more	2,400/F(kHz)x SQRT(power/500)	³ 300
induction cooking ranges	below 90kHz	any	24,000/F(kHz)	30
	on or above 90kHz	any	15	30
induction cooking ranges	below 90kHz	any	1,500	⁴ 30
	on or above 90kHz	any	300	⁴ 30

1 Field strength may not exceed 10 µV/m at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.

2 Reduced to the greatest extent possible.

3 Field strength may not exceed 10 µV/m at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.

4 Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

8 Detailed test results - Emission

8.1 Electromagnetic radiated emissions (distance 3 m)

8.1.1 Instrumentation for test (see equipment list)

F 1	F 2	F 3	F 4	F 5	F 6	F 7	F 8	F 28			
-----	-----	-----	-----	-----	-----	-----	-----	------	--	--	--

8.1.2 Test plan

EUT set-up	set 1		
Operating mode	Application	Limit	result
op 1	Enclosure	FCC part 18	passed

EUT set-up	set 2		
Operating mode	Application	Limit	result
op 2	Enclosure	FCC part 18	passed

8.1.3 Radiated limits

	FCC part 18
9KHz - 30 MHz	23,52dBµV/m@300m or 103,52dBµV/m@3m


Remarks:	- the measurements have been performed @3m distance, therefore the limit line was recalculated accordingly (distance correction for 300m: $40\log(300/3)=80\text{dB}$)
-----------------	---

8.1.4 Test results

set 1/op1:

Common Information

EUT:	Ladestaufach
Serial number:	1541816041916301020050400018
Test description:	FCC part 18@3m - x-axis
Operating condition:	wireless charging
Operator name:	Wolsdorfer
Comment:	DC 12V

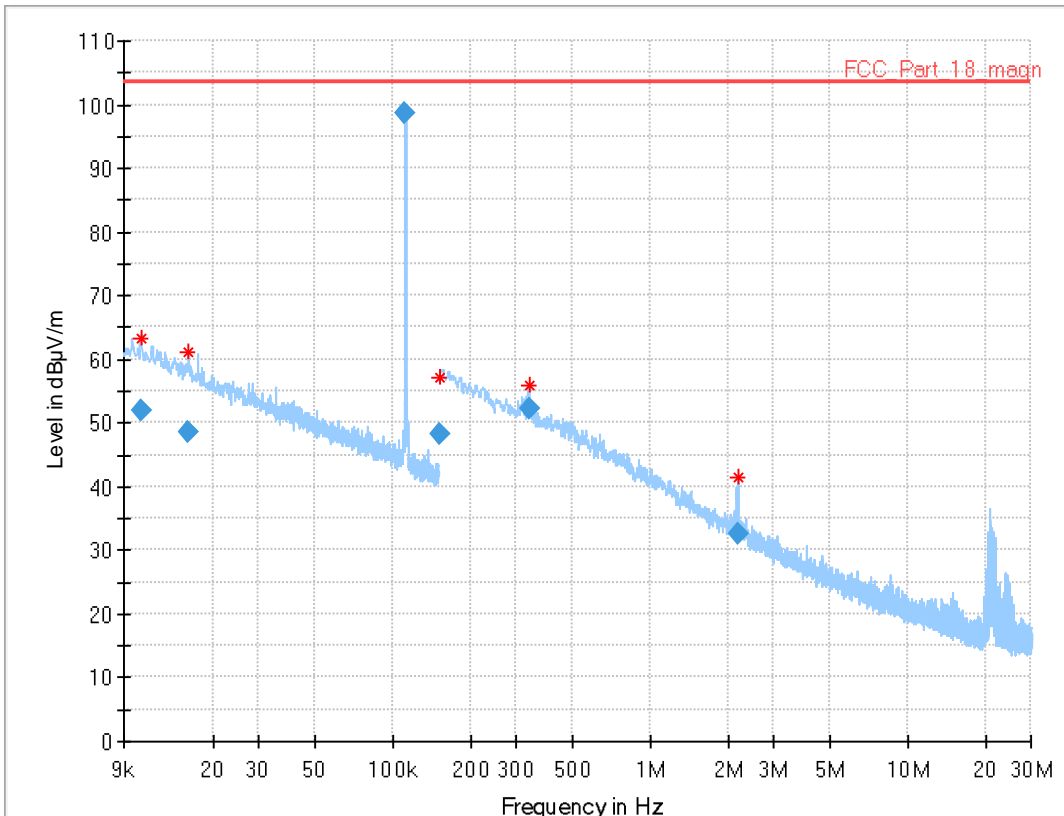


Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.010	51.81	103.5	51.7	1000	0.2	V	166	19
0.016	48.64	103.5	54.9	1000	0.2	V	183	16
0.112	98.71	103.5	4.8	1000	0.2	V	341	11
0.151	48.35	103.5	55.2	1000	9.0	V	183	11
0.337	52.35	103.5	51.2	1000	9.0	V	9	11
2.199	32.46	103.5	71.1	1000	9.0	V	329	12

Common Information

EUT:	Ladestaufach
Serial number:	1541816041916301020050400018
Test description:	FCC part 18@3m - y-axis
Operating condition:	wireless charging
Operator name:	Wolsdorfer
Comment:	DC 12V

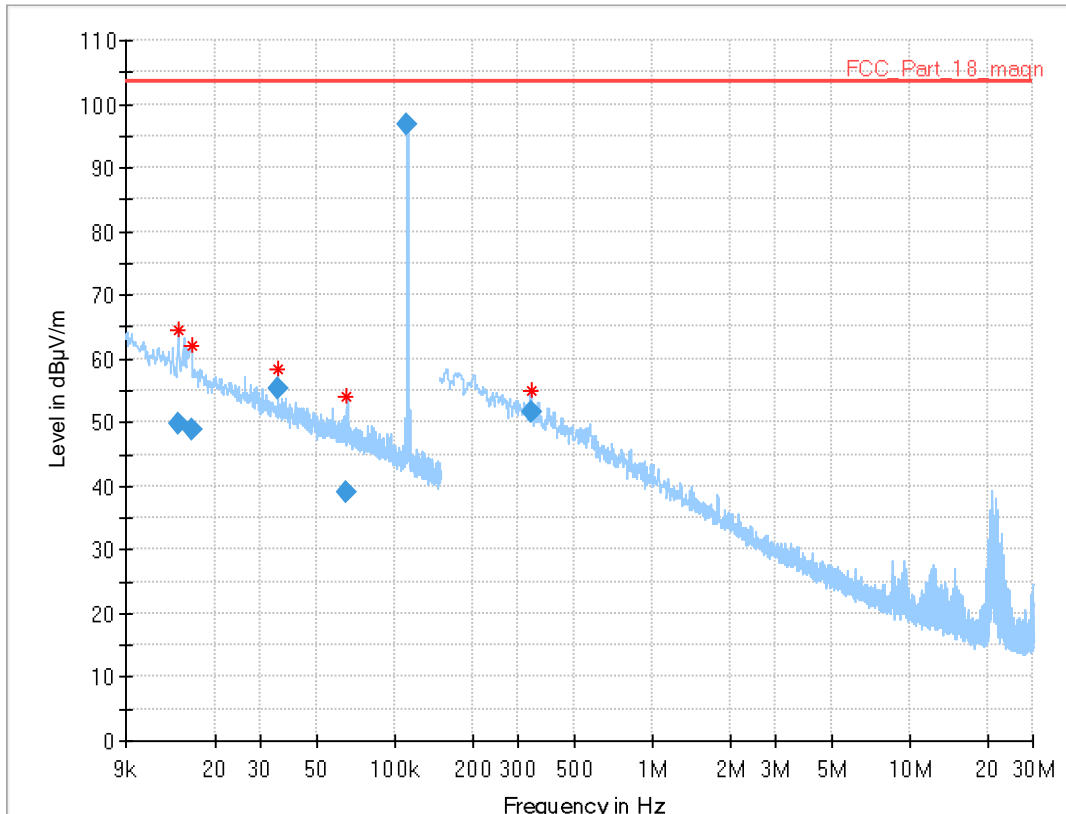


Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.014	49.87	103.5	53.7	1000	0.2	V	352	17
0.016	48.87	103.5	54.6	1000	0.2	V	352	16
0.035	55.36	103.5	48.2	1000	0.2	V	67	13
0.065	38.94	103.5	64.6	1000	0.2	V	236	12
0.112	96.94	103.5	6.6	1000	0.2	V	352	11
0.337	51.73	103.5	51.8	1000	9.0	V	352	11

Common Information

EUT:	Ladestaufach
Serial number:	1541816041916301020050400018
Test description:	FCC part 18@3m - z-axis
Operating condition:	wireless charging
Operator name:	Wolsdorfer
Comment:	DC 12V

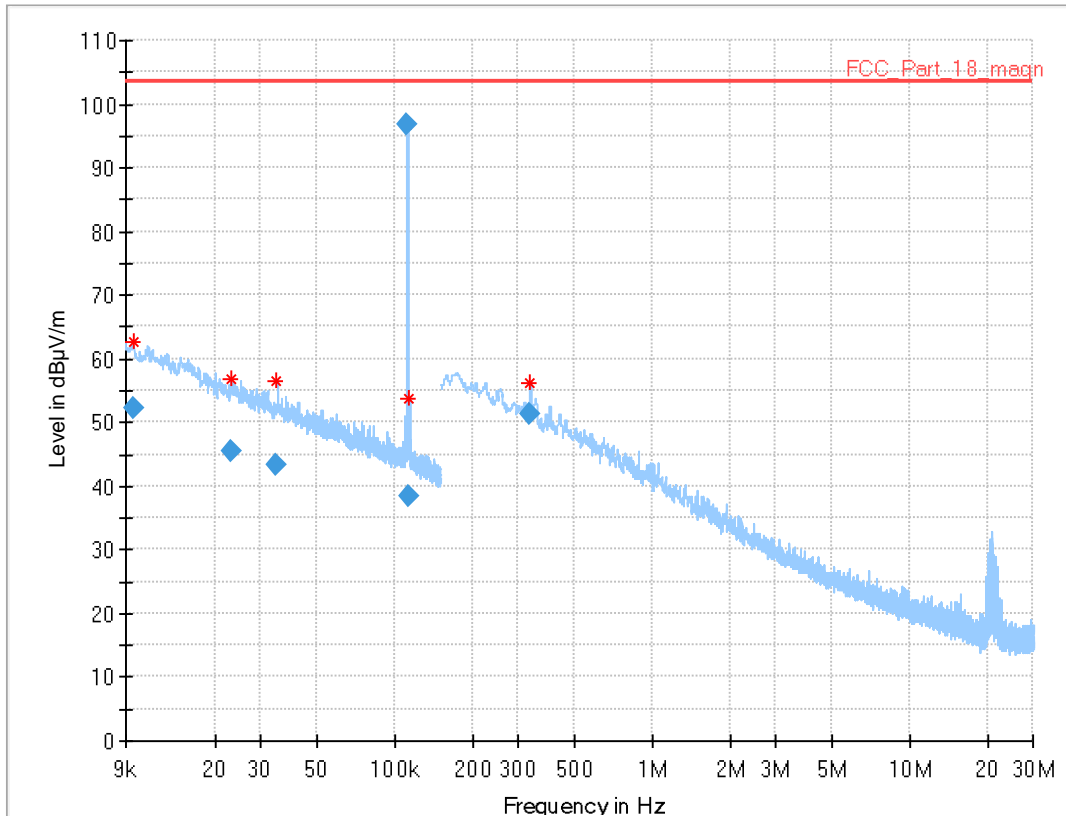


Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.010	52.20	103.5	51.3	1000	0.2	V	84	19
0.023	45.54	103.5	58.0	1000	0.2	V	240	14
0.034	43.27	103.5	60.2	1000	0.2	V	230	13
0.112	96.76	103.5	6.8	1000	0.2	V	277	11
0.113	38.51	103.5	65.0	1000	0.2	V	84	11
0.336	51.22	103.5	52.3	1000	9.0	V	288	11

set 2/op2:

Common Information

EUT:	Ladestaufach
Serial number:	1541816041916301020050400018
Test description:	FCC part 18@3m - x-axis
Operating condition:	USB load
Operator name:	Wolsdorfer
Comment:	DC 12V

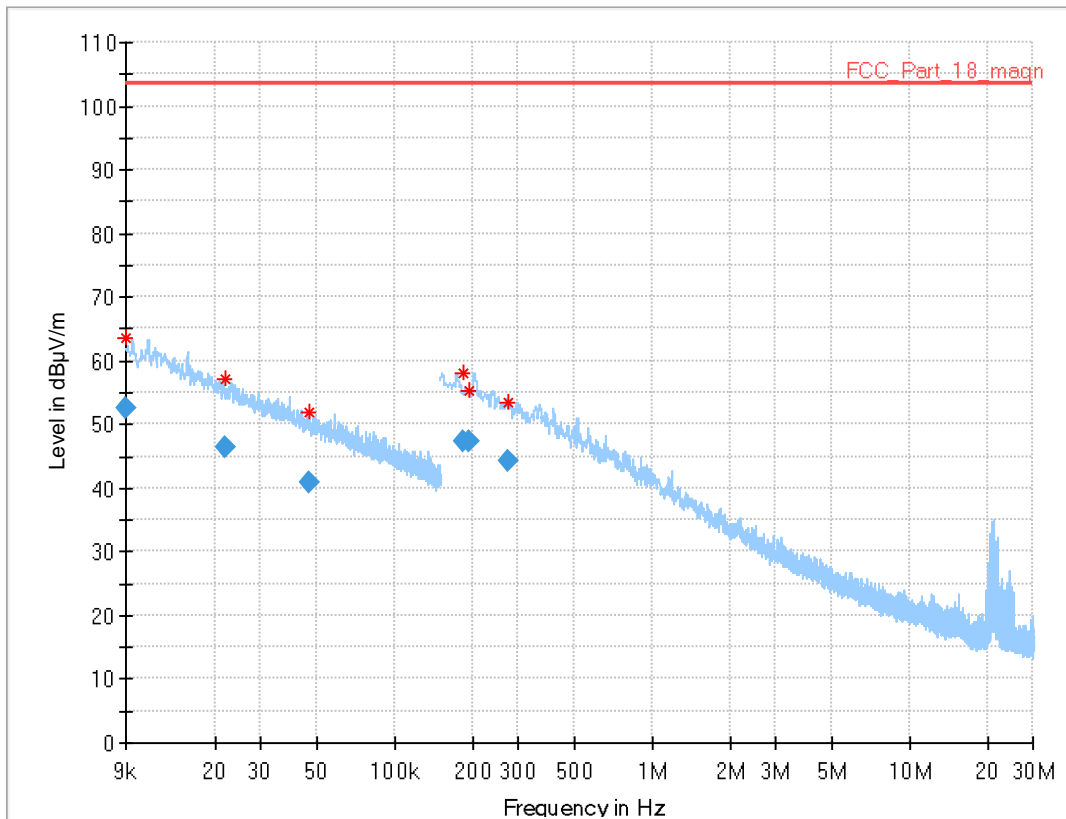


Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.009	52.44	103.5	51.1	1000	0.2	V	177	20
0.022	46.29	103.5	57.2	1000	0.2	V	329	15
0.046	40.84	103.5	62.7	1000	0.2	V	32	12
0.184	47.45	103.5	56.1	1000	9.0	V	335	11
0.193	47.18	103.5	56.3	1000	9.0	V	120	11
0.275	44.31	103.5	59.2	1000	9.0	V	249	11

Common Information

EUT:	Ladestaufach
Serial number:	1541816041916301020050400018
Test description:	FCC part 18@3m - y-axis
Operating condition:	USB load
Operator name:	Wolsdorfer
Comment:	DC 12V

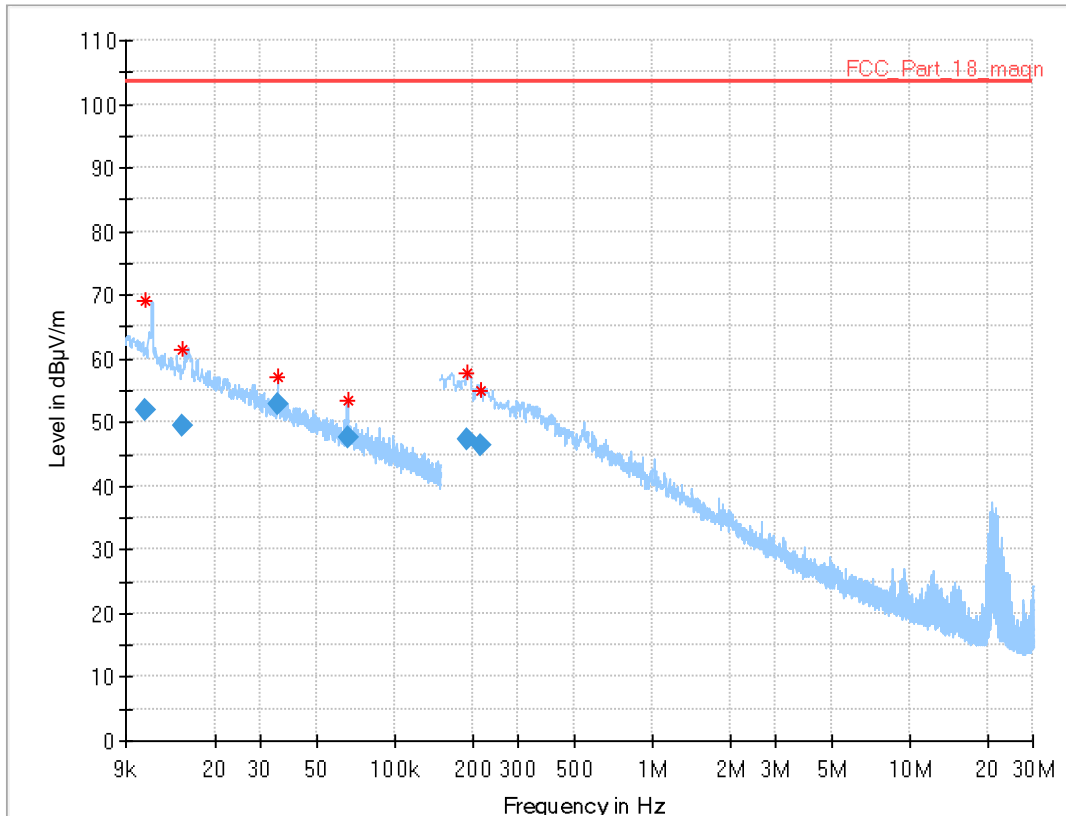


Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.011	52.02	103.5	51.5	1000	0.2	V	355	19
0.015	49.47	103.5	54.1	1000	0.2	V	43	17
0.035	52.75	103.5	50.8	1000	0.2	V	294	13
0.065	47.48	103.5	56.0	1000	0.2	V	49	12
0.191	47.27	103.5	56.3	1000	9.0	V	0	11
0.214	46.38	103.5	57.1	1000	9.0	V	84	11

Common Information

EUT:	Ladestaufach
Serial number:	1541816041916301020050400018
Test description:	FCC part 18@3m - z-axis
Operating condition:	USB load
Operator name:	Wolsdorfer
Comment:	DC 12V

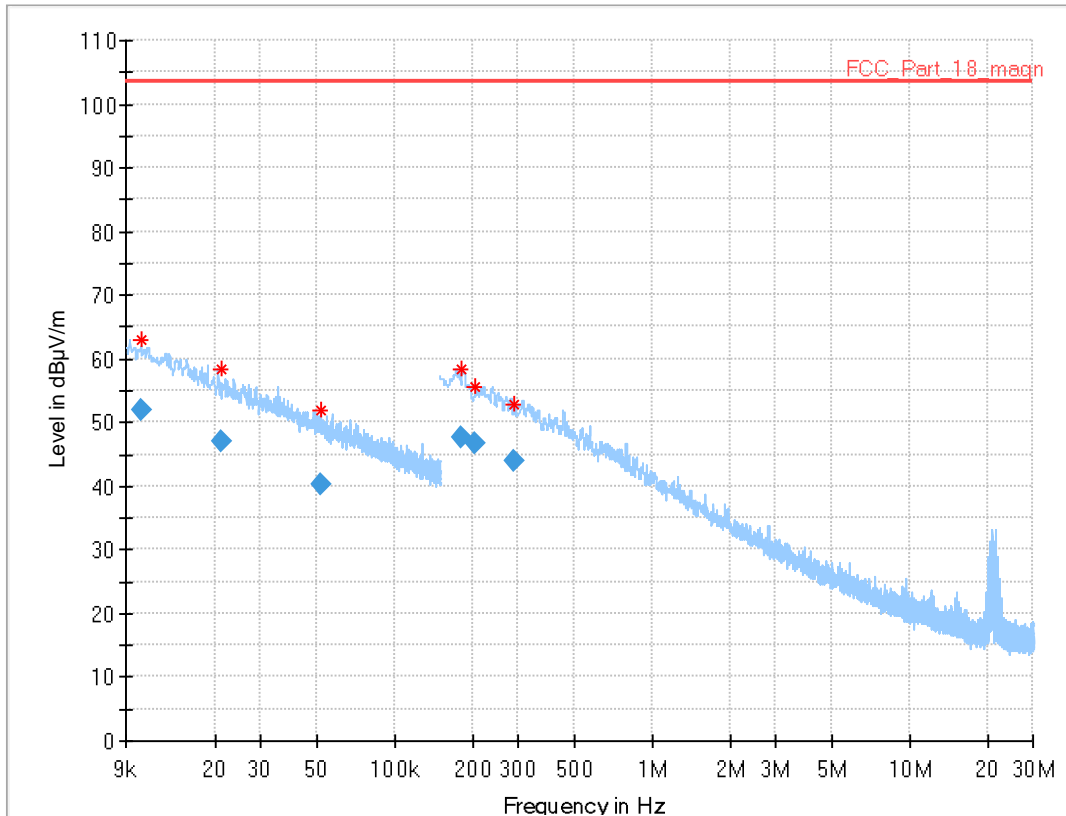


Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.010	51.82	103.5	51.7	1000	0.2	V	212	19
0.021	46.90	103.5	56.6	1000	0.2	V	55	15
0.051	40.34	103.5	63.2	1000	0.2	V	334	12
0.180	47.70	103.5	55.8	1000	9.0	V	245	11
0.205	46.68	103.5	56.8	1000	9.0	V	306	11
0.291	43.88	103.5	59.6	1000	9.0	V	296	11

8.1.5 Hardware set-up

Frequency Range:	9 kHz - 30 MHz
Receiver:	ESR 3 [ESR 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	LOOP-Ant FW 1.0
Antenna:	EMCO6502 Correction Table (vertical): EMCO6502A_2016 Correction Table (horizontal): EMCO6502A Correction Table (vertical): SUB_Cable (1005) Correction Table (horizontal): SUB_Cable (1005)
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12
Software version:	V10.59.0

8.1.6 Test set-up

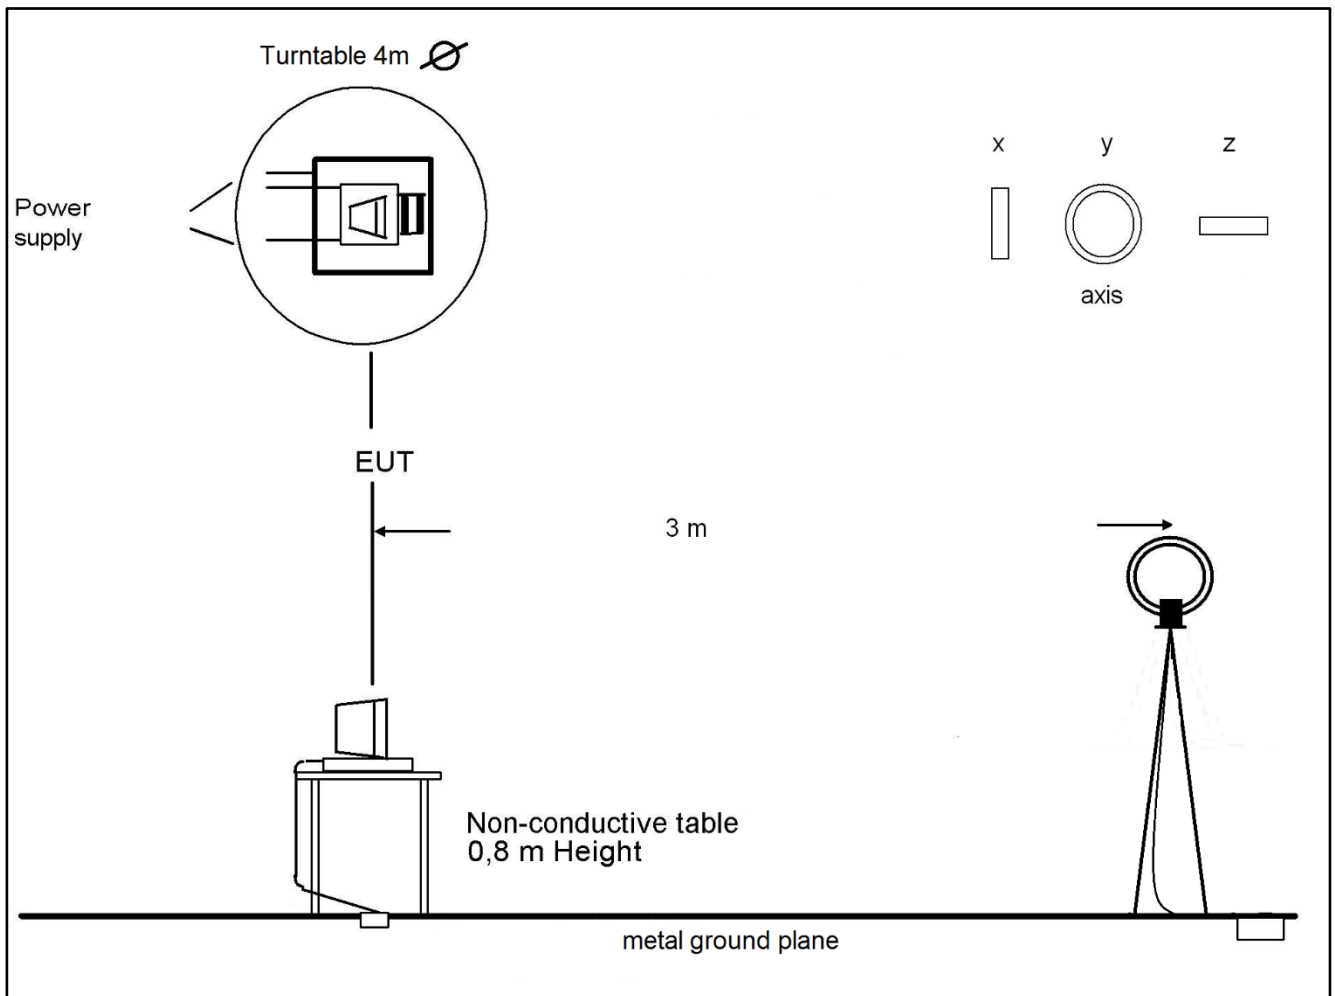

8.1.7 Sequence of testing

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a nonconducting table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC or DC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized successively in x, y and z axis
- The antenna height is 2 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$
- The final measurement is done with average detector (as described in FCC/OET MP-5).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna position, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.1.8 Signal strength calculation

Calculation formula:

$$SS = U_R + CL + AF$$

List of abbreviations:

SS	▶	signal strength
U_R	▶	voltage at the receiver
CL	▶	loss of the cable
AF	▶	antenna factor

List with correction factors:

Frequency [MHz]	CL [dB]	AF [1/m]
0,009	0,20	17,60
0,015	0,20	11,17
1,000	0,30	10,96
10,000	0,40	9,90
22,000	0,40	6,56
30,000	0,40	3,40

Example calculation:

For example at 1,000 MHz the measured Voltage (U_R) is 12,35 dB μ V, the loss of the cable (CL) is 0,30 dB and the antenna factor (AF) is 10,96 dB (m^{-1}) the final result will be calculated:

$$SS \text{ [dB}\mu\text{V/m]} = 12,35 \text{ [dB}\mu\text{V]} + 0,30 \text{ [dB]} + 10,96 \text{ [dB (m}^{-1}\text{)]} = \underline{23,61 \text{ [dB}\mu\text{V/m]}} \text{ (15,1 } \mu\text{V/m)}$$

8.2 Electromagnetic Radiated Emissions (distance 10 m)

8.2.1 Instrumentation for Test (see equipment list)

F 1	F 2	F 4b	F 5	F 6	F 7	F 8	F 28				
-----	-----	------	-----	-----	-----	-----	------	--	--	--	--

8.2.2 Test Plan

EUT set-up	set 1		
Operating mode	Application	Limit	Result
op 1	Enclosure	FCC part 18	passed

Remarks:	- Powered by external power supply (12V DC) - the measurements have been performed @10m distance, therefore the limit line was recalculated accordingly (distance correction for 300m: $20\log(300/10)=29,54\text{dB}$)
-----------------	---

8.2.3 Radiated Limits

Frequency- range	FCC part 18
30 MHz – 1000 MHz	23,52dB μ V/m@300m or 53 dB μ V/m@10m
	* This values are recalculated from the limits at 300m antenna distance in §18.305 of the FCC rules

8.2.4 Calibration Information

Device	Serial number	Internal Number	Calibration valid until	Calibration interval
ESR 3	1316.3003K03-102587-ct	300005771	12 / 2020	12 month
Trilog Antenna	9163-295	300003787	02 / 2021	24 month


Remarks:
System check of all relevant devices and the chamber (weekly)

8.2.5 Test Results

set 1/ op1:

Common Information

EUT:	BMW 1 541 816
Serial number:	1541816041916301020050400018
Test description:	FCC part 18@10m
Operating condition:	wireless charging
Operator name:	Wolsdorfer
Comment:	DC 12V

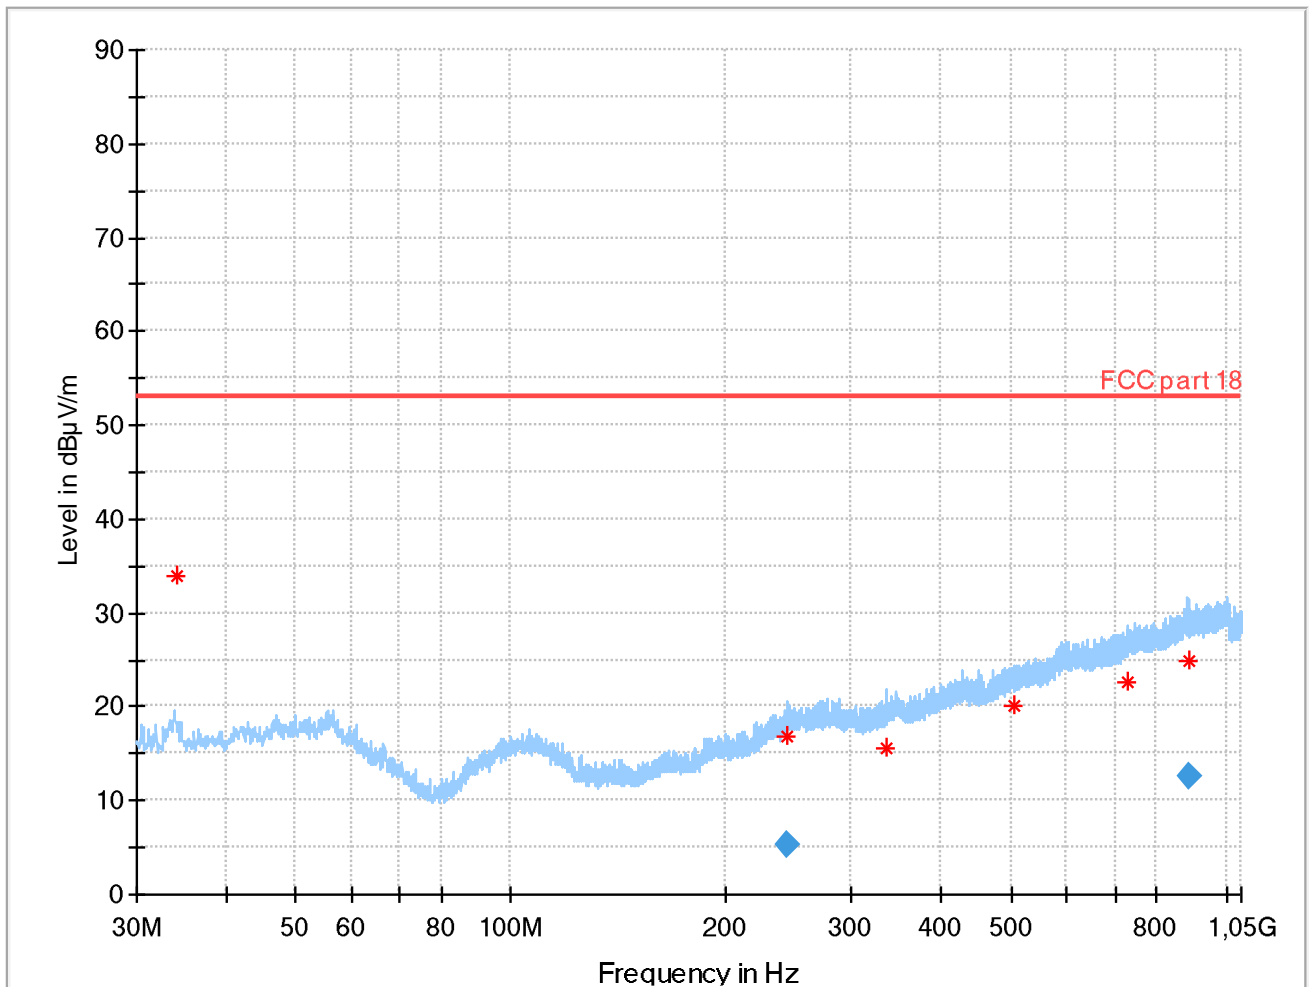


Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.029	6.72	53	46.3	200	120.0	118.0	V	77	12
243.831	5.22	53	47.8	200	120.0	170.0	V	185	13
336.146	2.87	53	50.1	200	120.0	170.0	V	75	15
505.408	6.49	53	46.5	200	120.0	170.0	H	9	18
725.931	10.00	53	43	200	120.0	163.0	V	75	21
885.130	12.53	53	40.5	200	120.0	170.0	H	75	23

set 2/ op2:

Common Information

EUT:	BMW 1 541 816
Serial number:	1541816041916301020050400018
Test description:	FCC part 18@10m
Operating condition:	USB load 2.1A
Operator name:	Wolsdorfer
Comment:	DC 12V

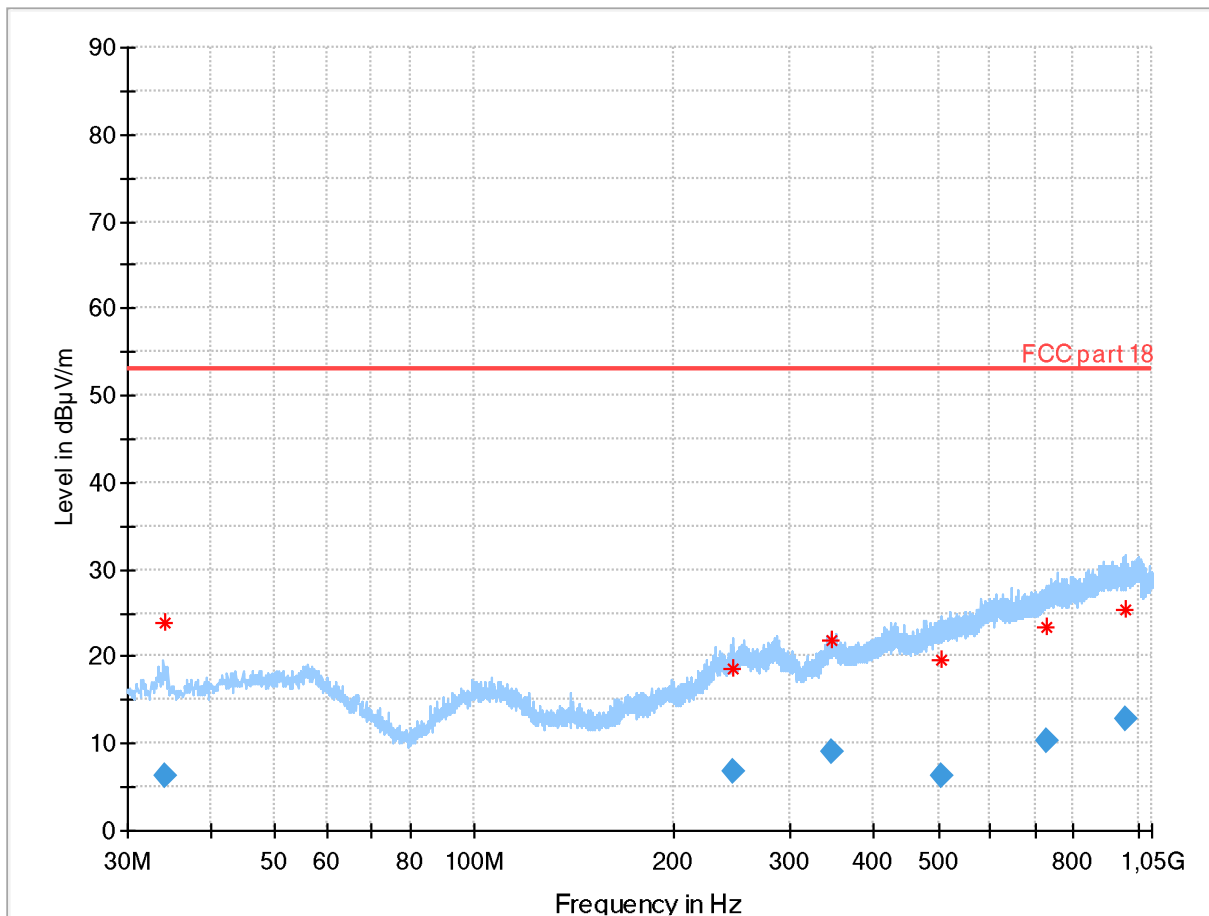

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.023	6.35	53	46.6	200	120.0	109.0	V	-15	12
244.801	6.74	53	46.3	200	120.0	170.0	V	-15	13
345.113	9.04	53	44	200	120.0	110.0	V	285	16
504.829	6.36	53	46.6	200	120.0	170.0	H	-15	18
729.905	10.37	53	42.6	200	120.0	170.0	V	255	21
955.612	12.79	53	40.2	200	120.0	170.0	V	-15	24

8.2.6 Hardware Set-up

Subrange 1

Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESR] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12
Software version	EMC32 V10.59.0

8.2.7 Sequence of testing

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a nonconducting table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with average detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.2.8 Signal strength calculation

Calculation formula:

$$SS = U_R + CL + AF$$

List of abbreviations:

SS	▶	signal strength
U_R	▶	voltage at the receiver
CL	▶	loss of the cable
AF	▶	antenna factor

List with correction factors:


Frequency [MHz]	CL [dB]	AF [1/m]
30,000	0,20	12,30
100,000	0,60	11,30
200,000	1,10	10,60
300,000	1,30	13,20
400,000	1,60	15,30
500,000	1,90	16,80
600,000	2,00	18,80
700,000	2,20	20,30
800,000	2,30	21,50
900,000	2,40	22,80
1000,000	2,50	23,30

Example calculation:

For example at 500,000 000 MHz the measured Voltage (U_R) is 12,35 dB μ V, the loss of the cable (CL) is 1,90 dB and the antenna factor (AF) is 16,80 dB (m^{-1}) the final result will be calculated:

$$SS \text{ [dB}\mu\text{V/m]} = 12,35 \text{ [dB}\mu\text{V]} + 1,90 \text{ [dB]} + 16,80 \text{ [dB (m}^{-1}\text{)]} = \underline{31,05 \text{ [dB}\mu\text{V/m]}} \text{ (35,69 } \mu\text{V/m)}$$

8.2.9 Test Set-up

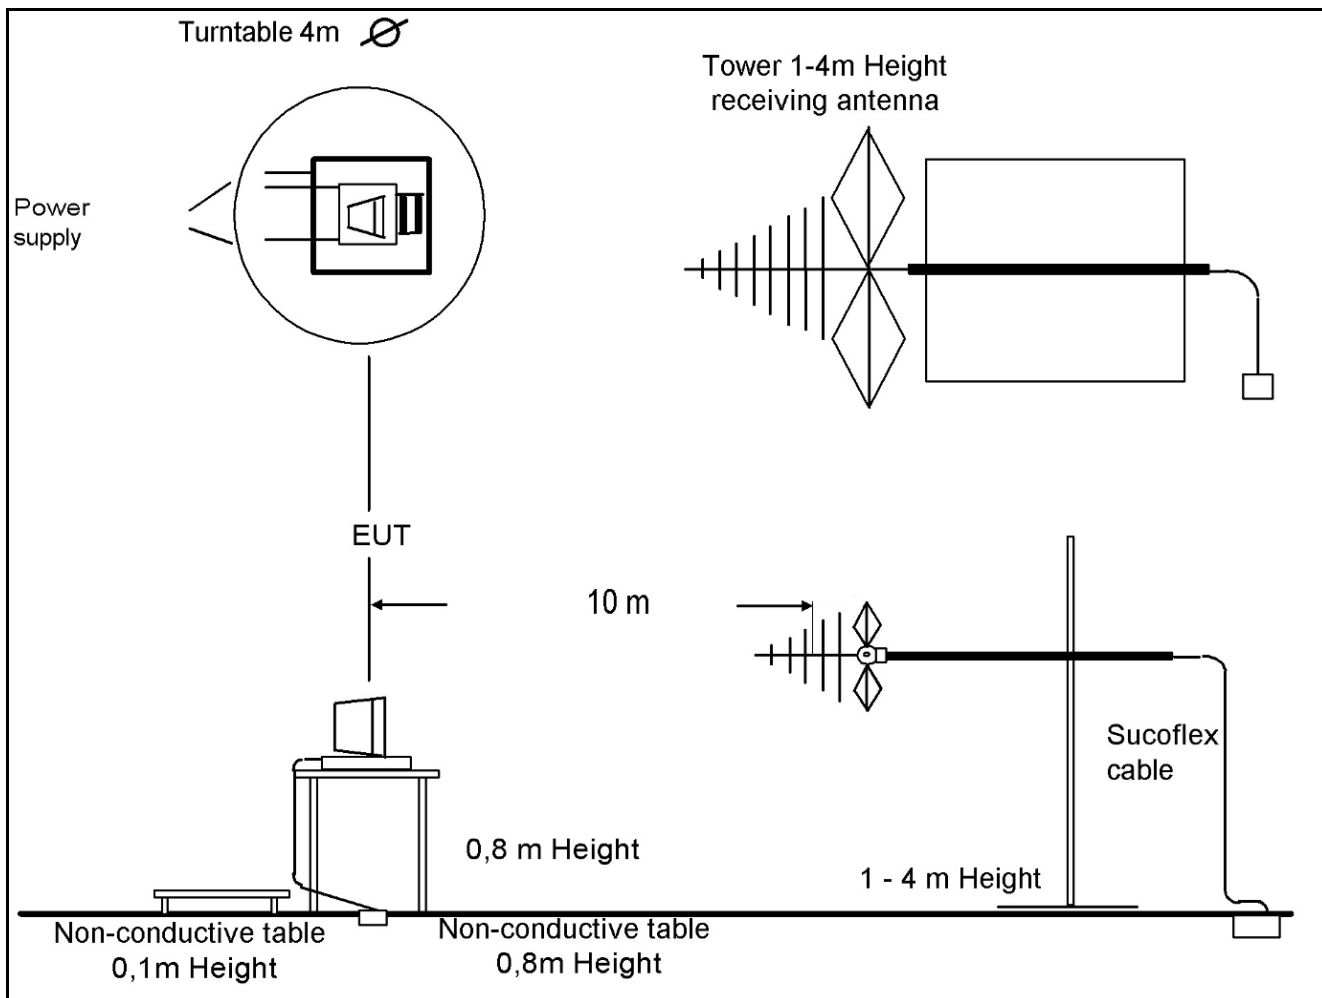

9 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

No.	Instrument/Ancillary	Manufacturer	Type	Serial-No.	Internal identification
Radiated emission in chamber F					
F-1	Control Computer	F+W		2934939v001	300005258
F-2	Trilog-Antenna	Schwarzbeck	VULB 9163	9163-295	300003787
F-3a	Amplifier	Veritech Microwave Inc.	0518C-138	- / -	- / -
F-4b	Switch	Netgear	GS108P	26V12A3H50336	300000368
F-5	EMI Test receiver	R&S	ESR	1316.3003K03-102587-ct	300005771
F-6	Turntable Interface-Box	EMCO / ETS-LINDGREN	Model 105637	44583	300003747
F-7	Tower/Turntable Controller	EMCO / ETS-LINDGREN	Model 2090	64672	300003746
F-8	Tower	EMCO / ETS-LINDGREN	Model 2175	64762	300003745
F-9	Ultra Notch-Filter Rejected band Ch. 62	WRCD		9	
Radiated immunity in chamber F					
F-10	Control Computer	F+W		FW0502032	300003303
F-11	Signal Generator	R&S	SMB 100A	1406.6000k02-113856	300005266
F-13	RF-Amplifier	Bonn	BLWA 0860-250/100D	035491	300003210
F-14	Stacked Logper Antenna	Schwarzbeck	STLP9128 E	9128 E 013	300003408
F-14a	Bicon-Antenna	EMCO	3109	8906-2309	300000575
F-14b	Bicon-Antenna	Schwarzbeck	Balun VHBD 9134 elements BBFA 9146	3011 0057	300005385
F-15	RF-Amplifier	ar	1000LM20	20562	-/-
F-16	Directional Coupler	ar	DC7144A	312786	300003411
F-16a	Directional coupler	emv	DC 2000	9401-1677	300000592
F-18	Power Meter	R&S	NRP2	104973	300005114
F-19	Power sensor	R&S	NRP-Z91	103332	300005114-1
F-20	Power sensor	R&S	NRP-Z91	103333	300005114-2
F-35	RF- Amplifier	Bonn	BLMA 2060-5	097392A	300003908
F-36	Stacked Microwave Log.-Per. Antenna	Schwarzbeck	STLP9149	9149-044	300003919
Harmonics and flicker in front of chamber F					
F-21	Flicker and Harmonics Test System	Spitzenberger & Spies	PHE4500/B I PHE4500/B II	B5983 B5984	300003314
F-28	Power Supply	Hewlett Packard	6032 A	2920 A 04466	300000580
Radiated emission in chamber F > 1GHz					
F-29	Horn antenna	Schwarzbeck	BBHA 9120 B	188	300003896
F-30	Amplifier	ProNova	0518C-138	005	F 024
F-31	Amplifier	Miteq	42-00502650-28-5A	1103782	300003379
F-32	Horn antenna	Emco	3115	8812-3088	300001032
F-33	Spectrum Analyzer	R&S	FSU26	200809	300003874
F-34	Loop antenna	EMCO	6502	8905-2342	300000256

10 Observations

No observations, exceeding those reported with the single test cases, have been made.

Annex A Document history

Version	Applied changes	Date of release
- / -	Initial release	2020-08-13
A	FCC ID added	2020-09-15
B	Photo documentation removed	2020-09-23

This test report replaces the test report 1-8238/19-01-57-A and dated 2020-09-15

Annex B Further information**Glossary**

DUT	-	Device under Test
EMC	-	Electromagnetic Compatibility
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	not applicable
S/N	-	Serial Number
SW	-	Software