



FCC/IC Test Report

FOR:

Model #: EA_GKWWIC_GX

**A3 ALPHA meter with Gatekeeper module, GSM/GPRS, External WAN antenna
and Internal LAN antenna**

FCC ID: QZCWWIC-G01

IC ID: 4557A-WWICG01

47 CFR Part 15.247 for FHSS Systems

IC RSS-210 Issue 8

TEST REPORT #: EMC_ELSTE_004_11001_FCC15.247

DATE: 2011-05-05



**Bluetooth Qualification
Test Facility
(BQTF)**



**FCC listed
A2LA Accredited**

**IC recognized #
3462B**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansoerge, Hans Peter May

TABLE OF CONTENTS

1	Assessment	4
2	Administrative Data	5
2.1	Identification of the Testing Laboratory Issuing the EMC Test Report	5
2.2	Identification of the Client	5
2.3	Identification of the Manufacturer	5
3	Equipment under Test (EUT)	6
3.1	Specification of the Equipment under Test	6
3.2	Identification of the Equipment Under Test (EUT).....	6
3.3	Identification of Accessory equipment	7
4	Subject of Investigation	8
5	Summary of Measurement Results	9
6	Measurements	10
6.1	Radiated Measurement Procedure	10
6.2	Maximum Peak Output Power	12
6.2.1	References:	12
6.2.2	Measurement requirements:	12
6.2.3	Limits:	12
6.2.4	Test Conditions:.....	12
6.2.5	Test Results:.....	12
6.2.6	Test Data/plots:	13
6.3	Restricted Band Edge Compliance	15
6.3.1	References:	15
6.3.2	Limits: §15.247/15.205.....	15
6.3.3	Measurement Procedure:	15
6.3.4	Test Data/plots:	16
6.4	Transmitter Spurious Emissions- Radiated.....	18
6.4.1	References:	18
6.4.2	Measurement requirements:	18
6.4.3	Limits:	18
6.4.4	Test Result:	19
6.4.5	Test data/ plots:	20
6.5	Receiver Spurious Emissions- Radiated	24
6.5.1	Limits:	24
6.5.2	Test Conditions:.....	24
6.5.3	Test Result:	24
6.5.4	Test data/ plots:	25
6.6	AC Power Line Conducted Emissions.....	27

6.6.1	References:	27
6.6.2	Limits:	27
6.6.3	Test Conditions:.....	27
6.6.4	Results.....	27
6.6.5	Test Results:.....	28
7	Test Equipment and Ancillaries used for tests.....	30
8	Test Setup Info:	31
9	Revision History	32

1 Assessment

The following device was tested against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Issue 8 and no deviations were ascertained during the course of the tests performed.

Company	Description	Model #
Elster Solutions, LLC	A3 ALPHA meter with Gatekeeper module, GSM/GPRS, External WAN antenna and Internal LAN antenna	EA_GKWWIC_GX

Responsible for Testing Laboratory:

2011-05-05	Compliance	Sajay Jose (Test Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2011-05-05	Compliance	Christopher Torio (EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Test Lab Director:	Heiko Strehlow
Responsible Project Leader:	David Ahn

2.2 Identification of the Client

Applicant's Name:	Elster Solutions, LLC
Street Address:	208 S. Rogers Lane
City/Zip Code	Raleigh, NC 27610
Country	USA
Contact Person:	David Cooper
Phone No.	919.250.5420
Fax:	919.250.5486
e-mail:	david.cooper@us.elster.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as above.
Manufacturers Address:	
City/Zip Code	
Country	

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name:	EA_GKWWIC_GX
Model No:	EA_GKWWIC_GX
Product Type:	A3 ALPHA meter with Gatekeeper module, GSM/GPRS, External WAN antenna and Internal LAN antenna
Hardware Revision :	1.0
Software Revision :	1.4
Cellular Modem Information:	Sierra Wireless Q2687 FCC ID: N7NQ2687
Other Radios:	900MHz ILC2 Radio FCC ID: QZC-ILC24
FCC-ID:	QZCWWIC-G01
IC-ID :	4557A-WWICG01
Frequencies of operation:	GSM 850: 824.2-848.8MHz; PCS 1900: 1850.2-1909.8MHz ILC2: 902-928 MHz
Type(s) of Modulation:	GMSK; 8-PSK; ILC2: FSK
Number of channels:	GSM850: 125 and PCS 1900: 300 ILC2: Frequency Hopping/ 25 channels per network. Up to 2 networks available.
Other Bands supported:	GSM 900/1800
Antenna Type:	GSM: External antenna with: +3dBi peak gain. ILC2: Internal antenna with: -2.5dBi peak gain.
Power Supply:	Nominal Voltage: 120/240V AC Low: 96VAC/ High: 288 VAC

3.2 Identification of the Equipment Under Test (EUT)

EUT #	Serial Number/IMEI	Model	HW Status	SW Status
1	13255863/ 352421040002109	EA_GKWWIC_GX	1.0	1.4

3.3 Identification of Accessory equipment

AE #	Type	Manufacturer	Model	Serial Number
1	Transformer	Elster	N/A	N/A
2	Optical connector	Elster	N/A	N/A

4 Subject of Investigation

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS-210 Issue 8.

This test report is to support a request for new equipment authorization under the FCC ID: **QZCWWIC-G01** and IC ID: **4557A-WWICG01**.

All testing was performed on the product referred to in Section 3 as EUT.

This test report contains full radiated and conducted testing results as per

- 47 CFR Part 15: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter A- General, Part 15- Radio Frequency Devices.
- RSS-210 Issue 8: Spectrum Management and Telecommunications- Radio Standards Specification. Low-power Licence-exempt radio communication devices (All frequency bands): Category 1 equipment.

During the testing process, the EUT was tested on a single channel using a custom Control software provided by the manufacturer. Hopping was also controlled using the manufacturer provided SW.

All data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

5 Summary of Measurement Results

Test Specification	Test Case	Temperature and Voltage Conditions	Pass	Fail	NA	NP	Result
§15.247(b)(4) RSS210 A8.4(2)	Antenna Gain	Nominal	■	□	□	□	Complies
§15.247(e) RSS210 A8.2(b)	Power Spectral Density	Nominal	□	□	■	□	-
§15.247(a)(1) RSS210 A8.1(b)	Carrier Frequency Separation	Nominal	□	□	□	■	Complies
§15.247(a)(1) RSS210 A8.1(d)	Number of Hopping Channels	Nominal	□	□	□	■	Complies
§15.247(a)(1)(iii) RSS210 A8.3(1)	Time of occupancy	Nominal	□	□	□	■	Complies
§15.247(a)(1) RSS210 A8.2(a)	Spectrum Bandwidth	Nominal	□	□	□	■	Complies
§15.247(b)(1) RSS210 A8.4(2)	Maximum Output Power	Nominal	■	□	□	□	Complies
§15.247(d) RSS210 A8.5	Band edge compliance-Conducted	Nominal	□	□	□	■	Complies
§15.247(d) RSS210 A8.5	Band edge compliance-Radiated	Nominal	■	□	□	□	Complies
§15.247(d) RSS210 A8.5	TX Spurious emissions-Conducted	Nominal	□	□	□	■	Complies
§15.247(d) RSS210 A8.5	TX Spurious emissions-Radiated	Nominal	■	□	□	□	Complies
§15.209(a) RSS Gen	TX Spurious Emissions Radiated<30MHz	Nominal	■	□	□	□	Complies
§15.109 RSS Gen	RX Spurious Emissions Radiated	Nominal	■	□	□	□	Complies
§15.107(a)	Conducted Emissions <30MHz	Nominal	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

1. Tests indicated NP is leveraged from the module testing data of device with FCC ID: QZC-ILC24. Data available in Test report #30953899.003 issued by TUV Rheinland of North America on 24 Feb 2010.
2. Power Spectral Density is NOT APPLICABLE for devices with hopping functionality.

6 Measurements

6.1 Radiated Measurement Procedure

ANSI C63.4 Section 8.3.1.1: Exploratory radiated emission measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

ANSI C63.4 Section 8.3.1.2: Final radiated emission measurements

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT’s size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.

NOTES

- 1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- 2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.
- 3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

6.2 Maximum Peak Output Power

6.2.1 References:

**FCC CFR §2.1046
RSS-Gen 4.8**

6.2.2 Measurement requirements:

6.2.2.1 FCC 2.1046: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

6.2.2.2 RSS-Gen 4.8: RF power output.

Transmitter output power measurements shall be carried out before the unwanted emissions test. The transmitter output power value, obtained from this test, serves as the reference level used to determine the unwanted emissions.

6.2.3 Limits:

6.2.3.1 §15.247 (b)(2)

For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

6.2.3.2 RSS 210- A8.4(2)

Nominal Peak Output Power < 30 dBm (1W)

6.2.4 Test Conditions:

Tnom: 25°C;

Hopping OFF

Spectrum Analyzer settings:

RBW=VBW=3MHz, Detector: Peak- Max Hold.

Sweep Time: Auto

Span=6MHz

6.2.5 Test Results:

Maximum Peak output Power:

Ch 1: 16.00 dBm

Ch 31: 16.87 dBm


Ch 63: 15.34 dBm

6.2.5.1 Measurement Result


Pass.

6.2.6 Test Data/plots:


Radiated Peak Power Ch 1

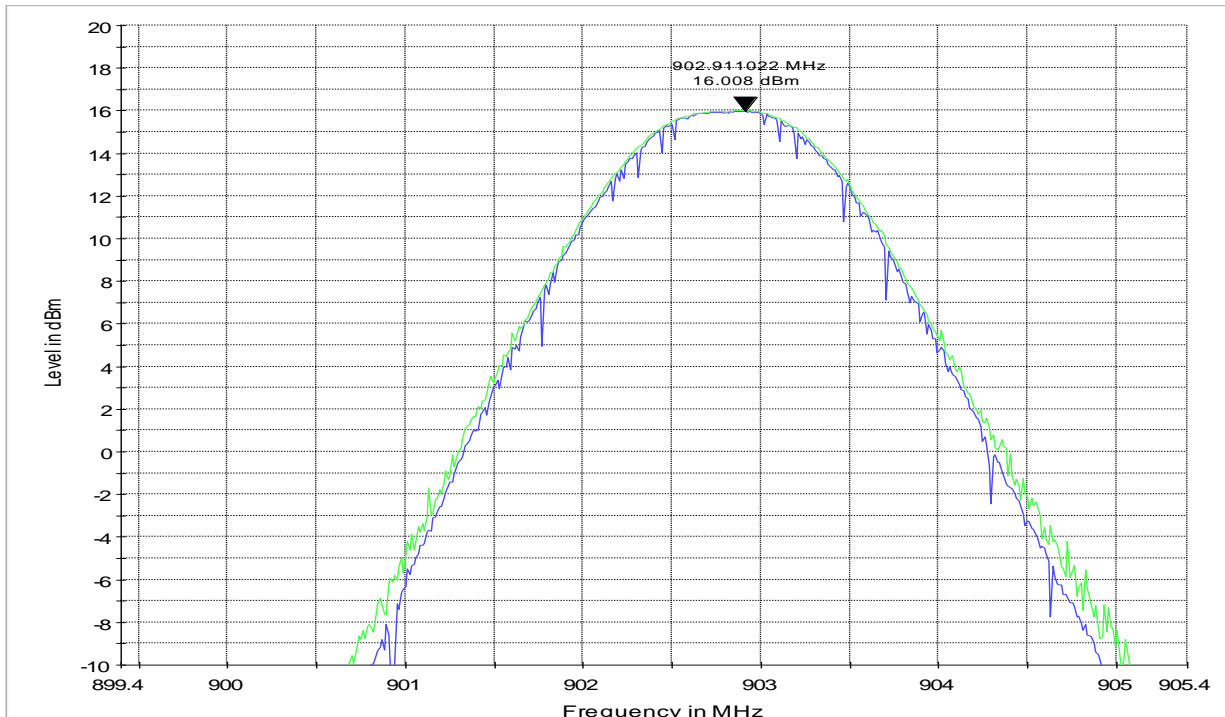

Radiated Peak Power Ch 31

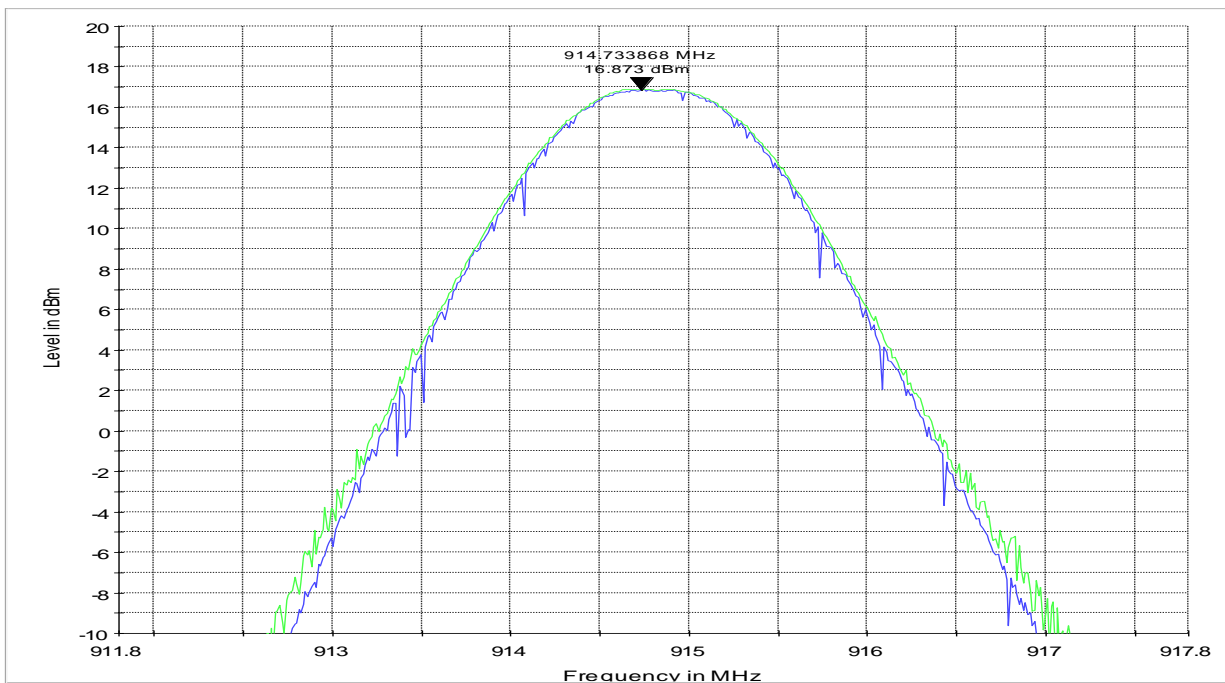

Radiated Peak Power Ch 63

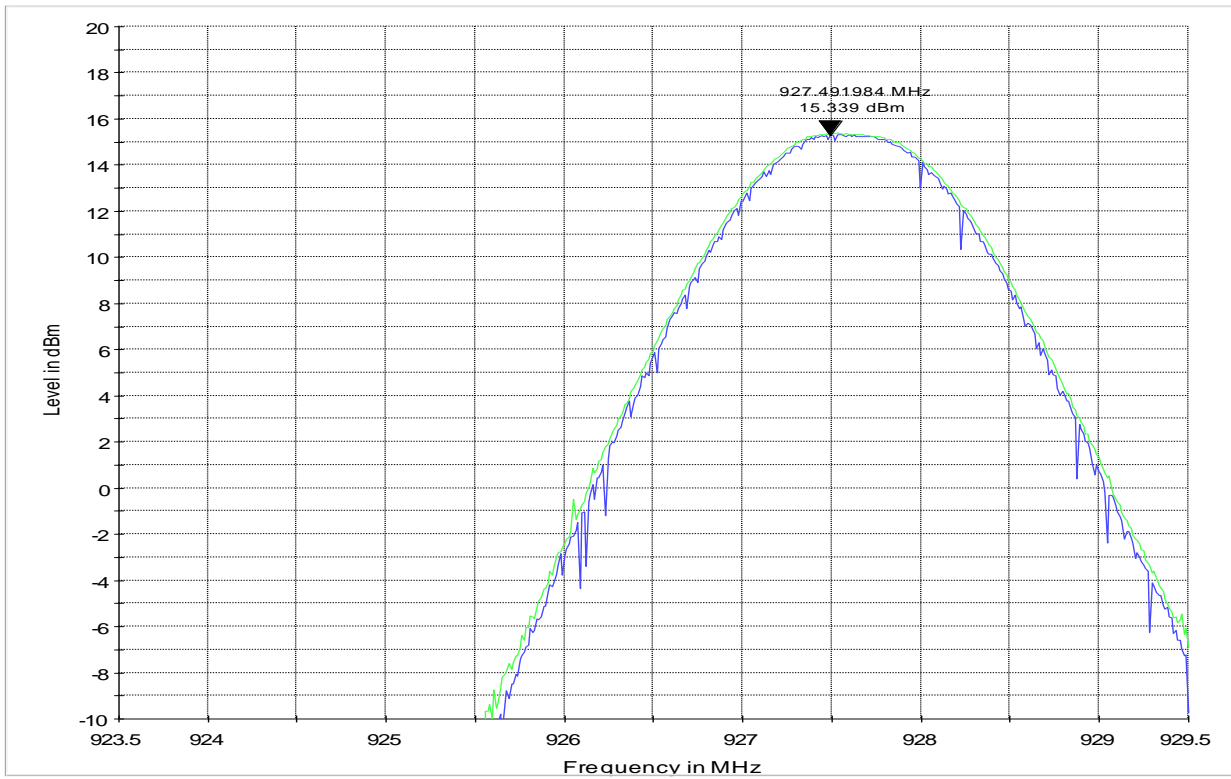

6.3 Restricted Band Edge Compliance

6.3.1 References:
FCC CFR §2.1053

6.3.2 Limits: §15.247/15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

6.3.3 Measurement Procedure:


Peak measurements are made using a peak detector and RBW=100kHz.
 Measurement Uncertainty: ±3.0dB

6.3.3.1 Measurement Result


Pass. Emissions at band edges (902MHz and 928 MHz) are 20 dB below peak emission value.

6.3.4 Test Data/plots:


Lower band edge peak :

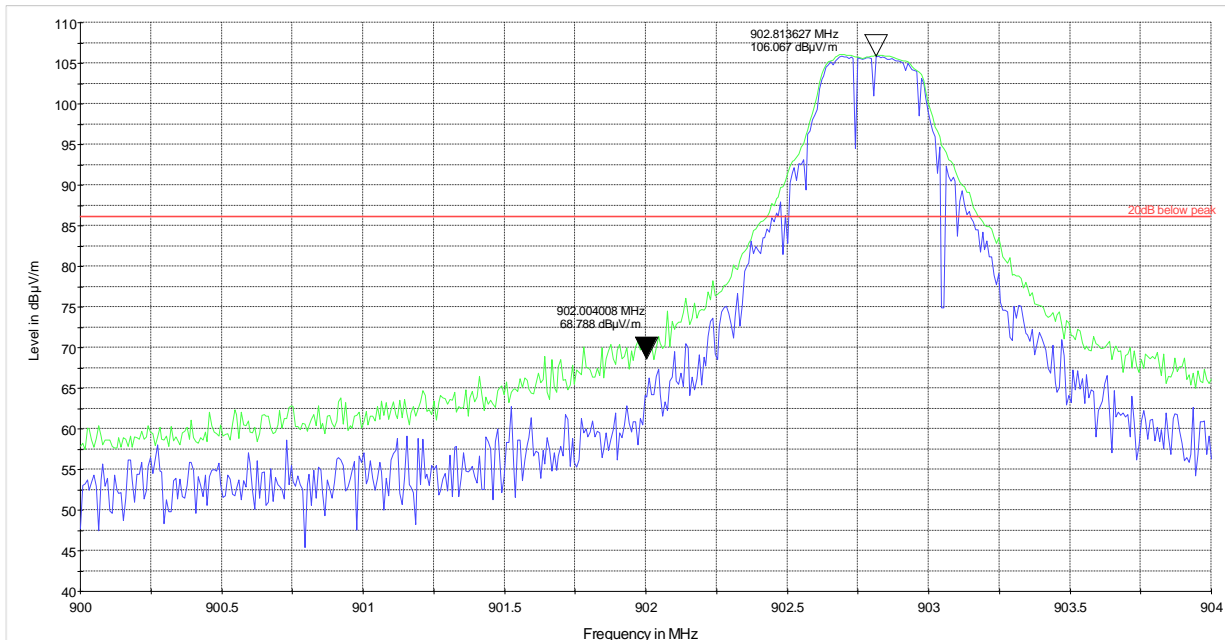


Lower band edge peak –with Hopping ON:

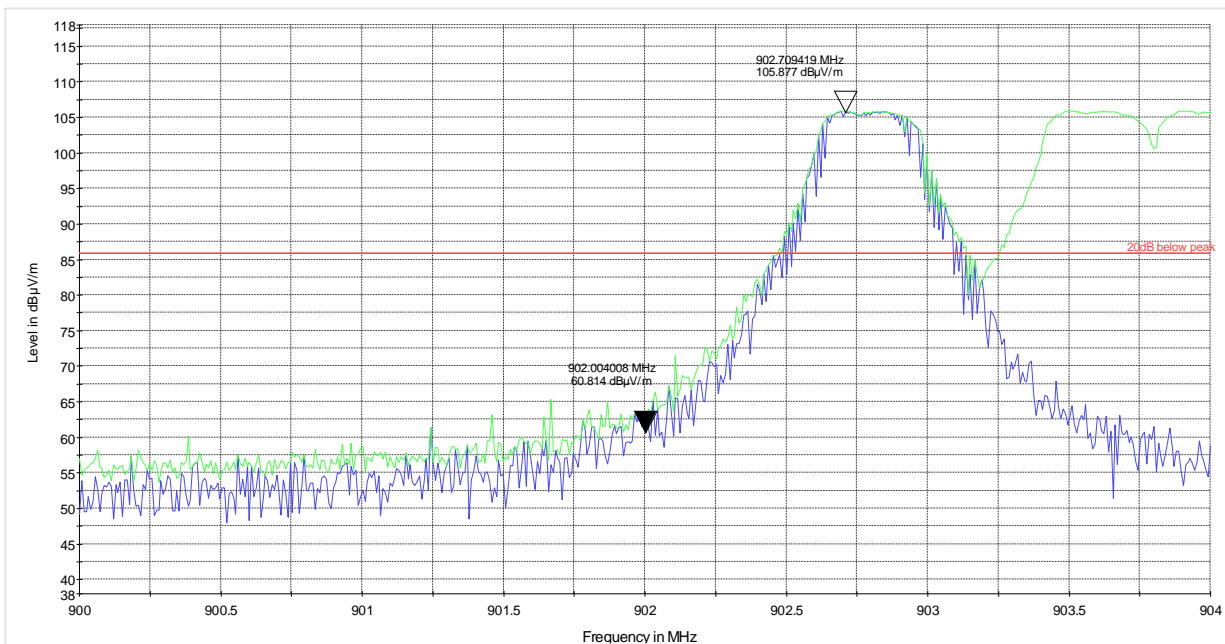

Higher band edge peak:

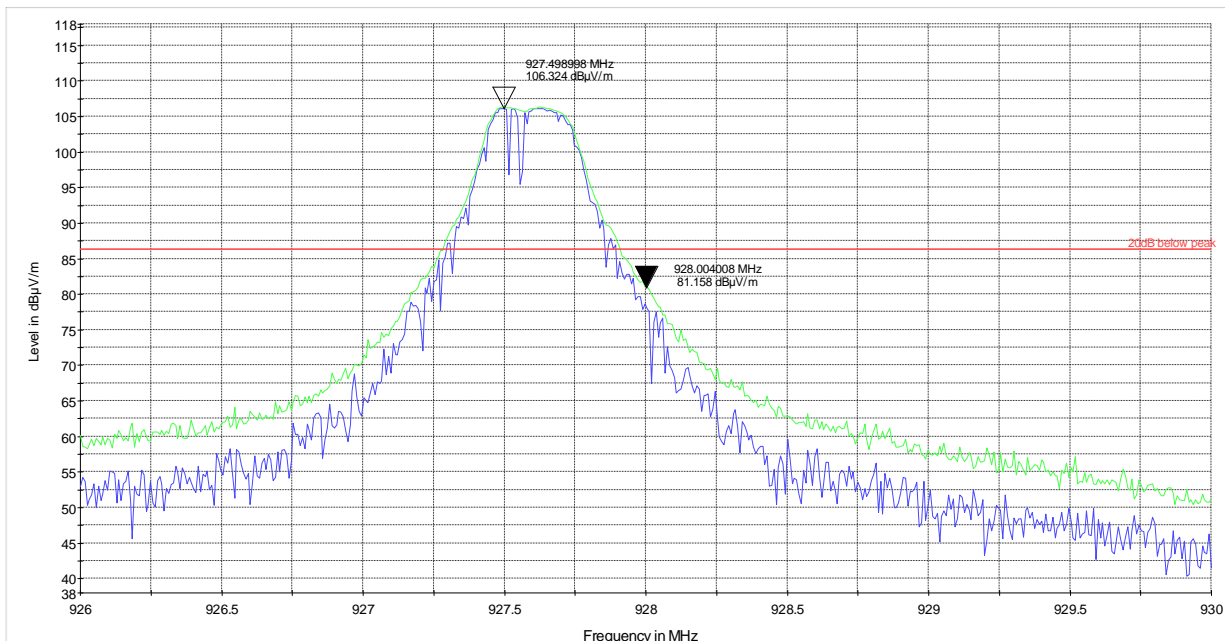

Higher band edge peak- with Hopping ON:

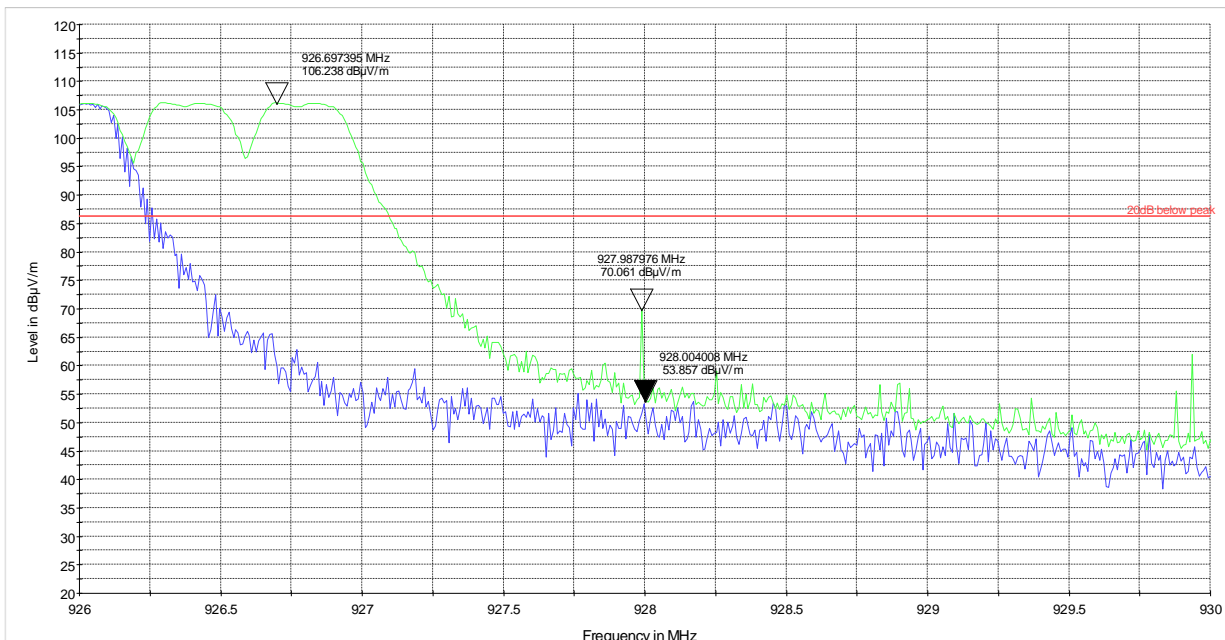

6.4 Transmitter Spurious Emissions- Radiated

6.4.1 References:

FCC CFR 2.1053
 RSS-Gen Section 4.9; RSS 210-A8.5

6.4.2 Measurement requirements:

6.4.2.1 FCC 2.1053: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

6.4.2.2 RSS-Gen 4.9: Transmitter unwanted spurious emissions

The same parameter, peak power or average power, used for the transmitter output power measurement shall be used for unwanted emission measurements.
 The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lower, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

6.4.3 Limits:

§15.247/15.205
RSS 210-A8.5

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB.

*PEAK LIMIT= 74dB μ V/m

*AVG. LIMIT= 54dB μ V/m

Table 1:

Frequency of emission (MHz)	Field strength (μ V/m)
30–88	100 (40dB μ V/m)
88–216	150 (43.5 dB μ V/m)
216–960	200 (46 dB μ V/m)
Above 960	500 (54 dB μ V/m)

Table 2:

Frequency of emission (MHz)	Field strength (μ V/m)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30

6.4.4 Test Result:

A Notch filter was used during testing for the fundamental frequency; and a High Pass filter used for the spurious emissions.

Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

Plots reported here represent the worse case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT.

Measurement Uncertainty: ± 3.0 dB


6.4.4.1 Measurement Result

Pass.

6.4.5 Test data/ plots:


Transmitter Radiated Spurious Emission:<30MHz

**Note: Worst case representation for all modes of operation in this frequency range-
Limits adjusted for 3m measurement.**

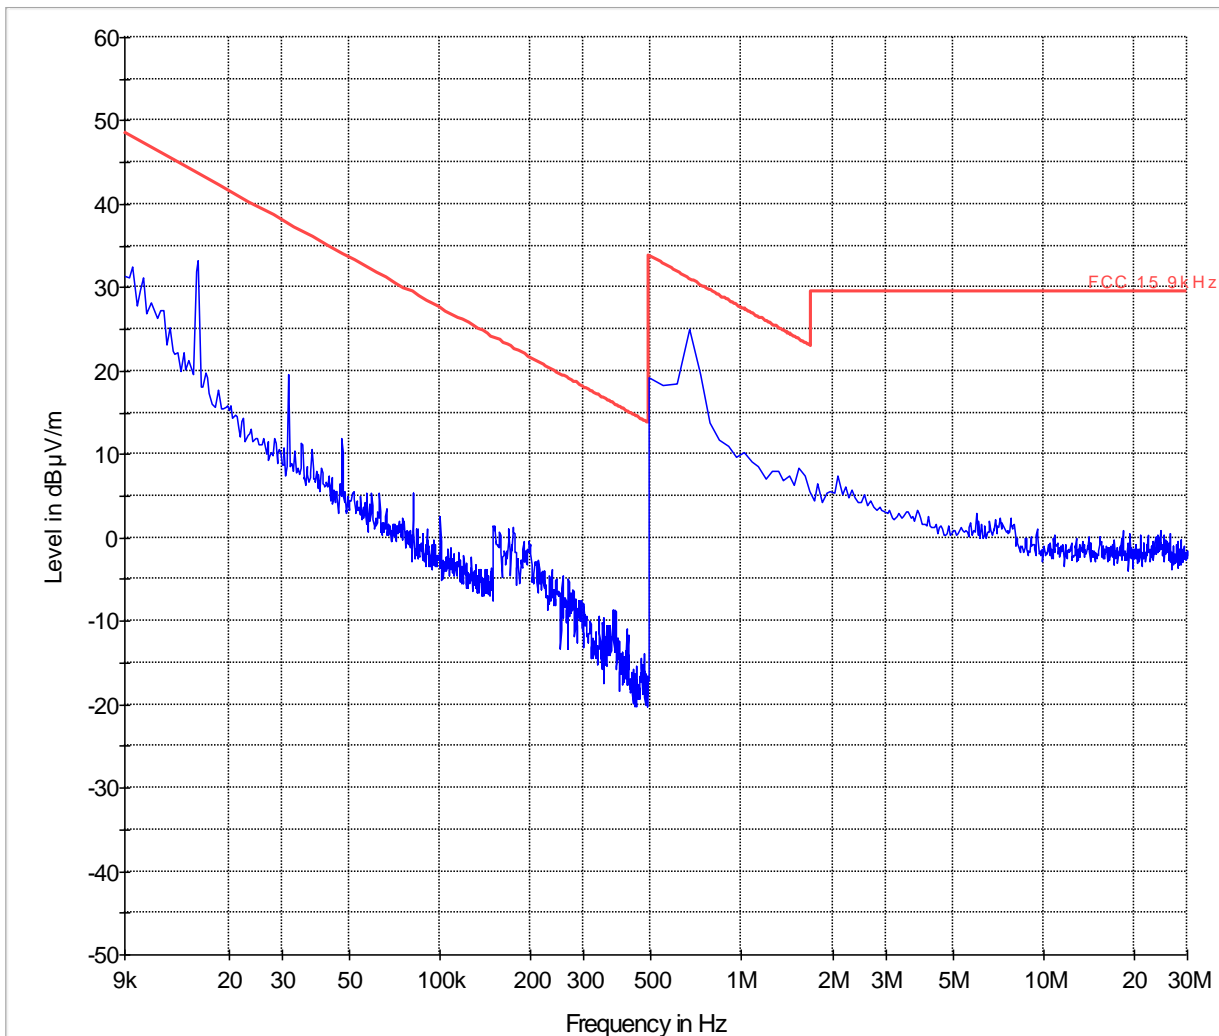


Transmitter Radiated Spurious Emission- Ch1- 30M-1GHz

FCC 15 30-1000MHz

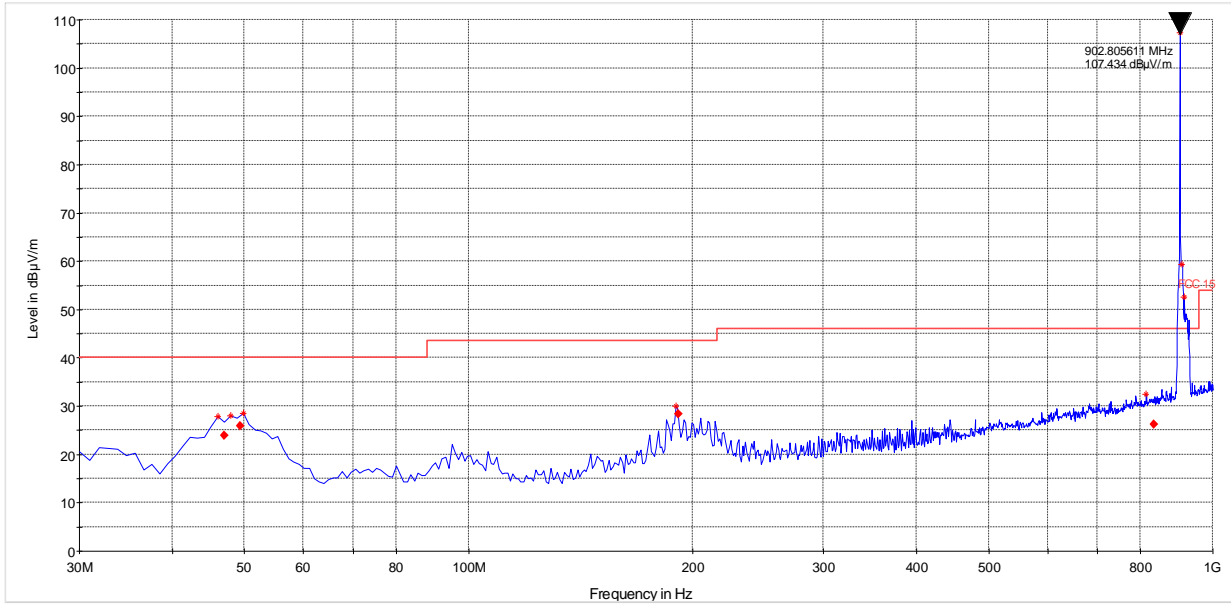


— FCC 15.LimitLine — Preview Result 1 ♦ Data Reduction Result 1 [3] ♦ Final Measurement Result 1

Transmitter Radiated Spurious Emission- Ch0- 1G-18GHz

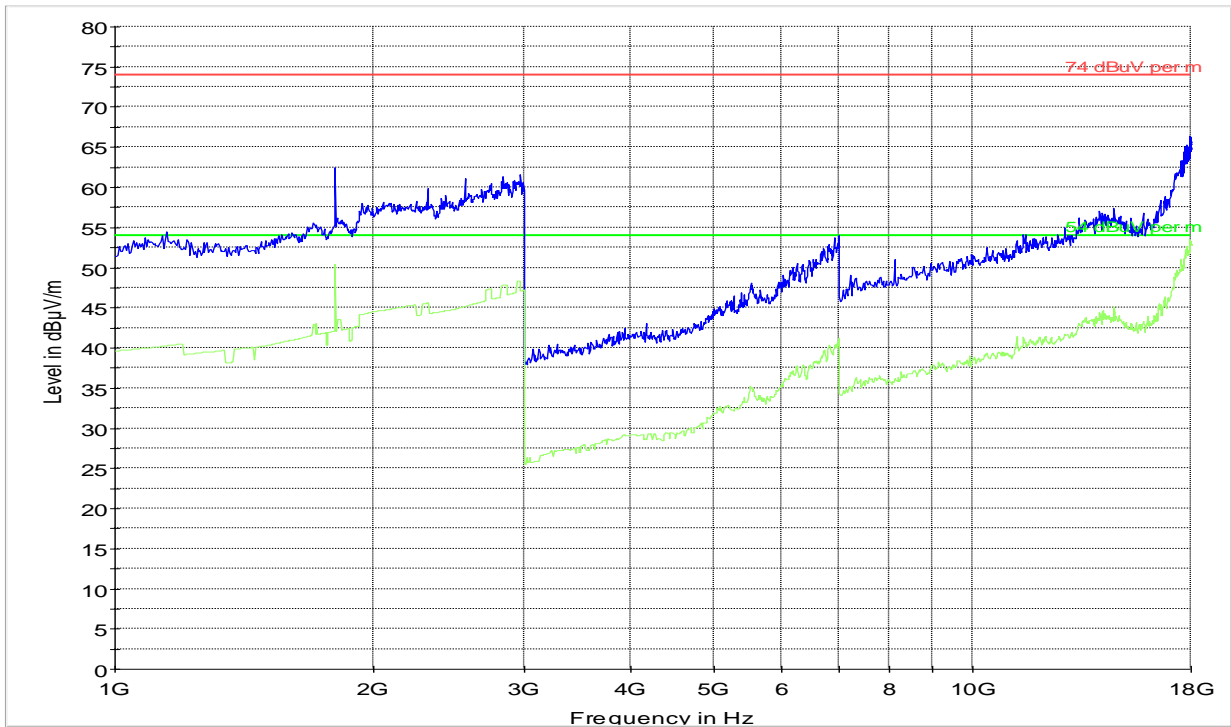


— 74 dBµV per m.LimitLine — 54 dBµV per m.LimitLine — Preview Result 1 — Preview Result 2

Transmitter Radiated Spurious Emission- Ch31- 30M-1GHz

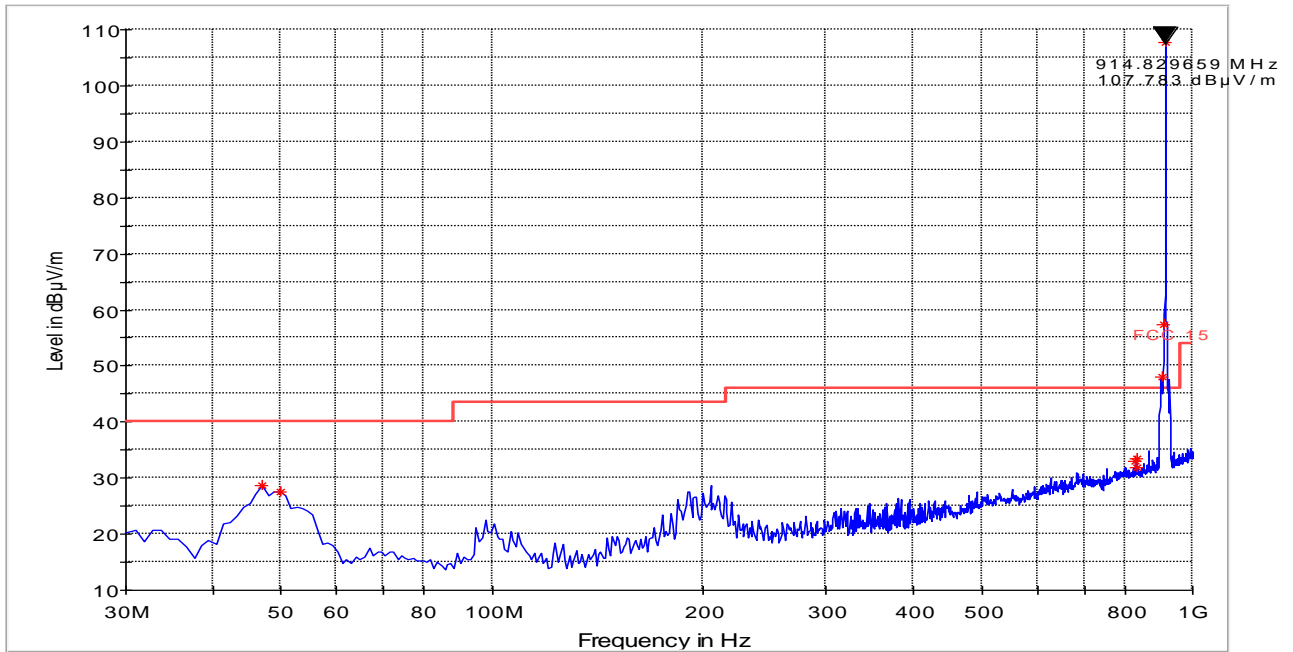


— FCC 15.LimitLine — Preview Result 1 * Data Reduction Result 1 [3]

Transmitter Radiated Spurious Emission- Ch39- 1G-18GHz

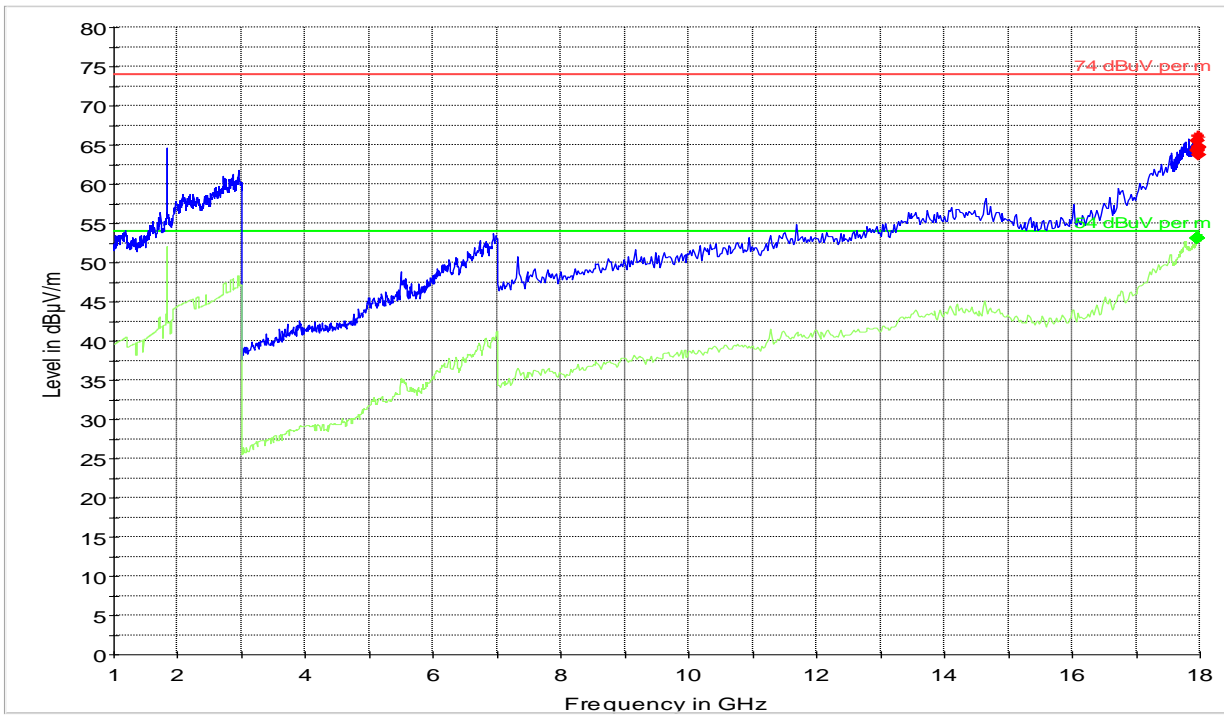


— 74 dBµV per m.LimitLine — 54 dBµV per m.LimitLine — Preview Result 1
 — Preview Result 2 — Data Reduction Result 1 [4] — Data Reduction Result 2 [4]
 ◆ Final Result 1 ◆ Final Result 2

Transmitter Radiated Spurious Emission- Ch78- 30M-1GHz

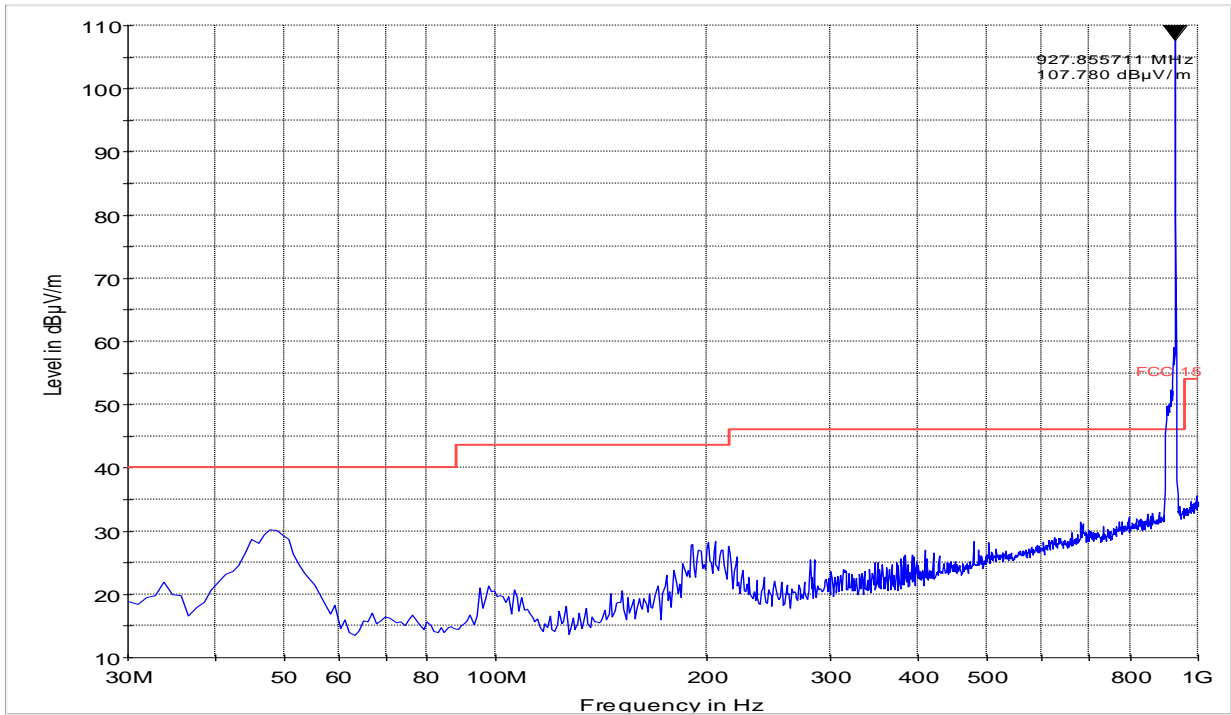

— FCC 15.LimitLine — Preview Result 1

Transmitter Radiated Spurious Emission- Ch78- 1G-18GHz

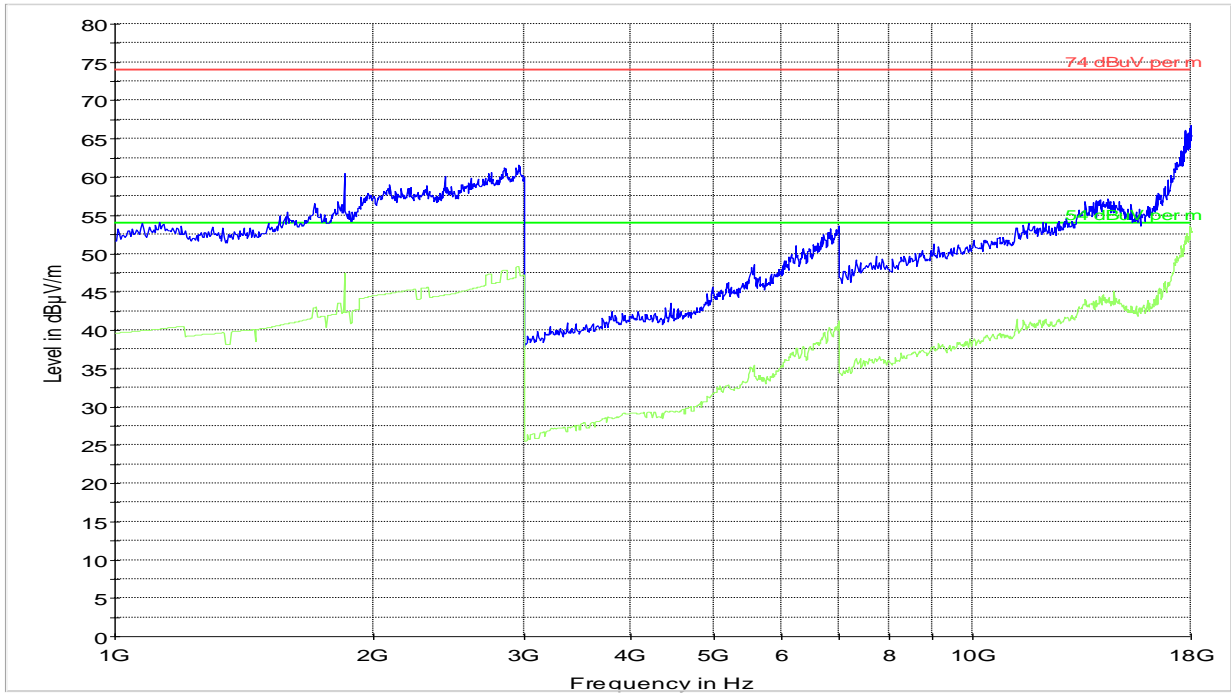

— 74 dBµV per m.LimitLine — 54 dBµV per m.LimitLine — Preview Result 1 — Preview Result 2

6.5 Receiver Spurious Emissions- Radiated

6.5.1 Limits:

6.5.1.1 FCC CFR §15.109

6.5.1.2 RSS-Gen

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100 (40dB $\mu\text{V/m}$)	3
88–216	150 (43.5 dB $\mu\text{V/m}$)	3
216–960	200 (46 dB $\mu\text{V/m}$)	3
Above 960	500 (54 dB $\mu\text{V/m}$)	3

6.5.2 Test Conditions:

Measurement Uncertainty: $\pm 3.0\text{dB}$

6.5.3 Test Result:

No significant emissions measurable. Plots reported here represent the worse case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT.


6.5.3.1 Measurement Result

Pass.


6.5.4 Test data/ plots:

Receive Mode: <30MHz


Note: Limits adjusted for 3m measurement.

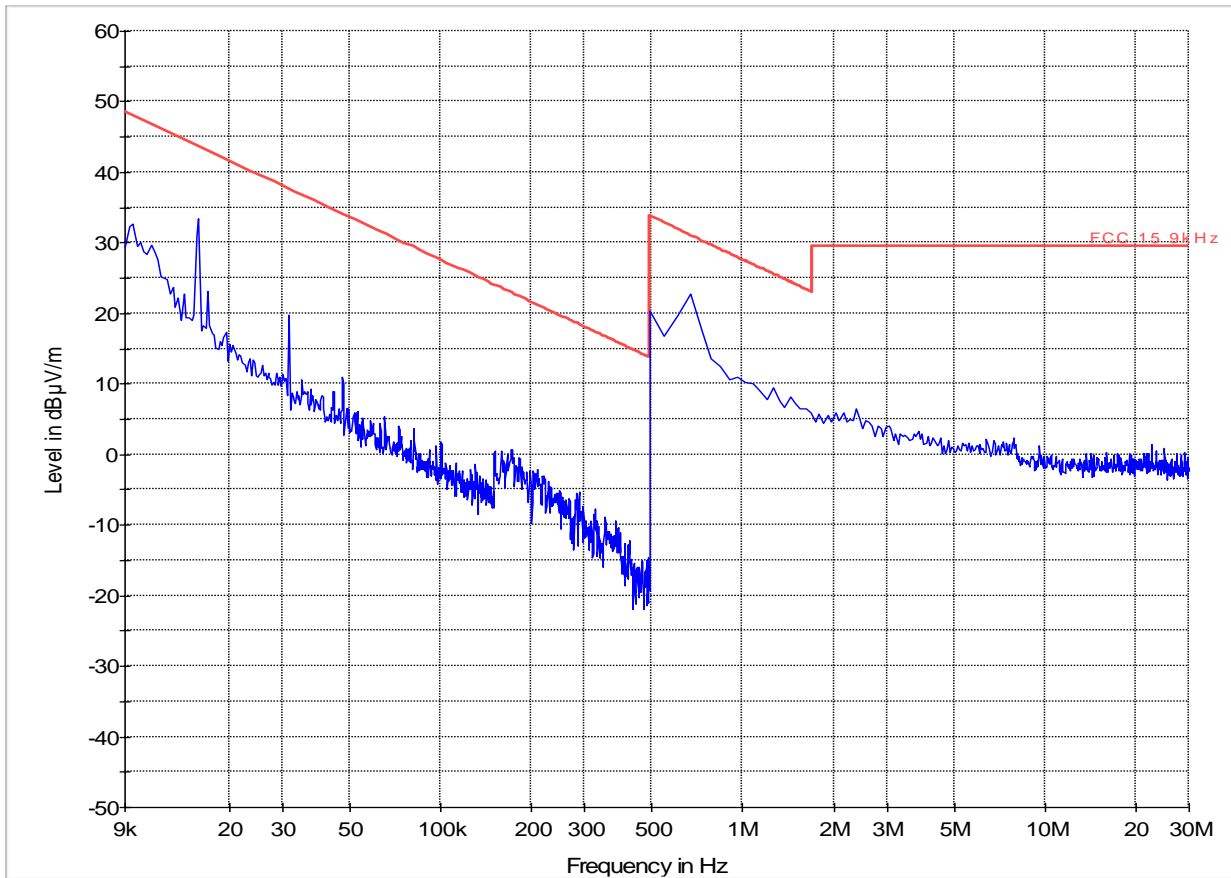

Receive Mode: 30MHz-1GHz

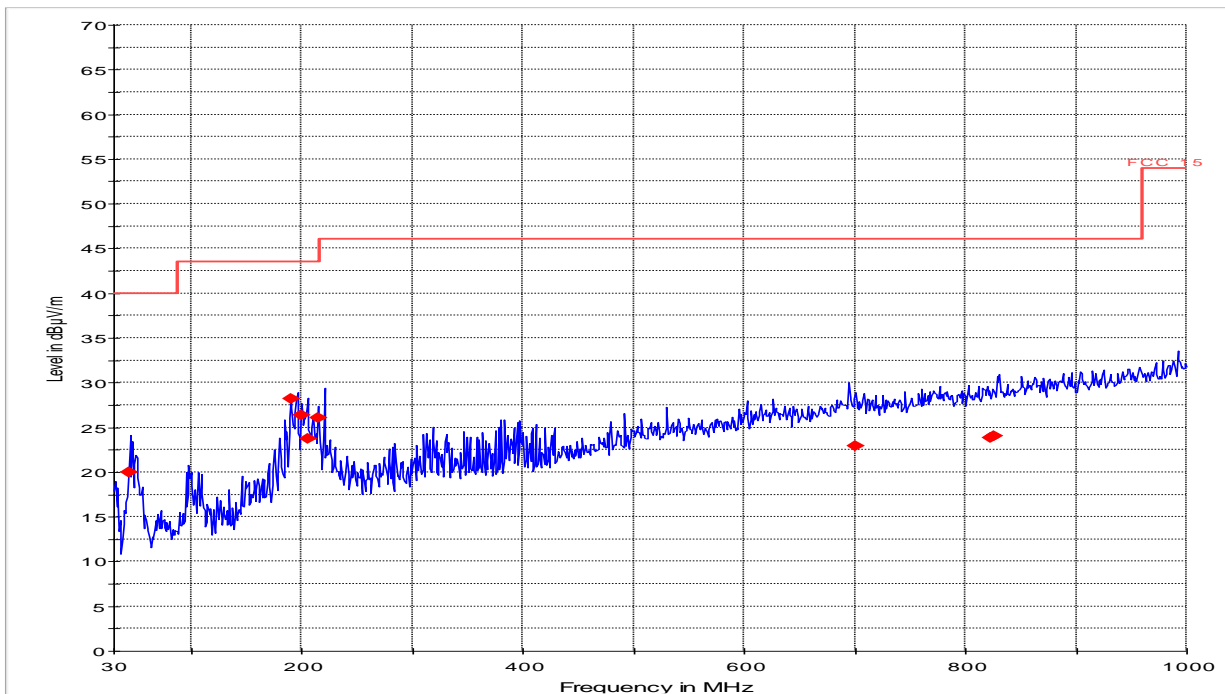

Receive Mode: 1GHz-18GHz

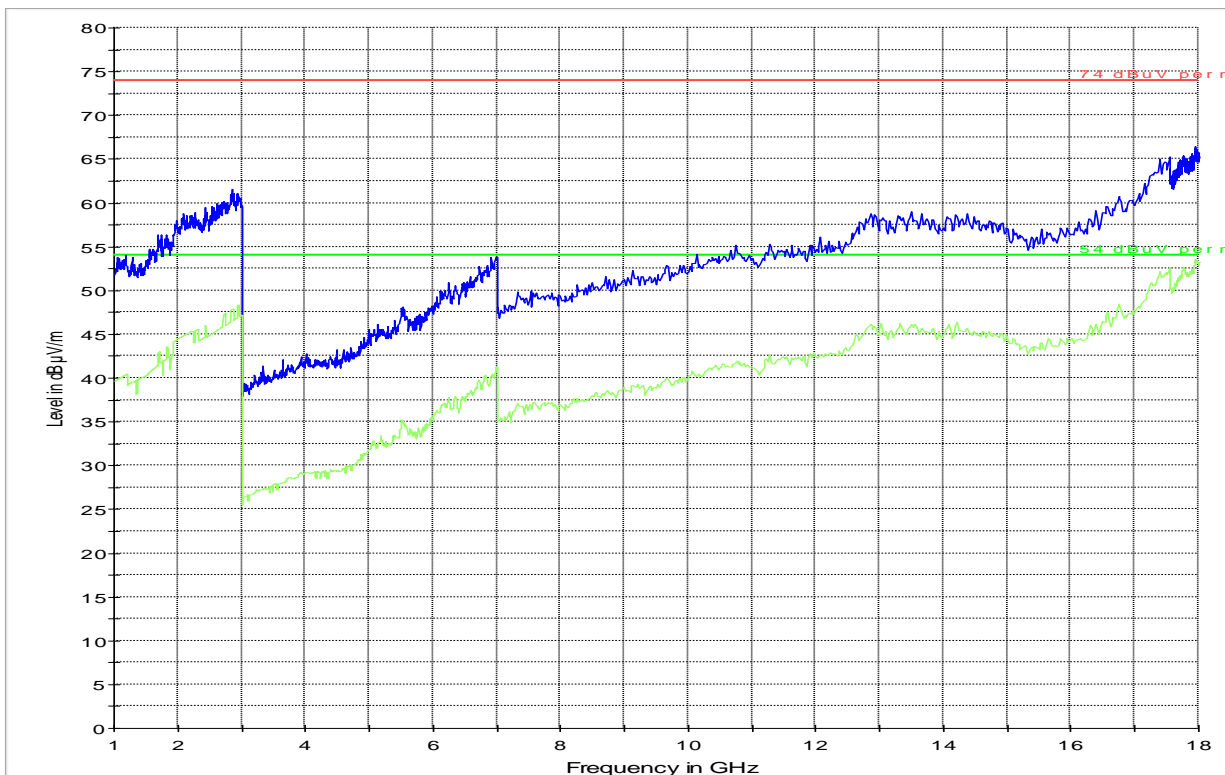

6.6 AC Power Line Conducted Emissions

6.6.1 References:

FCC: CFR Part 15.207

IC: RSS-Gen Section 7.2.2

The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

6.6.2 Limits:

6.6.2.1 §15.207 Conducted limits- Intentional Radiators:

(a) Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

6.6.2.2 RSS-Gen 7.2.2

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown below. The tighter limit applies at the frequency range boundaries.

Table 1:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

Analyzer Settings: CISPR Bandwidth- 9KHz.

6.6.3 Test Conditions:

Measurement Uncertainty: ±3.0dB

6.6.4 Results


Plots shown here represent the combined worst case emissions for power lines, phases and neutral line.

6.6.4.1 Measurement Result

Pass.


6.6.5 Test Results:

TX Mode:

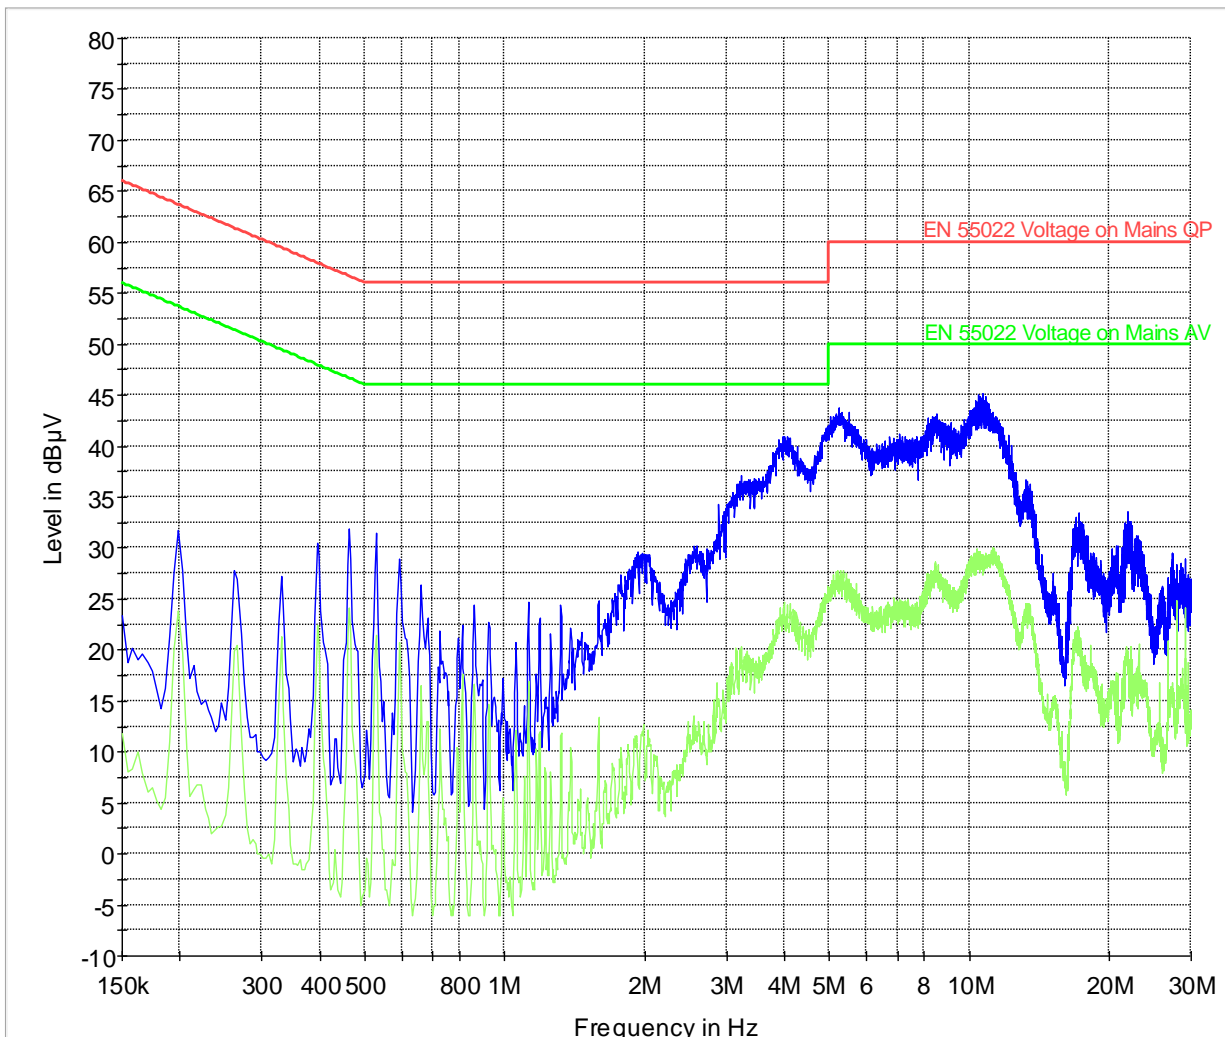

— EN 55022 Voltage on Mains QP.LimitLine — EN 55022 Voltage on Mains AV.LimitLine
— Preview Result 1 — Preview Result 2

RX Mode:


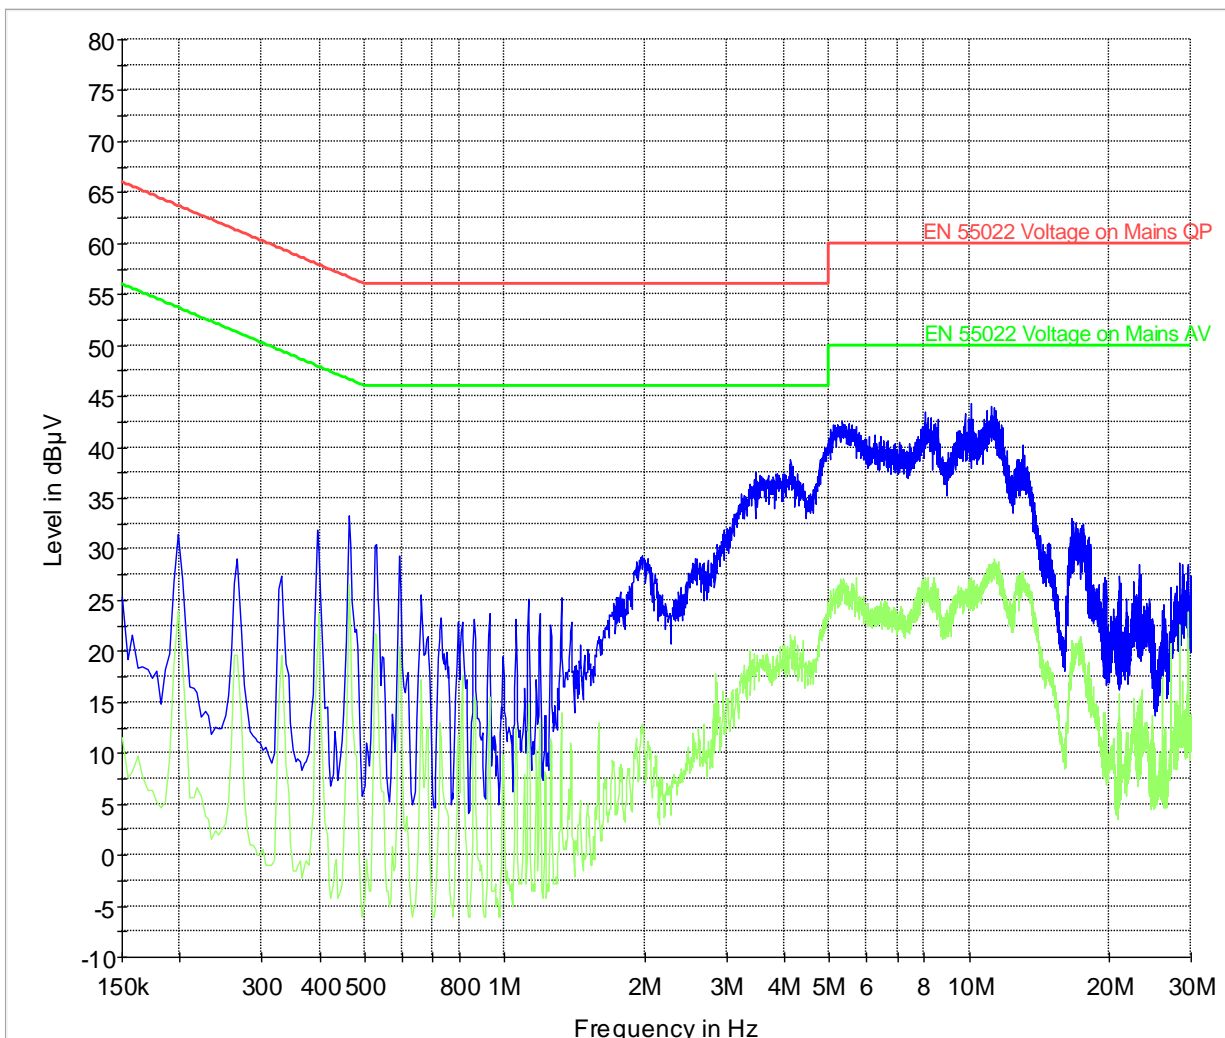


— EN 55022 Voltage on Mains QP.LimitLine — EN 55022 Voltage on Mains AV.LimitLine
— Preview Result 1 — Preview Result 2

7 Test Equipment and Ancillaries used for tests

Instrument/Ancillary	Model	Manufacturer	Serial No.	Cal Date	Cal Interval
EMI Receiver/Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2010	1 year
Spectrum Analyzer	FSU	Rohde & Schwarz	200302	Jul 2010	1 year
Loop Antenna	6512	EMCO	00049838	April 2009	3 years
Biconilog Antenna	3141	EMCO	0005-1186	June 2009	3 years
Horn Antenna (1-18GHz)	3115	ETS	00035111	Jan 2009	3 years
Horn Antenna (18-40GHz)	3116	ETS	00070497	Jan 2009	3 years
Communication Antenna	IBP5-900/1940	Kathrein	n/a	n/a	n/a
High Pass Filter	5HC2700	Trilithic Inc.	9926013	Part of system calibration	
High Pass Filter	4HC1600	Trilithic Inc.	9922307	Part of system calibration	
6GHz High Pass Filter	HPM50106	Microtronics	001	Part of system calibration	
Pre-Amplifier	JS4-00102600	Miteq	00616	Part of system calibration	
LISN	50-25-2-08	FCC	08014	June 2010	1 year
Power Smart Sensor	R&S	NRP-Z81	100161	June 2010	1 Year
DC Power Supply	6655A	Hewlett Packard	3403A-00487	n/a	n/a
Multimeter	MM200	Klein	N/A	Apr 2011	1 Year
Temp Hum Logger	TM320	Dickson	03280063	Feb 2011	1 Year
Temp Hum Logger	TM325	Dickson	5285354	Feb 2011	1 Year

8 Test Setup Info:

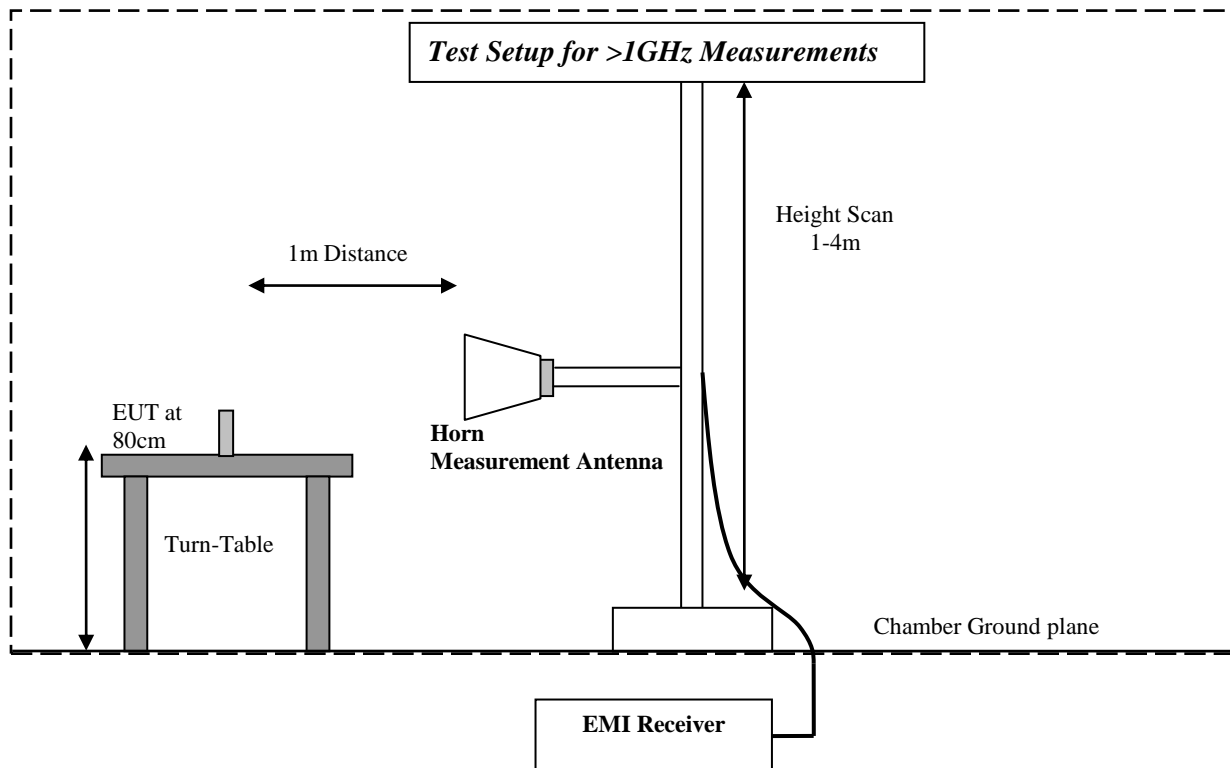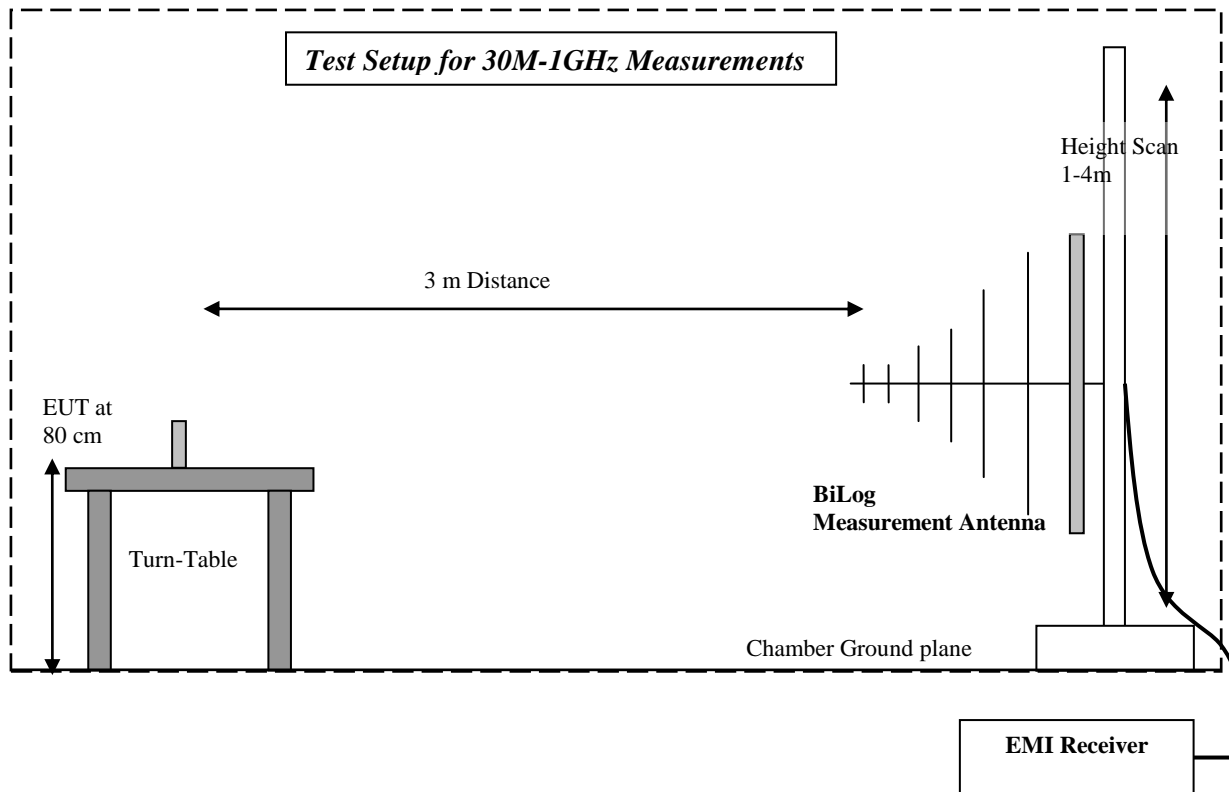

Test Report #: **EMC_ELSTE_004_11001_FCC15.247**

FCC ID: QZCWWIC-G01



Date of Report: 2011-05-05

IC ID: 4557A-WWICG01

9 Revision History

Date	Report Name	Changes to report	Report prepared by
2011-05-05	EMC_ELSTE_004_11001_FCC15.247	First Version	C Torio