



Valued Quality. Delivered.

## TEST REPORT

**Report No.: 15070407HKG-001**

**Philips Consumer Luminaires**

Application  
For  
Certification  
(Original Grant)  
**(FCC ID: R2WHUELSPLUSG1)**

Transceiver

Prepared and Checked by:

Approved by:

Signed On File  
Lee Shui Tim, Tim  
Lead Engineer

Digitally signed by Koo  
Wai Ip  
Location: Intertek  
Testing Services Hong  
Kong Ltd.

---

Koo Wai Ip  
Assistant Supervisor  
Date: March 1, 2016

- Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-ettsemko.com](http://www.hk.intertek-ettsemko.com)

## INTERTEK TESTING SERVICES

---

### GENERAL INFORMATION

Grantee:	Philips Consumer Luminaires
Grantee Address:	Satenrozen 13, Kontich, B-2550, Belgium.
Contact Person:	Tjeerd Dijkstra
Tel:	+3234589140
Fax:	+3234581003
e-mail:	N/A
Manufacturer:	Philips Consumer Luminaires
Manufacturer Address:	Satenrozen 13, B-2550 Kontich, Belgium
Brand Name:	Philips
Model:	71901
	71903
Type of EUT:	Transceiver
Description of EUT:	Smartlink Controlled Extendable Hue Lightstrip
Serial Number:	N/A
FCC ID:	R2WHUELSPLUSG1
Date of Sample Submitted:	July 08, 2015
Date of Test:	July 08, 2015 to July 28, 2015
Report No.:	15070407HKG-001
Report Date:	March 1, 2016
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

## INTERTEK TESTING SERVICES

---

### SUMMARY OF TEST RESULT

TEST SPECIFICATION	REFERENCE	RESULTS
Transmitter Power Line Conducted Emissions	15.207	Pass
Radiated Emission Radiated Emission on the Bandedge	15.249, 15.209	Pass
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2014 Edition

- Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

1.0	<b><u>General Description</u></b> .....	1
1.1	Product Description .....	1
1.2	Related Submittal(s) Grants.....	1
1.3	Test Methodology .....	1
1.4	Test Facility .....	1
2.0	<b><u>System Test Configuration</u></b> .....	2
2.1	Justification.....	2
2.2	EUT Exercising Software.....	2
2.3	Special Accessories .....	2
2.4	Measurement Uncertainty.....	2
2.5	Support Equipment List and Description.....	2
3.0	<b><u>Emission Results</u></b> .....	3
3.1	Field Strength Calculation.....	3
3.2	Radiated Emission Configuration Photograph .....	4
3.3	Radiated Emission Data .....	4
3.4	Conducted Emission Configuration Photograph .....	4
3.5	Conducted Emission Data .....	4
4.0	<b><u>Equipment Photographs</u></b> .....	10
5.0	<b><u>Product Labelling</u></b> .....	10
6.0	<b><u>Technical Specifications</u></b> .....	10
7.0	<b><u>Instruction Manual</u></b> .....	10
8.0	<b><u>Miscellaneous Information</u></b> .....	11
8.1	Radiated Emission on the Bandedge.....	11
8.2	Discussion of Pulse Desensitization .....	12
8.3	Calculation of Average Factor.....	12
8.4	Emissions Test Procedures .....	17
8.5	Occupied Bandwidth.....	21
9.0	<b><u>Confidentiality Request</u></b> .....	22
10.0	<b><u>Equipment List</u></b> .....	22

## INTERTEK TESTING SERVICES

---

### 1.0 General Description

#### 1.1 Product Description

The Equipment Under Test (EUT) is a Smartlink Controlled Extendable Hue Lightstrip. The EUT can operate while connected and controlled by a ZigBee Remote (Provided by Applicant) via ZigBee radio link. The EUT can only support ZigBee. The ZigBee portion occupies frequency range of 2405MHz to 2480MHz (15 channels with channel spacing of 5MHz). The EUT is powered by 120VAC 60Hz.

Model: 71903 is the same as the Model: 71901 in hardware aspect. The difference in model number serves as marketing strategy.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

#### 1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

## INTERTEK TESTING SERVICES

---

### 2.0 **System Test Configuration**

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by 120VAC 60Hz.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

#### 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

#### 2.5 Support Equipment List and Description

ZigBee Remote (Provided by Applicant)

## INTERTEK TESTING SERVICES

---

### 3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where      FS = Field Strength in dB $\mu$ V/m  
              RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V  
              CF = Cable Attenuation Factor in dB  
              AF = Antenna Factor in dB  
              AG = Amplifier Gain in dB  
              AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where      FS = Field Strength in dB $\mu$ V/m  
              RR = RA - AG - AV in dB $\mu$ V  
              LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 52.0 dB $\mu$ V/m	
AF = 7.4 dB	RR = 18.0 dB $\mu$ V
CF = 1.6 dB	LF = 9.0 dB
AG = 29.0 dB	
AV = 5.0 dB	
FS = RR + LF	
FS = 18 + 9 = 27 dB $\mu$ V/m	

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$

## INTERTEK TESTING SERVICES

---

### 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 2483.500 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 6.1 dB

### 3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.43 MHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

### 3.5 Conducted Emission Data


For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 8.3 dB



INTERTEK TESTING SERVICES

Worst-Case Operating Mode: Transmitting (ZigBee)

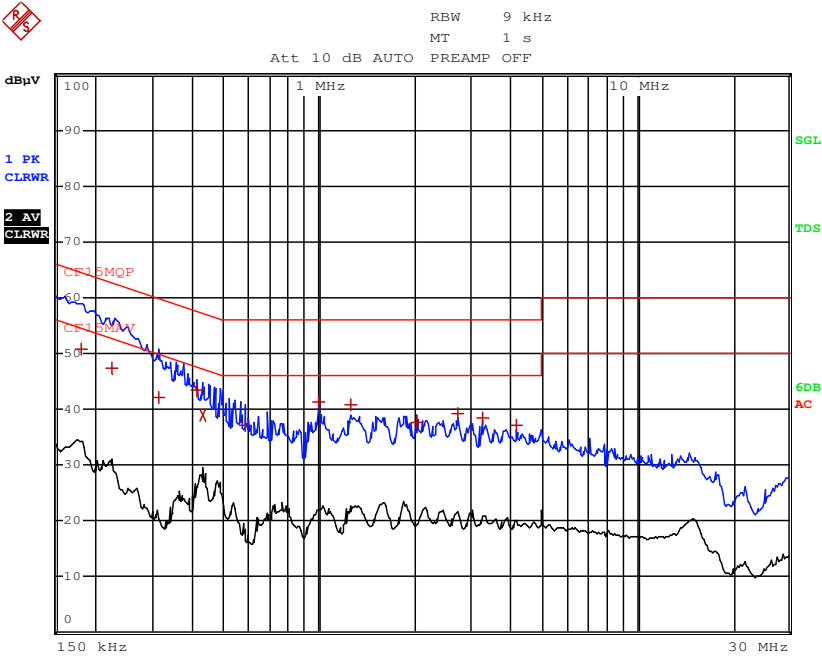

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	181.5 kHz	50.66	N	-13.75
1 Quasi Peak	226.5 kHz	47.36	N	-15.21
1 Quasi Peak	312 kHz	42.22	N	-17.68
1 Quasi Peak	411 kHz	43.55	N	-14.07
2 CISPR Average	429 kHz	39.00	N	-8.26
1 Quasi Peak	586.5 kHz	37.12	N	-18.87
1 Quasi Peak	991.5 kHz	41.26	N	-14.73
1 Quasi Peak	1.257 MHz	40.81	N	-15.18
1 Quasi Peak	2.031 MHz	37.67	N	-18.32
1 Quasi Peak	2.7195 MHz	39.36	N	-16.63
1 Quasi Peak	3.264 MHz	38.34	N	-17.66
1 Quasi Peak	4.1595 MHz	37.24	N	-18.75

Note: Measurement Uncertainty is ±4.2dB at a level of confidence of 95%.

## INTERTEK TESTING SERVICES

Applicant: Philips Consumer Luminaires

Date of Test: July 28, 2015

Model: 71901

Worst-Case Operating Mode: Transmitting (ZigBee)

Table 1  
**Radiated Emissions**  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

### Lowest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2400.000	69.5	33	29.4	65.9	23.3	42.6	54.0	-11.4
H	2405.000	102.8	33	29.4	99.2	23.3	75.9	94.0	-18.1
<b>H</b>	<b>4810.000</b>	<b>54.5</b>	<b>33</b>	<b>34.9</b>	<b>56.4</b>	<b>23.3</b>	<b>33.1</b>	<b>54.0</b>	<b>-20.9</b>
H	7215.000	49.2	33	37.9	54.1	23.3	30.8	54.0	-23.2
H	9620.000	49.1	33	40.4	56.5	23.3	33.2	54.0	-20.8
<b>H</b>	<b>12025.000</b>	<b>50.3</b>	<b>33</b>	<b>40.5</b>	<b>57.8</b>	<b>23.3</b>	<b>34.5</b>	<b>54.0</b>	<b>-19.5</b>
H	14430.000	29.0	33	40.0	59.3	23.3	36.0	54.0	-18.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2400.000	69.5	33	29.4	65.9	74.0	-8.1
H	2405.000	102.8	33	29.4	99.2	114.0	-14.8
<b>H</b>	<b>4810.000</b>	<b>54.5</b>	<b>33</b>	<b>34.9</b>	<b>56.4</b>	<b>74.0</b>	<b>-17.6</b>
H	7215.000	49.2	33	37.9	54.1	74.0	-19.9
H	9620.000	49.1	33	40.4	56.5	74.0	-17.5
<b>H</b>	<b>12025.000</b>	<b>50.3</b>	<b>33</b>	<b>40.5</b>	<b>57.8</b>	<b>74.0</b>	<b>-16.2</b>
H	14430.000	52.3	33	40.0	59.3	74.0	-14.7

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## INTERTEK TESTING SERVICES

Applicant: Philips Consumer Luminaires

Date of Test: July 28, 2015

Model: 71901

Worst-Case Operating Mode: Transmitting (ZigBee)

Table 2  
**Radiated Emissions**  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

### Middle Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2440.000	102.5	33	29.4	98.9	23.3	75.6	94.0	-18.4
<b>H</b>	<b>4880.000</b>	<b>53.9</b>	<b>33</b>	<b>34.9</b>	<b>55.8</b>	<b>23.3</b>	<b>32.5</b>	<b>54.0</b>	<b>-21.5</b>
<b>H</b>	<b>7320.000</b>	<b>49.4</b>	<b>33</b>	<b>37.9</b>	<b>54.3</b>	<b>23.3</b>	<b>31.0</b>	<b>54.0</b>	<b>-23.0</b>
H	9760.000	49.3	33	40.4	56.7	23.3	33.4	54.0	-20.6
<b>H</b>	<b>12200.000</b>	<b>50.4</b>	<b>33</b>	<b>40.5</b>	<b>57.9</b>	<b>23.3</b>	<b>34.6</b>	<b>54.0</b>	<b>-19.4</b>
H	14640.000	53.7	33	38.4	59.1	23.3	35.8	54.0	-18.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2440.000	102.5	33	29.4	98.9	114.0	-15.1
<b>H</b>	<b>4880.000</b>	<b>53.9</b>	<b>33</b>	<b>34.9</b>	<b>55.8</b>	<b>74.0</b>	<b>-18.2</b>
<b>H</b>	<b>7320.000</b>	<b>49.4</b>	<b>33</b>	<b>37.9</b>	<b>54.3</b>	<b>74.0</b>	<b>-19.7</b>
H	9760.000	49.3	33	40.4	56.7	74.0	-17.3
<b>H</b>	<b>12200.000</b>	<b>50.4</b>	<b>33</b>	<b>40.5</b>	<b>57.9</b>	<b>74.0</b>	<b>-16.1</b>
H	14640.000	53.7	33	38.4	59.1	74.0	-14.9

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

6. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.

## INTERTEK TESTING SERVICES

Applicant: Philips Consumer Luminaires

Date of Test: July 28, 2015

Model: 71901

Worst-Case Operating Mode: Transmitting (ZigBee)

Table 3  
**Radiated Emissions**  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

### Highest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	101.9	33	29.4	98.3	23.3	75.0	94.0	-19.0
<b>H</b>	<b>2483.500</b>	<b>71.5</b>	<b>33</b>	<b>29.4</b>	<b>67.9</b>	<b>23.3</b>	<b>44.6</b>	<b>54.0</b>	<b>-9.4</b>
<b>H</b>	<b>4960.000</b>	<b>54.4</b>	<b>33</b>	<b>34.9</b>	<b>56.3</b>	<b>23.3</b>	<b>33.0</b>	<b>54.0</b>	<b>-21.0</b>
<b>H</b>	<b>7440.000</b>	<b>49.5</b>	<b>33</b>	<b>37.9</b>	<b>54.4</b>	<b>23.3</b>	<b>31.1</b>	<b>54.0</b>	<b>-22.9</b>
H	9920.000	49.5	33	40.4	56.9	23.3	33.6	54.0	-20.4
<b>H</b>	<b>12400.000</b>	<b>50.5</b>	<b>33</b>	<b>40.5</b>	<b>58.0</b>	<b>23.3</b>	<b>34.7</b>	<b>54.0</b>	<b>-19.3</b>
H	14880.000	30.7	33	38.4	59.4	23.3	36.1	54.0	-17.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	101.9	33	29.4	98.3	114.0	-15.7
<b>H</b>	<b>2483.500</b>	<b>71.5</b>	<b>33</b>	<b>29.4</b>	<b>67.9</b>	<b>74.0</b>	<b>-6.1</b>
<b>H</b>	<b>4960.000</b>	<b>54.4</b>	<b>33</b>	<b>34.9</b>	<b>56.3</b>	<b>74.0</b>	<b>-17.7</b>
<b>H</b>	<b>7440.000</b>	<b>49.5</b>	<b>33</b>	<b>37.9</b>	<b>54.4</b>	<b>74.0</b>	<b>-19.6</b>
H	9920.000	49.5	33	40.4	56.9	74.0	-17.1
<b>H</b>	<b>12400.000</b>	<b>50.5</b>	<b>33</b>	<b>40.5</b>	<b>58.0</b>	<b>74.0</b>	<b>-16.0</b>
H	14880.000	54.0	33	38.4	59.4	74.0	-14.6

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## INTERTEK TESTING SERVICES

Applicant: Philips Consumer Luminaires  
Model: 71901  
Worst-Case Operating Mode: Power On

Date of Test: July 28, 2015

Table 4  
**Radiated Emissions**  
**Pursuant to FCC Part 15 Section 15.209 Requirement**

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	42.122	35.8	16	10.0	29.8	40.0	-10.2
V	54.362	37.2	16	11.0	32.2	40.0	-7.8
V	58.323	36.7	16	11.0	31.7	40.0	-8.3
V	75.961	40.9	16	6.0	30.9	40.0	-9.1
V	80.643	40.4	16	6.0	30.4	40.0	-9.6
H	86.964	37.8	16	8.0	29.8	40.0	-10.2
V	101.080	28.5	16	13.0	25.5	43.5	-18.0
<b>H</b>	<b>129.815</b>	<b>29.1</b>	<b>16</b>	<b>14.0</b>	<b>27.1</b>	<b>43.5</b>	<b>-16.4</b>
<b>H</b>	<b>165.841</b>	<b>23.5</b>	<b>16</b>	<b>17.0</b>	<b>24.5</b>	<b>43.5</b>	<b>-19.0</b>
H	186.323	32.8	16	16.0	32.8	43.5	-10.7
H	191.756	35.7	16	16.0	35.7	43.5	-7.8
H	286.084	18.7	16	22.0	24.7	46.0	-21.3
H	297.723	19.3	16	22.0	25.3	46.0	-20.7
H	336.521	16.1	16	24.0	24.1	46.0	-21.9
H	383.083	21.5	16	24.0	29.5	46.0	-16.5
<b>H</b>	<b>408.306</b>	<b>17.4</b>	<b>16</b>	<b>24.0</b>	<b>25.4</b>	<b>46.0</b>	<b>-20.6</b>
H	433.529	17.4	16	25.0	26.4	46.0	-19.6
H	637.146	13.2	16	29.0	26.2	46.0	-19.8
H	815.095	13.8	16	31.0	28.8	46.0	-17.2

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## INTERTEK TESTING SERVICES

---

### 4.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

### 5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

### 6.0 **Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

### 7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## INTERTEK TESTING SERVICES

---

### 8.0 **Miscellaneous Information**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor.

#### 8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

## INTERTEK TESTING SERVICES

---

### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 0.2ms for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 3MHz, so the pulse desensitivity factor is 0dB.

### 8.3 Calculation of Average Factor

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 100ms

Effective period of the cycle = 0.2+2.0+0.4+0.2+0.4+1.8+1.8ms



DC = 6.8ms / 100ms=0.068

Therefore, the averaging factor is found by  $20\log 0.068 = -23.3\text{dB}$ .





INTERTEK TESTING SERVICES

Average Factor occurred at Normal operation

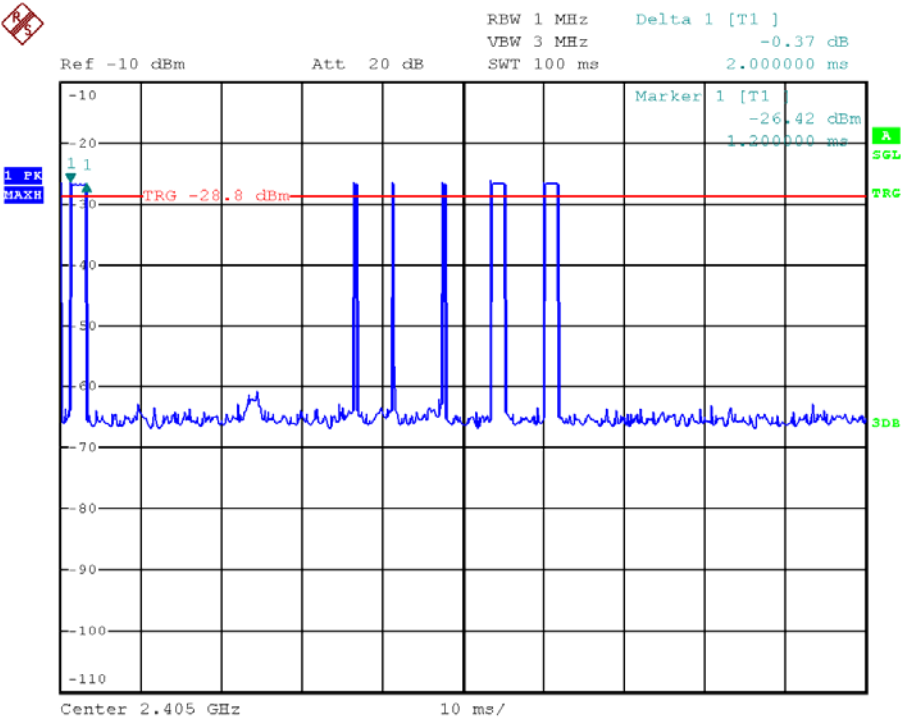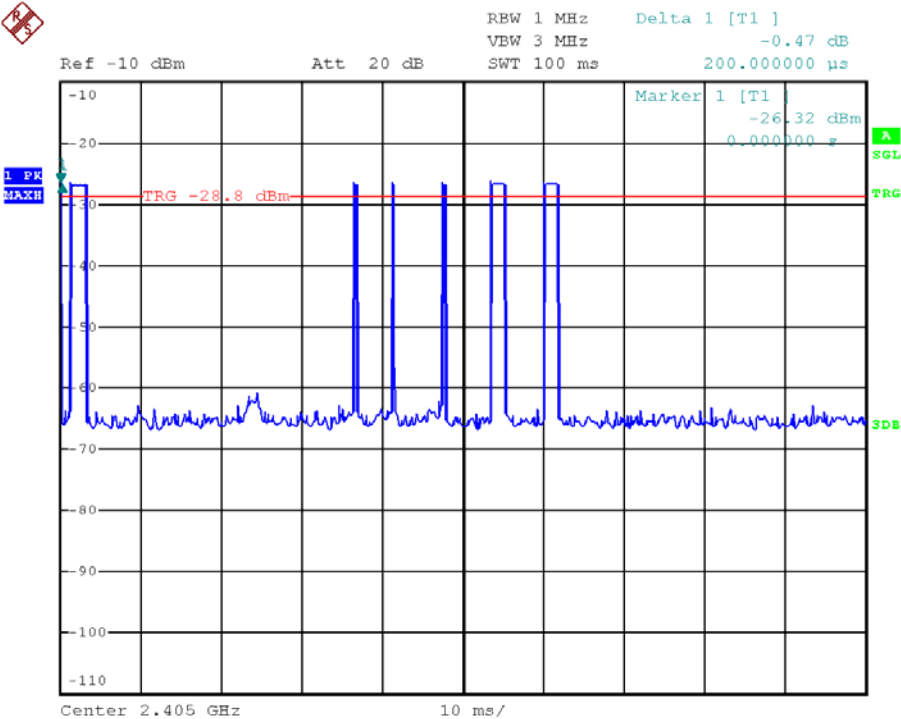



INTERTEK TESTING SERVICES

Average Factor occurred at Normal operation

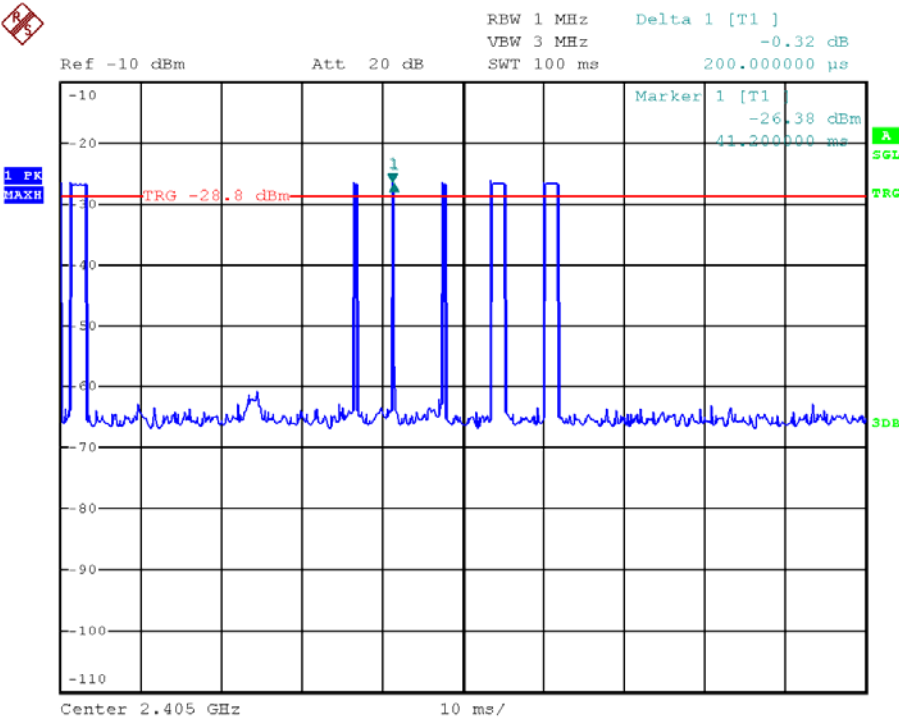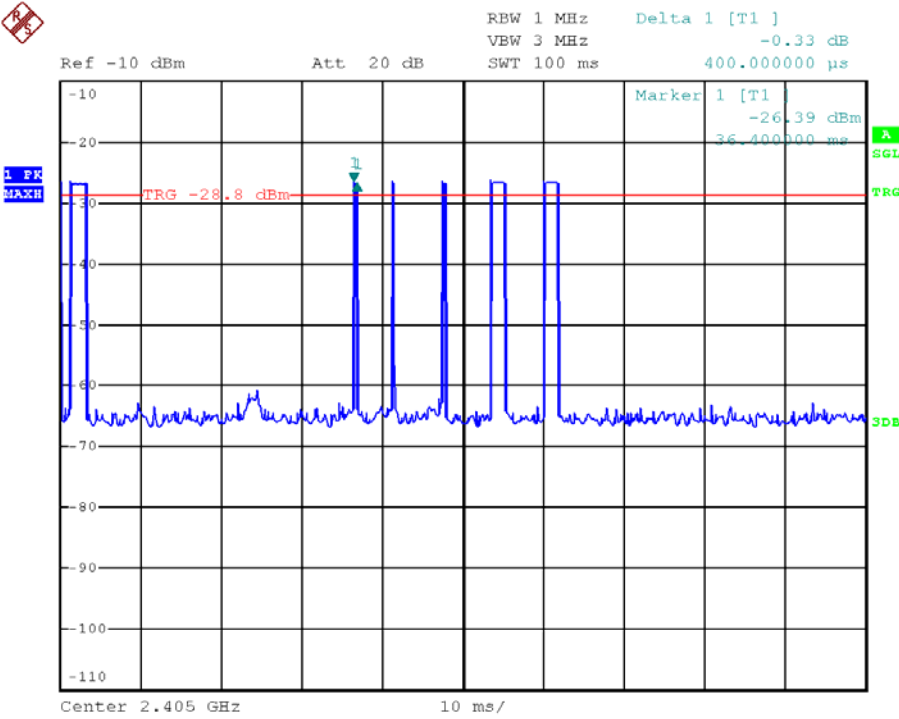


INTERTEK TESTING SERVICES

Average Factor occurred at Normal operation

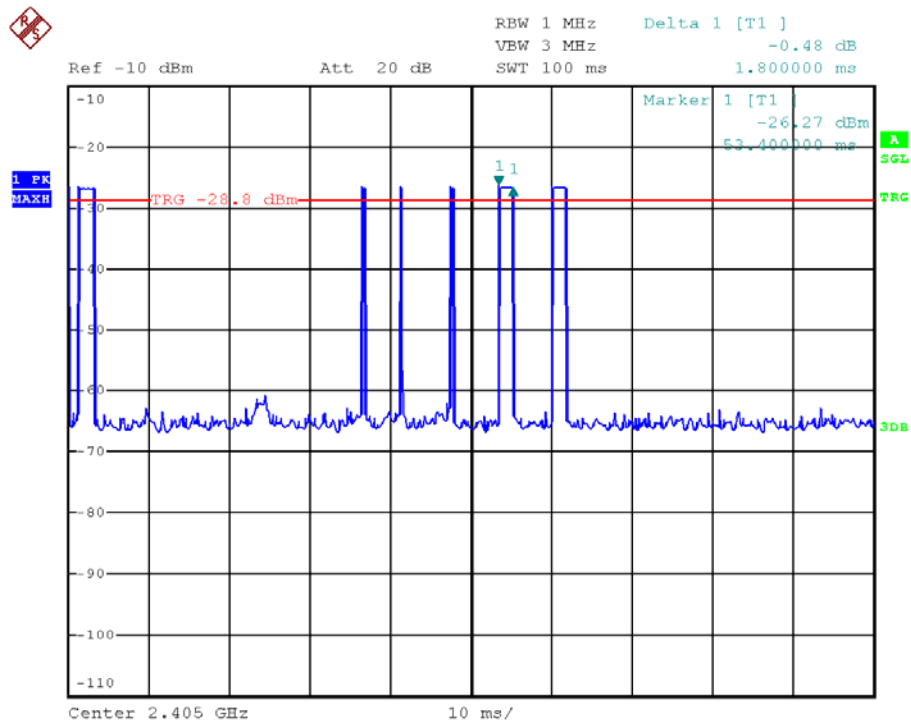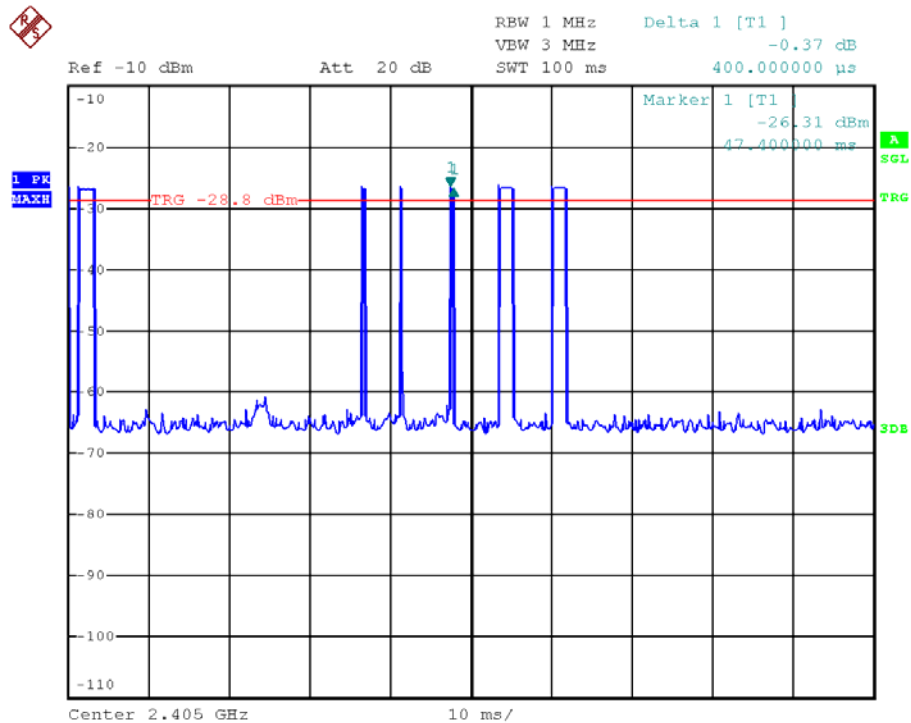

INTERTEK TESTING SERVICES

Average Factor occurred at Normal operation

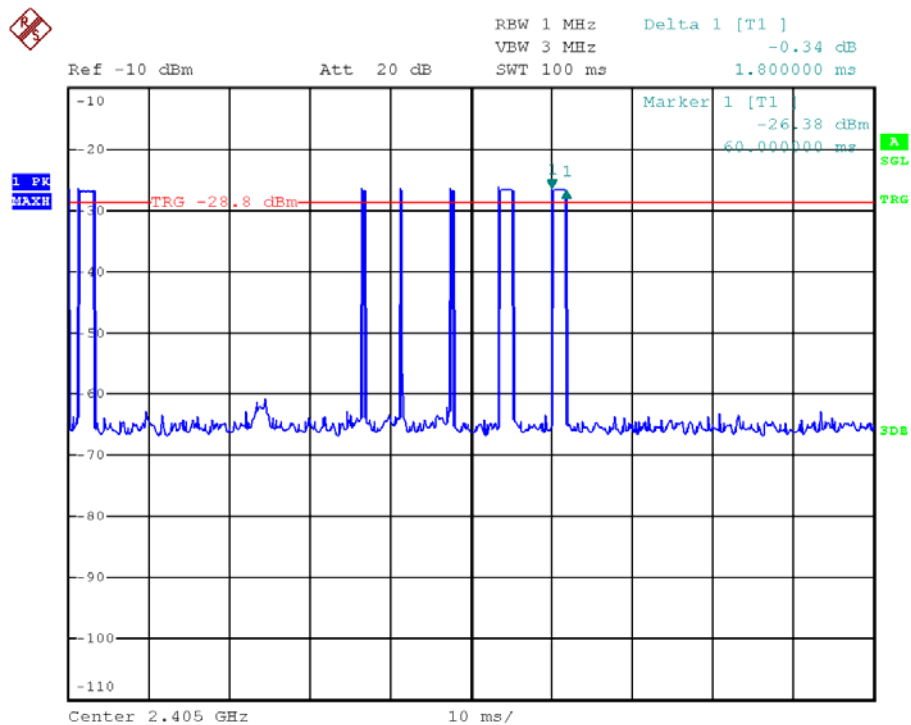

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


## INTERTEK TESTING SERVICES

### 8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

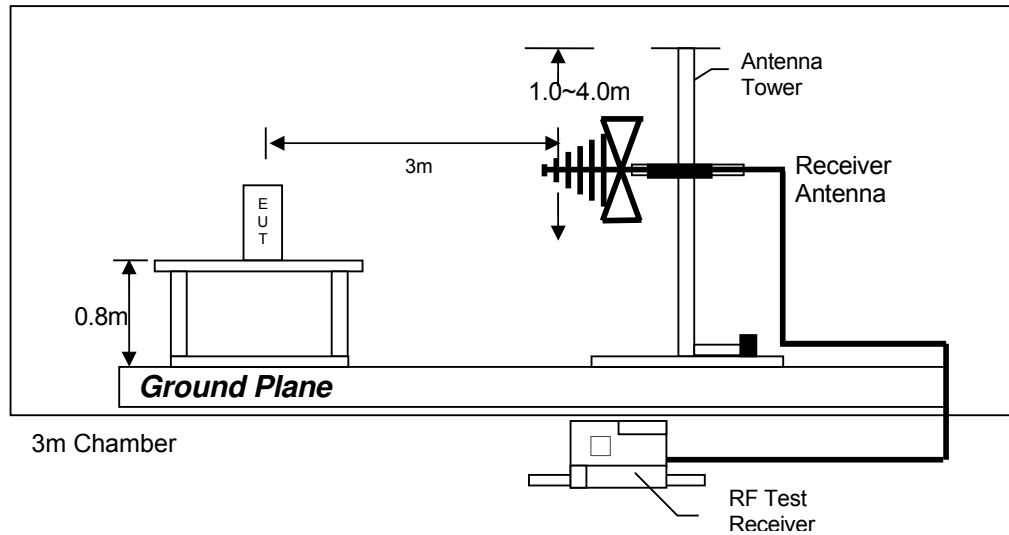

Test setup of radiated emissions up to 1GHz

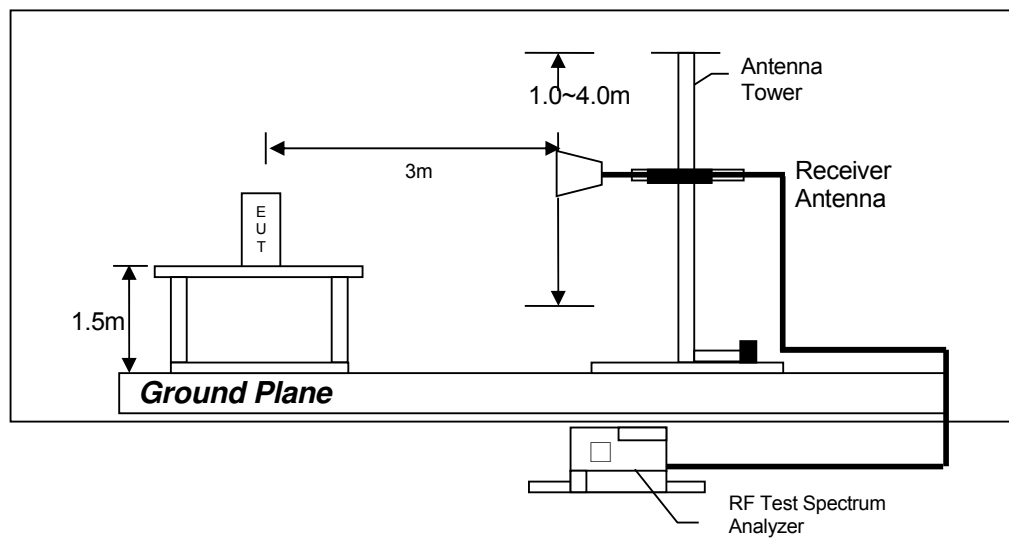

Test setup of radiated emissions above 1GHz

---

## INTERTEK TESTING SERVICES


---

### 8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

### 8.4.3 Conducted Emission Test Setup

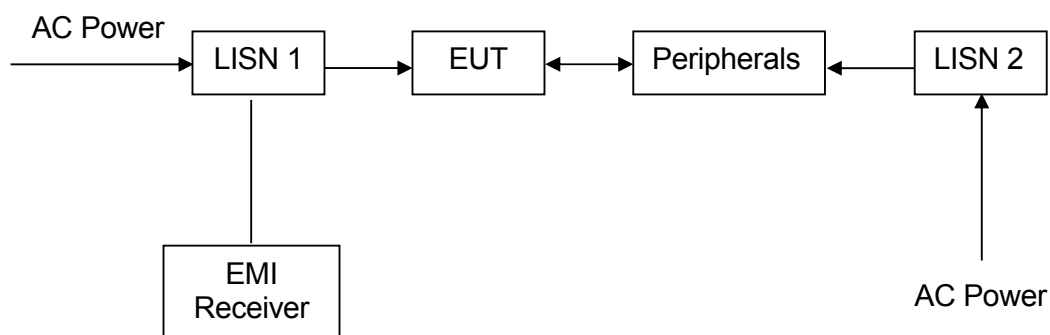




## INTERTEK TESTING SERVICES

### 8.5 Occupied Bandwidth

#### Occupied Bandwidth Results: (ZigBee)

Bluetooth	Occupied Bandwidth (MHz)
Low Channel: 2405	2.40
Middle Channel: 2440	2.44
High Channel: 2480	2.32

The worst case is shown as below

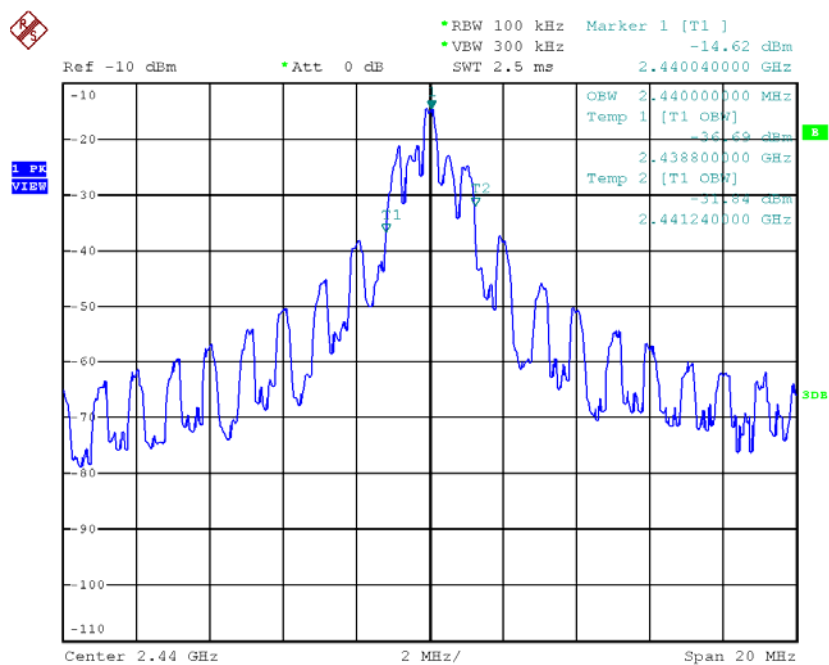

## INTERTEK TESTING SERVICES

### 9.0 Confidentiality Request

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

### 10.0 Equipment List

#### 1) Radiated Emissions Test

Equipment	EMI Test Receiver	Biconical Antenna	Log Periodic Antenna
Registration No.	EW-3095	EW-2512	EW-0447
Manufacturer	R&S	EMCO	EMCO
Model No.	ESCI	3104C	3146
Calibration Date	Oct. 16, 2014	Jan. 22, 2015	Mar. 16, 2015
Calibration Due Date	Oct. 16, 2015	Jul. 22, 2016	Sep. 16, 2016

Equipment	Spectrum Analyzer	Pyramidal Horn Antenna	Double Ridged Guide Antenna
Registration No.	EW-2466	EW-0905	EW-1133
Manufacturer	R&S	EMCO	EMCO
Model No.	FSP30	3160-09	3115
Calibration Date	Sep. 02, 2014	Jan. 28, 2014	Apr. 30, 2014
Calibration Due Date	Sep. 02, 2015	Jul. 28, 2015	Oct. 30, 2015

#### 2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2500	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Nov. 06, 2014	Jan. 15, 2015
Calibration Due Date	Nov. 06, 2015	Jan. 15, 2016

#### 3) Bandedge Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2249
Manufacturer	R&S
Model No.	FSP30
Calibration Date	Nov. 19, 2014
Calibration Due Date	Nov. 19, 2015

END OF TEST REPORT