



FCC SAR TEST REPORT

Report No.: ZR/2020/90032
Applicant: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Manufacturer: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Product Name: Mobile Hotspot
Model No.(EUT): CP337AS
FCC ID: R38YLCP337AS
Standards: FCC 47CFR §2.1093
Date of Receipt: 2020-10-08
Date of Test: 2020-10-09 to 2021-01-22
Date of Issue: 2021-02-01
Test conclusion: **PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

REVISION HISTORY

Report Number	Revision	Description	Issue Date
ZR/2020/9003205	01	Original	2021-02-01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)
	Hotspot
WCDMA Band II	1.05
WCDMA Band IV	1.03
WCDMA Band V	1.09
LTE Band 2	0.88
LTE Band 4	0.97
LTE Band 5	0.64
LTE Band 12	0.62
LTE Band 13	0.58
LTE Band 14	0.57
LTE Band 25	0.89
LTE Band 26	0.78
LTE Band 41	0.35
LTE Band 66	1.19
LTE Band 71	0.27
WI-FI (2.4GHz)	0.23
WI-FI (5GHz)	0.30
SAR Limited(W/kg)	1.6
Maximum Simultaneous Transmission SAR (W/kg)	
Scenario	Hotspot
Sum SAR	1.50
SPLSR	/
SPLSR Limited	0.04

Approved & Released by



Simon Ling

SAR Manager

Tested by



Jackson Li

SAR Engineer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

CONTENTS

1	GENERAL INFORMATION	6
1.1	DETAILS OF CLIENT.....	6
1.2	TEST LOCATION.....	6
1.3	TEST FACILITY.....	7
1.4	GENERAL DESCRIPTION OF EUT.....	8
1.4.1	DUT Antenna Locations(Front View).....	10
1.4.2	LTE CA additional specification.....	11
1.5	TEST SPECIFICATION.....	12
1.6	RF EXPOSURE LIMITS.....	13
2	LABORATORY ENVIRONMENT	14
3	SAR MEASUREMENTS SYSTEM CONFIGURATION	15
3.1	THE SAR MEASUREMENT SYSTEM.....	15
3.2	ISOTROPIC E-FIELD PROBE EX3DV4.....	16
3.3	DATA ACQUISITION ELECTRONICS (DAE).....	17
3.4	SAM TWIN PHANTOM.....	17
3.5	ELI PHANTOM.....	18
3.6	DEVICE HOLDER FOR TRANSMITTERS.....	19
3.7	MEASUREMENT PROCEDURE.....	20
3.7.1	Scanning procedure.....	20
3.7.2	Data Storage.....	22
3.7.3	Data Evaluation by SEMCAD.....	22
4	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	24
4.1	SAR MEASUREMENT VARIABILITY.....	24
4.2	SAR MEASUREMENT UNCERTAINTY.....	24
5	DESCRIPTION OF TEST POSITION	25
5.1	BODY EXPOSURE CONDITION.....	25
5.1.1	Wireless Router exposure conditions.....	25
6	SAR SYSTEM VERIFICATION PROCEDURE	26
6.1	TISSUE SIMULATE LIQUID.....	26
6.1.1	Recipes for Tissue Simulate Liquid.....	26
6.1.2	Measurement for Tissue Simulate Liquid.....	27
6.2	SAR SYSTEM CHECK.....	28
6.2.1	Justification for Extended SAR Dipole Calibrations.....	29
6.2.2	Summary System Check Result(s).....	30
6.2.3	Detailed System Check Results.....	30
7	TEST CONFIGURATION	31
7.1	3G SAR TEST REDUCTION PROCEDURE.....	31
7.2	OPERATION CONFIGURATIONS.....	31
7.2.1	WCDMA Test Configuration.....	31
7.2.2	WiFi Test Configuration.....	37



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.2.3	LTE Test Configuration	42
8	TEST RESULT	45
8.1	MEASUREMENT OF RF CONDUCTED POWER	45
8.1.1	Conducted Power of Main Antenna.....	45
8.1.2	Conducted Power of Uplink & Downlink LTE CA	72
8.1.3	Conducted Power of WIFI.....	75
8.2	STAND-ALONE SAR TEST EVALUATION	77
8.3	MEASUREMENT OF SAR DATA.....	78
8.3.1	SAR Result of WCDMA Band II.....	78
8.3.2	SAR Result of WCDMA Band IV.....	79
8.3.3	SAR Result of WCDMA Band V.....	80
8.3.4	SAR Result of LTE Band 2	81
8.3.5	SAR Result of LTE Band 4	82
8.3.6	SAR Result of LTE Band 5.....	83
8.3.7	SAR Result of LTE Band 12.....	84
8.3.8	SAR Result of LTE Band 13.....	85
8.3.9	SAR Result of LTE Band 14.....	86
8.3.10	SAR Result of LTE Band 25.....	87
8.3.11	SAR Result of LTE Band 26.....	88
8.3.12	SAR Result of LTE Band 41	89
8.3.13	SAR Result of LTE Band 66.....	90
8.3.14	SAR Result of LTE Band 71	91
8.3.15	SAR Result of WIFI 2.4G	92
8.3.16	SAR Result of WIFI 5G.....	93
8.4	MULTIPLE TRANSMITTER EVALUATION	94
8.4.1	Simultaneous SAR SAR test evaluation.....	94
8.4.2	Simultaneous Transmission SAR Summation Scenario	95
9	EQUIPMENT LIST	96
10	F CALIBRATION CERTIFICATE	97
11	PHOTOGRAPHS	97
	APPENDIX A: DETAILED SYSTEM CHECK RESULTS.....	97
	APPENDIX B: DETAILED TEST RESULTS	97
	APPENDIX C: CALIBRATION CERTIFICATE	97
	APPENDIX D: PHOTOGRAPHS.....	97



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1 General Information

1.1 Details of Client

Applicant:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address:	Floor 21, Block A, Coolpad Building, Intersection of Keyuan Avenue and Baoshen Road, North High-Tech Industrial Park, Nanshan District, Shenzhen
Manufacturer:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address:	Floor 21, Block A, Coolpad Building, Intersection of Keyuan Avenue and Baoshen Road, North High-Tech Industrial Park, Nanshan District, Shenzhen

1.2 Test Location

Company: SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab
 Address: No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
 Post code: 518057
 Telephone: +86 (0) 755 2601 2053
 Fax: +86 (0) 755 2671 0594
 E-mail: ee.shenzhen@sgs.com



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Industry Canada (IC)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006

IC#: 4620C.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.4 General Description of EUT

Product Name:	Mobile Hotspot		
Model No.(EUT):	CP337AS		
FCC ID:	R38YLCP337AS		
Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Phase:	Identical Prototype		
SN:	8b21b0bd/869042050006123/869536050025462		
Hardware Version:	P3		
Software Version:	3.18.110.P3.201216.CP337AS		
Antenna Type:	Inner Antenna		
Device Operating Configurations :			
Modulation Mode:	WCDMA: QPSK; LTE: QPSK,16QAM,64QAM; WIFI: DSSS, OFDM;		
HSDPA UE Category:	14	HSUPA UE Category	6
DC-HSDPA UE Category:	24		
Power Class	3, tested with power control "all 1"(WCDMA Band II/V)		
	tested with power control Max Power(LTE Band 2/4/5/12/13/14/25/26/41/66/71)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	WCDMA Band II	1850~1910	1930~1990
	WCDMA Band IV	1710~1755	2110~2155
	WCDMA Band V	824~849	869~894
	LTE Band 2	1850~1910	1930~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869~894
	LTE Band 12	699~716	729~746
	LTE Band 13	777~787	746~756
	LTE Band 14	788~798	758~768
	LTE Band 25	1850~1915	1930~1995
	LTE Band 26	814~849	859~894
	LTE Band 66	1710~1780	2110~2180
	LTE Band 71	663~698	617~652
	LTE Band 41	2496~2690	2496~2690
	Wi-Fi 2.4G	2412~2462	2412~2462
	Wi-Fi 5G	5150~5250	5150~5250
5725~5850		5725~5850	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Battery 1# Information:	Model:	CPLD-440
	Normal Voltage:	+3.85V
	Rated capacity:	3920mAh
	Manufacturer:	Jiade
Battery 2# Information:	Model:	CPLD-440
	Normal Voltage:	+3.85V
	Rated capacity:	3920mAh
	Manufacturer:	Ganfeng

Remark:

The differences between Main Supply and Secondary Supply are showed in the following table.

Main Supply:

Part Name	Model Name	supplier	Remark
Battery	CPLD-440	Jiade	
Memory	FS702B2R1DH2A2KDE	FORESEE	
PCB	CP337AS MAINBOARD P3-ZH	Zhihao	

Secondary Supply:

Part Name	Model Name	supplier	Remark
Battery	CPLD-440	Ganfeng	
Memory	NM1282KSLAXAL-3B	Nanya	
PCB	CP337AS MAINBOARD P3_SUNTAK	Suntak	


Note:

According to the difference description above, for Secondary Supply are test at the worst case on the Main Supply in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1.4.1 DUT Antenna Locations(Front View)

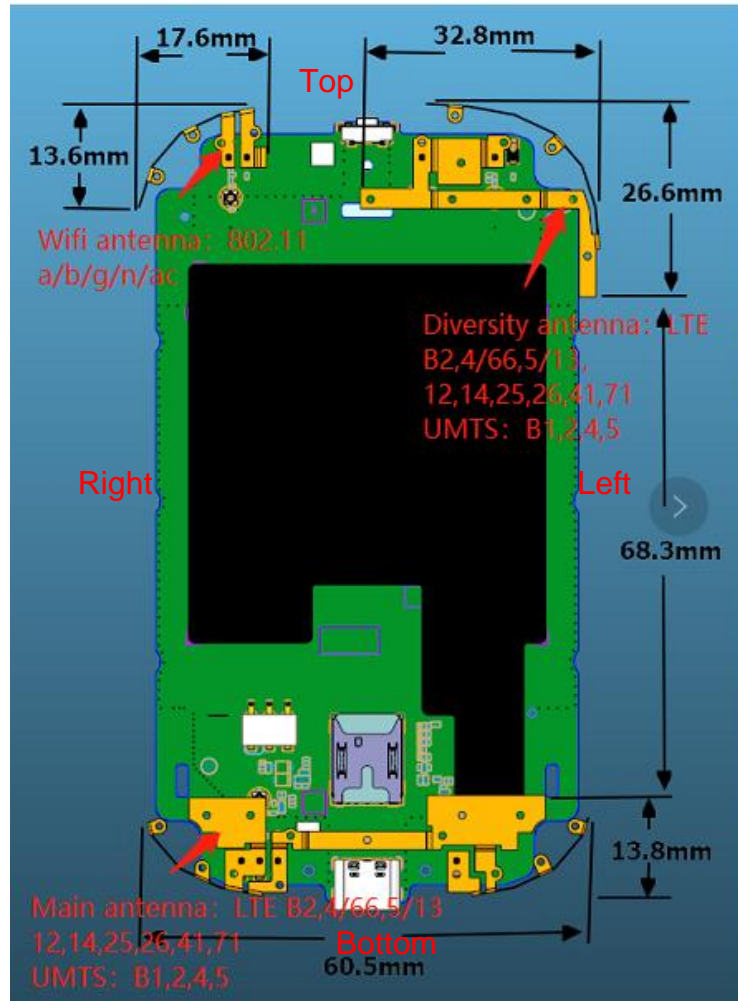

Note:

- 1) The Diversity antenna only for Rx.

According to the distance between LTE/WCDMA&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing						
Mode	Front	Back	Left	Right	Top	Bottom
Main Antenna	Yes	Yes	Yes	Yes	No	Yes
WIFI 2.4G/5G	Yes	Yes	No	Yes	Yes	No

Table 1: EUT Sides for SAR Testing

Note:

- 1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1.4.2 LTE CA additional specification

The device supports downlink and intra-band contiguous uplink LTE Carrier Aggregation (CA). When carrier aggregation applies, implementation and measurement details for the following are necessary.

- a) Intra-band carrier aggregation requirements for uplink.
- b) Intra-band and inter-band carrier aggregation requirements for downlink.

The possible downlink and uplink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The conducted power measurement results of downlink and uplink LTE CA are provided in Section 8 of this report per 3GPP TS 36.521-1 V14.4.0. The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.

SAR test procedure for intra-band contiguous UL LTE CA is as below:

- 1) Maximum output power is measured for each UL CA configuration for the required test channels described in KDB 941225 D05
 - UL PCC configuration is determined by the required test channel
 - SCC and subsequent CCs are added alternatively to either side of the PCC or within the transmission band for channels at the ends of a frequency band.
- 2) SAR for UL CA is required in each exposure condition and frequency band combination
- 3) For this device, as the maximum output for Intra-band uplink LTE CA is \leq standalone LTE mode (without CA),
 - PCC is configured according to the highest standalone SAR configuration tested.
 - SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC
- 4) When the reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels (PCC based)
- 5) UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 2: The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

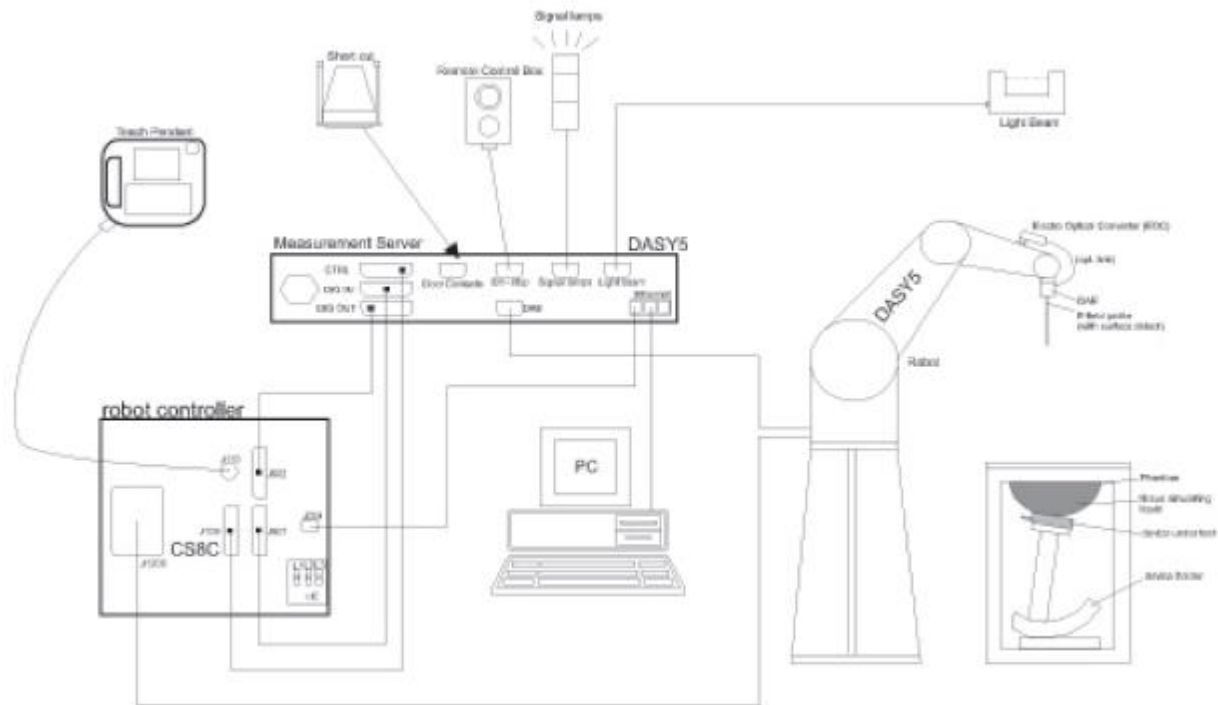


F-1. SAR Measurement System Configuration



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

3.2 Isotropic E-field Probe EX3DV4

	<p>Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p>
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3.3 Data Acquisition Electronics (DAE)

Model	DAE
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)
Input Offset Voltage	< 5μV (with auto zero)
Input Bias Current	< 50 f A
Dimensions	60 x 60 x 68 mm



3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet
Filling Volume	approx. 25 liters
Wooden Support	SPEAG standard phantom table




The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	
<p>Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.</p> <p>ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.</p>		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz _{Zoom} (n-1)	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm i = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
 - 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
 - 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
 - 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5 Description of Test Position

5.1 Body Exposure Condition

5.1.1 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Tissue Type	Head				
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ+ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate			Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose		
HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 3: Recipe of Tissue Simulate Liquid



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6.1.2 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp. ($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	43.089	0.878	22.1	2020/10/11
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	42.499	0.884	22.1	2020/12/15
835 Head	835	41.5 39.43~43.58)	0.90 (0.86~0.95)	42.605	0.929	22.0	2020/10/10
1750 Head	1750	40.1 38.10~42.11)	1.37 (1.30~1.44)	40.019	1.413	21.8	2020/10/12
1750 Head	1750	40.1 38.10~42.11)	1.37 (1.30~1.44)	40.015	1.411	21.8	2020/12/15
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.019	1.413	22.2	2021/1/22
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	39.920	1.431	22.1	2020/10/9
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	39.950	1.432	22.1	2020/12/15
1950 Head	1950	40.0 (38.00~42.00)	1.40 (1.33~1.47)	39.656	1.448	22.3	2021/1/22
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.663	1.791	21.8	2020/10/13
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.147	1.823	21.8	2020/12/15
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	40.162	1.962	21.9	2020/10/13
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	40.162	1.962	22.1	2021/1/22
5250Head	5250	35.9 (34.11~37.70)	4.71 (4.47~4.95)	36.638	4.842	22.2	2020/10/14
5750 Head	5750	35.4 (33.63~37.17)	5.22 (4.96~5.48)	35.589	5.430	22.2	2020/10/14

Table 4: Measurement result of Tissue electric parameters




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 ± 0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

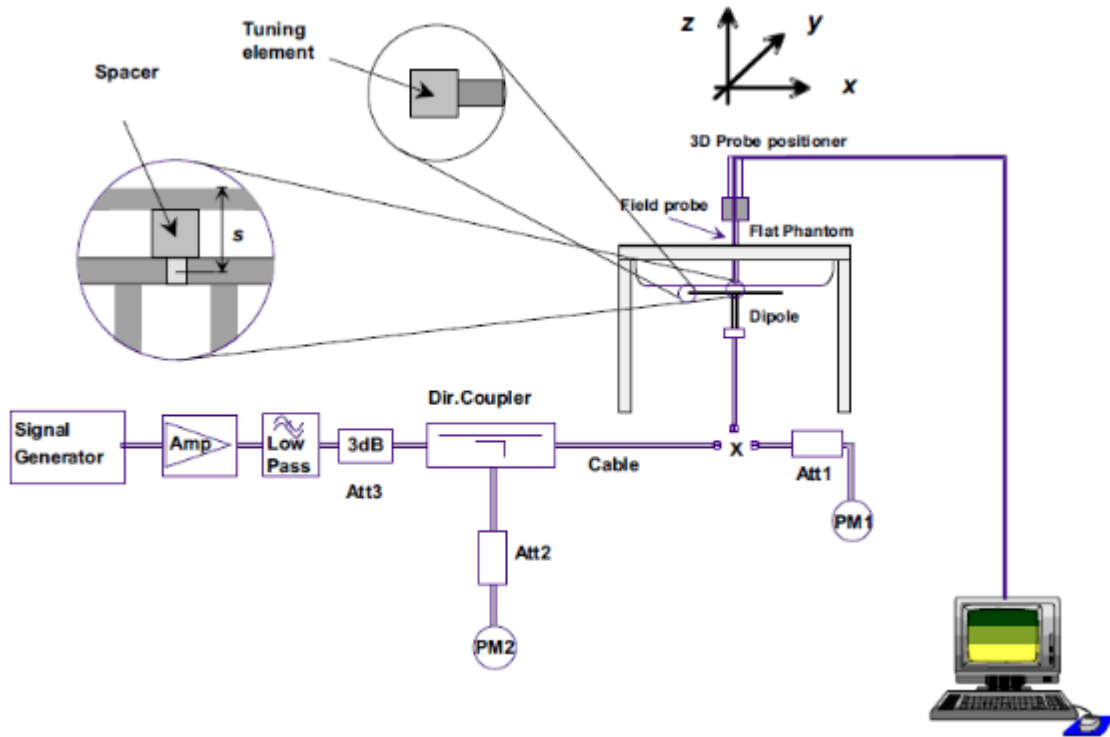

F-3. the microwave circuit arrangement used for SAR system check



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

6.2.1 Justification for Extended SAR Dipole Calibrations

- 1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated value;
 - c) Return-loss is within 20% of calibrated measurement;
 - d) Impedance is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V3	Head	2.18	1.43	8.72	5.72	8.39 (7.55~9.23)	5.63 (5.07~6.19)	22.1	2020/10/11
D750V3	Head	2.14	1.38	8.56	5.52	8.39 (7.55~9.23)	5.63 (5.07~6.19)	22.1	2020/12/15
D835V2	Head	2.40	1.58	9.60	6.32	9.64 (8.68~10.60)	6.29 (5.66~6.92)	22.0	2020/10/10
D1750V2	Head	9.82	5.22	39.28	20.88	36.3 (32.67~39.93)	19.2 (17.28~21.12)	21.8	2020/10/12
D1750V2	Head	9.36	4.95	37.44	19.80	36.3 (32.67~39.93)	19.2 (17.28~21.12)	21.8	2020/12/15
D1750V2	Head	9.78	5.06	39.12	20.24	36.3 (32.67~39.93)	19.2 (17.28~21.12)	22.2	2021/1/22
D1900V2	Head	10.60	5.47	42.40	21.88	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.1	2020/10/9
D1900V2	Head	10.60	5.46	42.40	21.84	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.1	2020/12/15
D1950V2	Head	10.9	5.44	43.6	21.76	40 (36.00~44.00)	20.3 (18.27~22.33)	22.3	2021/1/22
D2450V2	Head	12.60	5.94	50.40	23.76	51.9 (46.71~57.09)	23.8 (21.42~26.18)	21.8	2020/10/13
D2450V2	Head	13.30	6.11	53.20	24.44	51.9 (46.71~57.09)	23.8 (21.42~26.18)	21.8	2020/12/15
D2600V2	Head	13.80	6.21	55.20	24.84	56.8 (51.12~62.48)	24.9 (22.41~27.39)	21.9	2020/10/13
D2600V2	Head	13.6	6.06	54.4	24.24	56.8 (51.12~62.48)	24.9 (22.41~27.39)	22.1	2021/1/22
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head (5.25GHz)	8.17	2.35	81.70	23.50	75.2 (67.68~82.72)	21.5 (19.35~23.65)	22.2	2020/10/14
	Head (5.75GHz)	8.06	2.30	80.60	23.00	78.7 (70.83~86.57)	22.3 (20.07~24.53)	22.2	2020/10/14

Table 5: SAR System Check Result

6.2.3 Detailed System Check Results

Please see the Appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7 Test Configuration

7.1 3G SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

7.2 Operation Configurations

7.2.1 WCDMA Test Configuration

1) . Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) . Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

3) . HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

the following table The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	Bd	$\beta_d(SF)$	β_c/β_d	β_{hs}	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ Ahs = $\beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, ΔACK and $\Delta NACK = 8$ (Ahs = 30/15) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta CQI = 7$ (Ahs = 24/15) with $\beta_{hs} = 24/15 * \beta_c$.
Note3: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 6: settings of required H-Set 1 QPSK acc. to 3GPP 34.121



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 7: HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset“ and „Release 5 HSUPA Data Device“ sections of 3G device.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Sub-test [Ⓛ]	$\beta_{c\ell}$	$\beta_{d\ell}$	β_d (SF) [Ⓛ]	$\beta_c/\beta_{d\ell}$	β_{hs} ⁽¹⁾	$\beta_{ec\ell}$	$\beta_{ed\ell}$	β_c ^(SF)	$\beta_{ed\ell}$ ^(code)	CM ⁽²⁾ [Ⓛ] (dB) [Ⓛ]	MP R [Ⓛ] (dB) [Ⓛ]	AG ⁽⁴⁾ Inde ^x	E-TFC I [Ⓛ]
1 [Ⓛ]	11/15 ⁽³⁾	15/15 ⁽³⁾	64 [Ⓛ]	11/15 ⁽³⁾	22/15 [Ⓛ]	209/225 [Ⓛ]	1039/225 [Ⓛ]	4 [Ⓛ]	1 [Ⓛ]	1.0 [Ⓛ]	0.0 [Ⓛ]	20 [Ⓛ]	75 [Ⓛ]
2 [Ⓛ]	6/15 [Ⓛ]	15/15 [Ⓛ]	64 [Ⓛ]	6/15 [Ⓛ]	12/15 [Ⓛ]	12/15 [Ⓛ]	94/75 [Ⓛ]	4 [Ⓛ]	1 [Ⓛ]	3.0 [Ⓛ]	2.0 [Ⓛ]	12 [Ⓛ]	67 [Ⓛ]
3 [Ⓛ]	15/15 [Ⓛ]	9/15 [Ⓛ]	64 [Ⓛ]	15/9 [Ⓛ]	30/15 [Ⓛ]	30/15 [Ⓛ]	$\beta_{ed1}:47/15Ⓛ$ $\beta_{ed2}:47/15Ⓛ$	4 [Ⓛ]	2 [Ⓛ]	2.0 [Ⓛ]	1.0 [Ⓛ]	15 [Ⓛ]	92 [Ⓛ]
4 [Ⓛ]	2/15 [Ⓛ]	15/15 [Ⓛ]	64 [Ⓛ]	2/15 [Ⓛ]	4/15 [Ⓛ]	2/15 [Ⓛ]	56/75 [Ⓛ]	4 [Ⓛ]	1 [Ⓛ]	3.0 [Ⓛ]	2.0 [Ⓛ]	17 [Ⓛ]	71 [Ⓛ]
5 [Ⓛ]	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64 [Ⓛ]	15/15 ⁽⁴⁾	30/15 [Ⓛ]	24/15 [Ⓛ]	134/15 [Ⓛ]	4 [Ⓛ]	1 [Ⓛ]	1.0 [Ⓛ]	0.0 [Ⓛ]	21 [Ⓛ]	81 [Ⓛ]

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference[Ⓛ]
 Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ [Ⓛ]
 Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ [Ⓛ]
 Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g[Ⓛ]
 Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.[Ⓛ]

Table 8: Subtests for UMTS Release 6 HSUPA

UE Category	E-DCH Codes Transmitted	Number of HARQ Processes	of E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 9: HSUPA UE category



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

c) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 10: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

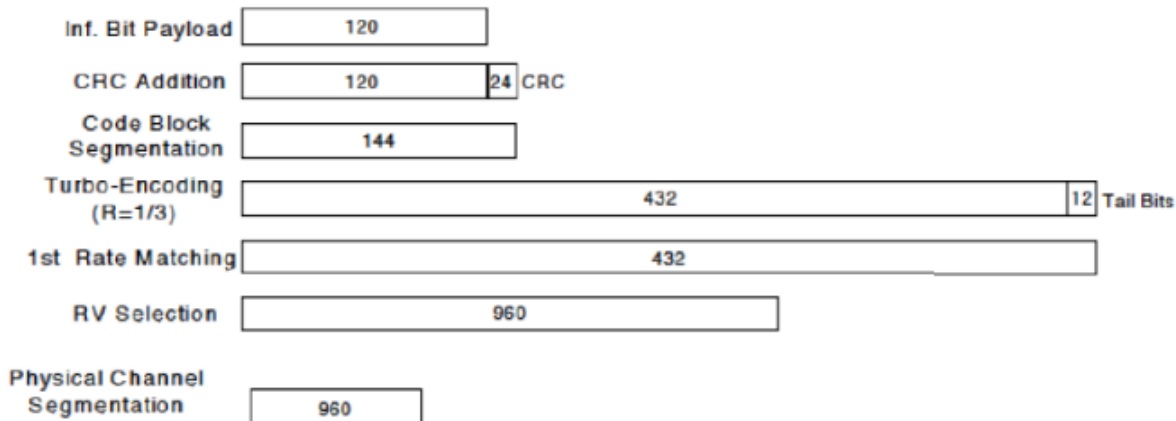


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	$\beta_d \cdot (SF)$ ^o	β_c / β_d ^o	$\beta_{hs} (1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ ^o

Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.^o

Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ^o

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


7.2.2 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.2.2.1 Duty cycle

1) Wi-Fi 2.4GHz 802.11b:


Duty cycle=12.3478/12.4348=99.30%

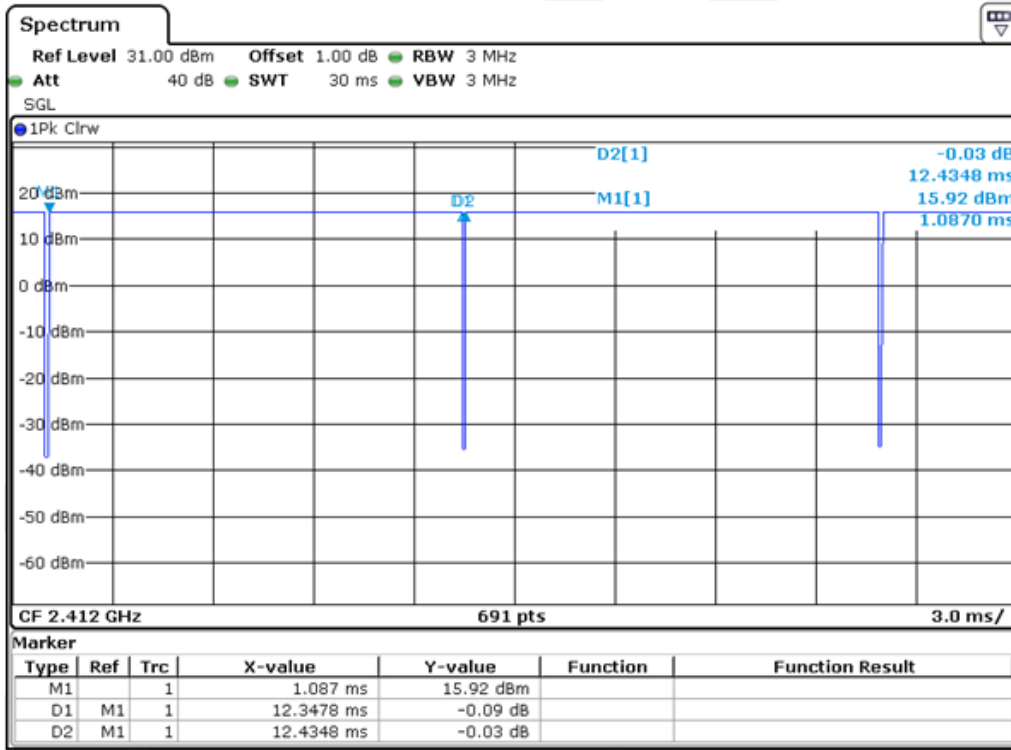

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2) Wi-Fi 5GHz 802.11a:
Duty cycle=2.029/2.1609=93.90%

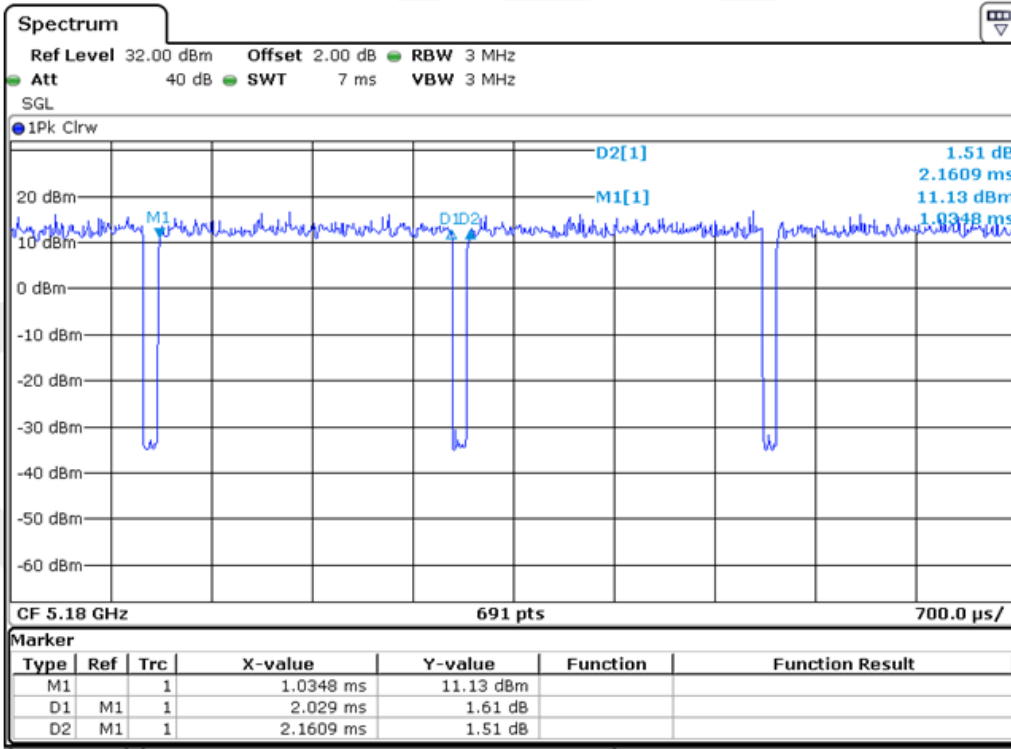

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2.2.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.2.2.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.2.2.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace “initial test configuration” with “all tested higher output power configurations”



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.2.2.5 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.2.3 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8821C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

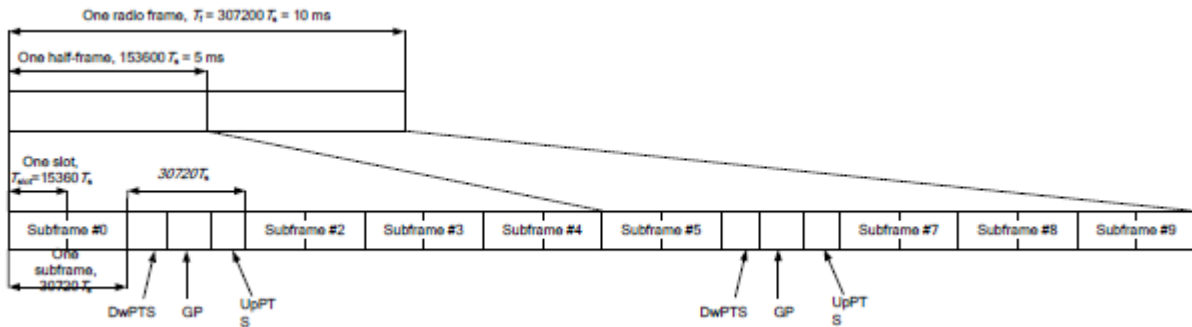


Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts	4384.Ts	5120.Ts	7680.Ts	4384.Ts	5120.Ts
5	6592.Ts			20480.Ts		
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts	-	-	-	-	-
9	13168.Ts	-	-	-	-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8 Test Result

8.1 Measurement of RF conducted Power

8.1.1 Conducted Power of Main Antenna

8.1.1.1 Conducted Power of WCDMA

WCDMA Band II					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	21.58	21.55	21.57	22.50
	Subtest 1	20.40	20.51	20.39	21.50
HSDPA	Subtest 2	20.39	20.38	20.38	21.50
	Subtest 3	19.95	20.11	19.96	21.00
	Subtest 4	19.93	20.07	20.07	21.00
HSUPA	Subtest 1	20.26	20.37	20.27	21.50
	Subtest 2	18.44	18.38	18.41	19.50
	Subtest 3	19.51	19.64	19.54	20.50
	Subtest 4	18.28	18.34	18.45	19.50
	Subtest 5	20.49	20.57	20.45	21.50
DC-HSDPA	Subtest 1	20.41	20.57	20.61	21.50
	Subtest 2	20.40	20.50	20.52	21.50
	Subtest 3	19.90	19.90	19.95	21.00
	Subtest 4	19.85	19.93	19.83	21.00
WCDMA Band IV					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	21.54	21.46	21.50	22.50
	Subtest 1	20.31	20.32	20.23	21.50
HSDPA	Subtest 2	20.23	20.29	20.17	21.50
	Subtest 3	19.78	19.91	19.73	21.00
	Subtest 4	19.74	19.98	19.80	21.00
	Subtest 1	20.25	20.31	19.99	21.50
HSUPA	Subtest 2	18.23	18.40	18.20	19.50
	Subtest 3	19.33	19.43	19.22	20.50
	Subtest 4	18.16	18.39	18.22	19.50
	Subtest 5	20.44	20.50	20.19	21.50
	Subtest 1	20.30	20.53	20.28	21.50
DC-HSDPA	Subtest 2	20.29	20.48	20.22	21.50
	Subtest 3	19.68	19.89	19.59	21.00
	Subtest 4	19.65	19.87	19.68	21.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

WCDMA Band V					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	23.12	23.04	23.02	24.00
	Subtest 1	21.86	21.69	21.98	23.00
HSDPA	Subtest 2	21.84	21.77	21.92	23.00
	Subtest 3	21.44	21.20	21.21	22.50
	Subtest 4	21.05	21.24	21.25	22.50
HSUPA	Subtest 1	21.94	21.73	21.94	23.00
	Subtest 2	19.96	19.70	19.95	21.00
	Subtest 3	20.93	20.76	21.04	22.00
	Subtest 4	19.91	19.71	20.14	21.00
	Subtest 5	21.95	21.75	21.95	23.00
DC-HSDPA	Subtest 1	21.76	21.63	21.95	23.00
	Subtest 2	21.69	21.60	21.89	23.00
	Subtest 3	21.39	21.23	21.09	22.50
	Subtest 4	21.08	21.14	21.10	22.50

Table 11: Conducted Power of WCDMA

Note:

- 1) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.1.1.2 Conducted Power of LTE

LTE Band 2				Conducted Power(dBm)					
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
				18607	18900	19193			
1.4MHz	QPSK	1	0	21.15	21.34	21.34	22.00		
		1	2	21.23	21.31	21.52	22.00		
		1	5	21.20	21.35	21.51	22.00		
		3	0	21.15	21.33	21.48	22.00		
		3	2	21.15	21.32	21.44	22.00		
		3	3	21.17	21.22	21.59	22.00		
	16QAM	6	0	20.30	20.27	20.47	21.00		
		1	0	20.32	20.34	20.64	21.00		
		1	2	20.57	20.69	21.00	21.00		
		1	5	20.68	20.55	20.97	21.00		
		3	0	20.23	20.47	20.45	21.00		
		3	2	20.34	20.33	20.37	21.00		
	64QAM	3	3	20.39	20.51	20.65	21.00		
		6	0	19.36	19.55	19.68	20.00		
		1	0	19.03	19.17	19.39	20.00		
		1	2	19.27	19.43	19.72	20.00		
		1	5	19.55	19.27	19.86	20.00		
		3	0	19.02	19.27	19.31	20.00		
	3MHz	QPSK	3	2	19.19	19.17	19.19	20.00	
			3	3	19.09	19.27	19.49	20.00	
			6	0	18.15	18.28	18.56	19.00	
			1	0	21.13	21.37	21.50	22.00	
			1	7	21.22	21.40	21.67	22.00	
			1	14	21.03	21.35	21.57	22.00	
16QAM		8	0	20.40	20.35	20.58	21.00		
		8	4	20.29	20.41	20.76	21.00		
		8	7	20.32	20.44	20.62	21.00		
		15	0	20.18	20.41	20.59	21.00		
		1	0	20.90	20.78	20.68	21.00		
		1	7	20.89	20.65	20.63	21.00		
64QAM		1	14	20.44	20.52	20.90	21.00		
		8	0	19.30	19.40	19.57	20.00		
		8	4	19.37	19.46	19.83	20.00		
		8	7	19.43	19.48	19.64	20.00		
		15	0	19.24	19.57	19.58	20.00		
		1	0	19.77	19.57	19.51	20.00		
18625		18900	19175	1	7	19.67	19.98	19.42	20.00
				1	14	19.19	19.32	19.74	20.00
				8	0	18.16	18.20	18.28	19.00
				8	4	18.19	18.20	18.68	19.00
				8	7	18.14	18.33	18.51	19.00
				15	0	18.04	18.40	18.42	19.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

5MHz	QPSK	1	0	21.21	21.47	21.62	22.00		
		1	13	21.07	21.46	21.74	22.00		
		1	24	21.28	21.41	21.53	22.00		
		12	0	20.26	20.31	20.68	21.00		
		12	6	20.17	20.57	20.66	21.00		
		12	13	20.29	20.48	20.48	21.00		
	16QAM	25	0	20.37	20.48	20.59	21.00		
		1	0	20.91	20.91	20.87	21.00		
		1	13	20.75	20.86	20.88	21.00		
		1	24	20.71	20.52	20.89	21.00		
		12	0	19.37	19.52	19.62	20.00		
		12	6	19.30	19.65	19.69	20.00		
	64QAM	12	13	19.19	19.45	19.52	20.00		
		25	0	19.28	19.52	19.56	20.00		
		1	0	19.67	19.56	19.40	20.00		
		1	13	19.77	19.87	19.41	20.00		
		1	24	19.26	19.33	19.66	20.00		
		12	0	18.02	18.16	18.33	19.00		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
					18650	18900	19150		
			10MHz	QPSK	1	0	21.05	21.12	21.25
1					25	21.17	21.47	21.20	22.00
1					49	21.02	21.18	21.11	22.00
25					0	20.09	20.05	20.25	21.00
25					13	20.02	20.03	20.24	21.00
25					25	20.15	20.05	20.08	21.00
16QAM	50	0		20.03	20.08	20.28	21.00		
	1	0		20.64	20.85	20.67	21.00		
	1	25		20.60	20.13	20.19	21.00		
	1	49		20.02	20.27	20.38	21.00		
	25	0		19.17	19.27	19.24	20.00		
	25	13		19.57	19.00	19.24	20.00		
64QAM	25	25		19.57	19.57	19.11	20.00		
	50	0		19.04	19.00	19.27	20.00		
	1	0		19.86	19.75	19.73	20.00		
	1	25		19.81	19.78	19.63	20.00		
	1	49	19.44	19.58	19.91	20.00			
	25	0	18.37	18.35	18.66	19.00			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
				18675	18900	19125			
		15MHz	QPSK	25	13	18.33	18.54	18.89	19.00
				25	25	18.46	18.41	18.66	19.00
				50	0	18.32	18.65	18.63	19.00
				1	0	21.53	21.74	21.81	22.00
				1	38	21.38	21.46	21.65	22.00
				1	74	21.60	21.50	21.65	22.00
36	0	20.34	20.55	20.88	21.00				
36	18	20.46	20.51	20.71	21.00				
36	39	20.46	20.37	20.65	21.00				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18700	18900	19100		
20MHz	16QAM	75	0	20.35	20.34	20.78	21.00	
		1	0	20.88	20.36	20.77	21.00	
		1	38	20.96	20.39	20.51	21.00	
		1	74	20.37	20.74	20.69	21.00	
		36	0	19.58	19.47	19.86	20.00	
		36	18	19.49	19.60	19.65	20.00	
		36	39	19.40	19.43	19.68	20.00	
		75	0	19.58	19.38	19.72	20.00	
	64QAM	1	0	19.95	19.87	19.60	20.00	
		1	38	19.88	19.51	19.56	20.00	
		1	74	19.51	19.50	19.86	20.00	
		36	0	18.20	18.42	18.61	19.00	
		36	18	18.40	18.51	18.84	19.00	
		36	39	18.36	18.51	18.60	19.00	
		75	0	18.34	18.51	18.48	19.00	
		20MHz	QPSK	1	0	21.65	21.91	21.70
	1			50	21.45	21.37	21.47	22.00
	1			99	21.52	21.54	21.52	22.00
	50			0	20.76	20.56	20.86	21.00
	50			25	20.58	20.64	20.57	21.00
	50			50	20.42	20.55	20.65	21.00
	100			0	20.46	20.51	20.75	21.00
	16QAM			1	0	20.75	20.85	20.82
			1	50	20.81	20.50	20.81	21.00
			1	99	20.86	20.72	20.74	21.00
			50	0	19.65	19.54	19.68	20.00
			50	25	19.69	19.57	19.83	20.00
			50	50	19.57	19.48	19.56	20.00
100			0	19.52	19.54	19.56	20.00	
64QAM			1	0	19.61	19.61	19.40	20.00
	1		50	19.79	19.91	19.38	20.00	
	1		99	19.31	19.39	19.68	20.00	
	50		0	18.20	18.13	18.31	19.00	
	50		25	18.22	18.21	18.67	19.00	
	50		50	18.23	18.30	18.51	19.00	
	100		0	18.11	18.41	18.32	19.00	

LTE Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	22.29	22.36	22.47	23.00
		1	2	22.40	22.39	22.38	23.00
		1	5	22.32	22.47	22.45	23.00
		3	0	22.27	22.36	22.41	23.00
		3	2	22.30	22.38	22.32	23.00
		3	3	22.37	22.45	22.37	23.00
		6	0	21.20	21.27	21.38	22.00
	16QAM	1	0	21.83	21.71	21.78	22.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

		1	2	21.86	21.77	21.51	22.00	
		1	5	21.54	21.61	21.83	22.00	
		3	0	21.33	21.32	21.39	22.00	
		3	2	21.23	21.37	21.52	22.00	
		3	3	21.22	21.57	21.52	22.00	
		6	0	20.38	20.32	20.23	21.00	
	64QAM	1	0	20.84	20.68	20.88	21.00	
		1	2	20.89	20.84	20.49	21.00	
		1	5	20.54	20.60	20.82	21.00	
		3	0	20.35	20.42	20.35	21.00	
		3	2	20.33	20.33	20.43	21.00	
		3	3	20.15	20.51	20.46	21.00	
		6	0	19.33	19.38	19.27	20.00	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				19965	20175	20385		
3MHz	QPSK	1	0	22.28	22.57	22.38	23.00	
		1	7	22.69	22.47	22.45	23.00	
		1	14	22.46	22.44	22.47	23.00	
		8	0	21.41	21.42	21.28	22.00	
		8	4	21.43	21.48	21.53	22.00	
		8	7	21.53	21.60	21.38	22.00	
		15	0	21.45	21.45	21.48	22.00	
	16QAM	1	0	21.72	21.57	21.73	22.00	
		1	7	21.65	21.65	21.72	22.00	
		1	14	21.90	21.77	21.65	22.00	
		8	0	20.49	20.54	20.31	21.00	
		8	4	20.51	20.50	20.63	21.00	
		8	7	20.61	20.48	20.34	21.00	
		15	0	20.44	20.62	20.43	21.00	
	64QAM	1	0	20.79	20.54	20.81	21.00	
		1	7	20.97	20.55	20.77	21.00	
		1	14	20.83	20.78	20.74	21.00	
		8	0	19.53	19.61	19.27	20.00	
		8	4	19.50	19.58	19.73	20.00	
		8	7	19.53	19.43	19.28	20.00	
		15	0	19.40	19.67	19.40	20.00	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					19975	20175	20375	
	5MHz	QPSK	1	0	22.30	22.38	22.57	23.00
1			13	22.67	22.58	22.37	23.00	
1			24	22.46	22.52	22.35	23.00	
12			0	21.47	21.50	21.35	22.00	
12			6	21.47	21.43	21.39	22.00	
12			13	21.50	21.46	21.50	22.00	
25			0	21.63	21.40	21.33	22.00	
16QAM		1	0	21.84	21.94	21.91	22.00	
		1	13	21.87	21.57	21.87	22.00	
		1	24	21.56	21.73	21.56	22.00	
		12	0	20.58	20.58	20.50	21.00	
		12	6	20.66	20.52	20.45	21.00	
		12	13	20.53	20.50	20.53	21.00	
		25	0	20.71	20.63	20.40	21.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20000	20175	20350	
10MHz	64QAM	1	0	20.70	20.56	20.64	21.00
		1	13	20.65	20.61	20.72	21.00
		1	24	20.95	20.22	20.59	21.00
		12	0	19.49	19.53	19.24	20.00
		12	6	19.59	19.46	19.53	20.00
		12	13	19.70	19.50	19.36	20.00
		25	0	19.34	19.57	19.53	20.00
10MHz	QPSK	1	0	22.50	22.60	22.38	23.00
		1	25	22.53	22.66	22.37	23.00
		1	49	22.51	22.40	22.45	23.00
		25	0	21.54	21.45	21.53	22.00
		25	13	21.67	21.55	21.46	22.00
		25	25	21.43	21.47	21.44	22.00
		50	0	21.62	21.48	21.63	22.00
	16QAM	1	0	21.70	21.75	21.80	22.00
		1	25	21.79	21.55	21.62	22.00
		1	49	21.86	21.99	21.84	22.00
		25	0	20.54	20.44	20.62	21.00
		25	13	20.57	20.60	20.66	21.00
		25	25	20.68	20.53	20.61	21.00
		50	0	20.63	20.60	20.57	21.00
	64QAM	1	0	20.77	20.60	20.73	21.00
		1	25	20.69	20.58	20.68	21.00
		1	49	20.88	20.75	20.62	21.00
		25	0	19.43	19.58	19.21	20.00
		25	13	19.56	19.52	19.60	20.00
		25	25	19.65	19.49	19.37	20.00
		50	0	19.42	19.59	19.35	20.00
15MHz	QPSK	1	0	22.67	22.75	22.72	23.00
		1	38	22.42	22.55	22.56	23.00
1		74	22.74	22.46	22.47	23.00	
36		0	21.59	21.66	21.50	22.00	
36		18	21.51	21.60	21.39	22.00	
36		39	21.53	21.41	21.36	22.00	
75		0	21.42	21.48	21.61	22.00	
16QAM	1	0	21.87	21.50	21.69	22.00	
	1	38	21.67	21.46	21.90	22.00	
	1	74	21.77	21.56	21.92	22.00	
	36	0	20.63	20.62	20.53	21.00	
	36	18	20.51	20.44	20.47	21.00	
	36	39	20.39	20.59	20.47	21.00	
	75	0	20.44	20.49	20.55	21.00	
64QAM	1	0	20.77	20.61	20.79	21.00	
	1	38	20.98	20.67	20.66	21.00	
	1	74	20.84	20.80	20.70	21.00	
	36	0	19.47	19.59	19.39	20.00	
	36	18	19.55	19.49	19.62	20.00	
	36	39	19.57	19.54	19.40	20.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Bandwidth	Modulation	75	0	19.37	19.56	19.48	20.00
		RB size	RB offset	Channel	Channel	Channel	Tune up
20MHz	QPSK	1	0	22.59	22.59	22.87	23.00
		1	50	22.69	22.26	22.50	23.00
		1	99	22.40	22.55	22.26	23.00
		50	0	21.76	21.52	21.70	22.00
		50	25	21.66	21.55	21.53	22.00
		50	50	21.77	21.47	21.28	22.00
		100	0	21.54	21.63	21.64	22.00
	16QAM	1	0	21.95	21.91	21.69	22.00
		1	50	21.95	21.96	21.49	22.00
		1	99	21.87	21.66	21.74	22.00
		50	0	20.76	20.64	20.62	21.00
		50	25	20.56	20.71	20.48	21.00
		50	50	20.60	20.44	20.47	21.00
		100	0	20.59	20.55	20.41	21.00
	64QAM	1	0	20.73	20.50	20.73	21.00
		1	50	21.00	20.69	20.73	21.00
		1	99	20.87	20.68	20.66	21.00
		50	0	19.57	19.62	19.38	20.00
		50	25	19.42	19.43	19.56	20.00
		50	50	19.57	19.54	19.42	20.00
		100	0	19.37	19.55	19.49	20.00

LTE Band 5				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20407	20525	20643		
1.4MHz	QPSK	1	0	22.70	22.57	22.56	24.00	
		1	2	22.71	22.59	22.64	24.00	
		1	5	22.62	22.55	22.48	24.00	
		3	0	22.70	22.54	22.60	24.00	
		3	2	22.71	22.59	22.67	24.00	
		3	3	22.75	22.70	22.47	24.00	
		6	0	21.71	21.66	21.58	23.00	
	16QAM	1	0	21.72	21.85	22.03	23.00	
		1	2	21.99	21.93	22.09	23.00	
		1	5	22.22	21.65	21.96	23.00	
		3	0	21.77	21.53	21.67	23.00	
		3	2	21.88	21.76	21.62	23.00	
		3	3	21.83	21.73	21.48	23.00	
		6	0	20.80	20.67	20.62	22.00	
	64QAM	1	0	20.66	20.84	21.04	22.00	
		1	2	20.98	20.86	21.08	22.00	
		1	5	21.17	20.57	20.92	22.00	
		3	0	20.74	20.55	20.69	22.00	
		3	2	20.82	20.77	20.61	22.00	
		3	3	20.80	20.66	20.44	22.00	
		6	0	19.76	19.60	19.55	21.00	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Bandwidth	Modulation	RB size	RB offset	20415	20525	20635	Tune up	
				20425	20525	20625		
3MHz	QPSK	1	0	22.73	22.64	22.56	24.00	
		1	7	22.72	22.67	22.70	24.00	
		1	14	22.66	22.67	22.73	24.00	
		8	0	21.85	21.64	21.66	23.00	
		8	4	21.81	21.68	21.65	23.00	
		8	7	21.78	21.68	21.69	23.00	
		15	0	21.77	21.67	21.63	23.00	
	16QAM	1	0	21.88	22.16	21.81	23.00	
		1	7	21.98	22.10	22.25	23.00	
		1	14	22.28	21.87	21.50	23.00	
		8	0	20.98	20.67	20.71	22.00	
		8	4	20.86	20.83	20.79	22.00	
		8	7	20.85	20.75	20.81	22.00	
		15	0	20.91	20.68	20.65	22.00	
	64QAM	1	0	20.82	21.18	20.80	22.00	
		1	7	20.97	21.06	21.26	22.00	
		1	14	21.26	20.89	20.52	22.00	
		8	0	20.00	19.68	19.66	21.00	
		8	4	19.85	19.81	19.72	21.00	
		8	7	19.77	19.68	19.74	21.00	
		15	0	19.87	19.66	19.66	21.00	
	5MHz	QPSK	1	0	22.73	22.58	22.56	24.00
			1	13	22.63	22.74	22.63	24.00
			1	24	22.72	22.66	22.59	24.00
12			0	21.85	21.73	21.53	23.00	
12			6	21.82	21.67	21.70	23.00	
12			13	21.73	21.63	21.65	23.00	
25			0	21.74	21.73	21.74	23.00	
16QAM		1	0	22.04	22.30	21.45	23.00	
		1	13	22.21	21.88	21.60	23.00	
		1	24	21.87	22.11	21.71	23.00	
		12	0	20.80	20.75	20.67	22.00	
		12	6	20.77	20.80	20.74	22.00	
		12	13	20.82	20.60	20.68	22.00	
		25	0	20.77	20.79	20.63	22.00	
64QAM		1	0	21.06	21.25	20.42	22.00	
		1	13	21.16	20.84	20.53	22.00	
		1	24	20.80	21.13	20.63	22.00	
		12	0	19.81	19.76	19.65	21.00	
		12	6	19.72	19.80	19.67	21.00	
		12	13	19.82	19.58	19.68	21.00	
		25	0	19.69	19.77	19.60	21.00	
10MHz		QPSK	1	0	22.69	22.76	22.68	24.00
			1	25	22.75	22.69	22.62	24.00
1			49	22.70	22.65	22.56	24.00	
25	0		21.71	21.79	21.67	23.00		
25	13		21.72	21.66	21.75	23.00		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

	16QAM	25	25	21.78	21.69	21.67	23.00
		50	0	21.69	21.66	21.68	23.00
		1	0	22.21	21.80	22.11	23.00
		1	25	22.18	21.75	22.14	23.00
		1	49	21.73	21.51	21.58	23.00
		25	0	20.74	20.64	20.65	22.00
		25	13	20.74	20.80	20.69	22.00
		25	25	20.73	20.63	20.68	22.00
	64QAM	50	0	20.76	20.77	20.75	22.00
		1	0	21.23	20.76	21.06	22.00
		1	25	21.17	20.76	21.15	22.00
		1	49	20.70	20.45	20.60	22.00
		25	0	19.75	19.66	19.60	21.00
		25	13	19.72	19.79	19.69	21.00
		25	25	19.68	19.58	19.61	21.00
		50	0	19.72	19.79	19.69	21.00

LTE FDD Band 12				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23017	23095	23173		
1.4MHz	QPSK	1	0	22.43	22.38	22.52	24.00	
		1	2	22.50	22.47	22.62	24.00	
		1	5	22.53	22.33	22.54	24.00	
		3	0	22.43	22.46	22.52	23.00	
		3	2	22.62	22.47	22.59	23.00	
		3	3	22.53	22.39	22.58	23.00	
	16QAM	6	0	21.55	21.44	21.62	23.00	
		1	0	21.90	21.86	21.82	23.00	
		1	2	21.38	22.07	21.67	23.00	
		1	5	21.61	21.69	21.88	23.00	
		3	0	21.50	21.49	21.63	22.00	
		3	2	21.48	21.58	21.66	22.00	
		3	3	21.42	21.48	21.53	22.00	
		6	0	20.65	20.59	20.74	22.00	
		16QAM	1	0	20.83	20.80	20.77	22.00
			1	2	20.39	21.07	20.68	22.00
			1	5	20.59	20.67	20.87	22.00
			3	0	20.49	20.48	20.59	21.00
	3		2	20.49	20.57	20.62	21.00	
	3		3	20.36	20.42	20.47	21.00	
	3MHz	QPSK	6	0	19.65	19.55	19.68	21.00
			1	0	22.71	22.64	22.56	24.00
			1	7	22.69	22.67	22.70	24.00
			1	14	22.66	22.67	22.71	24.00
8			0	21.85	21.64	21.66	23.00	
8			4	21.81	21.68	21.65	23.00	
8			7	21.78	21.68	21.69	23.00	
15			0	21.77	21.67	21.63	23.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

	16QAM	1	0	21.88	22.16	21.81	23.00	
		1	7	21.98	22.10	22.25	23.00	
		1	14	22.28	21.87	21.50	23.00	
		8	0	20.98	20.67	20.71	22.00	
		8	4	20.86	20.83	20.79	22.00	
		8	7	20.85	20.75	20.81	22.00	
		15	0	20.91	20.68	20.65	22.00	
	64QAM	1	0	20.83	21.18	20.78	22.00	
		1	7	20.94	21.09	21.23	22.00	
		1	14	21.25	20.88	20.42	22.00	
		8	0	19.99	19.64	19.68	21.00	
		8	4	19.87	19.83	19.73	21.00	
		8	7	19.80	19.73	19.78	21.00	
		15	0	19.86	19.67	19.60	21.00	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
5MHz	QPSK	1	0	22.50	22.55	22.63	24.00	
		1	13	22.71	22.55	22.68	24.00	
		1	24	22.59	22.68	22.59	24.00	
		12	0	21.69	21.69	21.72	23.00	
		12	6	21.60	21.62	21.73	23.00	
		12	13	21.67	21.66	21.65	23.00	
		25	0	21.58	21.67	21.69	23.00	
	16QAM	1	0	21.99	21.72	21.65	23.00	
		1	13	21.80	22.02	21.95	23.00	
		1	24	22.08	22.16	21.55	23.00	
		12	0	20.62	20.63	20.77	22.00	
		12	6	20.63	20.62	20.86	22.00	
		12	13	20.55	20.67	20.70	22.00	
		25	0	20.63	20.66	20.72	22.00	
	64QAM	1	0	20.99	20.67	20.66	22.00	
		1	13	20.75	20.94	20.87	22.00	
		1	24	21.05	21.09	20.47	22.00	
		12	0	19.62	19.57	19.76	21.00	
		12	6	19.62	19.55	19.86	21.00	
		12	13	19.54	19.64	19.68	21.00	
		25	0	19.55	19.63	19.65	21.00	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	10MHz	QPSK	1	0	22.46	22.72	22.71	24.00
			1	25	22.60	22.39	22.59	24.00
			1	49	22.60	22.64	22.62	24.00
			25	0	21.56	21.78	21.73	23.00
			25	13	21.59	21.73	21.67	23.00
			25	25	21.60	21.57	21.66	23.00
50			0	21.55	21.67	21.70	23.00	
16QAM		1	0	22.18	21.77	21.68	23.00	
		1	25	21.63	21.61	22.13	23.00	
		1	49	21.54	21.86	21.91	23.00	
		25	0	20.63	20.58	20.77	22.00	
		25	13	20.66	20.67	20.89	22.00	
		25	25	20.60	20.60	20.63	22.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

		50	0	20.62	20.63	20.68	22.00
	64QAM	1	0	21.20	20.73	20.63	22.00
		1	25	20.59	20.56	21.13	22.00
		1	49	20.56	20.78	20.93	22.00
		25	0	19.55	19.60	19.70	21.00
		25	13	19.68	19.69	19.89	21.00
		25	25	19.53	19.53	19.58	21.00
		50	0	19.59	19.62	19.63	21.00

LTE FDD Band 13				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23205	23230	23255		
5MHz	QPSK	1	0	22.79	22.73	22.78	24.00	
		1	13	22.76	22.75	22.76	24.00	
		1	24	22.77	22.78	22.73	24.00	
		12	0	21.82	21.85	21.78	23.00	
		12	6	21.89	21.77	21.79	23.00	
		12	13	21.80	21.76	21.73	23.00	
		25	0	21.81	21.74	21.71	23.00	
	16QAM	1	0	22.20	22.32	22.01	23.00	
		1	13	22.09	21.77	22.37	23.00	
		1	24	21.80	21.92	22.27	23.00	
		12	0	20.82	20.80	20.81	22.00	
		12	6	20.99	20.82	20.76	22.00	
		12	13	20.75	20.68	20.61	22.00	
		25	0	20.85	20.83	20.76	22.00	
	16QAM	1	0	21.21	21.31	20.95	22.00	
		1	13	21.10	20.76	21.32	22.00	
		1	24	20.80	20.91	21.29	22.00	
		12	0	19.83	19.75	19.74	21.00	
		12	6	19.93	19.84	19.70	21.00	
		12	13	19.67	19.66	19.61	21.00	
		25	0	19.82	19.80	19.71	21.00	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	10MHz	QPSK	1	0	22.79	22.80	22.79	24.00
			1	25	22.78	22.78	22.78	24.00
1			49	22.74	22.74	22.74	24.00	
25			0	21.82	21.83	21.82	23.00	
25			13	21.81	21.81	21.81	23.00	
25			25	21.77	21.77	21.77	23.00	
50			0	21.84	21.84	21.84	23.00	
16QAM		1	0	22.35	22.35	22.35	23.00	
		1	25	22.27	22.27	22.27	23.00	
		1	49	22.23	22.23	22.23	23.00	
		25	0	20.83	20.83	20.83	22.00	
		25	13	20.75	20.75	20.75	22.00	
		25	25	20.65	20.65	20.65	22.00	
		50	0	20.80	20.80	20.80	22.00	
64QAM		1	0	21.31	21.36	21.30	22.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

		1	25	21.21	21.25	21.25	22.00
		1	49	21.24	21.24	21.17	22.00
		25	0	19.83	19.85	19.80	21.00
		25	13	19.73	19.67	19.68	21.00
		25	25	19.61	19.65	19.64	21.00
		50	0	19.81	19.79	19.73	21.00

LTE FDD Band 14				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23305	23330	23355		
5MHz	QPSK	1	0	22.82	22.68	22.80	24.00	
		1	13	22.80	22.81	22.76	24.00	
		1	24	22.70	22.70	22.72	24.00	
		12	0	21.81	21.83	21.74	23.00	
		12	6	21.81	21.76	21.78	23.00	
		12	13	21.74	21.74	21.72	23.00	
	16QAM	25	0	21.83	21.78	21.73	23.00	
		1	0	22.31	21.90	21.63	23.00	
		1	13	22.42	21.95	21.94	23.00	
		1	24	22.18	21.92	22.19	23.00	
		12	0	20.77	20.80	20.65	22.00	
		12	6	20.77	20.84	20.80	22.00	
	64QAM	12	13	20.76	20.79	20.61	22.00	
		25	0	20.75	20.77	20.74	22.00	
		1	0	21.33	20.85	20.61	22.00	
		1	13	21.41	20.88	20.91	22.00	
		1	24	21.20	20.88	21.18	22.00	
		12	0	19.71	19.74	19.57	21.00	
	10MHz	QPSK	12	6	19.77	19.79	19.82	21.00
			12	13	19.78	19.72	19.61	21.00
			25	0	19.67	19.77	19.75	21.00
			1	0	22.83	22.84	22.83	24.00
			1	25	22.67	22.67	22.67	24.00
			1	49	22.58	22.58	22.58	24.00
16QAM		25	0	21.80	21.81	21.80	23.00	
		25	13	21.76	21.76	21.76	23.00	
		25	25	21.74	21.74	21.74	23.00	
		50	0	21.76	21.76	21.76	23.00	
		1	0	22.23	22.23	22.23	23.00	
		1	25	22.00	22.00	22.00	23.00	
64QAM		1	49	21.84	21.84	21.84	23.00	
		25	0	20.89	20.89	20.89	22.00	
		25	13	20.70	20.70	20.70	22.00	
		25	25	20.74	20.74	20.74	22.00	
		50	0	20.74	20.74	20.74	22.00	
		1	0	21.19	21.20	21.22	22.00	
		1	25	20.96	20.97	21.01	22.00	
		1	49	20.79	20.81	20.78	22.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		25	0	19.89	19.86	19.89	21.00
		25	13	19.65	19.65	19.65	21.00
		25	25	19.74	19.74	19.66	21.00
		50	0	19.73	19.68	19.71	21.00

LTE Band 25				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26047	26365	26683		
1.4MHz	QPSK	1	0	21.29	21.56	21.41	22.00	
		1	2	21.36	21.71	21.47	22.00	
		1	5	21.11	21.43	21.51	22.00	
		3	0	21.25	21.59	21.55	22.00	
		3	2	21.19	21.66	21.60	22.00	
		3	3	21.19	21.78	21.69	22.00	
	16QAM	6	0	20.16	20.58	20.59	21.00	
		1	0	20.30	20.82	20.90	21.00	
		1	2	20.55	20.74	20.88	21.00	
		1	5	20.84	20.87	20.74	21.00	
		3	0	20.38	20.66	20.67	21.00	
		3	2	20.07	20.69	20.64	21.00	
	64QAM	3	3	20.27	20.59	20.65	21.00	
		6	0	19.25	19.75	19.64	20.00	
		1	0	19.29	19.86	19.91	20.00	
		1	2	19.62	19.79	19.79	20.00	
		1	5	19.79	19.94	19.82	20.00	
		3	0	19.28	19.73	19.57	20.00	
	3MHz	QPSK	3	2	19.07	19.70	19.62	20.00
			3	3	19.18	19.53	19.70	20.00
			6	0	18.18	18.68	18.60	19.00
1			0	21.32	21.48	21.51	22.00	
1			7	21.37	21.54	21.67	22.00	
1			14	21.29	21.48	21.63	22.00	
16QAM		8	0	20.22	20.44	20.71	21.00	
		8	4	20.42	20.52	20.72	21.00	
		8	7	20.27	20.43	20.69	21.00	
		15	0	20.43	20.33	20.63	21.00	
		1	0	20.53	20.98	20.81	21.00	
		1	7	20.89	20.78	20.88	21.00	
64QAM	1	14	20.90	20.75	20.71	21.00		
	8	0	19.16	19.51	19.57	20.00		
	8	4	19.51	19.56	19.75	20.00		
	8	7	19.42	19.30	19.62	20.00		
	15	0	19.30	19.39	19.55	20.00		
	1	0	19.49	19.95	19.77	20.00		
	64QAM	1	7	19.91	19.87	19.71	20.00	
		1	14	19.90	19.84	19.65	20.00	
		8	0	18.11	18.42	18.64	19.00	
		8	4	18.60	18.47	18.71	19.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Bandwidth	Modulation	RB size	RB offset	8	7	18.38	18.38	18.71	19.00	
				15	0	18.38	18.49	18.59	19.00	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up			
				26065	26365	26665				
5MHz	QPSK	1	0	21.40	21.35	21.71	22.00			
		1	13	21.20	21.44	21.66	22.00			
		1	24	21.41	21.36	21.64	22.00			
		12	0	20.40	20.47	20.53	21.00			
		12	6	20.27	20.58	20.66	21.00			
		12	13	20.24	20.38	20.59	21.00			
		25	0	20.32	20.41	20.63	21.00			
	16QAM	1	0	20.83	20.54	20.95	21.00			
		1	13	20.25	20.46	20.81	21.00			
		1	24	20.54	20.34	20.91	21.00			
		12	0	19.32	19.40	19.59	20.00			
		12	6	19.39	19.49	19.69	20.00			
		12	13	19.31	19.55	19.65	20.00			
		25	0	19.31	19.58	19.64	20.00			
	64QAM	1	0	19.58	19.56	19.83	20.00			
		1	13	19.94	19.87	19.88	20.00			
		1	24	19.80	19.73	19.67	20.00			
		12	0	18.25	18.44	18.48	19.00			
		12	6	18.53	18.50	18.74	19.00			
		12	13	18.39	18.24	18.69	19.00			
		25	0	18.22	18.49	18.65	19.00			
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
					26090	26365	26640			
	10MHz	QPSK	1	0	21.80	21.67	21.70	22.00		
1			25	21.49	21.50	21.69	22.00			
1			49	21.39	21.53	21.48	22.00			
25			0	20.43	20.48	20.78	21.00			
25			13	20.62	20.58	20.61	21.00			
25			25	20.45	20.34	20.68	21.00			
50			0	20.39	20.42	20.72	21.00			
16QAM		1	0	20.79	20.81	20.79	21.00			
		1	25	20.11	20.84	20.85	21.00			
		1	49	20.77	20.80	20.75	21.00			
		25	0	19.50	19.61	19.57	20.00			
		25	13	19.51	19.49	19.50	20.00			
		25	25	19.46	19.69	19.74	20.00			
		50	0	19.48	19.51	19.57	20.00			
64QAM		1	0	19.55	19.98	19.90	20.00			
		1	25	19.91	19.87	19.88	20.00			
		1	49	19.90	19.65	19.73	20.00			
		25	0	18.13	18.53	18.57	19.00			
		25	13	18.56	18.65	18.78	19.00			
		25	25	18.35	18.36	18.62	19.00			
		50	0	18.26	18.40	18.58	19.00			
Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
					26115	26365	26615			
15MHz		QPSK	1	0	21.39	21.41	21.69	22.00		
	1		38	21.34	21.50	21.70	22.00			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26140	26365	26590		
20MHz	16QAM	1	74	21.40	21.37	21.65	22.00	
		36	0	20.63	20.42	20.93	21.00	
		36	18	20.65	20.44	20.88	21.00	
		36	39	20.57	20.34	20.68	21.00	
		75	0	20.47	20.41	20.69	21.00	
		1	0	20.46	20.98	20.65	21.00	
		1	38	20.65	20.70	20.68	21.00	
		1	74	20.67	20.69	20.78	21.00	
		36	0	19.64	19.45	19.90	20.00	
		36	18	19.48	19.58	19.95	20.00	
		36	39	19.46	19.40	19.72	20.00	
		75	0	19.64	19.44	19.75	20.00	
	64QAM	1	0	19.53	19.91	19.90	20.00	
		1	38	19.93	19.83	19.87	20.00	
		1	74	19.90	19.78	19.76	20.00	
		36	0	18.26	18.59	18.50	19.00	
		36	18	18.43	18.49	18.73	19.00	
		36	39	18.42	18.38	18.71	19.00	
		75	0	18.36	18.31	18.55	19.00	
		1	0	19.53	19.91	19.90	20.00	
	20MHz	QPSK	1	0	21.83	21.65	21.70	22.00
			1	50	21.48	21.37	21.48	22.00
			1	99	21.45	21.30	21.47	22.00
			50	0	20.56	20.52	20.78	21.00
			50	25	20.59	20.45	20.65	21.00
			50	50	20.48	20.31	20.72	21.00
			100	0	20.68	20.66	20.69	21.00
			1	0	20.96	20.94	20.88	21.00
16QAM		1	50	20.67	20.91	20.84	21.00	
		1	99	21.00	20.95	20.95	21.00	
		50	0	19.67	19.70	19.83	20.00	
		50	25	19.40	19.53	19.84	20.00	
		50	50	19.50	19.32	19.85	20.00	
		100	0	19.41	19.47	19.68	20.00	
		1	0	19.53	19.90	19.86	20.00	
		1	50	19.83	19.92	19.83	20.00	
64QAM		1	99	19.99	19.65	19.81	20.00	
		50	0	18.07	18.56	18.48	19.00	
		50	25	18.46	18.56	18.82	19.00	
		50	50	18.46	18.33	18.67	19.00	
		100	0	18.39	18.49	18.54	19.00	

LTE Band 26				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26697	26865	27033	
1.4MHz	QPSK	1	0	22.43	22.60	22.57	24.00
		1	2	22.56	22.71	22.69	24.00
		1	5	22.59	22.62	22.62	24.00
		3	0	22.54	22.65	22.59	24.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

	16QAM	3	2	22.55	22.67	22.61	24.00	
		3	3	22.57	22.61	22.57	24.00	
		6	0	21.51	21.63	21.63	23.00	
		1	0	22.01	21.81	21.52	23.00	
		1	2	22.01	21.92	21.80	23.00	
		1	5	21.50	22.05	21.56	23.00	
		3	0	21.44	21.58	21.65	23.00	
		3	2	21.67	21.70	21.69	23.00	
		3	3	21.59	21.56	21.62	23.00	
	6	0	20.61	20.79	20.67	22.00		
	64QAM	1	0	20.98	20.82	20.49	22.00	
		1	2	20.95	20.93	20.75	22.00	
		1	5	20.50	21.00	20.55	22.00	
		3	0	20.38	20.59	20.64	22.00	
		3	2	20.65	20.66	20.62	22.00	
		3	3	20.51	20.57	20.56	22.00	
		6	0	19.62	19.77	19.62	21.00	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26705	26865	27025		
3MHz	QPSK	1	0	22.73	22.69	22.76	24.00	
		1	7	22.74	22.82	22.79	24.00	
		1	14	22.85	22.63	22.77	24.00	
		8	0	21.80	21.81	21.83	23.00	
		8	4	21.87	21.80	21.82	23.00	
		8	7	21.86	21.73	21.80	23.00	
		15	0	21.88	21.78	21.75	23.00	
	16QAM	1	0	21.96	21.98	22.13	23.00	
		1	7	22.48	22.08	21.85	23.00	
		1	14	22.03	22.23	21.57	23.00	
		8	0	20.95	20.80	20.86	22.00	
		8	4	20.92	20.84	20.79	22.00	
		8	7	20.80	20.77	20.72	22.00	
		15	0	20.91	20.78	20.81	22.00	
	64QAM	1	0	20.94	21.00	21.05	22.00	
		1	7	21.50	21.06	20.84	22.00	
		1	14	21.03	21.25	20.57	22.00	
		8	0	19.87	19.79	19.79	21.00	
		8	4	19.92	19.82	19.71	21.00	
		8	7	19.76	19.69	19.71	21.00	
		15	0	19.88	19.80	19.80	21.00	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					26715	26865	27015	
	5MHz	QPSK	1	0	22.84	22.85	22.69	24.00
1			13	22.78	22.80	22.80	24.00	
1			24	22.68	22.73	22.66	24.00	
12			0	21.85	21.81	21.78	23.00	
12			6	21.94	21.83	21.86	23.00	
12			13	21.80	21.70	21.82	23.00	
25			0	21.81	21.75	21.78	23.00	
16QAM		1	0	22.06	22.32	21.92	23.00	
		1	13	21.96	22.06	22.19	23.00	
		1	24	21.79	22.13	21.79	23.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26750	26865	26990	
10MHz	64QAM	12	0	20.95	20.87	20.87	22.00
		12	6	20.85	20.81	20.82	22.00
		12	13	20.82	20.84	20.80	22.00
		25	0	20.88	20.76	20.85	22.00
		1	0	21.06	21.29	20.85	22.00
		1	13	20.91	21.02	21.13	22.00
	QPSK	1	24	20.78	21.12	20.72	22.00
		12	0	19.94	19.79	19.82	21.00
		12	6	19.87	19.80	19.80	21.00
		12	13	19.76	19.83	19.80	21.00
		25	0	19.87	19.76	19.83	21.00
		1	0	22.74	22.84	22.76	24.00
15MHz	16QAM	1	25	22.85	22.72	22.74	24.00
		1	49	22.80	22.57	22.68	24.00
		25	0	21.73	21.81	21.78	23.00
		25	13	21.86	21.77	21.74	23.00
		25	25	21.81	21.80	21.76	23.00
		50	0	21.83	21.85	21.69	23.00
	64QAM	1	0	22.08	21.92	22.22	23.00
		1	25	21.86	22.33	22.13	23.00
		1	49	22.36	21.91	22.01	23.00
		25	0	20.70	20.92	20.73	22.00
		25	13	20.72	20.82	20.77	22.00
		25	25	20.97	20.80	20.84	22.00
15MHz	QPSK	50	0	20.83	20.81	20.84	22.00
		1	0	21.06	20.84	21.22	22.00
		1	25	20.87	21.25	21.15	22.00
		1	49	21.38	20.89	20.99	22.00
		25	0	19.68	19.93	19.69	21.00
		25	13	19.73	19.83	19.79	21.00
	16QAM	25	25	19.99	19.78	19.85	21.00
		50	0	19.83	19.75	19.77	21.00
		1	0	22.74	22.86	22.82	24.00
		1	38	22.80	22.79	22.80	24.00
		1	74	22.80	22.75	22.71	24.00
		36	0	21.92	22.06	21.73	23.00
64QAM	36	18	22.00	21.85	21.84	23.00	
	36	39	21.99	21.77	21.89	23.00	
	75	0	21.90	21.82	21.88	23.00	
	1	0	22.05	22.43	21.68	23.00	
	1	38	22.26	22.32	21.99	23.00	
	1	74	22.30	22.33	21.96	23.00	
16QAM	36	0	21.02	20.85	20.79	22.00	
	36	18	21.04	20.86	20.82	22.00	
	36	39	21.00	20.77	20.93	22.00	
	75	0	20.93	20.85	20.84	22.00	
	1	0	20.97	21.45	20.65	22.00	
	1	38	21.25	21.34	20.94	22.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

		1	74	21.31	21.28	20.96	22.00
		36	0	20.04	19.86	19.77	21.00
		36	18	19.97	19.88	19.84	21.00
		36	39	20.00	19.75	19.87	21.00
		75	0	19.88	19.87	19.82	21.00

LTE Band 41 class 3				Conducted Power(dBm)						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Channel	Channel	Tune up	
				39675	40148	40620	41093	41565		
5MHz	QPSK	1	0	21.16	21.24	21.14	21.08	21.10	22.00	
		1	13	21.09	21.19	21.16	21.06	21.07	22.00	
		1	24	21.13	21.08	21.17	21.20	21.08	22.00	
		12	0	20.11	20.17	20.35	20.15	20.07	21.00	
		12	6	20.22	20.26	20.29	20.19	20.07	21.00	
		12	13	20.11	20.20	20.28	20.20	20.16	21.00	
		25	0	20.12	20.28	20.42	20.01	20.12	21.00	
	16QAM	1	0	20.19	20.68	20.66	20.48	20.35	21.00	
		1	13	20.27	20.30	20.19	20.52	20.22	21.00	
		1	24	20.47	20.57	20.75	20.37	20.12	21.00	
		12	0	19.15	19.19	19.29	19.15	19.08	20.00	
		12	6	19.18	19.39	19.41	19.19	19.06	20.00	
		12	13	19.08	19.29	19.23	19.07	19.04	20.00	
		25	0	19.03	19.18	19.42	19.07	19.05	20.00	
	64QAM	1	0	19.19	19.70	19.36	19.66	19.61	20.00	
		1	13	19.83	19.55	19.45	20.00	19.22	20.00	
		1	24	19.30	19.28	19.54	19.69	19.09	20.00	
		12	0	18.53	18.51	18.59	18.60	18.70	19.00	
		12	6	18.46	18.68	18.64	18.49	18.52	19.00	
		12	13	18.52	18.62	18.71	18.36	18.34	19.00	
		25	0	18.47	18.35	18.70	18.34	18.43	19.00	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Channel	Channel	Tune up
	10MHz	QPSK	1	0	21.08	21.19	21.26	21.09	21.05	22.00
			1	25	21.03	21.34	21.30	21.15	21.05	22.00
1			49	21.08	21.15	21.25	21.31	21.05	22.00	
25			0	20.22	20.16	20.27	20.05	20.13	21.00	
25			13	20.10	20.35	20.29	20.19	20.07	21.00	
25			25	20.08	20.39	20.23	20.18	20.01	21.00	
50			0	20.05	20.26	20.39	20.20	20.04	21.00	
16QAM		1	0	20.33	20.86	20.70	20.25	20.09	21.00	
		1	25	20.11	20.77	20.39	20.05	20.20	21.00	
		1	49	20.51	20.58	20.26	20.13	20.13	21.00	
		25	0	19.08	19.32	19.39	19.07	19.25	20.00	
		25	13	19.13	19.17	19.40	19.10	19.22	20.00	
		25	25	19.14	19.11	19.21	19.28	19.06	20.00	
		50	0	19.12	19.35	19.47	19.06	19.01	20.00	
64QAM		1	0	19.24	19.69	19.47	19.70	19.89	20.00	
		1	25	19.78	19.94	19.44	19.42	19.21	20.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Channel	Channel	Tune up
				39725	40173	40620	41068	41515	
15MHz	QPSK	1	0	19.44	19.41	19.55	19.76	19.19	20.00
		25	0	18.61	18.64	18.70	18.49	18.65	19.00
		25	13	18.63	18.72	18.61	18.59	18.51	19.00
		25	25	18.51	18.59	18.61	18.44	18.36	19.00
		50	0	18.56	18.53	18.73	18.30	18.36	19.00
		36	0	20.18	20.43	20.45	20.71	20.09	21.00
		36	18	20.19	20.39	20.29	20.61	20.13	21.00
	16QAM	36	39	20.19	20.42	20.29	20.51	20.05	21.00
		75	0	20.13	20.23	20.42	20.52	20.17	21.00
		1	0	20.48	20.50	20.71	20.98	20.40	21.00
		1	38	20.28	20.24	20.87	20.36	20.08	21.00
		1	74	20.71	20.37	20.31	20.88	20.05	21.00
		36	0	19.19	19.42	19.46	19.75	19.18	20.00
		36	18	19.23	19.18	19.46	19.54	19.12	20.00
	64QAM	36	39	19.24	19.30	19.37	19.59	19.03	20.00
		75	0	19.35	19.24	19.43	19.57	19.19	20.00
		1	0	19.16	19.75	19.37	19.63	19.84	20.00
		1	38	19.87	19.91	19.48	19.83	19.17	20.00
		1	74	19.43	19.28	19.62	19.78	19.08	20.00
		36	0	18.56	18.56	18.69	18.61	18.70	19.00
36		18	18.49	18.66	18.54	18.50	18.51	19.00	
20MHz	QPSK	36	39	18.40	18.60	18.66	18.38	18.41	19.00
		75	0	18.47	18.55	18.64	18.33	18.39	19.00
		1	0	21.36	21.41	21.47	21.40	21.49	22.00
		1	50	21.22	21.58	21.43	21.08	21.16	22.00
		1	99	21.11	21.39	21.38	21.20	21.08	22.00
		50	0	20.23	20.42	20.34	20.23	20.31	21.00
		50	25	20.28	20.42	20.53	20.30	20.19	21.00
	16QAM	50	50	20.15	20.36	20.46	20.17	20.06	21.00
		100	0	20.28	20.35	20.56	20.22	20.12	21.00
		1	0	20.15	20.41	20.29	20.47	20.60	21.00
		1	50	20.72	20.58	20.38	20.61	20.31	21.00
		1	99	20.17	20.78	20.99	20.22	20.37	21.00
		50	0	19.34	19.45	19.43	19.33	19.43	20.00
		50	25	19.21	19.42	19.61	19.24	19.18	20.00
	64QAM	50	50	19.39	19.42	19.50	19.40	19.26	20.00
		100	0	19.26	19.33	19.47	19.26	19.10	20.00
		1	0	19.29	19.83	19.32	19.68	19.89	20.00
		1	50	19.80	19.75	19.48	19.82	19.19	20.00
		1	99	19.31	19.26	19.45	19.76	19.26	20.00
		50	0	18.56	18.54	18.54	18.53	18.66	19.00
50		25	18.50	18.62	18.58	18.62	18.44	19.00	
64QAM	50	50	18.58	18.59	18.51	18.50	18.45	19.00	
	100	0	18.57	18.44	18.72	18.40	18.44	19.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE Band 41 class 2				Conducted Power(dBm)						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Channel	Channel	Tune up	
				39675	40148	40620	41093	41565		
5MHz	QPSK	1	0	24.07	24.37	24.27	24.10	24.01	25.00	
		1	13	24.03	24.36	24.29	24.09	24.10	25.00	
		1	24	24.05	24.30	24.15	24.34	24.34	25.00	
		12	0	23.09	23.22	23.23	23.17	23.13	24.00	
		12	6	23.11	23.23	23.25	23.05	23.17	24.00	
		12	13	23.08	23.12	23.34	23.01	23.07	24.00	
	16QAM	25	0	23.10	23.15	23.30	23.15	23.22	24.00	
		1	0	23.32	23.45	23.38	23.20	23.32	24.00	
		1	13	23.48	23.44	23.41	23.22	23.27	24.00	
		1	24	23.54	23.71	23.52	23.09	23.29	24.00	
		12	0	22.00	22.24	22.15	22.13	22.27	23.00	
		12	6	22.11	22.24	22.36	22.30	22.04	23.00	
	64QAM	12	13	22.20	22.29	22.20	22.07	22.23	23.00	
		25	0	22.26	22.43	22.31	22.19	22.08	23.00	
		1	0	22.18	22.45	22.25	22.07	22.17	23.00	
		1	13	22.46	22.35	22.41	22.04	22.09	23.00	
		1	24	22.50	22.71	22.39	21.92	22.16	23.00	
		12	0	20.86	21.23	20.95	21.00	21.14	22.00	
	10MHz	QPSK	12	6	21.01	21.17	21.24	21.19	20.88	22.00
			12	13	21.19	21.15	21.16	20.96	21.05	22.00
			25	0	21.25	21.38	21.30	21.07	21.02	22.00
			1	0	24.35	24.30	24.27	24.15	24.09	25.00
			1	25	24.25	24.33	24.30	24.37	24.07	25.00
			1	49	24.31	24.30	24.27	24.24	24.39	25.00
16QAM		25	0	23.06	23.28	23.25	23.24	23.12	24.00	
		25	13	23.15	23.28	23.37	23.23	23.19	24.00	
		25	25	23.09	23.23	23.35	23.04	23.17	24.00	
		50	0	23.08	23.17	23.37	23.27	23.03	24.00	
		1	0	23.19	23.48	23.37	23.35	23.30	24.00	
		1	25	23.46	23.53	23.41	23.18	23.41	24.00	
64QAM	1	49	23.51	23.59	23.45	23.00	23.26	24.00		
	25	0	22.08	22.20	22.02	22.13	22.14	23.00		
	25	13	22.09	22.27	22.48	22.44	22.08	23.00		
	25	25	22.23	22.22	22.32	22.23	22.11	23.00		
	50	0	22.28	22.26	22.33	22.14	22.21	23.00		
	1	0	22.10	22.34	22.18	22.30	22.18	23.00		
64QAM	1	25	22.31	22.33	22.38	22.06	22.23	23.00		
	1	49	22.38	22.57	22.36	21.98	22.16	23.00		
	25	0	20.99	21.06	20.92	21.05	21.09	22.00		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Channel	Channel	Tune up	
				39725	40173	40620	41068	41515		
15MHz	QPSK	25	13	20.89	21.18	21.30	21.29	20.96	22.00	
		25	25	21.07	21.03	21.17	21.15	21.01	22.00	
		50	0	21.28	21.10	21.26	20.96	21.09	22.00	
		1	0	24.35	24.33	24.38	24.01	24.04	25.00	
		1	38	24.26	24.16	24.23	24.23	24.25	25.00	
		1	74	24.30	24.14	24.36	24.18	24.19	25.00	
	16QAM	36	0	23.12	23.23	23.28	23.07	23.27	24.00	
		36	18	23.14	23.13	23.33	23.18	23.03	24.00	
		36	39	23.05	23.10	23.37	23.11	23.13	24.00	
		75	0	23.05	23.17	23.26	23.08	23.13	24.00	
		1	0	23.19	23.46	23.34	23.23	23.31	24.00	
		1	38	23.39	23.41	23.39	23.15	23.25	24.00	
	64QAM	1	74	23.37	23.62	23.41	23.06	23.35	24.00	
		36	0	22.05	22.22	22.14	22.05	22.10	23.00	
		36	18	22.13	22.31	22.40	22.29	22.03	23.00	
		36	39	22.16	22.22	22.22	22.10	22.04	23.00	
		75	0	22.30	22.35	22.32	22.03	22.13	23.00	
		1	0	21.91	22.22	22.19	22.07	22.07	23.00	
	20MHz	QPSK	1	38	22.18	22.25	22.26	22.02	22.12	23.00
			1	74	22.39	22.30	22.22	21.81	22.02	23.00
			36	0	20.98	21.08	20.79	20.84	20.96	22.00
			36	18	20.79	20.99	21.30	21.18	20.90	22.00
			36	39	21.11	21.10	21.16	21.06	20.81	22.00
			75	0	21.02	21.03	21.20	20.93	20.96	22.00
16QAM		1	0	24.05	24.33	24.28	24.25	24.34	25.00	
		1	50	24.00	24.38	24.35	24.28	24.04	25.00	
		1	99	24.01	24.20	24.21	24.34	24.02	25.00	
		50	0	23.03	23.15	23.14	23.21	23.35	24.00	
		50	25	23.06	23.27	23.28	23.15	23.18	24.00	
		50	50	23.03	23.12	23.37	23.05	23.18	24.00	
		100	0	23.07	23.23	23.44	23.28	23.14	24.00	
		1	0	23.32	23.53	23.39	23.23	23.38	24.00	
		1	50	23.52	23.51	23.46	23.17	23.25	24.00	
		1	99	23.49	23.62	23.46	23.05	23.32	24.00	
		50	0	22.08	22.35	22.02	22.20	22.32	23.00	
		64QAM	50	25	22.22	22.37	22.35	22.29	22.11	23.00
50			50	22.15	22.19	22.36	22.16	22.11	23.00	
100			0	22.24	22.31	22.32	22.09	22.12	23.00	
1			0	21.96	22.32	22.27	22.16	22.14	23.00	
1			50	22.27	22.24	22.13	21.95	22.14	23.00	
1			99	22.37	22.44	22.23	21.70	22.03	23.00	
		50	0	20.84	20.99	20.77	20.97	20.89	22.00	
	50	25	20.91	21.03	21.25	21.32	20.92	22.00		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

	16QAM	36	0	19.82	19.89	19.88	21.00
		36	18	19.92	19.93	19.89	21.00
		36	39	19.91	19.96	19.92	21.00
		75	0	19.83	19.86	19.89	21.00
		1	0	19.82	19.94	19.96	21.00
		1	38	19.93	19.95	19.93	21.00
		1	74	19.89	19.91	19.92	21.00
		36	0	18.87	18.89	18.86	20.00
		36	18	18.92	18.83	18.91	20.00
		36	39	18.84	18.85	18.88	20.00
	75	0	18.91	18.84	18.76	20.00	
	64QAM	1	0	18.83	18.89	18.97	20.00
		1	38	18.88	18.87	18.87	20.00
		1	74	18.91	18.91	18.84	20.00
		36	0	17.81	17.91	17.85	19.00
		36	18	17.86	17.81	17.93	19.00
		36	39	17.86	17.79	17.89	19.00
		75	0	17.91	17.80	17.76	19.00
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
132072					132322	132572	
20MHz	QPSK	1	0	20.92	20.92	20.88	22.00
		1	50	20.86	20.81	20.75	22.00
		1	99	20.84	20.88	20.87	22.00
		50	0	19.84	19.95	19.88	21.00
		50	25	19.91	19.82	19.92	21.00
		50	50	19.88	19.94	19.94	21.00
		100	0	19.78	19.86	19.79	21.00
	16QAM	1	0	19.95	19.93	19.93	21.00
		1	50	19.81	19.91	19.90	21.00
		1	99	19.96	19.89	19.83	21.00
		50	0	18.94	18.92	18.95	20.00
		50	25	18.93	18.83	18.73	20.00
		50	50	18.83	18.86	18.93	20.00
		100	0	18.80	18.83	18.92	20.00
	64QAM	1	0	18.97	18.85	18.88	20.00
		1	50	18.74	18.93	18.82	20.00
		1	99	18.88	18.90	18.78	20.00
		50	0	17.96	17.87	17.88	19.00
		50	25	17.91	17.82	17.66	19.00
		50	50	17.81	17.80	17.91	19.00
100		0	17.72	17.83	17.90	19.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 71				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				133147	133297	133447	
5MHz	QPSK	1	0	23.55	23.62	23.47	24.00
		1	13	23.72	23.67	23.44	24.00
		1	24	23.58	23.58	23.49	24.00
		12	0	22.64	22.68	22.55	23.00
		12	6	22.69	22.68	22.48	23.00
		12	13	22.66	22.57	22.53	23.00
		25	0	22.72	22.65	22.47	23.00
	16QAM	1	0	22.79	22.86	22.81	23.00
		1	13	22.88	22.91	22.87	23.00
		1	24	22.67	22.78	22.69	23.00
		12	0	21.62	21.67	21.54	22.00
		12	6	21.57	21.66	21.61	22.00
		12	13	21.56	21.64	21.53	22.00
		25	0	21.65	21.62	21.56	22.00
	64QAM	1	0	21.79	21.80	21.83	22.00
		1	13	21.82	21.83	21.89	22.00
		1	24	21.66	21.74	21.66	22.00
		12	0	20.54	20.60	20.55	21.00
		12	6	20.57	20.65	20.60	21.00
		12	13	20.58	20.59	20.53	21.00
		25	0	20.60	20.58	20.53	21.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				133172	133297	133422	
10MHz	QPSK	1	0	23.74	23.62	23.67	24.00
		1	25	23.72	23.73	23.72	24.00
		1	49	23.72	23.58	23.48	24.00
		25	0	22.71	22.59	22.63	23.00
		25	13	22.64	22.71	22.56	23.00
		25	25	22.59	22.60	22.56	23.00
		50	0	22.65	22.65	22.58	23.00
	16QAM	1	0	22.85	22.91	22.81	23.00
		1	25	22.79	22.94	22.93	23.00
		1	49	22.71	22.82	22.79	23.00
		25	0	21.75	21.62	21.62	22.00
		25	13	21.51	21.65	21.71	22.00
		25	25	21.59	21.64	21.75	22.00
		50	0	21.70	21.62	21.72	22.00
	64QAM	1	0	21.83	21.90	21.81	22.00
		1	25	21.76	21.96	21.94	22.00
		1	49	21.72	21.82	21.78	22.00
		25	0	20.76	20.57	20.59	21.00
		25	13	20.53	20.59	20.66	21.00
		25	25	20.53	20.63	20.69	21.00
		50	0	20.68	20.64	20.69	21.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				133197	133297	133397	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

15MHz	QPSK	1	0	23.73	23.70	23.73	24.00	
		1	38	23.52	23.64	23.68	24.00	
		1	74	23.59	23.55	23.57	24.00	
		36	0	22.53	22.63	22.77	23.00	
		36	18	22.69	22.74	22.86	23.00	
		36	39	22.49	22.54	22.39	23.00	
		75	0	22.57	22.62	22.61	23.00	
	16QAM	1	0	22.80	22.89	23.00	23.00	
		1	38	22.87	22.98	22.87	23.00	
		1	74	22.77	22.86	22.98	23.00	
		36	0	21.57	21.65	21.59	22.00	
		36	18	21.71	21.67	21.64	22.00	
		36	39	21.58	21.55	21.67	22.00	
		75	0	21.61	21.64	21.64	22.00	
	64QAM	1	0	21.72	21.82	21.93	22.00	
		1	38	21.86	21.96	21.81	22.00	
		1	74	21.70	21.81	21.94	22.00	
		36	0	20.55	20.67	20.52	21.00	
		36	18	20.66	20.62	20.57	21.00	
		36	39	20.56	20.50	20.61	21.00	
		75	0	20.53	20.57	20.66	21.00	
	Bandwidth	Modulation	RB size	RB offset	Channel 133222	Channel 133322	Channel 133372	Tune up
	20MHz	QPSK	1	0	23.72	23.75	23.74	24.00
			1	50	23.57	23.58	23.71	24.00
1			99	23.54	23.42	23.40	24.00	
50			0	22.75	22.81	22.56	23.00	
50			25	22.57	22.69	22.79	23.00	
50			50	22.49	22.55	22.64	23.00	
100			0	22.83	22.69	22.68	23.00	
16QAM		1	0	23.00	22.89	22.75	23.00	
		1	50	23.00	22.95	22.89	23.00	
		1	99	22.48	22.58	22.61	23.00	
		50	0	21.58	21.65	21.63	22.00	
		50	25	21.54	21.69	21.73	22.00	
		50	50	21.57	21.61	21.69	22.00	
		100	0	21.63	21.64	21.57	22.00	
64QAM		1	0	21.99	21.87	21.68	22.00	
		1	50	21.98	21.87	21.86	22.00	
		1	99	21.41	21.51	21.59	22.00	
		50	0	20.59	20.57	20.61	21.00	
		50	25	20.49	20.66	20.66	21.00	
		50	50	20.58	20.60	20.61	21.00	
		100	0	20.63	20.61	20.58	21.00	

Table 12: Conducted Power of LTE



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.1.2 Conducted Power of Uplink & Downlink LTE CA

8.1.2.1 Conducted Power of uplink LTE CA

Combination	Modulation	PCC						SCC					Power	tune-up(dBm)
		Band	BW (MHz)	UL Channel	UL# RB	UL RB Offset	DL Channel	Band	BW (MHz)	UL Channel	UL# RB	UL RB Offset		
CA_41C	QPSK	41	20	39750	1	99	39750	41	20	39948	1	0	21.33	22.00
CA_41C	QPSK	41	20	40185	1	99	40185	41	20	40383	1	0	21.35	22.00
CA_41C	QPSK	41	20	40185	1	0	40185	41	20	39987	1	99	21.43	22.00
CA_41C	QPSK	41	20	40620	1	99	40620	41	20	40818	1	0	21.39	22.00
CA_41C	QPSK	41	20	40620	1	0	40620	41	20	40422	1	99	21.39	22.00
CA_41C	QPSK	41	20	41055	1	99	41055	41	20	41253	1	0	21.28	22.00
CA_41C	QPSK	41	20	41055	1	0	41055	41	20	40857	1	99	21.33	22.00
CA_41C	QPSK	41	20	41490	1	0	41490	41	20	41292	1	99	21.22	22.00

Table 13: Conducted Power of uplink LTE CA



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.1.2.2 Conducted Power of Downlink LTE CA

In this section, the following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A. Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.

Power test equipment: Anritsu Radio Communication Analyzer MT8821C

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The detailed conducted power measurement results of downlink LTE CA are provided in the SAR report per 3GPP TS 36.521-1 V14.4.0. According to KDB 941225 D05A, the downlink only carrier aggregation conditions for this device can be excluded from SAR testing.

The conducted power measurement results of downlink LTE CA Conducted Power are as below, so the downlink only carrier aggregation conditions for this device can be excluded from SAR testing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

In applying the existing power measurement procedures for DL CA SAR test exclusion, the configurations that require power measurements are highlighted in the table as below:

DL LTE CA Class	PCC							SCC				Power(dBm)		
	LTE Band	BW (MHz)	Modulation	UL Freq. (MHz)	UL Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	DL LTE CA Tx.Power	LTE Rel 8 Tx.Power	Tune-up
CA_2C	Band 2	20	QPSK	1900	19100	1	0	Band 2	20	1960.2	902	21.66	21.70	22.00
CA_2A-2A	Band 2	20	QPSK	1900	19100	1	0	Band 2	20	1940	700	21.58	21.70	22.00
CA_4A-4A	Band 4	20	QPSK	1720	20050	1	0	Band 4	20	2145	2300	22.46	22.59	23.00
CA_25A-25A	Band 25	20	QPSK	1905	26590	1	0	Band 25	20	1940	8140	21.64	21.70	22.00
CA_41C	Band 41	20	QPSK	2593	40620	1	0	Band 41	20	2573.2	40422	21.43	21.47	22.00
CA_41A-41A	Band 41	20	QPSK	2680	41490	1	0	Band 41	20	2506	39750	21.41	21.49	22.00
CA_66C	Band 66	20	QPSK	1720	132072	1	0	Band 66	20	2139.8	66734	20.77	20.92	22.00
CA_66B	Band 66	10	QPSK	1775	132622	1	0	Band 66	10	2165.1	66987	20.71	20.80	22.00
CA_66A-66A	Band 66	20	QPSK	1720	132072	1	0	Band 66	20	2170	67036	20.86	20.92	22.00
CA_2A-4A	Band 2	20	QPSK	1900	19100	1	0	Band 4	20	2132.5	2175	21.69	21.70	22.00
CA_2A-4A	Band 4	20	QPSK	1720	20050	1	0	Band 2	20	1960	900	22.49	22.59	23.00
CA_4A-5A	Band 4	20	QPSK	1720	20050	1	0	Band 5	10	881.5	2525	22.52	22.59	23.00
CA_4A-5A	Band 5	10	QPSK	836.5	20525	1	0	Band 4	20	2132.5	2175	22.58	22.76	24.00
CA_4A-12A	Band 4	20	QPSK	1720	20050	1	0	Band 12	10	737.5	5095	22.55	22.59	23.00
CA_4A-12A	Band 12	10	QPSK	707.5	23095	1	0	Band 4	20	2132.5	2175	22.54	22.72	24.00
CA_2A-66A	Band 2	20	QPSK	1900	19100	1	0	Band 66	20	2145	66786	21.63	21.70	22.00
CA_2A-66A	Band 66	20	QPSK	1720	132072	1	0	Band 2	20	1960	900	20.76	20.92	22.00
CA_12A-66A	Band 12	10	QPSK	707.5	23095	1	0	Band 66	20	2145	66786	22.59	22.72	24.00
CA_12A-66A	Band 66	20	QPSK	1720	132072	1	0	Band 12	10	737.5	5095	20.86	20.92	22.00
CA_2A-5A	Band 2	20	QPSK	1900	19100	1	0	Band 5	10	881.5	2525	21.68	21.70	22.00
CA_2A-5A	Band 5	10	QPSK	836.5	20525	1	0	Band 2	20	1960	900	22.66	22.76	24.00
CA_2A-12A	Band 2	20	QPSK	1900	19100	1	0	Band 12	10	737.5	5095	21.68	21.70	22.00
CA_2A-12A	Band 12	10	QPSK	707.5	23095	1	0	Band 2	20	1960	900	22.54	22.72	24.00
CA_2A-71A	Band 2	20	QPSK	1900	19100	1	0	Band 71	20	637	68786	21.59	21.70	22.00
CA_2A-71A	Band 71	20	QPSK	683	133322	1	0	Band 2	20	1960	900	23.57	23.75	24.00
CA_4A-71A	Band 4	20	QPSK	1720	20050	1	0	Band 71	20	637	68786	22.48	22.59	23.00
CA_4A-71A	Band 71	20	QPSK	683	133322	1	0	Band 4	20	2132.5	2175	23.71	23.75	24.00
CA_5A-66A	Band 5	10	QPSK	836.5	20525	1	0	Band 66	20	2145	66786	22.65	22.76	24.00
CA_5A-66A	Band 66	20	QPSK	1720	132072	1	0	Band 5	10	881.5	2525	20.85	20.92	22.00
CA_25A-26A	Band 25	20	QPSK	1905	26590	1	0	Band 26	15	876.5	8865	21.66	21.70	22.00
CA_25A-26A	Band 26	15	QPSK	831.5	26865	1	0	Band 25	20	1962.5	8365	22.68	22.86	24.00
CA_25A-41A	Band 25	20	QPSK	1905	26590	1	0	Band 41	20	2593	40620	21.65	21.70	22.00
CA_25A-41A	Band 41	20	QPSK	2593	40620	1	0	Band 25	20	1962.5	8365	21.41	21.47	22.00
CA_66A-71A	Band 66	20	QPSK	1720	132072	1	0	Band 71	20	637	68786	20.86	20.92	22.00
CA_66A-71A	Band 71	20	QPSK	683	133322	1	0	Band 66	20	2145	66786	23.68	23.75	24.00

Table 14: Conducted Power of Downlink LTE CA

Note:

The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.1.3 Conducted Power of WIFI

Mode 2.4G	Channel	Frequency(MHz)	Data Rate(Mbps)	Average Power (dBm)	tune up	SAR Test
802.11b	1	2412	1	15.26	16.00	No
	6	2437		15.27	16.00	Yes
	11	2462		14.83	16.00	No
802.11g	1	2412	6	12.75	14.00	No
	6	2437		12.92	14.00	No
	11	2462		12.57	14.00	No
802.11n HT20 SISO	1	2412	MCS0	12.56	14.00	No
	6	2437		12.74	14.00	No
	11	2462		12.36	14.00	No
802.11n HT40 SISO	3	2422	MCS0	12.06	14.00	No
	6	2437		12.21	14.00	No
	9	2452		12.09	14.00	No

5GHz	mode	Channel	Frequency(MHz)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	14.00	13.91	Yes
		40	5200	14.00	13.88	No
		44	5220	14.00	13.71	No
		48	5240	14.00	13.72	No
	U-NII-3	149	5745	14.00	12.38	No
		153	5765	14.00	12.33	No
		157	5785	14.00	13.34	Yes
		161	5805	14.00	13.30	No
		165	5825	14.00	13.20	No

5GHz	mode	Channel	Frequency(MHz)	Tune up	Average Power (dBm)	SAR Test
802.11n- HT20	U-NII-1	36	5180	14.00	13.87	No
		40	5200	14.00	13.85	No
		44	5220	14.00	13.65	No
		48	5240	14.00	13.67	No
	U-NII-3	149	5745	14.00	12.12	No
		153	5765	14.00	12.08	No
		157	5785	14.00	13.08	No
		161	5805	14.00	13.01	No
		165	5825	14.00	12.95	No

5GHz	mode	Channel	Frequency(MHz)	Tune up	Average Power (dBm)	SAR Test
802.11n- HT40	U-NII-1	38	5190	13.00	12.96	No
		46	5230	13.00	12.81	No
	U-NII-3	151	5755	13.00	11.52	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5GHz	mode	Channel	Frequency(MHz)	Tune up	Average Power (dBm)	SAR Test
		159	5795	13.00	12.45	No
802.11ac 20M	U-NII-1	36	5180	14.00	13.87	No
		40	5200	14.00	13.84	No
		44	5220	14.00	13.68	No
		48	5240	14.00	12.67	No
	U-NII-3	149	5745	14.00	12.09	No
		153	5765	14.00	12.10	No
		157	5785	14.00	13.08	No
		161	5805	14.00	13.03	No
		165	5825	14.00	12.96	No
5GHz	mode	Channel	Frequency(MHz)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	13.00	12.77	No
		46	5230	13.00	12.60	No
	U-NII-3	151	5755	13.00	11.52	No
		159	5795	13.00	12.45	No
5GHz	mode	Channel	Frequency(MHz)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	13.00	12.52	No
	U-NII-3	155	5775	13.00	10.87	No

Table 15: Conducted Power of WiFi

Note:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.2 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Yes/No)
			dBm	mW				
Wi-Fi	2.462	hotspot	16.00	39.81	10	6.2	3	No
Wi-Fi	5.825	hotspot	14.00	25.12	10	6.1	3	No

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 f (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.3 Measurement of SAR Data

8.3.1 SAR Result of WCDMA Band II

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Hotspot Test data (Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.565	-0.03	21.55	22.50	1.245	0.703	22.3
Back side	RMC	9400/1880	1:1	0.826	-0.01	21.55	22.50	1.245	1.028	22.3
Back side	RMC	9262/1852.4	1:1	0.852	-0.06	21.58	22.50	1.236	1.053	22.3
Back side-repeat	RMC	9262/1852.4	1:1	0.768	-0.12	21.58	22.50	1.236	0.949	22.3
Back side	RMC	9538/1907.6	1:1	0.782	-0.18	21.57	22.50	1.239	0.969	22.3
Left side	RMC	9400/1880	1:1	0.129	-0.18	21.55	22.50	1.245	0.161	22.3
Right side	RMC	9400/1880	1:1	0.184	-0.17	21.55	22.50	1.245	0.229	22.3
Bottom side	RMC	9400/1880	1:1	0.512	-0.03	21.55	22.50	1.245	0.637	22.3
Hotspot Test Data at the worst case with Secondary Supply (Separate 10mm)										
Back side	RMC	9262/1852.4	1:1	0.831	-0.06	21.58	22.50	1.236	1.027	22.3

Table 16: SAR of WCDMA Band II for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back side	9262/1852.4	0.852	0.768	1.11	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 17: SAR Measurement Variability Results.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.3.2 SAR Result of WCDMA Band IV

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Hotspot Test data (Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.554	0.02	21.46	22.50	1.271	0.704	22.3
Back side	RMC	1412/1732.4	1:1	0.814	-0.14	21.46	22.50	1.271	1.034	22.3
Back side-repeat	RMC	1412/1732.4	1:1	0.718	-0.03	21.46	22.50	1.271	0.912	22.3
Back side	RMC	1312/1712.4	1:1	0.767	-0.11	21.54	22.50	1.247	0.957	22.3
Back side	RMC	1513/1752.6	1:1	0.798	-0.18	21.50	22.50	1.259	1.005	22.3
Left side	RMC	1412/1732.4	1:1	0.112	-0.04	21.46	22.50	1.271	0.142	22.3
Right side	RMC	1412/1732.4	1:1	0.136	-0.10	21.46	22.50	1.271	0.173	22.3
Bottom side	RMC	1412/1732.4	1:1	0.515	-0.15	21.46	22.50	1.271	0.654	22.3
Hotspot Test Data at the worst case with Secondary Supply (Separate 10mm)										
Back side	RMC	1412/1732.4	1:1	0.801	-0.12	21.46	22.50	1.271	1.018	22.3

Table 18: SAR of WCDMA Band IV for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back side	1412/1732.4	0.814	0.718	1.13	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 19: SAR Measurement Variability Results.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.3.3 SAR Result of WCDMA Band V

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.477	-0.02	23.04	24.00	1.247	0.595	22.1
Back side	RMC	4182/836.4	1:1	0.876	-0.03	23.04	24.00	1.247	1.093	22.1
Back side-Repeated	RMC	4182/836.4	1:1	0.871	-0.03	23.04	24.00	1.247	1.086	22.1
Left side	RMC	4182/836.4	1:1	0.427	0.06	23.04	24.00	1.247	0.533	22.1
Right side	RMC	4182/836.4	1:1	0.350	0.04	23.04	24.00	1.247	0.437	22.1
Bottom side	RMC	4182/836.4	1:1	0.026	0.07	23.04	24.00	1.247	0.032	22.1
Back side	RMC	4132/826.4	1:1	0.868	-0.13	23.12	24.00	1.225	1.063	22.1
Back side	RMC	4233/846.6	1:1	0.666	-0.12	23.02	24.00	1.253	0.835	22.1
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)										
Back side	RMC	4182/836.4	1:1	0.666	-0.01	23.04	24.00	1.247	0.831	22.0

Table 20: SAR of WCDMA Band V for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back side	4182/836.4	0.876	0.871	1.006	N/A	N/A

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 21: SAR Measurement Variability Results.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.3.4 SAR Result of LTE Band 2

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_0	18900/1880	1:1	0.604	-0.08	21.91	22.00	1.021	0.617	22.1
Back side	20	QPSK 1RB_0	18900/1880	1:1	0.830	-0.17	21.91	22.00	1.021	0.847	22.1
Back side-repeat	20	QPSK 1RB_0	18900/1880	1:1	0.821	-0.11	21.91	22.00	1.021	0.838	22.1
Back side	20	QPSK 1RB_0	18700/1860	1:1	0.807	-0.01	21.65	22.00	1.084	0.875	22.1
Back side	20	QPSK 1RB_0	19100/1900	1:1	0.817	-0.16	21.70	22.00	1.072	0.875	22.1
Left side	20	QPSK 1RB_0	18900/1880	1:1	0.136	-0.06	21.91	22.00	1.021	0.139	22.1
Right side	20	QPSK 1RB_0	18900/1880	1:1	0.183	-0.12	21.91	22.00	1.021	0.187	22.1
Bottom side	20	QPSK 1RB_0	18900/1880	1:1	0.579	-0.20	21.91	22.00	1.021	0.591	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	19100/1900	1:1	0.501	-0.16	20.86	21.00	1.033	0.517	22.1
Back side	20	QPSK 50RB_0	19100/1900	1:1	0.655	-0.14	20.86	21.00	1.033	0.676	22.1
Left side	20	QPSK 50RB_0	19100/1900	1:1	0.113	-0.17	20.86	21.00	1.033	0.117	22.1
Right side	20	QPSK 50RB_0	19100/1900	1:1	0.157	-0.13	20.86	21.00	1.033	0.162	22.1
Bottom side	20	QPSK 50RB_0	19100/1900	1:1	0.472	-0.02	20.86	21.00	1.033	0.487	22.1
Hotspot Test data (Separate 10mm 100%RB)											
Back side	20	QPSK 100RB_0	18900/1880	1:1	0.585	-0.01	20.64	21.00	1.086	0.636	22.1
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	20	QPSK 1RB_0	19100/1900	1:1	0.806	-0.01	21.70	22.00	1.072	0.864	22.1

Table 22: SAR of LTE Band 2 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Back side	18900/1880	0.830	0.821	1.01	N/A	N/A

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.3.5 SAR Result of LTE Band 4

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_0	20300/1745	1:1	0.612	-0.18	22.87	23.00	1.030	0.631	22.1
Back side	20	QPSK 1RB_0	20300/1745	1:1	0.900	-0.02	22.87	23.00	1.030	0.927	22.1
Back side-repeat	20	QPSK 1RB_0	20300/1745	1:1	0.899	-0.09	22.87	23.00	1.030	0.926	22.1
Back side	20	QPSK 1RB_50	20050/1720	1:1	0.871	-0.09	22.69	23.00	1.074	0.935	22.1
Back side	20	QPSK 1RB_0	20175/1732.5	1:1	0.880	-0.05	22.59	23.00	1.099	0.967	22.1
Left side	20	QPSK 1RB_0	20300/1745	1:1	0.144	-0.15	22.87	23.00	1.030	0.148	22.1
Right side	20	QPSK 1RB_0	20300/1745	1:1	0.164	-0.13	22.87	23.00	1.030	0.169	22.1
Bottom side	20	QPSK 1RB_0	20300/1745	1:1	0.658	-0.18	22.87	23.00	1.030	0.678	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	20050/1720	1:1	0.529	-0.05	21.77	22.00	1.054	0.558	22.1
Back side	20	QPSK 50RB_50	20050/1720	1:1	0.666	-0.10	21.77	22.00	1.054	0.702	22.1
Left side	20	QPSK 50RB_50	20050/1720	1:1	0.113	-0.20	21.77	22.00	1.054	0.119	22.1
Right side	20	QPSK 50RB_50	20050/1720	1:1	0.129	-0.19	21.77	22.00	1.054	0.136	22.1
Bottom side	20	QPSK 50RB_50	20050/1720	1:1	0.531	-0.04	21.77	22.00	1.054	0.560	22.1
Hotspot Test data (Separate 10mm 100%RB)											
Back side	20	QPSK 100RB_0	20300/1745	1:1	0.656	-0.17	21.64	22.00	1.086	0.713	22.1
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	20	QPSK 1RB_0	20175/1732.5	1:1	0.873	0.01	22.59	23.00	1.099	0.959	22.1

Table 23: SAR of LTE Band 4 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Back side	20300/1745	0.900	0.899	1.01	N/A	N/A

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.3.6 SAR Result of LTE Band 5

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_0	20525/836.5	1:1	0.411	-0.04	22.76	24.00	1.330	0.547	22.0
Back side	10	QPSK 1RB_0	20525/836.5	1:1	0.477	-0.13	22.76	24.00	1.330	0.635	22.0
Left side	10	QPSK 1RB_0	20525/836.5	1:1	0.239	-0.19	22.76	24.00	1.330	0.318	22.0
Right side	10	QPSK 1RB_0	20525/836.5	1:1	0.247	-0.12	22.76	24.00	1.330	0.329	22.0
Bottom side	10	QPSK 1RB_0	20525/836.5	1:1	0.018	0.14	22.76	24.00	1.330	0.024	22.0
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	20525/836.5	1:1	0.324	-0.14	21.79	23.00	1.321	0.428	22.0
Back side	10	QPSK 25RB_0	20525/836.5	1:1	0.366	-0.04	21.79	23.00	1.321	0.484	22.0
Left side	10	QPSK 25RB_0	20525/836.5	1:1	0.175	-0.13	21.79	23.00	1.321	0.231	22.0
Right side	10	QPSK 25RB_0	20525/836.5	1:1	0.193	0.04	21.79	23.00	1.321	0.255	22.0
Bottom side	10	QPSK 25RB_0	20525/836.5	1:1	0.008	0.00	21.79	23.00	1.321	0.011	22.0
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	10	QPSK 1RB_0	20525/836.5	1:1	0.453	-0.04	22.76	24.00	1.330	0.603	22.0

Table 24: SAR of LTE Band 5 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.3.7 SAR Result of LTE Band 12

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_0	23095/707.5	1:1	0.445	0.16	22.72	24.00	1.343	0.598	22.1
Back side	10	QPSK 1RB_0	23095/707.5	1:1	0.461	-0.18	22.72	24.00	1.343	0.619	22.1
Left side	10	QPSK 1RB_0	23095/707.5	1:1	0.252	0.09	22.72	24.00	1.343	0.338	22.1
Right side	10	QPSK 1RB_0	23095/707.5	1:1	0.240	-0.12	22.72	24.00	1.343	0.322	22.1
Bottom side	10	QPSK 1RB_0	23095/707.5	1:1	0.015	-0.16	22.72	24.00	1.343	0.020	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23095/707.5	1:1	0.368	-0.06	21.78	23.00	1.324	0.487	22.1
Back side	10	QPSK 25RB_0	23095/707.5	1:1	0.370	-0.02	21.78	23.00	1.324	0.490	22.1
Left side	10	QPSK 25RB_0	23095/707.5	1:1	0.213	0.00	21.78	23.00	1.324	0.282	22.1
Right side	10	QPSK 25RB_0	23095/707.5	1:1	0.199	-0.04	21.78	23.00	1.324	0.264	22.1
Bottom side	10	QPSK 25RB_0	23095/707.5	1:1	0.008	0.14	21.78	23.00	1.324	0.011	22.1
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	10	QPSK 1RB_0	23095/707.5	1:1	0.451	-0.13	22.72	24.00	1.343	0.606	22.1

Table 25: SAR of LTE Band 12 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.3.8 SAR Result of LTE Band 13

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_0	23230/782	1:1	0.354	0.07	22.80	24.00	1.318	0.467	22.1
Back side	10	QPSK 1RB_0	23230/782	1:1	0.389	-0.01	22.80	24.00	1.318	0.513	22.1
Left side	10	QPSK 1RB_0	23230/782	1:1	0.190	0.15	22.80	24.00	1.318	0.250	22.1
Right side	10	QPSK 1RB_0	23230/782	1:1	0.190	0.02	22.80	24.00	1.318	0.250	22.1
Bottom side	10	QPSK 1RB_0	23230/782	1:1	0.008	0.09	22.80	24.00	1.318	0.011	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23230/782	1:1	0.297	0.03	21.83	23.00	1.309	0.389	22.1
Back side	10	QPSK 25RB_0	23230/782	1:1	0.320	-0.04	21.83	23.00	1.309	0.419	22.1
Left side	10	QPSK 25RB_0	23230/782	1:1	0.163	0.06	21.83	23.00	1.309	0.213	22.1
Right side	10	QPSK 25RB_0	23230/782	1:1	0.158	0.04	21.83	23.00	1.309	0.207	22.1
Bottom side	10	QPSK 25RB_0	23230/782	1:1	0.006	0.02	21.83	23.00	1.309	0.008	22.1
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	10	QPSK 1RB_0	23230/782	1:1	0.442	-0.05	22.80	24.00	1.318	0.583	22.1

Table 26: SAR of LTE Band 13 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.3.9 SAR Result of LTE Band 14

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_0	23330/793	1:1	0.370	-0.16	22.83	24.00	1.309	0.484	22.1
Back side	10	QPSK 1RB_0	23330/793	1:1	0.404	-0.04	22.83	24.00	1.309	0.529	22.1
Left side	10	QPSK 1RB_0	23330/793	1:1	0.237	-0.03	22.83	24.00	1.309	0.310	22.1
Right side	10	QPSK 1RB_0	23330/793	1:1	0.189	0.04	22.83	24.00	1.309	0.247	22.1
Bottom side	10	QPSK 1RB_0	23330/793	1:1	0.006	0.12	22.83	24.00	1.309	0.008	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23330/793	1:1	0.287	0.17	21.81	23.00	1.315	0.377	22.1
Back side	10	QPSK 25RB_0	23330/793	1:1	0.305	-0.06	21.81	23.00	1.315	0.401	22.1
Left side	10	QPSK 25RB_0	23330/793	1:1	0.189	0.10	21.81	23.00	1.315	0.249	22.1
Right side	10	QPSK 25RB_0	23330/793	1:1	0.148	-0.10	21.81	23.00	1.315	0.195	22.1
Bottom side	10	QPSK 25RB_0	23330/793	1:1	0.003	0.18	21.81	23.00	1.315	0.004	22.1
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	10	QPSK 1RB_0	23330/793	1:1	0.437	-0.01	22.83	24.00	1.309	0.572	22.1

Table 27: SAR of LTE Band 14 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.3.10 SAR Result of LTE Band 25

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1RB_0	26140/1860	1:1	0.565	-0.02	21.83	22.00	1.040	0.588	22.1
Back side	20	QPSK 1RB_0	26140/1860	1:1	0.827	-0.02	21.83	22.00	1.040	0.860	22.1
Back side	20	QPSK 1RB_0	26365/1882.5	1:1	0.770	-0.05	21.65	22.00	1.084	0.835	22.1
Back side	20	QPSK 1RB_0	26590/1905	1:1	0.832	-0.15	21.70	22.00	1.072	0.892	22.1
Back side-repeat	20	QPSK 1RB_0	26590/1905	1:1	0.834	-0.18	21.70	22.00	1.072	0.894	22.1
Left side	20	QPSK 1RB_0	26140/1860	1:1	0.131	-0.18	21.83	22.00	1.040	0.136	22.1
Right side	20	QPSK 1RB_0	26140/1860	1:1	0.177	-0.15	21.83	22.00	1.040	0.184	22.1
Bottom side	20	QPSK 1RB_0	26140/1860	1:1	0.592	-0.03	21.83	22.00	1.040	0.616	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	26590/1905	1:1	0.502	-0.09	20.78	21.00	1.052	0.528	22.1
Back side	20	QPSK 50RB_0	26590/1905	1:1	0.653	-0.10	20.78	21.00	1.052	0.687	22.1
Left side	20	QPSK 50RB_0	26590/1905	1:1	0.115	-0.19	20.78	21.00	1.052	0.121	22.1
Right side	20	QPSK 50RB_0	26590/1905	1:1	0.163	-0.13	20.78	21.00	1.052	0.171	22.1
Bottom side	20	QPSK 50RB_0	26590/1905	1:1	0.468	0.07	20.78	21.00	1.052	0.492	22.1
Hotspot Test data (Separate 10mm 100%RB)											
Back side	20	QPSK 100RB_0	26590/1905	1:1	0.590	-0.08	20.69	21.00	1.074	0.634	22.1
Hotspot Test Data at the worst case with Secondary Supply (Separate 10mm)											
Back side	20	QPSK 1RB_0	26590/1905	1:1	0.821	0.06	21.70	22.00	1.072	0.880	22.1

Table 28: SAR of LTE Band 25 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Back side	26590/1905	0.832	0.834	1.01	N/A	N/A

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 29: SAR Measurement Variability Results.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.3.11 SAR Result of LTE Band 26

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	15	QPSK 1RB_0	26865/831.5	1:1	0.512	0.13	22.86	24.00	1.300	0.666	22.0
Back side	15	QPSK 1RB_0	26865/831.5	1:1	0.600	-0.06	22.86	24.00	1.300	0.780	22.0
Left side	15	QPSK 1RB_0	26865/831.5	1:1	0.296	0.12	22.86	24.00	1.300	0.385	22.0
Right side	15	QPSK 1RB_0	26865/831.5	1:1	0.280	0.02	22.86	24.00	1.300	0.364	22.0
Bottom side	15	QPSK 1RB_0	26865/831.5	1:1	0.016	-0.10	22.86	24.00	1.300	0.021	22.0
Hotspot Test data (Separate 10mm 50%RB)											
Front side	15	QPSK 36RB_0	26865/831.5	1:1	0.394	0.11	22.06	23.00	1.242	0.489	22.0
Back side	15	QPSK 36RB_0	26865/831.5	1:1	0.450	-0.09	22.06	23.00	1.242	0.559	22.0
Left side	15	QPSK 36RB_0	26865/831.5	1:1	0.227	-0.09	22.06	23.00	1.242	0.282	22.0
Right side	15	QPSK 36RB_0	26865/831.5	1:1	0.222	0.19	22.06	23.00	1.242	0.276	22.0
Bottom side	15	QPSK 36RB_0	26865/831.5	1:1	0.009	-0.04	22.06	23.00	1.242	0.011	22.0
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	15	QPSK 1RB_0	26865/831.5	1:1	0.384	0.07	22.86	24.00	1.300	0.499	22.0

Table 30: SAR of LTE Band 26 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.3.12 SAR Result of LTE Band 41

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_0	40185/2549.5	1:1.58	0.193	-0.03	21.58	22.00	1.102	0.213	22.1
Back side	20	QPSK 1RB_0	40185/2549.5	1:1.58	0.227	0.05	21.58	22.00	1.102	0.250	22.1
Left side	20	QPSK 1RB_0	40185/2549.5	1:1.58	0.033	-0.05	21.58	22.00	1.102	0.036	22.1
Right side	20	QPSK 1RB_0	40185/2549.5	1:1.58	0.160	-0.13	21.58	22.00	1.102	0.176	22.1
Bottom side	20	QPSK 1RB_0	40185/2549.5	1:1.58	0.142	-0.18	21.58	22.00	1.102	0.156	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_25	40620/2593	1:1.58	0.127	0.03	20.53	21.00	1.114	0.142	22.1
Back side	20	QPSK 50RB_25	40620/2593	1:1.58	0.205	0.09	20.53	21.00	1.114	0.228	22.1
Left side	20	QPSK 50RB_25	40620/2593	1:1.58	0.025	-0.15	20.53	21.00	1.114	0.028	22.1
Right side	20	QPSK 50RB_25	40620/2593	1:1.58	0.090	-0.13	20.53	21.00	1.114	0.100	22.1
Bottom side	20	QPSK 50RB_25	40620/2593	1:1.58	0.111	0.04	20.53	21.00	1.114	0.124	22.1
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	20	QPSK 1RB_0	40185/2549.5	1:1.58	0.213	0.04	21.58	22.00	1.102	0.235	22.1
Hotspot Test Data at the worst case with PC2 (Separate 10mm)											
Back side	20	QPSK 1RB_0	40185/2549.5	1:2.31	0.302	0.17	24.38	25.00	1.153	0.348	22.1

Table 31: SAR of LTE Band 41 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.3.13 SAR Result of LTE Band 66

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1RB_0	132322/1745	1:01	0.587	0.01	20.92	22.00	1.282	0.753	21.8
Back side	20	QPSK 1RB_0	132322/1745	1:01	0.686	0.00	20.92	22.00	1.282	0.880	21.8
Back side	20	QPSK 1RB_0	132072/1720	1:01	0.661	0.03	20.92	22.00	1.282	0.848	21.8
Back side	20	QPSK 1RB_0	132572/1770	1:01	0.654	0.08	20.88	22.00	1.294	0.846	21.8
Left side	20	QPSK 1RB_0	132322/1745	1:01	0.124	-0.15	20.92	22.00	1.282	0.159	21.8
Right side	20	QPSK 1RB_0	132322/1745	1:01	0.121	0.18	20.92	22.00	1.282	0.155	21.8
Bottom side	20	QPSK 1RB_0	132322/1745	1:01	0.596	-0.05	20.92	22.00	1.282	0.764	21.8
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	132322/1745	1:01	0.465	0.02	19.95	21.00	1.274	0.592	21.8
Back side	20	QPSK 50RB_0	132322/1745	1:01	0.547	0.07	19.95	21.00	1.274	0.697	21.8
Left side	20	QPSK 50RB_0	132322/1745	1:01	0.096	-0.16	19.95	21.00	1.274	0.122	21.8
Right side	20	QPSK 50RB_0	132322/1745	1:01	0.100	0.04	19.95	21.00	1.274	0.127	21.8
Bottom side	20	QPSK 50RB_0	132322/1745	1:01	0.486	0.05	19.95	21.00	1.274	0.619	21.8
Hotspot Test data (Separate 10mm 100%RB)											
Back side	20	QPSK 100RB_0	132322/1745	1:1	0.557	0.01	19.86	21.00	1.300	0.724	22.8
Hotspot Test Data at the worst case with Secondary Supply (Separate 10mm)											
Back side	20	QPSK 1RB_0	132322/1745	1:01	0.930	-0.06	20.92	22.00	1.282	1.193	21.8
Back side-Repeated	20	QPSK 1RB_0	132072/1720	1:01	0.913	0.15	20.92	22.00	1.282	1.171	21.8

Table 32: SAR of LTE Band 66 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Back side	132322/1745	0.930	0.913	1.019	N/A	N/A

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.3.14 SAR Result of LTE Band 71

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_0	133322/683	1:1	0.236	-0.01	23.75	24.00	1.059	0.250	22.1
Back side	20	QPSK 1RB_0	133322/683	1:1	0.253	-0.02	23.75	24.00	1.059	0.268	22.1
Left side	20	QPSK 1RB_0	133322/683	1:1	0.129	-0.08	23.75	24.00	1.059	0.137	22.1
Right side	20	QPSK 1RB_0	133322/683	1:1	0.120	0.19	23.75	24.00	1.059	0.127	22.1
Bottom side	20	QPSK 1RB_0	133322/683	1:1	0.016	-0.14	23.75	24.00	1.059	0.017	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	133322/683	1:1	0.186	-0.18	22.81	23.00	1.045	0.194	22.1
Back side	20	QPSK 50RB_0	133322/683	1:1	0.216	0.13	22.81	23.00	1.045	0.226	22.1
Left side	20	QPSK 50RB_0	133322/683	1:1	0.102	0.00	22.81	23.00	1.045	0.107	22.1
Right side	20	QPSK 50RB_0	133322/683	1:1	0.095	-0.19	22.81	23.00	1.045	0.099	22.1
Bottom side	20	QPSK 50RB_0	133322/683	1:1	0.010	0.16	22.81	23.00	1.045	0.010	22.1
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	20	QPSK 1RB_0	133322/683	1:1	0.250	-0.12	23.75	24.00	1.059	0.265	22.1

Table 33: SAR of LTE Band 71 for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.3.15 SAR Result of WIFI 2.4G

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data (Separate 10mm)											
Front side	802.11b	6/2437	99.30%	1.007	0.190	0.00	15.27	16.00	1.183	0.226	21.8
Back side	802.11b	6/2437	99.30%	1.007	0.084	0.05	15.27	16.00	1.183	0.100	21.8
Right side	802.11b	6/2437	99.30%	1.007	0.115	0.06	15.27	16.00	1.183	0.137	21.8
Top side	802.11b	6/2437	99.30%	1.007	0.057	0.02	15.27	16.00	1.183	0.068	21.8
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Front side	802.11b	6/2437	99.30%	1.007	0.192	0.10	15.27	16.00	1.183	0.229	21.8

Table 34: SAR of WIFI 2.4G for Body.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.3.16 SAR Result of WIFI 5G

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Hotspot Test data of U-NII-1(Separate 10mm)											
Front side	802.11a	36/5180	93.90%	1.065	0.089	0.00	13.91	14.00	1.021	0.097	22.2
Back side	802.11a	36/5180	93.90%	1.065	0.279	0.00	13.91	14.00	1.021	0.303	22.2
Right side	802.11a	36/5180	93.90%	1.065	0.090	-0.01	13.91	14.00	1.021	0.098	22.2
Top side	802.11a	36/5180	93.90%	1.065	0.092	0.04	13.91	14.00	1.021	0.100	22.2
Hotspot Test data of U-NII-3 (Separate 10mm)											
Front side	802.11a	157/5785	93.90%	1.065	0.053	0.00	13.34	14.00	1.164	0.065	22.2
Back side	802.11a	157/5785	93.90%	1.065	0.143	0.00	13.34	14.00	1.164	0.177	22.2
Right side	802.11a	157/5785	93.90%	1.065	0.050	0.09	13.34	14.00	1.164	0.061	22.2
Top side	802.11a	157/5785	93.90%	1.065	0.038	0.08	13.34	14.00	1.164	0.047	22.2
Hotspot Test Data at the worst case with Secondary Supply(Separate 10mm)											
Back side	802.11a	36/5180	93.90%	1.065	0.121	0.08	13.91	14.00	1.021	0.132	22.2

Table 35: SAR of WIFI 5G for Body.

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.4 Multiple Transmitter Evaluation

8.4.1 Simultaneous SAR test evaluation

- Simultaneous Transmission Possibilities

NO.	Simultaneous Tx Combination	Body
1	GSM DATA + WiFi 2.4G	Yes
2	GSM DATA + WiFi 5G	Yes
3	UMTS + WiFi 2.4G	Yes
4	UMTS + WiFi 5G	Yes
5	LTE + WiFi 2.4G	Yes
6	LTE + WiFi 5G	Yes



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.4.2 Simultaneous Transmission SAR Summation Scenario

Test position	Main Antenna SAR _{max} (W/kg)														WiFi Antenna SAR _{max} (W/kg)		Summed 1g SAR _{max} (W/kg)	SPLSR	
	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 12	LTE Band 13	LTE Band 14	LTE Band 25	LTE Band 26	LTE Band 41	LTE Band 66	LTE Band 71	WLAN 2.4G	WLAN 5G			
Hotspot 10mm	Front side	0.703	0.704	0.595	0.617	0.631	0.547	0.598	0.467	0.484	0.588	0.666	0.213	0.753	0.250	0.229	0.097	0.982	No
	Back side	1.053	1.034	1.093	0.875	0.967	0.635	0.619	0.583	0.572	0.894	0.780	0.348	1.193	0.268	0.100	0.303	1.496	No
	Left side	0.161	0.142	0.533	0.139	0.148	0.318	0.338	0.250	0.310	0.136	0.385	0.036	0.159	0.137	/	/	0.533	No
	Right side	0.229	0.173	0.437	0.187	0.169	0.329	0.322	0.250	0.247	0.184	0.364	0.176	0.155	0.127	0.137	0.098	0.574	No
	Top side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.068	0.100	0.108	No
	Bottom side	0.637	0.654	0.032	0.591	0.678	0.024	0.020	0.011	0.008	0.616	0.021	0.156	0.764	0.017	/	/	0.764	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

9 Equipment list

Test Platform		SPEAG DASY5 Professional				
Description		SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference		DASY52; SEMCAD X				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
<input checked="" type="checkbox"/>	Twin Phantom	SPEAG	SAM 3	1912	NCR	NCR
<input checked="" type="checkbox"/>	Twin Phantom	SPEAG	SAM 10	1563	NCR	NCR
<input checked="" type="checkbox"/>	DAE	SPEAG	DAE4	1428	2020-03-03	2021-03-02
<input checked="" type="checkbox"/>	DAE	SPEAG	DAE4	1267	2020-06-12	2021-06-11
<input checked="" type="checkbox"/>	E-Field Probe	SPEAG	EX3DV4	3923	2019-10-22	2020-10-21
<input checked="" type="checkbox"/>	E-Field Probe	SPEAG	EX3DV4	3793	2020-05-09	2021-05-08
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D750V3	1160	2019-05-22	2022-05-21
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D835V2	4d105	2019-12-17	2022-12-16
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D1750V2	1149	2019-05-21	2022-05-20
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D1950V2	1138	2019-12-17	2022-12-16
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D2450V2	733	2019-12-17	2022-12-16
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D2600V2	1125	2019-05-20	2022-05-19
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D5GHzV2	1165	2019-12-20	2022-12-19
<input checked="" type="checkbox"/>	Agilent Network Analyzer	Agilent	E5071C	MY46523591	2020-04-16	2021-04-15
<input checked="" type="checkbox"/>	Dielectric Probe Kit	Agilent	85070E	US01440210	NCR	NCR
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	111637	2020-04-16	2021-04-15
<input checked="" type="checkbox"/>	Radio Communication Analyzer	Anritsu	MT8821C	6201502984	2020-06-11	2021-06-10
<input checked="" type="checkbox"/>	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
<input checked="" type="checkbox"/>	Signal Generator	Agilent	N5171B	MY53050736	2020-04-15	2021-04-14
<input checked="" type="checkbox"/>	Preamplifier	Mini-Circuits	ZHL-42W	15542	NCR	NCR
<input checked="" type="checkbox"/>	Preamplifier	Compliance Directions Systems Inc.	AMP28-3W	073501433	NCR	NCR
<input checked="" type="checkbox"/>	Power Meter	Agilent	E4416A	GB41292095	2020-04-15	2021-04-14
<input checked="" type="checkbox"/>	Power Sensor	Agilent	8481H	MY41091234	2020-04-15	2021-04-14
<input checked="" type="checkbox"/>	Power Sensor	R&S	NRP-Z92	100025	2020-04-16	2021-04-15
<input checked="" type="checkbox"/>	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
<input checked="" type="checkbox"/>	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
<input checked="" type="checkbox"/>	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
<input checked="" type="checkbox"/>	50 Ω coaxial load	Mini-Circuits	KARN-50+	00850	NCR	NCR
<input checked="" type="checkbox"/>	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



<input checked="" type="checkbox"/>	Speed reading thermometer	MingGao	T809	NA	2020-04-21	2021-04-20
<input checked="" type="checkbox"/>	Humidity and Temperature Indicator	KIMTOKA	KIMTOKA	NA	2020-04-21	2021-04-20

Note: All the equipments are within the valid period when the tests are performed.

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

---END---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.