

TEST REPORT FOR RF TESTING

Report No.: SRTC2020-9004(F)-20081701(C)

Product Name: Smartphone

Product Model: CP3669AS

Applicant: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

Manufacturer: Yulong Computer Telecommunication Scientific (Shenzhen) Co.,
Ltd

Specification: FCC Part 2, Part 24E, Part 22H, Part 27 (2019)

FCC ID: R38YLCP3669AS

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30, Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	1
1.1 Notes of the test report	1
1.2 Information about the testing laboratory.....	2
1.3 Applicant’s details	2
1.4 Manufacturer’s details.....	2
1.5 Test Environment.....	2
2 DESCRIPTION OF THE EQUIPMENT UNDER TEST	4
2.1 Final Equipment Build Status	4
2.2 Support Equipment	5
2.3 Summary table	6
3 REFERENCE SPECIFICATION	11
4 KEY TO NOTES AND RESULT CODES	11
5 RESULT SUMMARY	12
6 TEST RESULT	13
6.1 RF Power Output	13
6.2 Effective Radiated Power and Effective Isotropic Radiated Power	14
6.3 Occupied Bandwidth	17
6.4 Emission Bandwidth.....	18
6.5 Peak-Average Ratio.....	19
6.6 Spurious Emissions at antenna terminal.....	20
6.7 Band Edges Compliance	21
6.8 Frequency Stability	23
6.9 Radiated Spurious Emissions	24
7 MEASUREMENT UNCERTAINTIES	26
8 TEST EQUIPMENTS	27
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	28
APPENDIX B – TEST DATA OF RADIATED EMISSION	28

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing

Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address:	Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan District, Shenzhen
City:	Shenzhen
Country or Region:	China
Contacted person:	Yentl Chen
Tel:	15927320221
Fax:	---
Email:	chenyanting@yulong.com

1.4 Manufacturer's details

Company:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address:	Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan District, Shenzhen
City:	Shenzhen
Country or Region:	China
Contacted person:	Yentl Chen
Tel:	15927320221
Fax:	---
Email:	chenyanting@yulong.com

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2020-08-17
Testing Start Date:	2020-08-17
Testing End Date:	2020-09-27

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	47
Maximum Extreme	55	---
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	3.85
Maximum Extreme Supply Voltage (V d.c.):	4.40
Minimum Extreme Supply Voltage (V d.c.):	3.60

2 DESCRIPTION OF THE EQUIPMENT UNDER TEST

2.1 Final Equipment Build Status

Frequency Range	LTE Band 2: Tx:1850~1910MHz Rx:1930~1990MHz LTE Band 4: Tx:1710~1755MHz Rx:2110~2155MHz LTE Band 5: Tx:824~849 MHz Rx:869 ~894MHz LTE Band 7: Tx:2500~2570MHz Rx:2620~2690MHz LTE Band 12: Tx:699~716MHz Rx:729~746MHz LTE Band 13: Tx:777~787MHz Rx:746~756MHz LTE Band 25: Tx:1850.7~1914.3MHz Rx:1930.7~1962.5MHz LTE Band 26: Tx:824~849 MHz Rx:869 ~894MHz LTE Band 41: Tx:2498.5~2687.5MHz Rx:2498.5~2687.5MHz LTE Band 41C: Tx:2498.5~2687.5MHz Rx:2498.5~2687.5MHz LTE Band 66: Tx:1710.7~1779.3MHz Rx:2110.7~2179.3MHz LTE Band 71: Tx:665.5~695.5MHz Rx:619.5~649.5MHz
Modulation Type	QPSK/16QAM/64QAM
Antenna Type	Fixed Internal Antenna
Antenna Gain	LTE B2/4/25/66 0.1dBi LTE B5/12/13/26/71 -5.0dBi LTE B7/41/41C 0dBi
Power Supply	Battery/Charger
Hardware Version	P0
Software Version	10.0.047.P0.200914.CP3669AS
IMEI	860084050001349

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery 1
Manufacturer	Ganfeng
Model Number	CPLD-438
Equipment	Battery 2
Manufacturer	Tianmao
Model Number	CPLD-438
Equipment	Charger
Manufacturer	Ruide
Model Number	RD0502000-USBA-87MG
Equipment	USB Cable1
Manufacturer	Lishi
Model Number	LS-KP003
Equipment	USB Cable2
Manufacturer	Saibao
Model Number	SYL-A173A

2.3 Summary table

FCC Rule Part	Frequency Range (MHz)	EIRP/ ERP (W)	Frequency Tolerance (ppm)	Emission Designator	BW (MHz)	Measured 26dBc Bandwidth (MHz)	Communication Type
LTE BAND2							
24E	1850.7-1909.3	0.218	-0.098	1M08G7D	1.4M	1.244	QPSK
	1850.7-1909.3	0.184	-0.098	1M08D7W	1.4M	1.239	16QAM
	1850.7-1909.3	0.193	-0.098	1M08W7D	1.4M	1.243	64QAM
	1851.5-1908.5	0.210	-0.096	2M69G7D	3M	2.905	QPSK
	1851.5-1908.5	0.173	-0.096	2M69D7W	3M	2.899	16QAM
	1851.5-1908.5	0.212	-0.096	2M69W7D	3M	2.891	64QAM
	1852.5-1907.5	0.229	0.094	4M48G7D	5M	4.867	QPSK
	1852.5-1907.5	0.196	0.094	4M47D7W	5M	4.824	16QAM
	1852.5-1907.5	0.201	0.094	4M48W7D	5M	4.852	64QAM
	1855-1905	0.264	-0.096	8M99G7D	10M	9.592	QPSK
	1855-1905	0.207	-0.096	8M97D7W	10M	9.611	16QAM
	1855-1905	0.204	-0.096	8M95W7D	10M	9.618	64QAM
	1857.5-1902.5	0.226	0.099	13M5G7D	15M	14.280	QPSK
	1857.5-1902.5	0.198	0.099	13M4D7W	15M	14.390	16QAM
	1857.5-1902.5	0.196	0.099	13M5W7D	15M	14.300	64QAM
	1860-1900	0.235	0.096	17M9G7D	20M	18.960	QPSK
	1860-1900	0.220	0.096	17M9D7W	20M	18.980	16QAM
1860-1900	0.219	0.096	17M9W7D	20M	18.910	64QAM	
LTE BAND4							
27	1710.7-1754.3	0.269	0.098	1M08G7D	1.4M	1.240	QPSK
	1710.7-1754.3	0.185	0.098	1M08D7W	1.4M	1.239	16QAM
	1710.7-1754.3	0.207	0.098	1M08W7D	1.4M	1.240	64QAM
	1711.5-1753.5	0.241	-0.096	2M69G7D	3M	2.892	QPSK
	1711.5-1753.5	0.201	-0.096	2M69D7W	3M	2.891	16QAM
	1711.5-1753.5	0.182	-0.096	2M69W7D	3M	2.883	64QAM
	1712.5-1752.5	0.232	-0.099	4M48G7D	5M	4.862	QPSK
	1712.5-1752.5	0.208	-0.099	4M48D7W	5M	4.867	16QAM
	1712.5-1752.5	0.226	-0.099	4M49W7D	5M	4.852	64QAM
	1715-1750	0.240	-0.099	8M97G7D	10M	9.599	QPSK
	1715-1750	0.194	-0.099	8M95D7W	10M	9.539	16QAM
	1715-1750	0.182	-0.099	8M97W7D	10M	9.556	64QAM
	1717.5-1747.5	0.230	-0.094	13M5G7D	15M	14.390	QPSK
	1717.5-1747.5	0.210	-0.094	13M5D7W	15M	14.290	16QAM
	1717.5-1747.5	0.168	-0.094	13M5W7D	15M	14.380	64QAM
	1720-1745	0.223	0.082	17M9G7D	20M	19.080	QPSK
	1720-1745	0.219	0.082	17M9D7W	20M	18.980	16QAM
1720-1745	0.202	0.082	18M0W7D	20M	19.110	64QAM	
TE BAND5							
22H	824.7-848.3	0.074	-0.082	1M08G7D	1.4M	1.239	QPSK
	824.7-848.3	0.063	-0.082	1M08D7W	1.4M	1.241	16QAM
	824.7-848.3	0.058	-0.082	1M08W7D	1.4M	1.239	64QAM
	825.5-847.5	0.067	-0.096	2M68G7D	3M	2.904	QPSK
	825.5-847.5	0.062	-0.096	2M69D7W	3M	2.896	16QAM
	825.5-847.5	0.063	-0.096	2M68W7D	3M	2.909	64QAM
	826.5-846.5	0.067	-0.100	4M48G7D	5M	4.840	QPSK
	826.5-846.5	0.060	-0.100	4M48D7W	5M	4.842	16QAM
	826.5-846.5	0.063	-0.100	4M48W7D	5M	4.842	64QAM
	829-844	0.071	-0.098	8M96G7D	10M	9.539	QPSK
	829-844	0.062	-0.098	8M97D7W	10M	9.562	16QAM
	829-844	0.058	-0.098	8M97W7D	10M	9.545	64QAM

LTE BAND7							
27	2502.5-2567.5	0.211	-0.100	4M48G7D	5M	4.868	QPSK
	2502.5-2567.5	0.177	-0.100	4M48D7W	5M	4.833	16QAM
	2502.5-2567.5	0.220	-0.100	4M48W7D	5M	4.843	64QAM
	2505-2565	0.230	0.091	8M95G7D	10M	9.600	QPSK
	2505-2565	0.215	0.091	8M99D7W	10M	9.477	16QAM
	2505-2565	0.180	0.091	8M95W7D	10M	9.546	64QAM
	2507.5-2562.5	0.207	0.092	13M5G7D	15M	14.270	QPSK
	2507.5-2562.5	0.208	0.092	13M4D7W	15M	14.400	16QAM
	2507.5-2562.5	0.191	0.092	13M4W7D	15M	14.320	64QAM
	2510-2560	0.256	0.099	17M9G7D	20M	19.010	QPSK
	2510-2560	0.201	0.099	17M9D7W	20M	18.970	16QAM
	2510-2560	0.185	0.099	17M9W7D	20M	18.920	64QAM
LTE BAND12							
27	699.7-715.3	0.070	0.096	1M08G7D	1.4M	1.236	QPSK
	699.7-715.3	0.064	0.096	1M08D7W	1.4M	1.256	16QAM
	699.7-715.3	0.059	0.096	1M08W7D	1.4M	1.234	64QAM
	700.5-714.5	0.080	0.098	2M68G7D	3M	2.897	QPSK
	700.5-714.5	0.058	0.098	2M69D7W	3M	2.889	16QAM
	700.5-714.5	0.062	0.098	2M69W7D	3M	2.899	64QAM
	701.5-713.5	0.076	0.097	4M48G7D	5M	5.107	QPSK
	701.5-713.5	0.063	0.097	4M49D7W	5M	5.017	16QAM
	701.5-713.5	0.059	0.097	4M48W7D	5M	5.008	64QAM
	704-711	0.075	-0.096	8M95G7D	10M	9.868	QPSK
	704-711	0.060	-0.096	8M95D7W	10M	9.805	16QAM
	704-711	0.063	-0.096	8M96W7D	10M	9.875	64QAM
LTE BAND13							
27	779.5-784.5	0.078	0.100	4M49G7D	5M	5.121	QPSK
	779.5-784.5	0.057	0.100	4M49D7W	5M	5.044	16QAM
	779.5-784.5	0.062	0.100	4M48W7D	5M	5.098	64QAM
	782	0.072	-0.091	8M97G7D	10M	9.856	QPSK
	782	0.057	-0.091	8M96D7W	10M	9.818	16QAM
	782	0.062	-0.091	8M95W7D	10M	9.751	64QAM
LTE BAND25							
24E	1850.7-1914.3	0.235	0.090	1M08G7D	1.4M	1.270	QPSK
	1850.7-1914.3	0.187	0.090	1M08D7W	1.4M	1.303	16QAM
	1850.7-1914.3	0.171	0.090	1M08W7D	1.4M	1.256	64QAM
	1851.5-1913.5	0.217	0.097	2M69G7D	3M	2.896	QPSK
	1851.5-1913.5	0.188	0.097	2M69D7W	3M	2.900	16QAM
	1851.5-1913.5	0.179	0.097	2M69W7D	3M	2.922	64QAM
	1852.5-1912.5	0.212	0.096	4M49G7D	5M	5.122	QPSK
	1852.5-1912.5	0.197	0.096	4M49D7W	5M	5.008	16QAM
	1852.5-1912.5	0.187	0.096	4M49W7D	5M	5.128	64QAM
	1855-1910	0.234	0.093	8M97G7D	10M	9.821	QPSK
	1855-1910	0.188	0.093	8M96D7W	10M	9.656	16QAM
	1855-1910	0.190	0.093	8M97W7D	10M	9.836	64QAM
	1857.5-1907.5	0.223	-0.100	13M5G7D	15M	14.530	QPSK
	1857.5-1907.5	0.211	-0.100	13M5D7W	15M	14.670	16QAM
	1857.5-1907.5	0.179	-0.100	13M5W7D	15M	14.590	64QAM
	1860-1905	0.229	-0.092	17M9G7D	20M	19.250	QPSK
	1860-1905	0.207	-0.092	17M9D7W	20M	19.230	16QAM
	1860-1905	0.214	-0.092	17M9W7D	20M	19.180	64QAM

LTE BAND26							
22H	824.7-848.3	0.068	-0.099	1M08G7D	1.4M	1.235	QPSK
	824.7-848.3	0.065	-0.099	1M08D7W	1.4M	1.246	16QAM
	824.7-848.3	0.069	-0.099	1M08W7D	1.4M	1.241	64QAM
	825.5-847.5	0.071	-0.092	2M69G7D	3M	2.899	QPSK
	825.5-847.5	0.063	-0.092	2M68D7W	3M	2.908	16QAM
	825.5-847.5	0.062	-0.092	2M69W7D	3M	2.885	64QAM
	826.5-846.5	0.070	-0.096	4M48G7D	5M	4.855	QPSK
	826.5-846.5	0.062	-0.096	4M48D7W	5M	4.811	16QAM
	826.5-846.5	0.061	-0.096	4M48W7D	5M	4.914	64QAM
	829-844	0.064	0.098	8M96G7D	10M	9.607	QPSK
	829-844	0.058	0.098	8M95D7W	10M	9.558	16QAM
	829-844	0.061	0.098	8M96W7D	10M	9.585	64QAM
	831.5-841.5	0.065	0.098	13M4G7D	15M	14.320	QPSK
	831.5-841.5	0.065	0.098	13M4D7W	15M	14.210	16QAM
	831.5-841.5	0.066	0.098	13M4W7D	15M	14.370	64QAM
LTE BAND41							
27	2498.5-2687.5	0.422	0.091	4M48G7D	5M	4.813	QPSK
	2498.5-2687.5	0.436	0.091	4M48D7W	5M	4.970	16QAM
	2498.5-2687.5	0.400	0.091	4M48W7D	5M	4.894	64QAM
	2501-2685	0.434	-0.086	8M98G7D	10M	9.548	QPSK
	2501-2685	0.424	-0.086	8M98D7W	10M	9.598	16QAM
	2501-2685	0.389	-0.086	8M96W7D	10M	9.815	64QAM
	2503.5-2682.5	0.494	-0.089	13M4G7D	15M	14.280	QPSK
	2503.5-2682.5	0.372	-0.089	13M5D7W	15M	14.230	16QAM
	2503.5-2682.5	0.397	-0.089	13M4W7D	15M	14.350	64QAM
	2506-2680	0.484	0.097	17M9G7D	20M	19.130	QPSK
	2506-2680	0.384	0.097	17M8D7W	20M	19.310	16QAM
	2506-2680	0.402	0.097	17M9W7D	20M	19.500	64QAM

LTE BAND41C							
27	2505.15-2674.15	0.483	---	22M8G7D	5M+20M	23.92	QPSK
	2505.15-2674.15	0.412	---	22M8D7W	5M+20M	24.12	16QAM
	2505.15-2674.15	0.372	---	22M9W7D	5M+20M	24.03	64QAM
	2511.85-2680.85	0.467	---	22M9G7D	20M+5M	23.92	QPSK
	2511.85-2680.85	0.406	---	22M9D7W	20M+5M	23.72	16QAM
	2511.85-2680.85	0.376	---	22M8W7D	20M+5M	23.74	64QAM
	2507.3-2676.5	0.466	---	23M1G7D	10M+15M	24.37	QPSK
	2507.3-2676.5	0.333	---	23M1D7W	10M+15M	24.15	16QAM
	2507.3-2676.5	0.294	---	23M2W7D	10M+15M	24.58	64QAM
	2509.5-2678.7	0.482	---	23M1G7D	15M+10M	24.10	QPSK
	2509.5-2678.7	0.377	---	23M2D7W	15M+10M	24.07	16QAM
	2509.5-2678.7	0.343	---	23M1W7D	15M+10M	24.31	64QAM
	2508.7-2672.8	0.484	---	27M7G7D	10M+20M	29.08	QPSK
	2508.7-2672.8	0.390	---	27M8D7W	10M+20M	29.33	16QAM
	2508.7-2672.8	0.313	---	27M8W7D	10M+20M	29.01	64QAM
	2513.2-2677.3	0.531	---	27M8G7D	20M+10M	30.10	QPSK
	2513.2-2677.3	0.370	---	27M7D7W	20M+10M	28.80	16QAM
	2513.2-2677.3	0.317	---	27M8W7D	20M+10M	29.25	64QAM
	2511-2675	0.502	---	28M4G7D	15M+15M	30.02	QPSK
	2511-2675	0.333	---	28M4D7W	15M+15M	29.79	16QAM
	2511-2675	0.316	---	28M4W7D	15M+15M	29.66	64QAM
	2512.35-2671.45	0.501	---	32M6G7D	15M+20M	34.08	QPSK
	2512.35-2671.45	0.345	---	32M6D7W	15M+20M	34.21	16QAM
	2512.35-2671.45	0.357	---	32M7W7D	15M+20M	33.97	64QAM
	2514.55-2673.65	0.519	---	32M6G7D	20M+15M	35.28	QPSK
	2514.55-2673.65	0.332	---	32M6D7W	20M+15M	34.65	16QAM
	2514.55-2673.65	0.352	---	32M7W7D	20M+15M	34.00	64QAM
2514.55-2670.1	0.471	---	37M6G7D	20M+20M	39.65	QPSK	
2514.55-2670.1	0.376	---	37M6D7W	20M+20M	40.85	16QAM	
2514.55-2670.1	0.281	---	37M6W7D	20M+20M	38.99	64QAM	

LTE BAND66							
27	1710.7-1779.3	0.230	0.096	1M08G7D	1.4M	1.237	QPSK
	1710.7-1779.3	0.189	0.096	1M08D7W	1.4M	1.239	16QAM
	1710.7-1779.3	0.187	0.096	1M08W7D	1.4M	1.244	64QAM
	1711.5-1778.5	0.232	-0.072	2M68G7D	3M	2.890	QPSK
	1711.5-1778.5	0.197	-0.072	2M69D7W	3M	2.891	16QAM
	1711.5-1778.5	0.195	-0.072	2M68W7D	3M	2.894	64QAM
	1712.5-1777.5	0.252	0.090	4M49G7D	5M	5.074	QPSK
	1712.5-1777.5	0.223	0.090	4M49D7W	5M	5.111	16QAM
	1712.5-1777.5	0.188	0.090	4M50W7D	5M	5.054	64QAM
	1715-1775	0.223	-0.096	8M97G7D	10M	9.935	QPSK
	1715-1775	0.174	-0.096	8M97D7W	10M	9.872	16QAM
	1715-1775	0.178	-0.096	8M98W7D	10M	9.873	64QAM
	1717.5-1772.5	0.221	-0.100	13M5G7D	15M	14.740	QPSK
	1717.5-1772.5	0.181	-0.100	13M5D7W	15M	14.560	16QAM
	1717.5-1772.5	0.196	-0.100	13M4W7D	15M	14.720	64QAM
	1720-1770	0.223	0.097	17M9G7D	20M	19.270	QPSK
	1720-1770	0.176	0.097	17M9D7W	20M	19.450	16QAM
1720-1770	0.221	0.097	17M9W7D	20M	19.290	64QAM	
LTE BAND71							
27	665.5-695.5	0.079	0.097	4M50G7D	5M	5.130	QPSK
	665.5-695.5	0.058	0.097	4M49D7W	5M	5.131	16QAM
	665.5-695.5	0.062	0.097	4M50W7D	5M	5.083	64QAM
	668-693	0.069	0.098	8M97G7D	10M	9.967	QPSK
	668-693	0.055	0.098	8M97D7W	10M	9.862	16QAM
	668-693	0.059	0.098	8M97W7D	10M	9.835	64QAM
	670.5-690.5	0.072	0.083	13M5G7D	15M	14.810	QPSK
	670.5-690.5	0.062	0.083	13M5D7W	15M	14.640	16QAM
	670.5-690.5	0.063	0.083	13M4W7D	15M	14.610	64QAM
	673-688	0.064	-0.098	17M9G7D	20M	19.470	QPSK
	673-688	0.061	-0.098	17M9D7W	20M	19.410	16QAM
	673-688	0.051	-0.098	17M9W7D	20M	19.330	64QAM

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC Part 2	2019	Frequency allocations and radio treaty matters; general rules and regulations
FCC Part 22	2019	Public mobile services
FCC Part 24	2019	Personal communications services
FCC Part 27	2019	Miscellaneous wireless communications services
ANSI C63.26	2015	American national standard for compliance testing of transmitters used in licensed radio services
KDB 971168 D01	April 9, 2018	Measurement guidance for certification of licensed digital transmitters
TIA-603-E-2016	March 2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards




4 KEY TO NOTES AND RESULT CODES

The following are the definition of the test result.

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
NT	Normal Temperature
NV	Nominal voltage
HV	High voltage
LV	Low voltage

5 RESULT SUMMARY

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)(5), 24.232(c), 27.50(b)(10), 27.50(c)(10), 27.50(h)(2), 27.50(d)(4), 27.50(a)(3)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Peak-Average Ratio	24.232(d), 27.50(d)(5)	Pass
5	Emission Bandwidth	2.1049	Pass
6	Spurious Emissions at antenna terminals	2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)	Pass
7	Band Edges Compliance	2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)	Pass
8	Frequency Stability	2.1055, 22.355, 24.235, 27.54	Pass
9	Radiated Spurious Emissions	2.1053, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(f), 27.53(a), 27.53(m)	Pass

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. He Dengshun 	Issued date: 20200927

6 TEST RESULT


6.1 RF Power Output

Rule Part(s)
FCC: 2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

Limits: No RF Power Output requirements in part 2.1046.

Test result:

The test results are shown in Appendix A.

6.2 Effective Radiated Power and Effective Isotropic Radiated Power


Rule Part(s)

FCC: 22.913(a) (5), 24.232(c), 27.50(b) (10), 27.50(c) (10), 27.50(h) (2), 27.50(d) (4), 27.50(a) (3)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test setup:

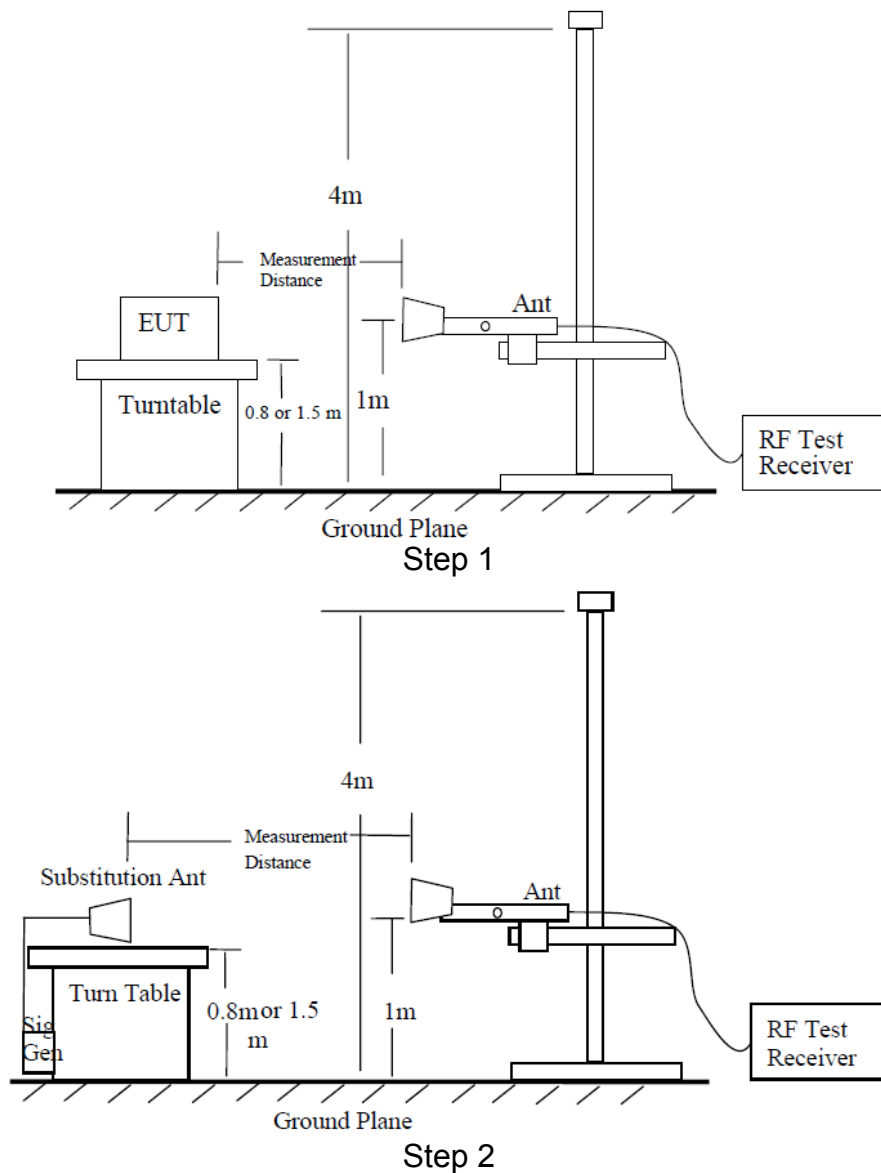

Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m ($f < 1\text{GHz}$)/1.5m ($f > 1\text{GHz}$) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100KHz($f < 1\text{GHz}$)/1MHz ($f > 1\text{GHz}$). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

Power (EIRP) = Pmea+ Pca+ Ga

ERP/EIRP LIMIT

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15 \text{ (dB)}$.

22.913(a) (5)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

24.232(c)

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

27.50(b) (10)

Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

27.50(c) (10)

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

27.50(h) (2)

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

27.50(d) (4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and

mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

27.50(a) (3)

Mobile and portable stations (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth.

Test result:

The test results are shown in Appendix B.


6.3 Occupied Bandwidth

Rule Part(s)
FCC: 2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test Setup:

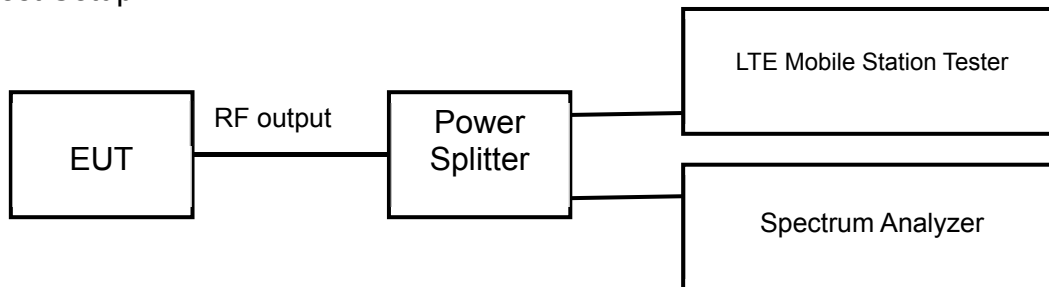

Test procedure:
KDB 971168 D01 v03r01 – Section 4.2

Test Setting:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:

The test results are shown in Appendix A.


6.4 Emission Bandwidth

Rule Part(s)
FCC: 2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test Setup:

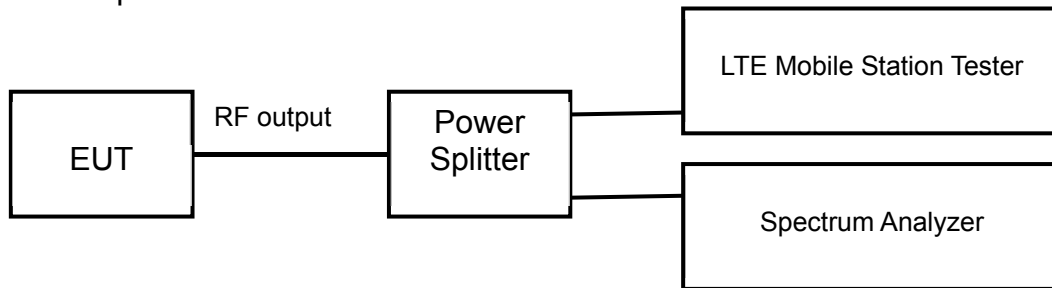

Test procedure:
KDB 971168 D01 v03r01 – Section 4.2

Test Setting:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of 26dB bandwidth observed in Step 7

Limits: No specific emission bandwidth requirements in part 2.1049.

Test result:
The test results are shown in Appendix A.

6.5 Peak-Average Ratio


Rule Part(s)

FCC: 24.232(d), 27.50(d) (5)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test Setup:

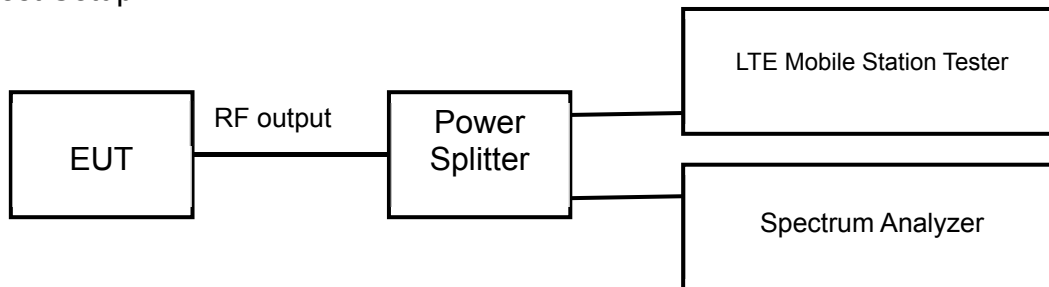

Test procedure:

KDB 971168 D01 v03r01 – Section 5.7.1

Test Setting:

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW ≥ OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Limits

24.232(d), 27.50(d) (5)

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test result:

The test results are shown in Appendix A.

6.6 Spurious Emissions at antenna terminal


Rule Part(s)

FCC: 2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test Setup:

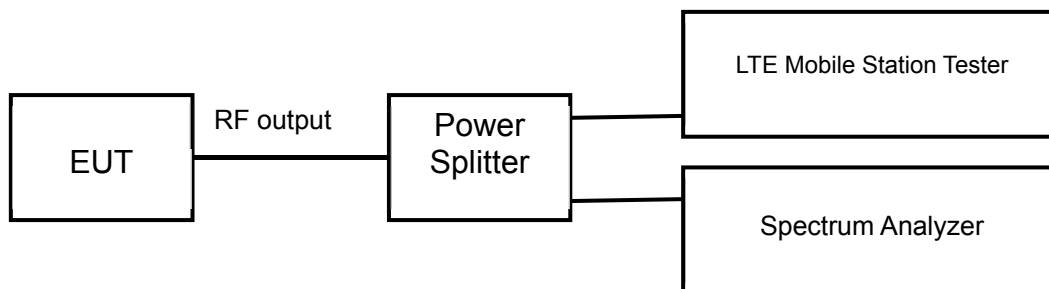

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Setting:

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency
2. Detector = RMS
3. RBW=1MHz
4. VBW=3MHz
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Limits

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P \text{ [Watts]})$, where P is the transmitter power in Watts.

For Band 30, the minimum permissible attenuation level of any spurious emission <2288MHz and >2365MHz is $70 + \log_{10}(P \text{ [Watts]})$.

For Band 7 and 41, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P \text{ [Watts]})$.

Test result:

The test results are shown in Appendix A.

6.7 Band Edges Compliance


Rule Part(s)

FCC: 2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test Setup:

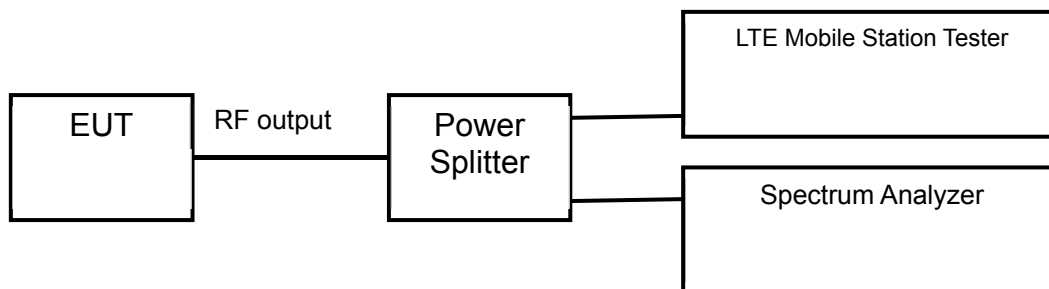

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Setting:

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limits

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 30 is $> 43 + 10\log_{10}(P)$ [Watts] at 2300-2305MHz & 2345-2360MHz, $> 55 + 10\log_{10}(P)$ [Watts] at 2320-2324MHz & 2341-2345MHz, $> 61 + 10\log_{10}(P)$ [Watts] at 2324-2328MHz & 2337-2341MHz, $> 67 + 10\log_{10}(P)$ [Watts] at 2288-2292MHz & 2328-2337MHz, and $> 70 + 10\log_{10}(P)$ [Watts] at frequencies $< 2288\text{MHz}$ & $> 2365\text{MHz}$.

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the

transmitter power.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c)(5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c)(4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(a)(5) in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5MHz.

Test result:

The test results are shown in Appendix A.

6.8 Frequency Stability


Rule Part(s)

FCC: 2.1055, 22.355, 24.235, 27.54

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test setup:

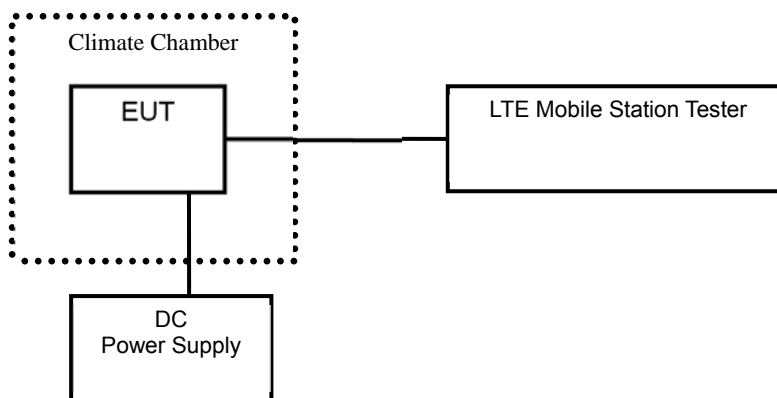

Test Procedure:

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C (The temperature range can be declared by the manufacturer). A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Limits: For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test result:

The test results are shown in Appendix A.

6.9 Radiated Spurious Emissions


Rule Part(s)

FCC: 2.1053, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(f), 27.53(a), 27.53(m)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	47%	101.9kPa

Test Setup:

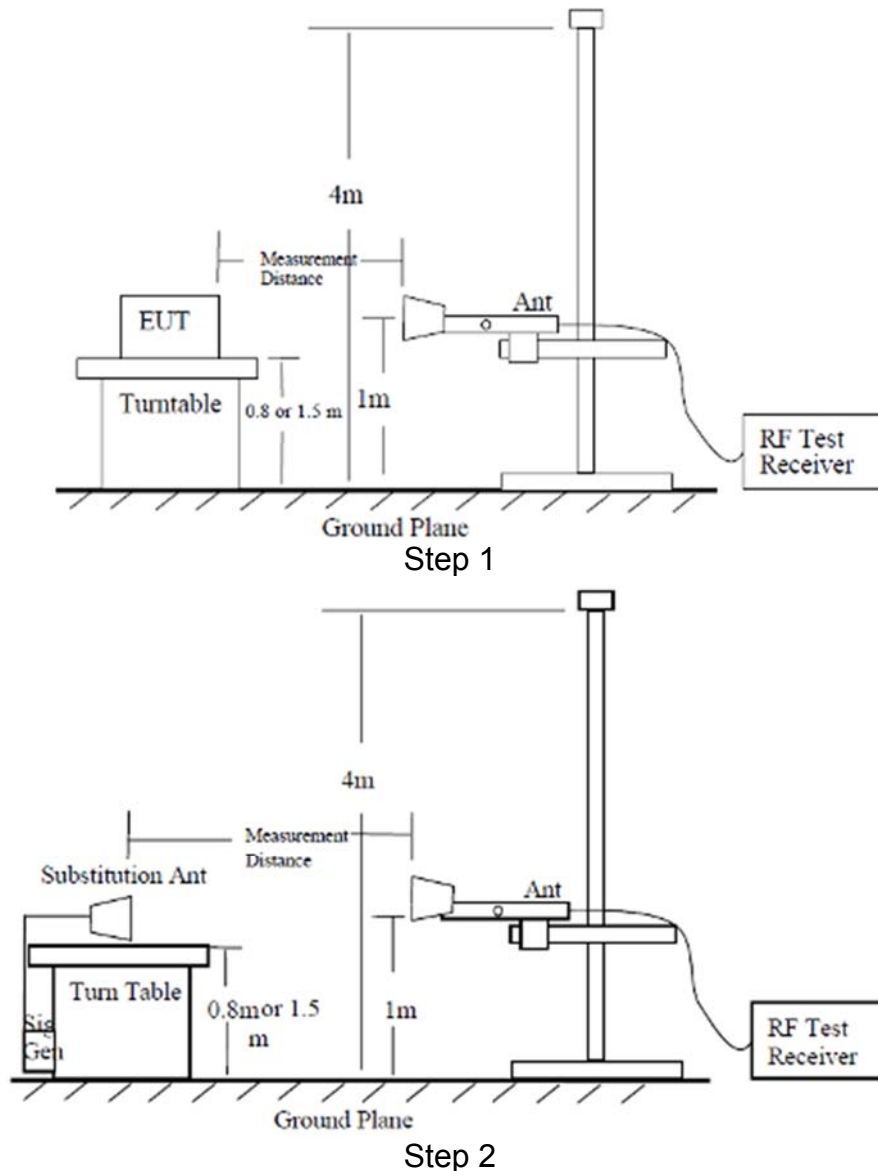

Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m ($f < 1\text{GHz}$)/1.5m ($f > 1\text{GHz}$) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100 kHz ($f < 1\text{GHz}$)/1MHz ($f > 1\text{GHz}$). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 10th harmonic of the carrier. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power (EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15 \text{ (dB)}$.

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{mea} + P_{ca} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

Test result:

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
RF Power Output	0.6 dB	
Occupied Bandwidth	3 kHz	
Spurious Emissions	30MHz~1GHz	2.83 dB
	1GHz~12.75GHz	2.50 dB
	12.75GHz~25GHz	2.75 dB
Band Edges Compliance	1.2dB	
Frequency Stability	4 Hz	

8 TEST EQUIPMENTS

No.	Name/Model	Manufacturer	S/N	Calibration Date	Calibration Due Date
1	MT8820C Mobile Station Tester	Anritsu	6201300660	2020.08.20	2021.08.19
2	CMW500 Radio Communication Station	R&S	161702	2020.08.20	2021.08.19
2	FSV40 Spectrum Analyzer	R&S	101065	2020.08.20	2021.08.19
3	N9020A Spectrum Analyzer	Agilent	MY48010771	2020.08.20	2021.08.19
4	6007 Power Divider	Weinschel	6007-GJ-1	2020.08.20	2021.08.19
5	DC Power Supply E3645A	Agilent	MY40000741	2020.03.01	2021.02.28
6	Temperature chamber SH241	ESPEC	92013758	2020.08.20	2021.08.19
7	12.65m×8.03m×7.50m Fully- Anechoic Chamber	FRANKONIA	----	----	----
8	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
9	Turn table Diameter:1m	FRANKONIA	----	----	----
10	Turn table Diameter:5m	FRANKONIA	----	----	----
11	Antenna master FAC(MA4.0)	MATURO	----	----	----
12	Antenna master SAC(MA4.0)	MATURO	----	----	----
13	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
14	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2020.08.20	2021.08.19
15	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100513	2020.08.20	2021.08.19
16	HL562 Ultra log antenna	R&S	100016	2020.08.20	2021.08.19
17	3160-09 Receive antenna	SCHWARZ- BECK	002058-002	2020.08.20	2021.08.19
18	ESI 40 EMI test receiver	R&S	100015	2020.08.20	2021.08.19
19	ESCS30 EMI test receiver	R&S	100029	2020.08.20	2021.08.19
20	HL562 Receive antenna	R&S	100167	2020.08.20	2021.08.19
21	ENV216 AMN	R&S	3560.6550.12	2020.08.20	2021.08.19

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Please refer to the attachment.

APPENDIX B – TEST DATA OF RADIATED EMISSION

Please refer to the attachment.