



Report No	EE0406-1
Client	Mobile Aspects, Inc. 112 19 th Street Pittsburg, PA 15222
Phone	1-412-325-1690
FRN	0010877447
<hr/>	
Product Name	IRISupply
Models	IS100, IS101, IS102, IS103, IS104
FCC ID	R4FIS100
Equipment Type	Low Power Communications Device Transmitter
Equipment Code	DXX
Results	As detailed within this report
<hr/>	
Prepared by	 Evan Gould – Test Engineer
Authorized by	 Michael Buchholz – EMC Manager
Issue Date	
Conditions of issue	This Test Report is issued subject to the conditions stated in ‘terms and conditions’ section of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.

Table Of Contents

<i>Summary</i>	3
<i>Test Methodology</i>	3
<i>Statement of Conformity</i>	4
<i>EUT Configuration</i>	5
<i>Fundamental Measurements</i>	6
<i>Radiated Spurious Emissions</i>	8
<i>AC Line Conducted Emission Measurements</i>	9
<i>Voltage Variation</i>	10
<i>Test Equipment Used</i>	11
<i>Terms And Conditions</i>	12
<i>A2LA Accreditation</i>	14



Summary

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 15.225. The product is the Mobile Aspects iRISupply RFID supply cabinet system (Models IS100, IS101, IS102, IS103, IS104). The transmitter operates at 13.56MHz. Model IS100 is the cabinet which contains the transmitter and user interface. The other cabinets only contain antennas. The transmitter used is the FEIG Electronic ID ISC.LRM200-A/B Reader Module (FCC ID PJMLRM200A). The system tested consisted of three cabinets (IS101, IS100, IS103) bolted together. This provided all possible antenna orientations to be represented. There are two PCB antenna types used in the cabinets.

Test Methodology

Radiated emissions testing is performed according to the procedures specified in ANSI C63.4 (2002). Emissions were maximized by rotating the system around its vertical axis as well as varying the test antenna's height and polarity.

Frequency range investigated: 0.09MHz – 18GHz

Measurement distance:	0.15 - 30MHz	Conducted
	0.09 – 30MHz	3m (loop antenna)
	30MHz – 1GHz	3m
	1 – 18GHz	1m

AC Line conducted emissions testing was performed with a 50Ω/50μH LISN.

Statement of Conformity

The iRISupply has been found to conform to the following parts of 47 CFR as detailed below:

Part 2	Part 15	Comments
	15.15(b)	There are no controls accessible to the user that vary the output power.
2.925	15.19	The label is shown in the label exhibit.
	15.21	Information to the user is shown in the instruction manual exhibit.
	15.27	No special accessories are required for compliance.
	15.203	This product is professionally installed.
	15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209.
	15.207	The unit meets the AC conducted emissions requirements of 15.207.
	15.225(a-d)	The unit complies with these requirements as shown in this test report
	15.225(e)	See attached PJMLRM200A – Test Report for frequency stability test data.

EUT Configuration

EUT Configuration				
Work Order: E0406				
Company: Mobile Aspects				
Company Address: 112 19th Street Pittsburg, PA 15222				
Contact: Khang Lee				
MN		SN		
EUT: IS100		1		
IS101		1		
IS103		1		
EUT Description: iRISupply				
EUT Max Frequency: 1GHz (PC)				
Support Equipment:		MN		SN
none				
EUT Cables:		Qty	Shielded?	Length
AC Power		9	No	2m
Unpopulated EUT Ports:		Qty	Reason	
none				
Software / Operating Mode Description:				
Fundamental: Transmitting full power on each antenna.in the system.				
Spurious: Continuously reading an RFID card.				
Line Conducted: Transmitting to the dummy load.				



Fundamental Measurements

LIMITS

Frequency Range (MHz)	Limit @ 30m (µV/m)	Limit @ 30m (dBµV/m)
13.553-13.567	15,848	83.9
13.410-13.553 13.567-13.710	334	50.4
13.110-13.410 13.710-14.010	106	40.5

[15.225(a-c)]

Note: If Peak measurements meet Quasi-Peak limits, then Quasi-Peak measurements are not required.

The limits of 15.209 apply outside the range 13.110-14.010 MHz.

MEASUREMENTS


Radiated Fundamental Table								Curtis-Straus LLC		
Date: 18-May-04		Company: Mobile Aspects				Work Order: E0406				
Engineer: Evan Gould		EUT Desc: iRIS								
Frequency Range: 9kHz - 30MHz					Measurement Distance: 3 m					
Notes: Doors Open; IS101 shelves populated with 8 AC Power cables; No spurious emissions detected RBW=9kHz VBW=30kHz										
Antenna Polarization (0° / 90°)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Distance Factor (dB)	Adjusted Reading (dBµV/m)	47 CFR 15.225(a)		
								Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
IS101 top 0° pk	13.56	73.9	22.4	37.9	0.0	40.0	49.4	83.9	-34.5	Pass
IS101 mid 0° pk	13.56	71.1	22.4	37.9	0.0	40.0	46.6	83.9	-37.3	Pass
S101 bottom 0° p	13.56	70.8	22.4	37.9	0.0	40.0	46.3	83.9	-37.6	Pass
IS100 top 0° pk	13.56	59.6	22.4	37.9	0.0	40.0	35.1	83.9	-48.8	Pass
IS100 mid 0° pk	13.56	58.9	22.4	37.9	0.0	40.0	34.4	83.9	-49.5	Pass
IS103 top 0° pk	13.56	65.6	22.4	37.9	0.0	40.0	41.1	83.9	-42.8	Pass
S103 bottom 0° p	13.56	65.3	22.4	37.9	0.0	40.0	40.8	83.9	-43.1	Pass
Table Result: Pass by -34.5 dB								Worst Freq: 13.56 MHz		
Test Site: "M"		Pre-Amp: Black		Cable: 65 ft RG8A/U		Analyzer: Black		Antenna: Sm Loop (high)		

Peak measurements were taken using each antenna in the three-cabinet system with their respective doors open during the maximization of each measurement.



SAMPLE ANALYZER PLOT

Agilent 14:59:14 May 18, 2004

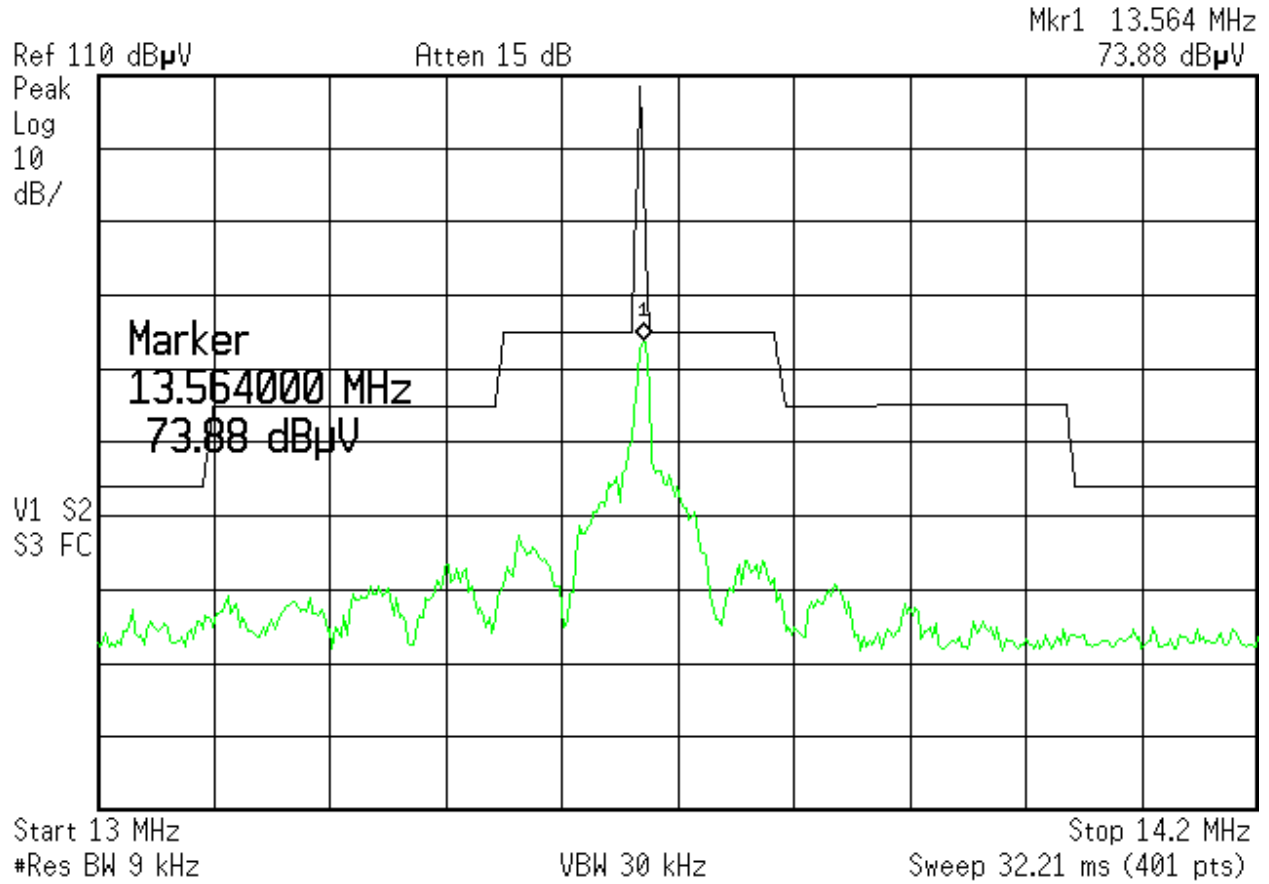

Radiated Spurious Emissions

LIMITS

“The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209” [15.225(d)]

Bandwidth Settings:

30-1000MHz
1-18GHz

RBW=120kHz, VBW=300kHz
RBW=1MHz, VBW=3MHz

MEASUREMENTS

Radiated Emissions Table							Curtis-Straus LLC		
Date: 17-Jun-04		Company: Mobile Aspects			Work Order: E0406				
Engineer: Evan Gould		EUT Desc: IRIS							
Frequency Range: 30-1000MHz				Measurement Distance: 3 m					
Notes:									
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	47 CFR 15.209		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
V	39.8	44.4	22.3	10.5	0.8	33.4	40.0	-6.6	Pass
V	119.3	42.4	22.2	6.9	1.4	28.5	43.5	-15.0	Pass
H	149.17	29.1	22.3	11.2	1.6	19.6	43.5	-23.9	Pass
H	398.0	27.0	21.9	16.6	2.9	24.6	46.0	-21.4	Pass
noise floor	412.45	16.9	21.9	16.8	3.0	14.8	46.0	-31.2	Pass
Table Result:		Pass		by		-6.6 dB		Worst Freq: 39.8 MHz	
Test Site: "M"		Pre-Amp: Black		Cable: 65 ft RG8A/U		Analyzer: Yellow		Antenna: Blue	

Radiated Emissions Table							Curtis-Straus LLC		
Date: 01-Jul-04		Company: Mobile Aspects			Work Order: E0406				
Engineer: Evan Gould		EUT Desc: iRIS							
Frequency Range: 1-18GHz				Measurement Distance: 1 m					
Notes:									
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	47 CFR 15.209		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Vpk	1033.0	44.1	15.6	24.8	1.4	54.7	63.5	-8.8	Pass
Vpk	1234.0	43.5	16.3	25.2	1.5	53.9	63.5	-9.6	Pass
Vpk	1550.0	45.3	17.4	26.0	1.7	55.6	63.5	-7.9	Pass
Table Result:		Pass		by		-7.9 dB		Worst Freq: 1550.0 MHz	
Test Site: "M"		Pre-Amp: White		Cable: 3 RG142LL		Analyzer: White		Antenna: Yellow Horn	

No spurious emissions detected in the range 9kHz – 30MHz.



AC Line Conducted Emission Measurements

LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dBµV)	Average limit (dBµV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS

AC Mains Conducted Emissions										Curtis-Straus LLC	
Date: 17-May-04			Company: Mobile Aspects				Work Order: E0406				
Engineer: Evan Gould			EUT Desc: iRIS				Test Site: EMI 1				
Notes: antenna set to dummy load											
LISN(s): Orange											
Range: 0.15-30Mhz			Other Equipment:				Spectrum Analyzer: Red				
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor (dB)	FCC/CISPR B		FCC/CISPR B		Overall Result (Pass/Fail)	
	QP1 (dBµV)	QP2 (dBµV)	AV1 (dBµV)	AV2 (dBµV)		qp Limit (dBµV)	qp Margin dB	AVE Limit (dBµV)	AVE Margin dB		
0.15	41.3	40.6	32.5	33.0	20.0	66.0	-4.7	56.0	-3.0	Pass	
0.22	29.8	29.7			20.0	62.8	-13.0	52.8	-3.0	Pass	
0.30	32.5	30.4	23.0	19.2	20.0	60.2	-7.7	50.2	-7.2	Pass	
0.37	25.9	25.9			20.0	58.5	-12.6	48.5	-2.6	Pass	
0.45	22.0	20.3			20.0	56.9	-14.9	46.9	-4.9	Pass	
13.60	4.6	5.5			20.0	60.0	-34.5	50.0	-24.5	Pass	
Table Result: Pass by -2.60 dB Worst Freq: 0.37 MHz											

Voltage Variation

REQUIREMENT

“For intentional radiators, measurements of the variation of the...radiated signal level of the fundamental frequency component of the emission...shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.”
 [15.31(e)]

MEASUREMENTS

Voltage Variation		
Date: 18-May-04		
Company: Mobile Aspects		
EUT: iRIS		
Engineer: Evan Gould		
Analyzer: Black		
Antenna: Small Loop		
Notes:		
Supply Voltage (VAC)	Frequency (MHz)	Reading (dBμV/m)
(85%) 102	13.56	58.4
(nominal) 120	13.56	58.5
(115%) 138	13.56	58.2

Test Equipment Used

REV. 28-JUN-2004

SPECTRUM ANALYZERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	9kHz-1.8GHz	8591E	HP	3441A03559	00024	26-MAY-2005
WHITE	9kHz-22GHz	8593E	HP	3547U01252	00022	04-MAR-2005
YELLOW	9kHz-2.9GHz	8594E	HP	3523A01958	00100	08-JUL-2004
BLACK	9kHz-12.8GHz	8596E	HP	3710A00944	00337	15-JUL-2004

LISNs/MEASUREMENT PROBES	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
ORANGE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	903707	00754	02-APR-2005

OPEN AREA TEST SITE (OATS)	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
SITE M	93448	IC 2762-M	R-904	25-MAR-2005

LINE CONDUCTED TEST SITES	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
EMI 1	93448	N/A	C-1801	01-MAY-2006

PREAMPS / ATTENUATORS / FILTERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
BLACK	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00799	27-FEB-2005
WHITE	1-20GHz	SMC-12A	C-S	426643	00760	29-JUL-2004

ANTENNAS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
BLUE BILOG	30MHz-1GHz	3143	EMCO	1271	00803	17-MAR-2005
YELLOW HORN	1-18GHz	3115	EMCO	9608-4898	00037	22-MAY-2005
SMALL LOOP	9kHz-30MHz	PLA-130/A	ARA	1024	00755	23-FEB-2006

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Terms And Conditions

Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- 1.2 Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- 1.3 Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- 2.1 Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.
- 2.2 Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- 2.3 Designate a person who is authorized to receive copies of LABORATORY's reports.
- 2.4 Undertake the following:
 - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the equipment proposed to require technical services, together with any relevant data.
 - (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

Paragraph 3. GENERAL CONDITIONS:

- 3.1 LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- 3.2 LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- 3.3 LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.
- 3.4 THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- 3.5 Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.
- 3.6 The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.
- 3.7 The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- 3.8 The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.
- 3.9 The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of test data.
- 3.10 It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other clients from said employees.
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes, including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

Paragraph 4. INSURANCE:

- 4.1 LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- 4.2 The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.
- 4.3 No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any other party's responsibility for damages resulting from their operations or for furnishing work and materials.

Paragraph 5. PAYMENT:

- 5.1 CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentment of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.

- 5.2 CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT.
- 5.3 Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:

- 6.1 CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY.
- 6.2 CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.
- 6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.

A2LA Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999			
<p>CURTIS-STRAUS¹ 527 Great Road Littleton, MA 01460 Barry Quinlan Phone: 978-486-8880</p> <p>ELECTRICAL</p>		<p>EN 55011 1991, 1998 characteristics of SABS CISPR 11: 1997</p> <p>Canada ICES-001 1998 CNS13803 AS/NZS 2064: 1997</p> <p>CSA C108.8 – M1983</p> <p>CISPR 13:1996, 1998, 2001</p> <p>EN 55013: 1990, 2001</p> <p>EN 55013 Amend 12 1994</p> <p>SABS CISPR 13: 1996</p> <p>CNS 13439 AS/NZS 1053: 1999</p> <p>CISPR 14 1993 (except discontinuous disturbances)</p> <p>EN 55014 1993, 1997 discontinuous disturbances)</p> <p>AS/NZS 1044: 1995 discontinuous disturbances)</p> <p>Immunity CNS13783-1 SABS CISPR 14-1 1993</p> <p>SABS CISPR 14-2 1997 + A1:2001</p>	<p>Limits and methods of measurement of radio disturbance industrial, scientific and medical (ISM) radio-frequency equipment – Industrial, scientific and medical (ISM) radio-frequency equipment – Electromagnetic disturbance characteristics Limits and methods of measurement</p> <p>Industrial, scientific and medical radio frequency generators</p> <p>Industrial, Scientific and Medical Instrument</p> <p>Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.</p> <p>Electromagnetic Emission from Data Processing Equipment and Electronic Office Machines</p> <p>Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Sound and television broadcast receivers and associated equipment: Electromagnetic compatibility. Part 1: Specification for limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment.</p> <p>Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Amendment 12</p> <p>Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Broadcast receiver and associated equipment Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Limits and methods of measurement of radio disturbance characteristics of electrical motor- operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus.</p> <p>Limits and methods of measurement of radio disturbance (except characteristics of electrical motor- operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus.</p> <p>Limits and methods of measurement of radio disturbance (except characteristics of electrical motor- operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus.</p> <p>Household Electrical Appliances</p> <p>Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 1: Emission – Product family standard</p> <p>Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity - Product family standard</p>
Valid until: July 31, 2005	Certificate Number: 1627-01		
<p>In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>Electromagnetic Compatibility (EMC), Telecommunications, and Product Safety tests:</u></p>			
<p>Electromagnetic Compatibility (EMC) Radiated emissions testing (electric and magnetic fields); Conducted emissions testing (voltage and current); Electrostatic Discharge testing; Electrical Fast Transient testing; Radiated Immunity testing; Conducted Immunity testing; Lightning Immunity testing; Voltage Dips, Interrupts and Voltage Variations testing; Magnetic Immunity testing; RF Power measurements; Frequency Stability measurements; Longitudinal Induction measurements; Harmonic emissions testing; Light flicker testing; Low frequency disturbance voltage testing; Disturbance Power measurements</p>			
<p>EMC Standards</p> <p><i>Emissions</i> CISPR 22 1997 with amendments 1 and 2 CNS13438 1994 EN55022:1994 and 1998 SABS CISPR 22:1997 Canada ICES-003 1997 AS/NZS 3548 1995 CISPR 11 1990, 1997, 1999</p>		<p>Title</p> <p>Limits and methods of measurement of radio disturbance characteristics of information technology equipment. Limits and methods of measurement of radio interference characteristics of information technology equipment. Limits and methods of measurement of radio disturbance characteristics of information technology equipment. Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.</p>	
<p>¹ Note: This accreditation covers testing performed at the laboratory listed above and the satellite facility located at 168 Ayer Rd, Littleton, MA 01460</p>			
(A2LA Cert. No. 1627-01) 10/31/03	Page 1 of 11	(A2LA Cert. No. 1627-01) 10/31/03	Page 2 of 11
<p>CISPR 14-2 1996, 1997 + A1:2001</p> <p>CISPR 20: 1995, 2002 with amendment 3 (associated group only)</p> <p>EN 55020: 1995, 2002 (associated group only)</p> <p>CISPR 24</p> <p>SABS CISPR 24 1997</p> <p>AS/NZS 3200.1.2: 1995</p> <p><i>European Union Basic EMC Standards</i> EN 61000-4-2: 1995, 1999, 2001 EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999 EN 61000-4-4 1995 EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999 EN 61000-4-8 1994 EN 61000-4-11 1994 ENV 61000-2-2 1993</p> <p><i>EU Product Family Standards</i> EN 50081-1 1992 EN 50081-2 1993 EN 50082-1 1992, 1998 EN 50082-2 1995</p>	<p>Immunity requirements for household appliances, tools and similar apparatus. Limits and methods of measurement of immunity characteristics of sound and television broadcast receivers and associated equipment. Electromagnetic immunity of broadcast receivers and Associated equipment. Information technology equipment – Immunity characteristics – Limits and methods of measurement Information technology equipment – Immunity characteristics – Limits and methods of measurement Approval and test specification – Medical electrical equipment – General requirements for safety – Collateral Standard: Electromagnetic compatibility – Requirements and tests.</p> <p>Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 2: Electrostatic discharge immunity test – Basic EMC Publication Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 3: Radiated, radio-frequency, electromagnetic field immunity test Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 4: Electrical fast transient/burst immunity test – Basic EMC publication (EMC) Part 4: Testing and measurement techniques. Section 5: Surge immunity test. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 6: Immunity to conducted disturbances, induce by radio-frequency fields. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 8: Power frequency magnetic field immunity test. (EMC) Part 4: Testing and measurement techniques. Section 11: Voltage dips, short interruptions and voltage Variations immunity tests. Electromagnetic compatibility (EMC). Part 2: Environment, Section 2: Compatibility levels for low-frequency conducted disturbances and signaling in public low-voltage power supply systems (IEC 1000-2-2:1990)</p> <p>Electromagnetic capability – Generic emission standard. Part 1: Residential, commercial and light industry. (I.S.) Electromagnetic compatibility – Generic emission standard. Part 2: Industrial environment Electromagnetic compatibility – Generic emission standard. Part 1: Residential, commercial and light industry Electromagnetic compatibility – Generic immunity Standard. Part 2: Industrial environment</p>	<p>EN 61000-6-1: 1997, 2001</p> <p>EN 61000-6-2: 1998, 2001</p> <p>EN 50091-2 1996</p> <p>EN 55024 1998</p> <p>EN 55103-1 1997</p> <p>EN 55103-2 1997 (excluding Annex A3)</p> <p>EN 61326 1998</p> <p>EN 61547 1996</p> <p>EN 50130-4 1996</p> <p>EN 55104 1995</p> <p>EN 50083-2 1995</p> <p>EN 60601-1-2: 1993, 2002</p> <p>IEC 1800-3 1995</p> <p>EN 60555 Part 2 1987</p> <p>EN 60555 Part 3 1987</p> <p>EN 61000-3-2: 1995, 2000 AS/NZS 61000.3.2 1998 EN 61000-3-3 1995 AS/NZS 61000.3.3 1999</p> <p>ETS 300 386-1 1994</p>	<p>Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 1: Immunity for residential, commercial and light-industrial environments</p> <p>Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 2: Immunity for industrial environments</p> <p>Specification for Uninterruptible Power Systems (UPS). Part 2: EMC requirements</p> <p>Information technology equipment – Immunity Characteristics – Limits and methods of measurement.</p> <p>Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control apparatus for professional use. Part 1: Emission</p> <p>Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control professional use. Part 2: Immunity</p> <p>Electrical equipment for measurement, control and laboratory use – EMC requirements</p> <p>Equipment for general lighting purposes – EMC immunity requirements</p> <p>Alarm Systems. Part 4: Electromagnetic compatibility. Product family standard: Immunity requirements for components of fire, intruder and social alarm systems.</p> <p>Electromagnetic compatibility immunity – requirements for household appliances, tools and similar apparatus. Product family standard.</p> <p>Cabled distribution systems for television and sound signals. Part 2: Electromagnetic compatibility for equipment.</p> <p>Medical electrical equipment Part 1: general requirements for safety Section 2: Collateral standard: Electromagnetic compatibility – requirements and tests</p> <p>Adjustable speed electrical power drive systems. Part 3: EMC product standard including specific test methods.</p> <p>Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 2: Harmonics</p> <p>Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 3: Voltage fluctuations</p> <p>Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limits for harmonic current emissions</p> <p>Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limitation of voltage fluctuations and flicker in low-voltage supply systems.</p> <p>Equipment Engineering (EE); Public telecommunication network equipment electro-magnetic compatibility (EMC) requirements Part 1: Product family overview, compliance criteria and test levels</p>
(A2LA Cert. No. 1627-01) 10/31/03	Page 3 of 11	(A2LA Cert. No. 1627-01) 10/31/03	Page 4 of 11



<p>ETS EN 300 386-2 1997, 1998, ETS EN 300 386 2000 v1.2.1, 2001 v1.3.1</p> <p>ETS 300 132-1 1996</p> <p>ETS 300 132-2 1996</p> <p>ETR 283 1997</p> <p><i>EU radio standards</i> (ETS) EN 300 385 v1.2.1: 1998, 1999</p> <p>EN 300 330 v1.2.1: 1998, 1999</p> <p>ETS 300 328 1996</p> <p>ETS EN 300 440 v1.2.1 1999</p> <p>EN 301 893:2002 v1.2.1</p> <p>ETS 300 836-1:1998</p> <p>EN301 489-17:2002 v1.2.1</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p style="text-align: right;">Page 5 of 11</p>	<p>Electromagnetic compatibility and radio spectrum matters (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements; Part 2: Product family standard.</p> <p>Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources</p> <p>Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)</p> <p>Equipment Engineering (EE): Transient voltages at Interface A on telecommunications direct current (DC) power distributions.</p> <p>Electromagnetic compatibility and Radio spectrum matters (ERM); Electromagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment (ETS)</p> <p>Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices (SRD); Technical characteristics and test methods for radio equipment in the range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz</p> <p>Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques</p> <p>Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 1 Ghz to 40 Ghz frequency range</p> <p>Broadband Radio Access Networks (BRAN); 5 GHz (draft) high performance RLAN; Harmonized EN covering Essential requirements of article 3.2 of the R&TTE Directive</p> <p>Broadband Radio Access Networks (BRAN); High Performance Radio Local Area Network (HIPERLAN) Type 1; Conformance testing specification; Part 1: Radio Type approval and Radio Frequency (RF) conformance test specification</p> <p>Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2,4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment</p> <p>EN 300 328-2:2001 v1.2.1</p> <p>EN 301 489-1:2002</p> <p>EN 60669-2-1:2002</p> <p><i>Canada Radio Standards</i> Canadian GL-36 1995</p> <p>Canadian RSS-119 1999, 2000 Issue 6</p> <p>Canadian RSS-134 1996 & 2000, Issue 1</p> <p>Canadian RSS-210 2000 Issue 3,</p> <p>RFS29 1998 Specification for Restricted Radiation Radio Apparatus (New Zealand)</p> <p><i>FCC Standards</i> 47 CFR FCC low power transmitters operating on frequencies below 1 GHz, emergency alert systems, unintentional radiators and ISM devices.</p> <p>47 CFR FCC low power transmitters operating on frequencies above 1 GHz, with the exception of spread spectrum devices.</p> <p>47 CFR FCC Unlicensed Personal Communications System (PCS) devices</p> <p>47 CFR FCC Unlicensed National Scope Information Infrastructure devices and low power transmitters using spread spectrum techniques.</p> <p>47 CFR FCC Personal mobile Radio Services in the following FCC Rule Parts 22, 24, 25, 27.</p> <p>47 CFR FCC General Mobile Radio Scope Services in the following FCC Rule Parts 22, 74, 90, 95, 97.</p> <p>47 CFR FCC Maritime and Aviation Scope RadioServices in 47 CFR Parts 80 and 87</p> <p>47 CFR FCC Microwave Radio Services Scope in 47 CFR Parts 21, 74 and 101.</p> <p>Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques; Part 2: Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive</p> <p>Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements</p> <p>Switches for household and similar fixed electrical installations -- Part 2-1: Particular requirements -- Electronic switches</p> <p>Industry Canada -- technical requirements for low power Devices in the 2400 -- 2483.5 MHz band.</p> <p>Industry Canada -- Land mobile and fixed radio Transmitters and receivers, 27.41 to 960.0 MHz</p> <p>Industry Canada -- 900 MHz narrowband personal communications services</p> <p>Industry Canada -- Low power license-exempt radio 2001 Issue 5 communication devices</p> <p>Scope A1</p> <p>Scope A2</p> <p>A3</p> <p>A4</p> <p>B1</p> <p>B2</p> <p>B3</p> <p>B4</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p style="text-align: right;">Page 6 of 11</p>
<p>FCC/OST MP-5 1986</p> <p>GR-1089-CORE: 1997, 1999 issue 2/ 2002 Issue 3</p> <p><i>ANSI EMC Standards</i> ANSI C63.4: 1992, 1999, 2001</p> <p>ANSI C63.5 1988</p> <p><i>IEEE EMC Standards</i> IEEE C62.41: 1980, 1991</p> <p><i>Swedish EMC Standards</i> BAKOM 3336.3 1995</p> <p><i>South African EMC standards other than CISPR equivalents</i> SABS 1718-1: 1996</p> <p><i>Japanese VCCI Standards</i> VCCI V-3/99.05 1999 VCCI V-4/99.05 1999</p> <p>Telecommunications Telecommunications Registration; General test methods; Lightning surge; Drop testing; Balance testing; Signal power (metallic and longitudinal); Frequency measurements; Pulse templates; Leakage testing; Impedance testing; Hearing Aid Compatibility testing (<i>excluding volume control</i>); Protocol analysis and Jitter testing.</p> <p>Telecom Standards</p> <p>FCC 47 CFR Part 68 Telephone</p> <p>CS-03 Issue 8 1996 through amendment 5</p> <p>TIA/EIA TSB31-B 1998</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p style="text-align: right;">Page 7 of 11</p>	<p>FCC (Federal Communications Commission) methods Of measurement of radio noise emissions from industrial, scientific and medical equipment.</p> <p>Bellcore electromagnetic compatibility and electrical safety -- Generic criteria for network telecommunications equipment.</p> <p>American National Standard for methods of measurement of radio-noise emissions for low-voltage electrical and electronic equipment in the range of 9 kHz to 40GHz.</p> <p>American National Standard for electromagnetic compatibility -- radiated emissions measurements in electromagnetic interference (EMI) control -- calibration of antennas.</p> <p>IEEE recommended practice on surge voltages in low-voltage AC power circuits</p> <p>Electromagnetic compatibility and electrical safety (EMC & S) for wired terminal equipment. Harmonization document information over the OFCOM requirements.</p> <p>South African Bureau of Standards: Specification for Gaming equipment. Part 1: Casino equipment.</p> <p>Technical Requirements</p> <p>Instruction for Test Conditions for Requirement under Test</p> <p>TIA/EIA-IS-968</p> <p>TIA/EIA-IS-883</p> <p>TIA-968-A</p> <p>T1.TRQ.6-2001</p> <p>Canada VDSL Issue 1 January 2003</p> <p>AS/ACIF S002-2001</p> <p>AS/ACIF S016-2001</p> <p>AS/ACIF S031-2001 AS/ACIF S038-2001 AS/ACIF S043-2001</p> <p>ITU-T G.703 HKTA 2028</p> <p>HKTA 2029</p> <p>TBR 1 : 1995</p> <p>TBR 2 : 1997</p> <p>Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network</p> <p>Telecommunications Telephone Terminal Equipment Supplemental Technical Requirements for Connection of Stutter Dial Tone Detection Devices and ADSL Modems to the Telephone Network</p> <p>Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network</p> <p>Technical Requirements for SHDSL, HDLSL2, HDLSL4 Digital Subscriber Line Terminal Equipment to Prevent Harm to the Telephone Network Industry</p> <p>Terminal Attachment Program Requirements and Test Methods for Very-High-Bit-Rate Digital Subscriber Line (VDSL) Terminal Equipment</p> <p>Analogue interworking and non-interference requirements for Customer Equipment for connection to the Public Switched Telephone Network</p> <p>Requirements for Customer Equipment for connection to hierarchical digital interfaces</p> <p>Requirements for ISDN Basic Access Interface</p> <p>Requirements for ISDN Primary Rate Access Interface</p> <p>Requirements for Customer Equipment for Connection to a Metallic Local Loop Interface of a Telecommunications Network --</p> <p>Part 1: General</p> <p>Part 2: Broadband</p> <p>Part 3: DC, Low Frequency AC and Voiceband</p> <p>Physical/electrical characteristics of hierarchical Digital interfaces</p> <p>Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 1544 kbit/s</p> <p>Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 2048 kbit/s</p> <p>Attachment requirements for terminal equipment to be connected to circuit switched data networks and leased circuits using a CCITT Recommendation X.21 interface, or at an interface physically, functionally and electrically compatible with CCITT Recommendation X.21 but operating at any data signaling rate up to, and including, 1 984 kbit/s</p> <p>Attachment requirements for Data Terminal Equipment (DTE) to connect to Packet Switched Public Data Networks (PSPDNs) for CCITT Recommendation X.25 interfaces at data signaling rates up to 1 920 kbit/s utilizing interfaces derived from CCITT Recommendations X.21 and X.21 bit</p> <p>(A2LA Cert. No. 1627-01)</p> <p style="text-align: right;">10/31/03 Page 8 of 11</p>



<p>TBR 3 : 1995 + Amdt : 1997</p> <p>TBR 4 : 1995 + Amdt : 1997</p> <p>TBR 012 : 1993 + Amdt : 1996</p> <p>TBR 013 : 1996</p> <p>TBR 21 : 1998</p> <p>TBR 24 : 1997</p> <p><i>Australia</i> TS 002 : 1997</p> <p>TS 016 : 1997</p> <p>TS 031 : 1997</p> <p>TS 038 : 1997</p> <p>AS/ACIF S043.2:2001</p> <p>Product Safety General test methods; Input tests; Electric strength tests; Impulse tests; Permanency of marking tests; Accessibility tests; Energy Hazard measurements; Capacitor discharge tests; Humidity conditioning; Earthing tests; Limited power source measurements; Stability tests; Steel ball tests; Lithium Battery Reverse Current measurements; Leakage current tests; Transformer abnormal tests; Telecom leakage tests; Over voltage/power cross tests (<i>excluding x-ray tests</i>).</p> <p><u>Product Safety Standards</u></p> <p>Specific Product Safety Standards IEC 950 1991</p> <p>UL 1950 1998</p> <p>CSA C22.2 No.950-95 UL 60950 2000</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p>	<p>Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access</p> <p>Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN primary rate access</p> <p>Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal equipment</p> <p>Business Telecommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for terminal equipment interface</p> <p>Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signaling</p> <p>Business Telecommunications (BTC); 34 Mbit/s digital Unstructured and structured leased lines (D34U and D34S); Attachment requirements for terminal equipment interface</p> <p>Analogue Interworking and Non interference Requirements for Customer Equipment Connected to the Public Switched Telephone Network</p> <p>General Requirements for Customer Equipment Connected to Hierarchical Digital Interfaces</p> <p>Requirements for ISDN Basic Access Interface</p> <p>Requirements for ISDN Primary Rate Access Interface</p> <p>Requirements for Customer Equipment for connection to a metallic loop interface of a Telecommunications Network – Part 2 Broadband</p> <p><u>Title</u></p> <p>Safety of information technology equipment including Amendments 1, 2, 3, and 4 electrical business equipment.</p> <p>Safety of information technology equipment, including electrical business equipment.</p> <p>Safety of Information Technology Equipment (UL 1950)</p> <p>Safety of information technology equipment</p>	<p>IEC 60950 2000</p> <p>EN 60950 1997, 1998, 2000</p> <p>IEC 60950-1 2001</p> <p>UL 60950-1 2003</p> <p>CSA C22.2 No. 60950-00</p> <p>CSA C22.2 No. 60950-1 03</p> <p>AS/NZS 3260 1993</p> <p>AS/NZS 3260 Supp 1 1996</p> <p>ACA TS 001 1997</p> <p>UL 1459 1995</p> <p>IEC 1010-1 1990</p> <p>IEC 61010-1 1993</p> <p>EN 61010-1 1993, 2001</p> <p>IEC 61010-1 2001</p> <p>UL 61010B-1 2003</p> <p>UL 3101-1 1993</p> <p>CAN/CSA 1010-1 1999 (<i>Including AM 2</i>)</p> <p>UL 3111-1 1996</p> <p>UL 3121-1 1995</p> <p>IEC 60601-1 1995</p> <p>EN 60601-1 1995 (<i>Including AM 2</i>)</p> <p>UL 2601-1 1997</p> <p>IEC 60065 1998, 2000</p> <p>ANSI/UL 6500: 1998</p> <p>CAN/CSA 60065-00</p> <p>AS/NZS 3250 1995</p> <p>AS/NZS 60065 2000</p> <p>Canadian C22.2 No. 1-94 (1-98)</p> <p>1998</p> <p>EN 60065 1994</p> <p>IEC 60825 1990</p> <p>EN 60825-1 1994</p> <p>IEC 60825-1 2001</p> <p>IEC 60825-2 2000-5 systems</p> <p>IEC 60825-4 1997-11</p> <p>IEC 60335-1 1995</p> <p>(<i>Including AM2 – 1997 & AM 12 – 1997</i>)</p> <p>EN 60335-1 2001</p> <p>UL 60335-1 1998</p> <p>CAN/CSA E335-1 1994</p>	<p>Safety of information technology equipment including electrical business equipment.</p> <p>Safety of information technology equipment, including Electrical business equipment.</p> <p>Approval and test specification – Safety of information technology equipment including electrical business Equipment.</p> <p>Approval and test specification – Safety of information technology equipment including electrical business equipment – Alphabetical reference index to IEC 950 (Supplement to AS/NZS 3260:1993)</p> <p>Australian Communications Authority – Safety requirements for customer equipment.</p> <p>Telephone Equipment</p> <p>Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements.</p> <p>Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements.</p> <p>Electrical equipment for laboratory use Part 1: General requirements.</p> <p>Electrical measuring and test equipment. Part 1: General requirements.</p> <p>Medical electrical equipment. Part 1: General requirements for safety.</p> <p>Medical electrical equipment. Part 1: General Requirements for safety.</p> <p>Audio, video and similar electronic apparatus – Safety requirements</p> <p>Audio/video and musical instrument apparatus for Household, commercial and similar general use</p> <p>Australian/New Zealand Standard – Approval and test Specification – Mains operated electronic and related Equipment for household and similar general use</p> <p>Audio, video and similar electronic equipment. Consumer and 1994, commercial products</p> <p>Safety requirements for main operated electronic and related apparatus for household and similar general use.</p> <p>Radiation safety of laser products, equipment Classification, requirements and user’s guide</p> <p>Safety of laser products Part 1: equipment Classification, requirements and user’s guide.</p> <p>Safety of laser products – Part 2: Safety of optical communication</p> <p>Safety of laser products – Part 4: Laser guards</p> <p>Safety of household and similar electrical appliances</p> <p>Part 1: General requirements</p>
<p>UL 61010A-1 : 2002</p> <p>EN 61010-1 : 2001</p> <p>AS/NZS 60950 : 2000</p> <p>Environmental²</p> <p><u>Environmental Standards</u></p> <p>GR-63-CORE</p> <p>ETS 300 019</p> <p>(vibration up to 1000Hz)</p>	<p>Electrical equipment for laboratory use; part 1: General requirements</p> <p>Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements</p> <p>Safety information technology equipment</p> <p><u>Title</u></p> <p>NEBS Requirements: Physical Protection</p> <p>Environmental conditions and environmental tests For telecommunications equipment</p>	<p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p>Page 9 of 11</p>	<p>(A2LA Cert. No. 1627-01) 10/31/03</p> <p>Page 10 of 11</p>
<p>² Environmental testing is performed at the satellite facility located at 168 Ayer Rd, Littleton, MA 01460</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p>	<p>Page 11 of 11</p>		

