



TEST REPORT

No.I23N00664-WLAN 2.4GHz

for

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

Mobile Phone

Model Name: CPH2565

with

Hardware Version: 11

Software Version: ColorOS 13.1

FCC ID: R9C-CPH2565

Issued Date: 2023-05-23

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn

©Copyright. All rights reserved by SAICT.



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I23N00664-WLAN 2.4GHz	Rev.0	1st edition	2023-05-23

Note: the latest revision of the test report supersedes all previous versions.



CONTENTS

CONTENTS	3
1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE	6
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. TEST RESULTS	9
5.1. TESTING ENVIRONMENT	9
5.2. TEST RESULTS	9
5.3. STATEMENTS	9
6. TEST EQUIPMENTS UTILIZED	10
7. LABORATORY ENVIRONMENT	11
8. MEASUREMENT UNCERTAINTY	12
ANNEX A: DETAILED TEST RESULTS	13
TEST CONFIGURATION	13
A.0 ANTENNA REQUIREMENT	16
A.1 MAXIMUM OUTPUT POWER	17
A.2 PEAK POWER SPECTRAL DENSITY	18
A.3 6dB BANDWIDTH	25
A.4 BAND EDGES COMPLIANCE	35
A.5 CONDUCTED EMISSION	42
A.6 RADIATED EMISSION	53
A.7 AC POWER LINE CONDUCTED EMISSION	75



1. Summary of Test Report

1.1. Test Items

Description	Mobile Phone
Model Name	CPH2565
Applicant's name	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Manufacturer's Name	Guangdong OPPO Mobile Telecommunications Corp., Ltd.

1.2. Test Standards

FCC Part15-2021; ANSI C63.10-2013.

1.3. Test Result

Pass

Please refer to "5.2. Test Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,
Futian District, Shenzhen, Guangdong, P. R. China 518000

1.5. Project data

Testing Start Date: 2023-05-05
Testing End Date: 2023-05-19

1.6. Signature

Lin Zechuang
(Prepared this test report)

An Ran
(Reviewed this test report)

Zhang Bojun
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City,
Guangdong, China
Contact Person Mei XiLi
E-Mail meixili@oppo.com
Telephone: (86)76986076999
Fax: /

2.2. Manufacturer Information

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City,
Guangdong, China
Contact Person Mei XiLi
E-Mail meixili@oppo.com
Telephone: (86)76986076999
Fax: /



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Mobile Phone
Model Name	CPH2565
RF Protocol	IEEE 802.11b/g/n-HT20/n-HT40/VHT20/VHT40
Operating Frequency	ISM 2412MHz~2462MHz
Type of Modulation	DSSS/CCK/OFDM
Antenna Type	Integrated antenna
Antenna Gain	0.29dBi
Power Supply	3.87V DC by Battery
FCC ID	R9C-CPH2565
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
UT16aa	864951060023214	11	ColorOS 13.1	2023-04-13
	864951060023206			
UT05aa	864951060048815	11	ColorOS 13.1	2023-04-27
	864951060048807			

*EUT ID: is used to identify the test sample in the lab internally.

UT16aa is used for conduction test, UT05aa is used for radiation test and AC Power line Conducted Emission test.

3.3. Internal Identification of AE used during the test

AE No.	Description	AE ID*
AE1	Battery	/
AE2	Charger	/
AE3	USB Cable	/

AE1

Model	BLPA07
Manufacturer	Dongguan NVT Technology CO., LTD
Capacity	4890mAh
Nominal Voltage	3.87 V

AE2

Model	VCB7CAUH
Manufacturer	Dongguan Yohoo Electronic Technology Co., Ltd
Specification	American Standard Charger

AE3



No.I23N00664-WLAN 2.4GHz

Model DL129
Manufacturer /

*AE ID and AE Label: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Mobile Phone with integrated antenna and battery.

It consists of normal options: Lithium Battery, Charger and USB Cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2021
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013



5. Test Results

5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Output Power	15.247 (b)	P
2	Peak Power Spectral Density	15.247 (e)	P
3	6dB Bandwidth	15.247 (a)	P
4	Band Edges Compliance	15.247 (d)	P
5	Conducted Emission	15.247 (d)	P
6	Radiated Emission	15.247, 15.205, 15.209	P
7	AC Power line Conducted	15.207	P

See **ANNEX A** for details.

5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacture as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

Disclaimer:

A. After confirmation with the customer, the sample information provided by the customer may affect the validity of the measurement results in this report, and the impact and consequences arising therefrom shall be borne by the customer.

B. The samples in this report are provided by the customer, and the test results are only applicable to the samples received.



6. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2023-12-28	1 year
2	Power Sensor	U2021XA	MY55430013	Keysight	2023-12-28	1 year
3	Data Acquisition	U2531A	TW55443507	Keysight	/	/
4	RF Control Unit	JS0806-2	21C8060398	Tonscend	2024-05-07	1 year
5	Shielding Room	S81	CT000986-1344	ETS-Lindgren	2026-09-12	5 years

Radiated test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Test Receiver	ESR7	101676	Rohde & Schwarz	2023-11-23	1 year
2	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024-05-27	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2025-04-17	3 years
4	Anechoic Chamber	FACT3-2.0	1285	ETS-Lindgren	2023-05-29	2 years
5	Spectrum Analyzer	FSV40	101192	Rohde & Schwarz	2024-01-11	1 year
6	Loop Antenna	HLA6120	35779	TESEQ	2025-05-12	3 years
7	Horn Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2026-02-01	3 years
8	Test Receiver	ESCI	100702	Rohde & Schwarz	2024-01-11	1 year
9	LISN	ENV216	102067	Rohde & Schwarz	2023-09-06	1 year

Test software

No.	Equipment	Manufacturer	Version
1	JS1120-3	Tonscend	3.3
2	EMC32	Rohde & Schwarz	10.50.40

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.



7. Laboratory Environment

Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 4 Ω

Anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3 m distance, from 30 to 1000 MHz
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz



8. Measurement Uncertainty

Test Name	Uncertainty ($k=2$)	
1. Maximum Peak Output Power	1.32dB	
2. Peak Power Spectral Density	1.32dB	
3. 6dB Bandwidth	4.56kHz	
4. Band Edges Compliance	1.92dB	
5. Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f < 1\text{GHz}$	1.41dB
	$1\text{GHz} \leq f < 7\text{GHz}$	1.92dB
	$7\text{GHz} \leq f < 13\text{GHz}$	2.31dB
	$13\text{GHz} \leq f \leq 26\text{GHz}$	2.61dB
6. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f < 30\text{MHz}$	1.79dB
	$30\text{MHz} \leq f < 1\text{GHz}$	4.86dB
	$1\text{GHz} \leq f < 18\text{GHz}$	4.82dB
	$18\text{GHz} \leq f \leq 40\text{GHz}$	2.90dB
7. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	2.62dB


ANNEX A: Detailed Test Results

Test Configuration

The measurement is made according to ANSI C63.10.

1) Conducted Measurements

1. Connect the EUT to the test system correctly.
2. Set the EUT to the required work mode.
3. Set the EUT to the required channel.
4. Set the spectrum analyzer to start measurement.
5. Record the values.

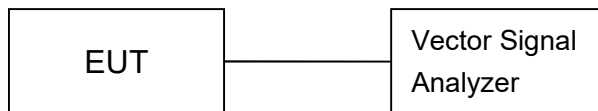


2) Radiated Measurements

Test setup:

9kHz-30MHz:

The EUT are measured in a anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving loop antenna is 1.0 meter above the ground. The test setup refers to figure below.


Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.

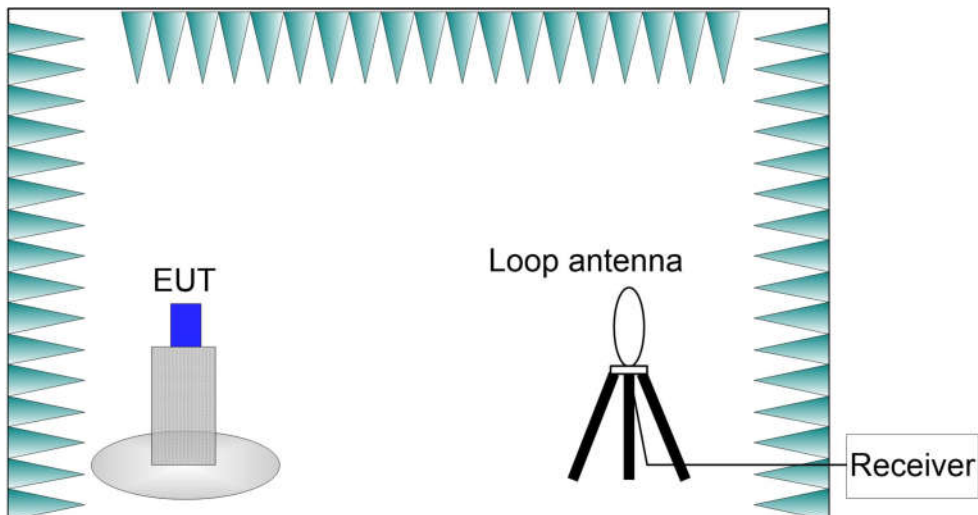


30MHz-26.5GHz:

The EUT are measured in a anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1.0 meter to 4.0 meter above the ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.


30MHz-1GHz:

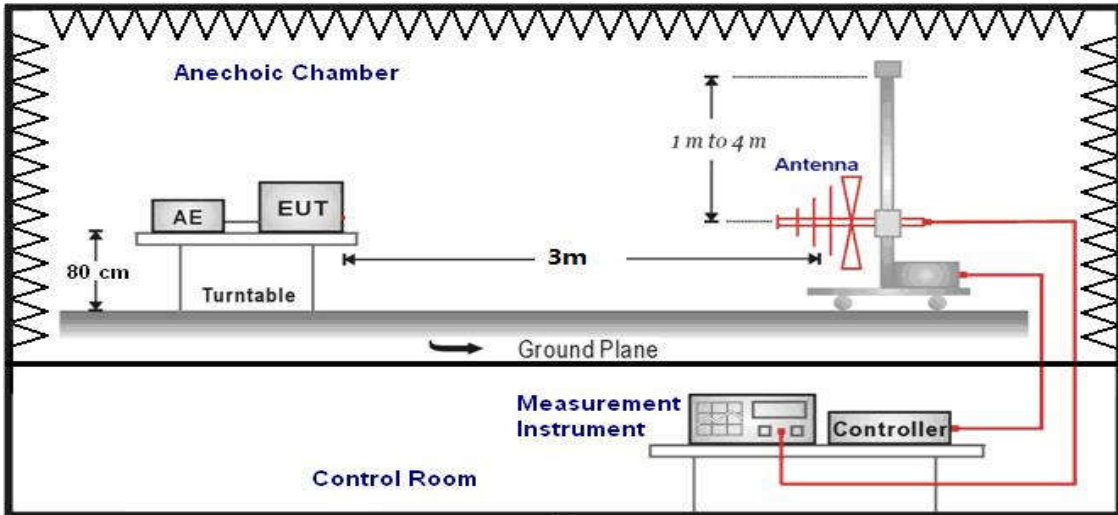

1GHz-3GHz:

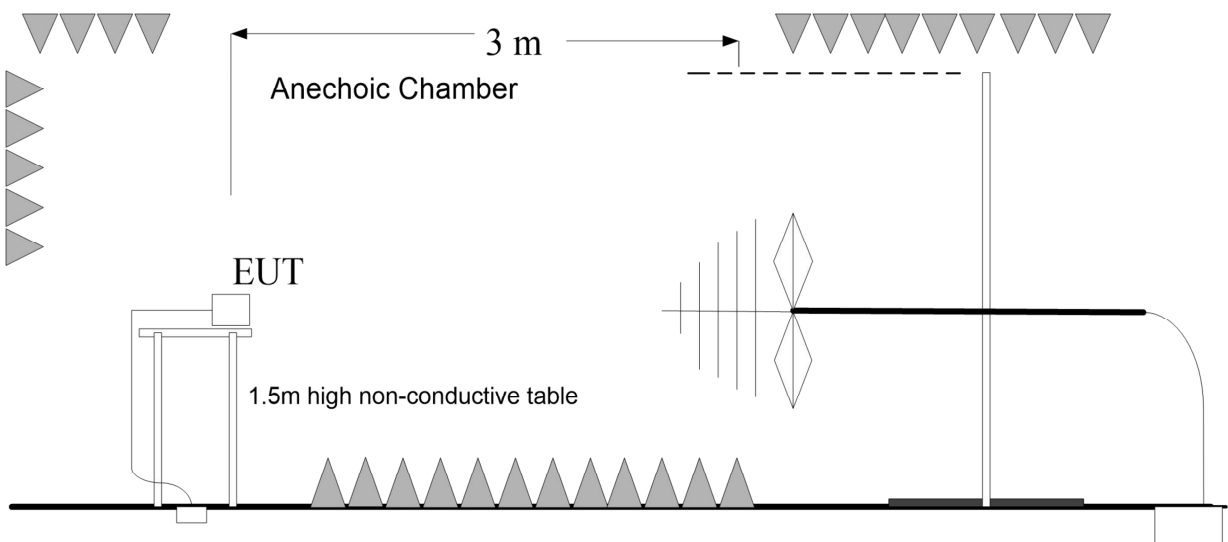


3GHz-26.5GHz:

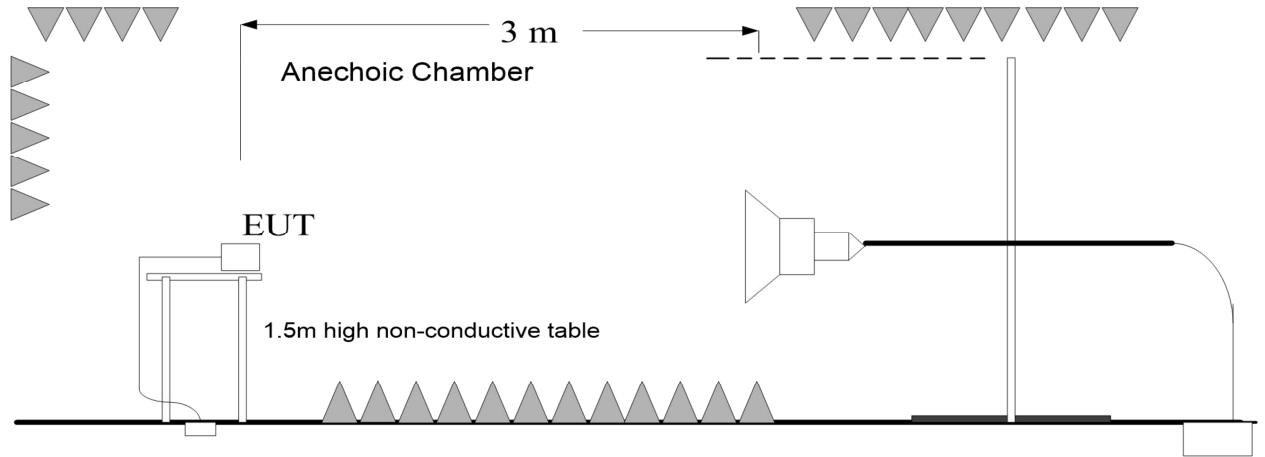

3) AC Power line Conducted Emission Measurement

For WLAN, the EUT is working under test mode. The EUT is commanded to operate at maximum transmitting power.

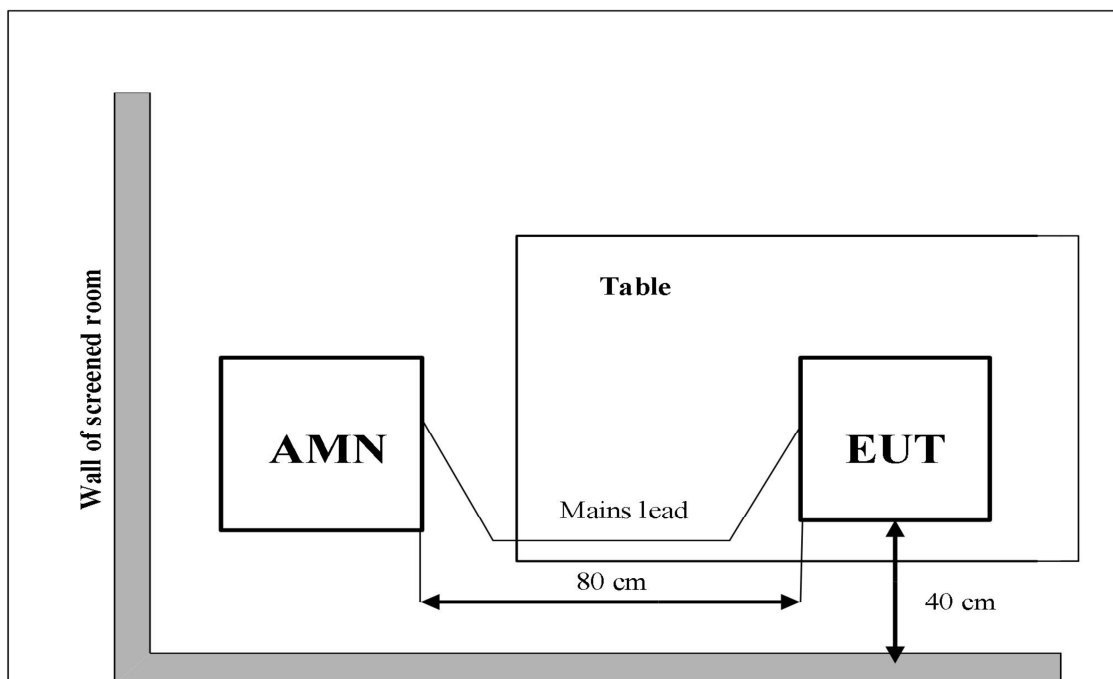



A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is 0.29dBi.
The RF transmitter uses an integrate antenna without connector.**



A.1 Maximum Output Power

Measurement of method: See ANSI C63.10-2013-Clause 11.9.2.3.2.

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

Measurement Results:

Mode	RF output power (dBm)		
	2412MHz (CH1)	2437MHz (CH6)	2462MHz (CH11)
802.11b	18.23	18.17	18.32
802.11g	17.27	17.24	17.45
802.11n-HT20	17.15	17.09	17.30
802.11-VHT20	16.49	16.50	16.72
/	2422MHz (CH3)	2437MHz (CH6)	2452MHz (CH9)
802.11n-HT40	16.82	16.55	16.37
802.11-VHT40	15.98	15.65	15.60

Note:

The data rate 1Mbps (11b mode), 6Mbps (11g mode), MCS0 (11n mode) and MCS0 (VHT mode) are selected as the Worst-Case. The following cases and test graphs are performed with this condition.

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

Conclusion: PASS



A.2 Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-clause 11.10.2.

Measurement Limit:

Standard	Limit (dBm/10 kHz)
FCC CRF Part 15.247(e)	< 8

Measurement Results:

Mode	Frequency (MHz)	Test Results(dBm/10 kHz)		Conclusion
802.11b	2412(CH1)	Fig.1	6.32	P
	2437(CH6)	Fig.2	6.24	P
	2462(CH11)	Fig.3	6.81	P
802.11g	2412(CH1)	Fig.4	-6.00	P
	2437(CH6)	Fig.5	-5.49	P
	2462(CH11)	Fig.6	-5.31	P
802.11n-HT20	2412(CH1)	Fig.7	-4.67	P
	2437(CH6)	Fig.8	-4.56	P
	2462(CH11)	Fig.9	-4.16	P
802.11-VHT20	2412(CH1)	Fig.10	-5.80	P
	2437(CH6)	Fig.11	-5.47	P
	2462(CH11)	Fig.12	-5.21	P

Note: The mode of 20M OCB have the largest PSD.

See below for test graphs.

Conclusion: PASS

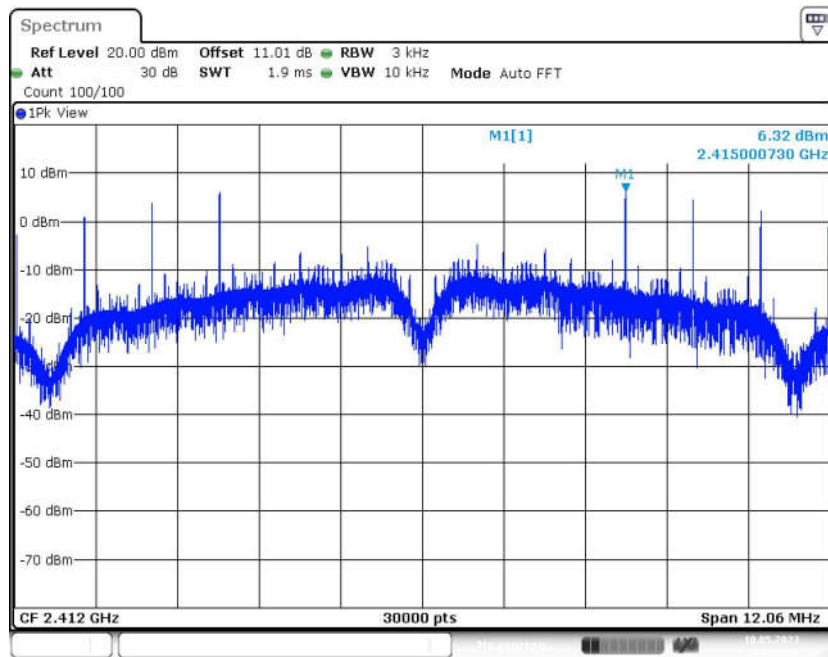


Fig.1 Power Spectral Density (802.11b, CH1)

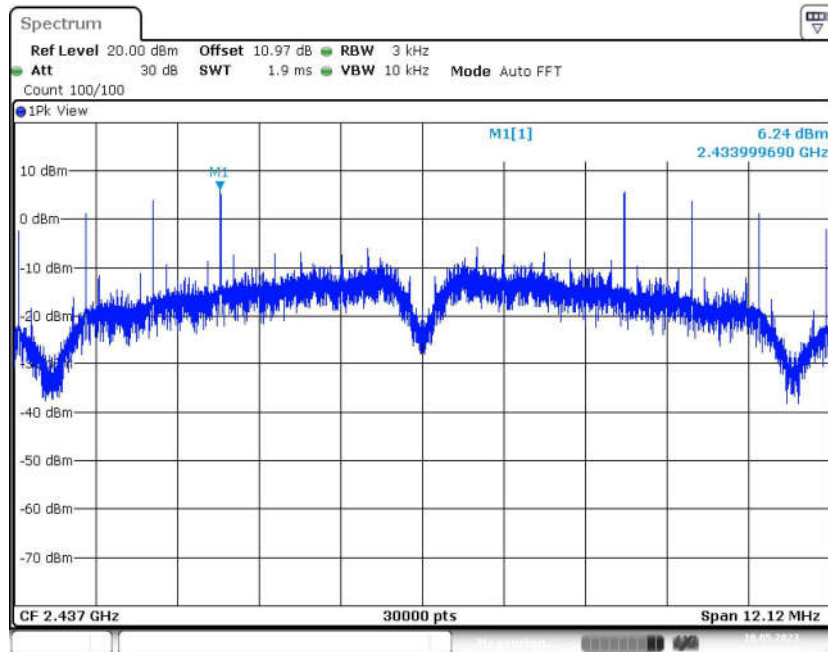


Fig.2 Power Spectral Density (802.11b, CH6)

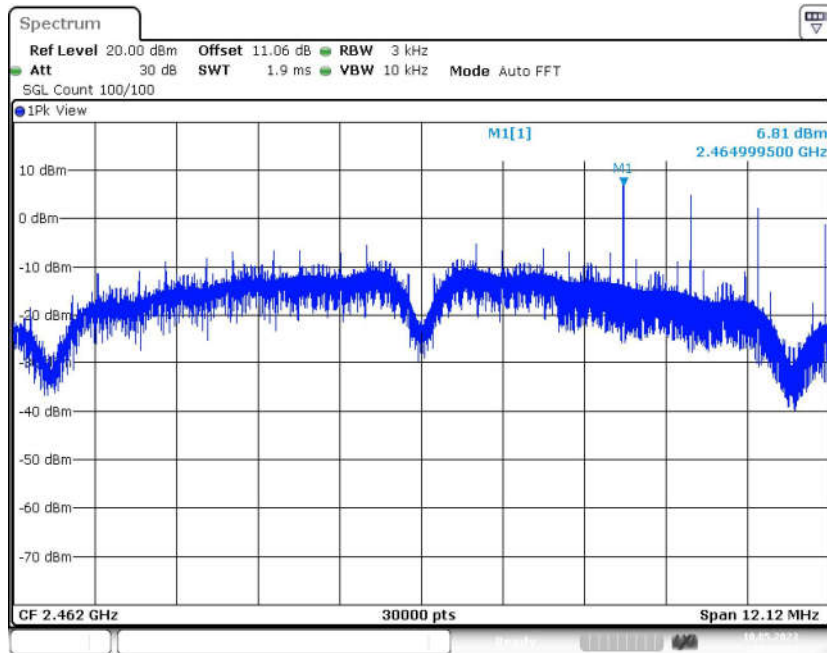


Fig.3 Power Spectral Density (802.11b, CH11)

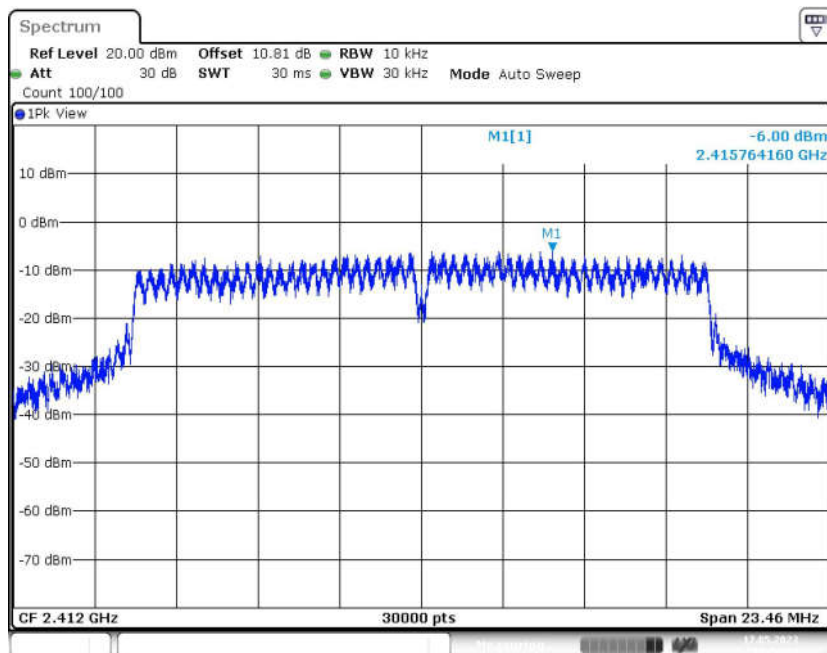


Fig.4 Power Spectral Density (802.11g, CH1)

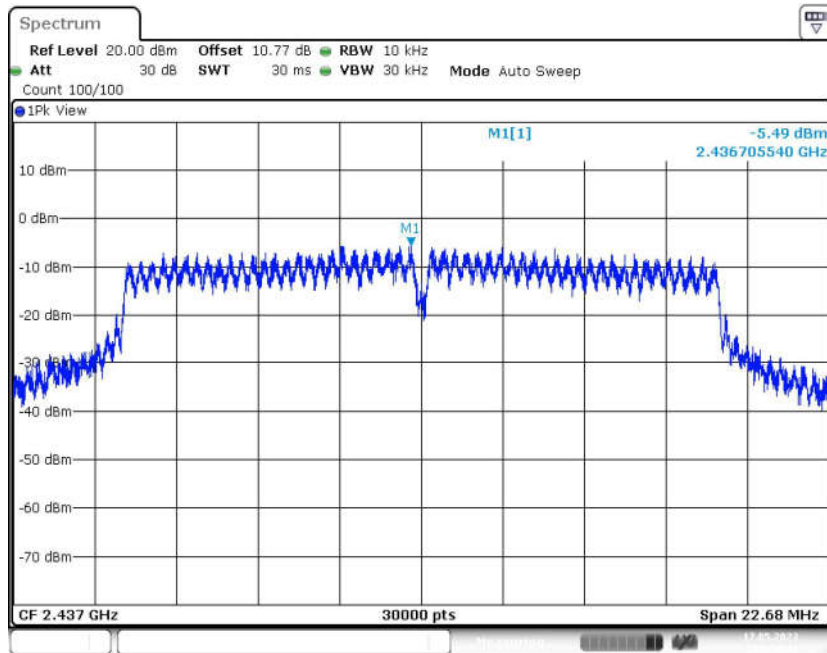


Fig.5 Power Spectral Density (802.11g, CH6)

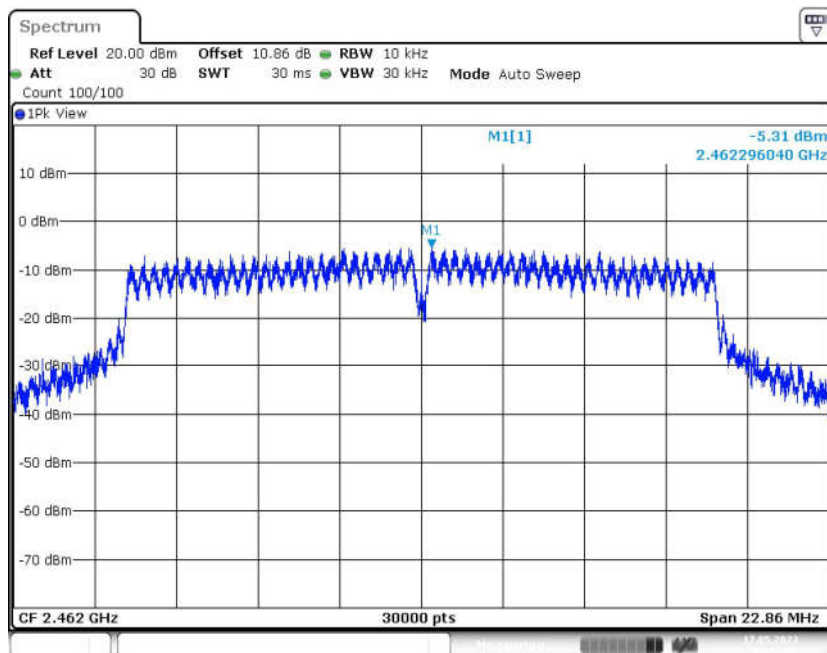


Fig.6 Power Spectral Density (802.11g, CH11)

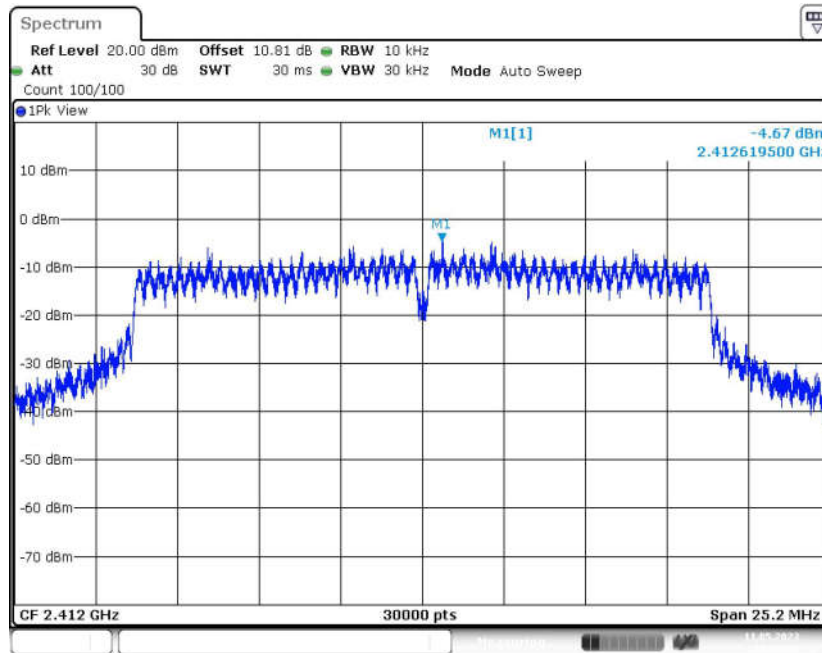


Fig.7 Power Spectral Density (802.11n-HT20, CH1)

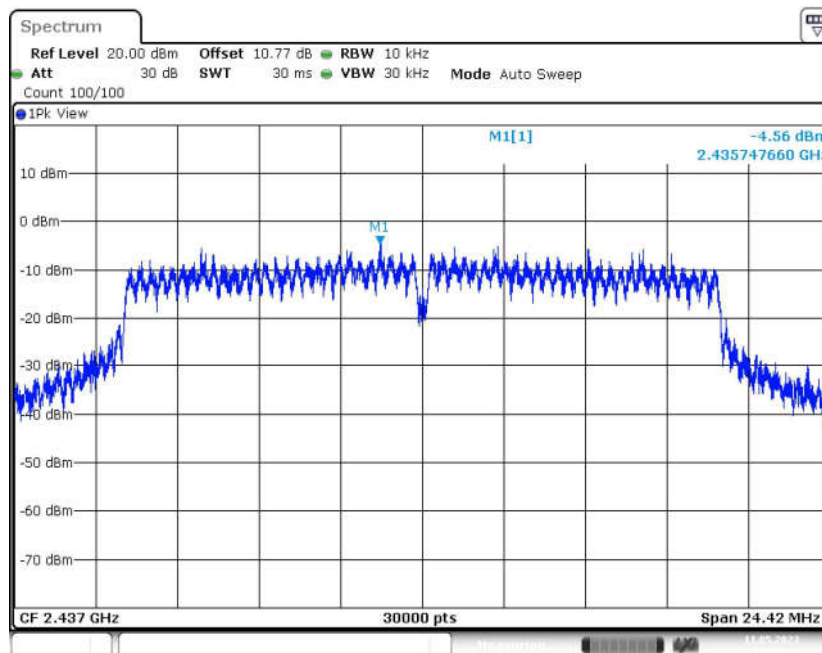


Fig.8 Power Spectral Density (802.11n-HT20, CH6)

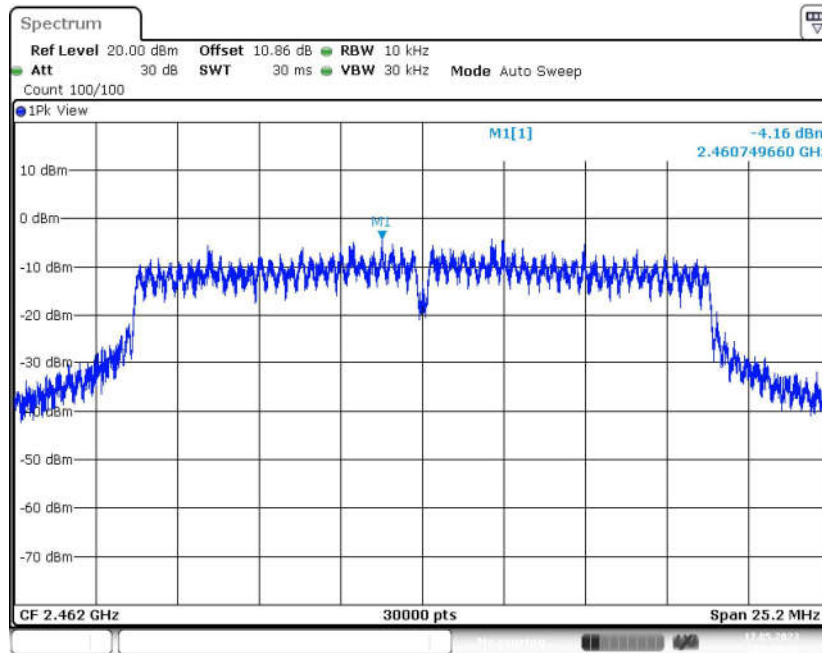


Fig.9 Power Spectral Density (802.11n-HT20, CH11)

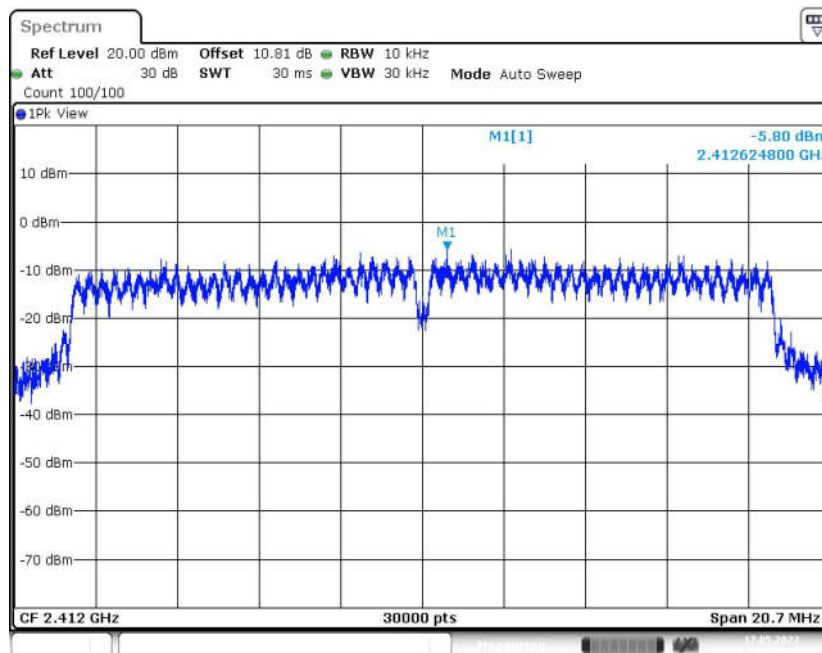


Fig.10 Power Spectral Density (802.11-VHT20, CH1)

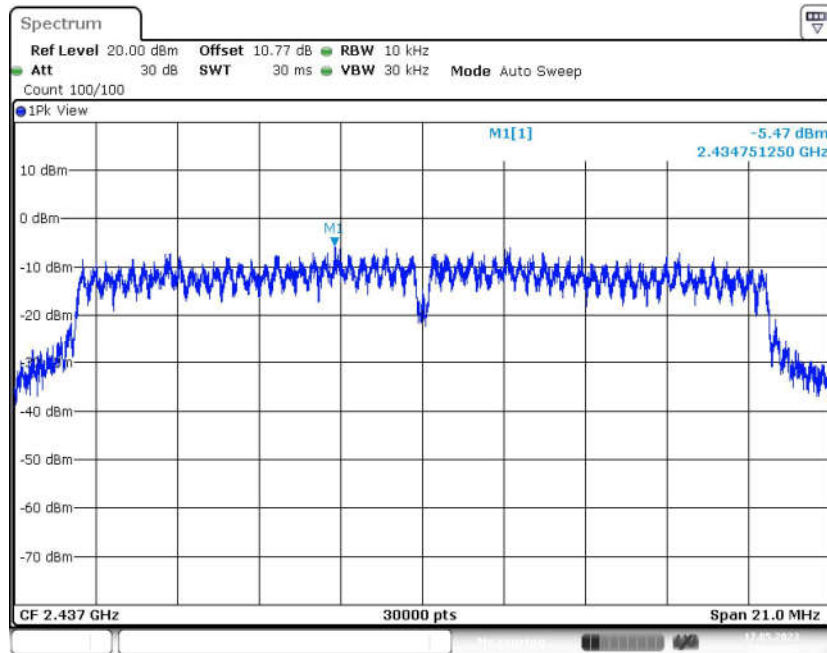


Fig.11 Power Spectral Density (802.11-VHT20, CH6)

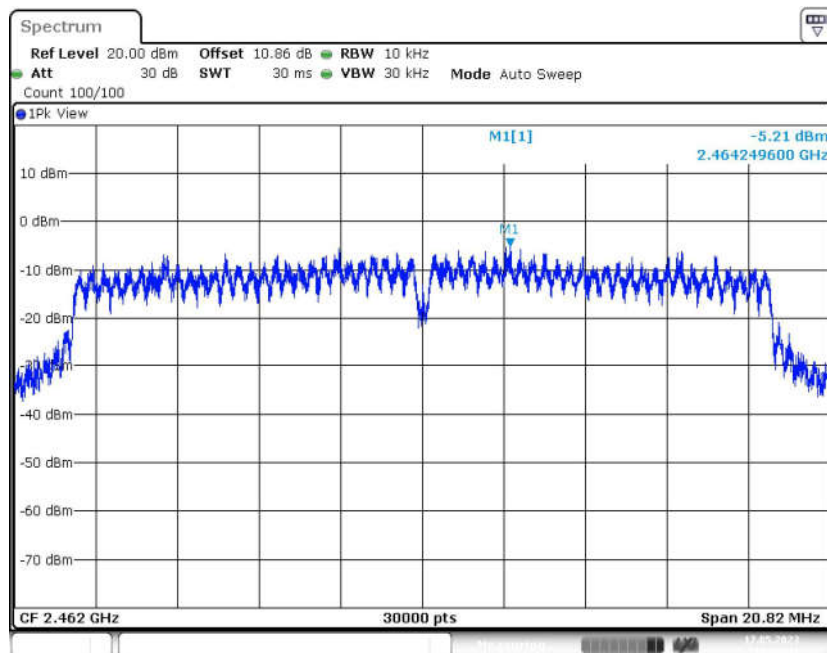


Fig.12 Power Spectral Density (802.11-VHT20, CH11)



A.3 6dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 11.8.

Measurement Limit:

Standard	Limit (MHz)
FCC 47 CFR Part 15.247 (a)	≥ 0.5

Measurement Result:

Mode	Frequency (MHz)	Test Results (MHz)		Conclusion
		Fig.	Value	
802.11b	2412(CH1)	Fig.13	8.04	P
	2437(CH6)	Fig.14	8.08	P
	2462(CH11)	Fig.15	8.08	P
802.11g	2412(CH1)	Fig.16	15.64	P
	2437(CH6)	Fig.17	15.12	P
	2462(CH11)	Fig.18	15.24	P
802.11n-HT20	2412(CH1)	Fig.19	16.80	P
	2437(CH6)	Fig.20	16.28	P
	2462(CH11)	Fig.21	16.80	P
802.11n-HT40	2422(CH3)	Fig.22	35.12	P
	2437(CH6)	Fig.23	35.36	P
	2452(CH9)	Fig.24	35.12	P
802.11-VHT20	2412(CH1)	Fig.25	13.80	P
	2437(CH6)	Fig.26	14.00	P
	2462(CH11)	Fig.27	13.88	P
802.11-VHT40	2422(CH3)	Fig.28	35.12	P
	2437(CH6)	Fig.29	35.36	P
	2452(CH9)	Fig.30	35.36	P

See below for test graphs.

Conclusion: PASS

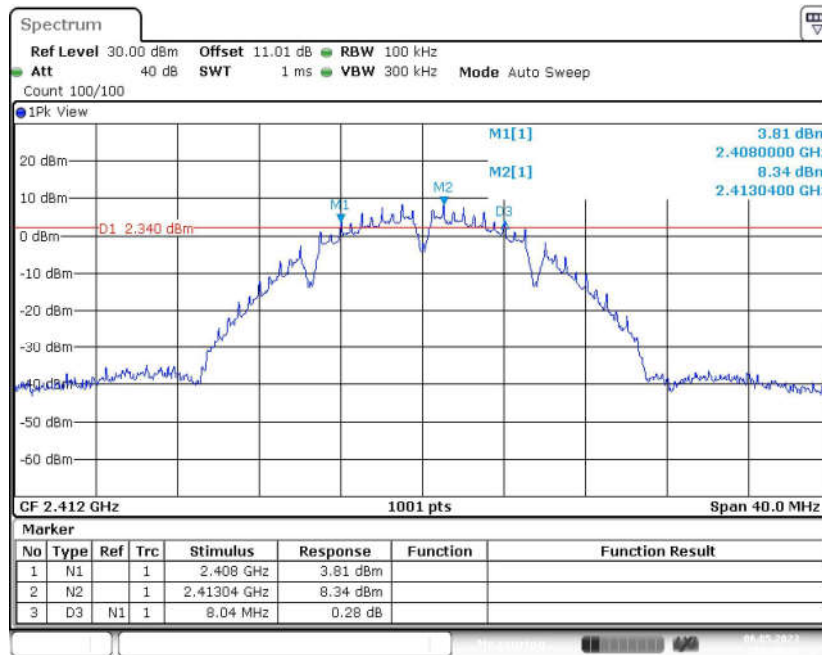


Fig.13 6dB Bandwidth (802.11b, CH1)

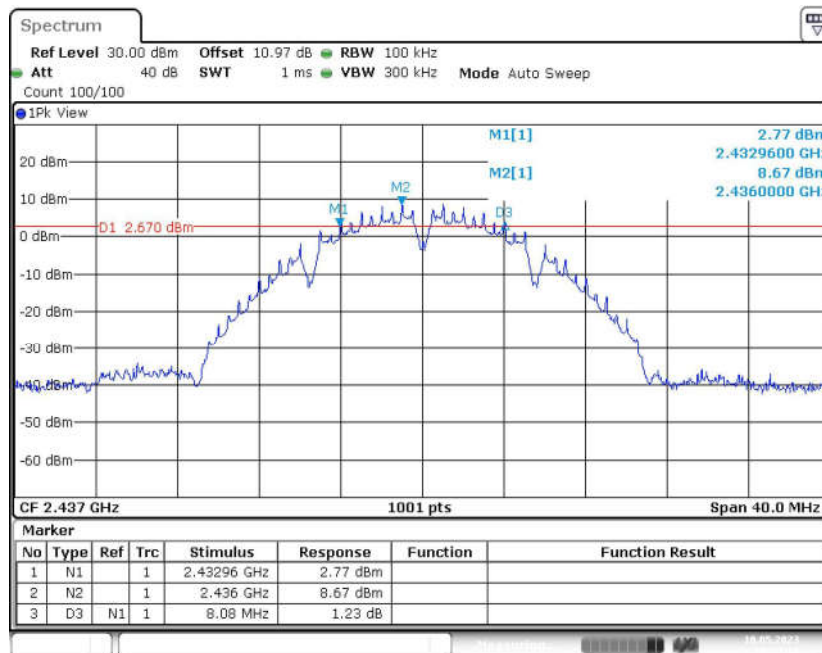


Fig.14 6dB Bandwidth (802.11b, CH6)

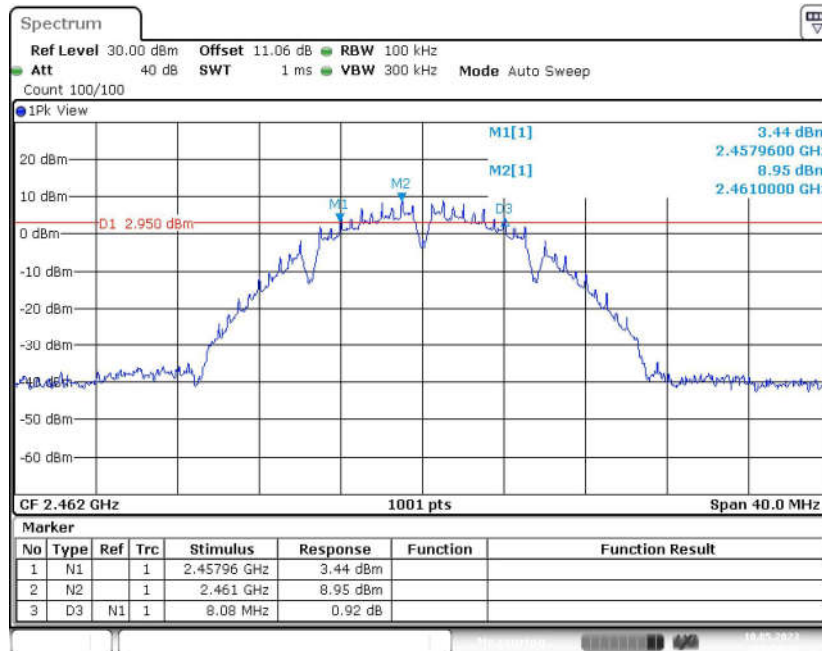


Fig.15 6dB Bandwidth (802.11b, CH11)

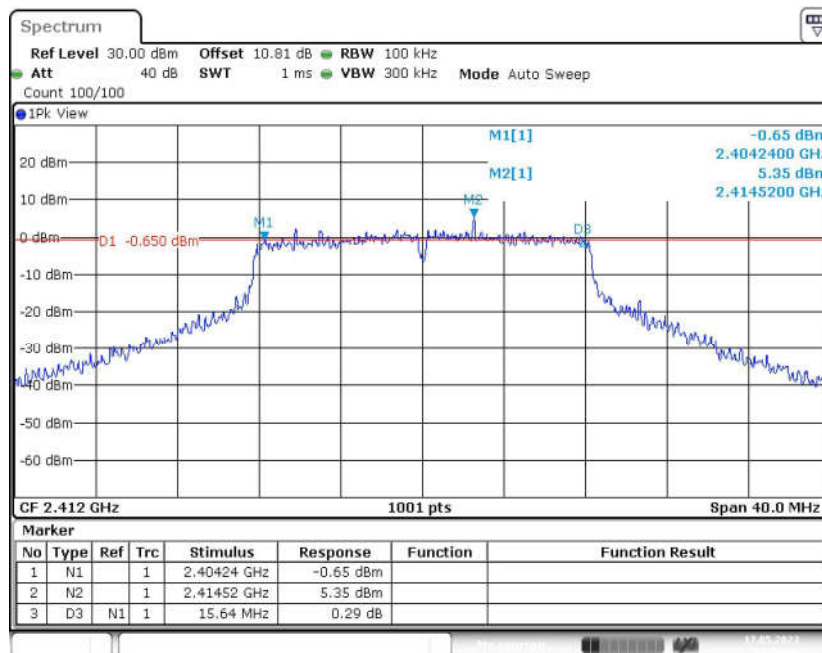


Fig.16 6dB Bandwidth (802.11g, CH1)

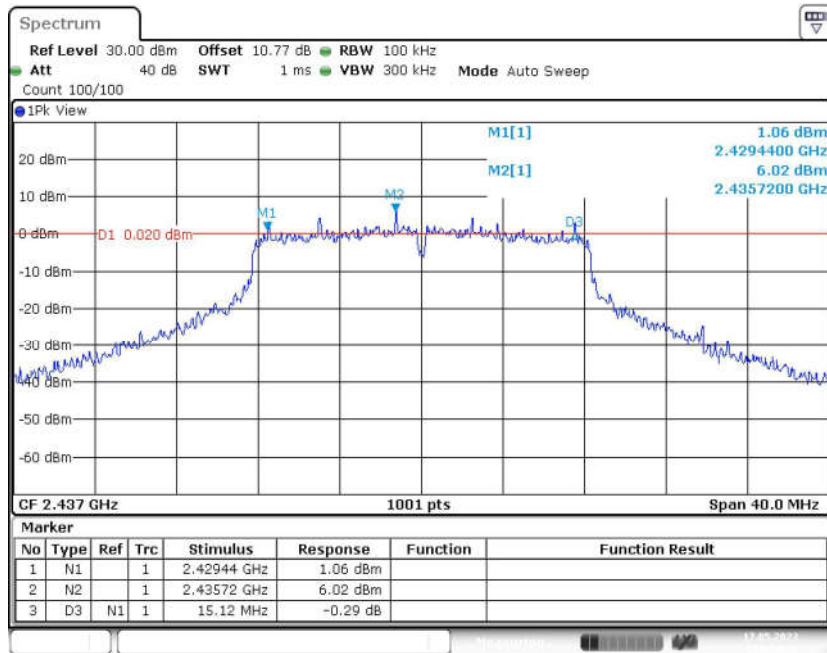


Fig.17 6dB Bandwidth (802.11g, CH6)

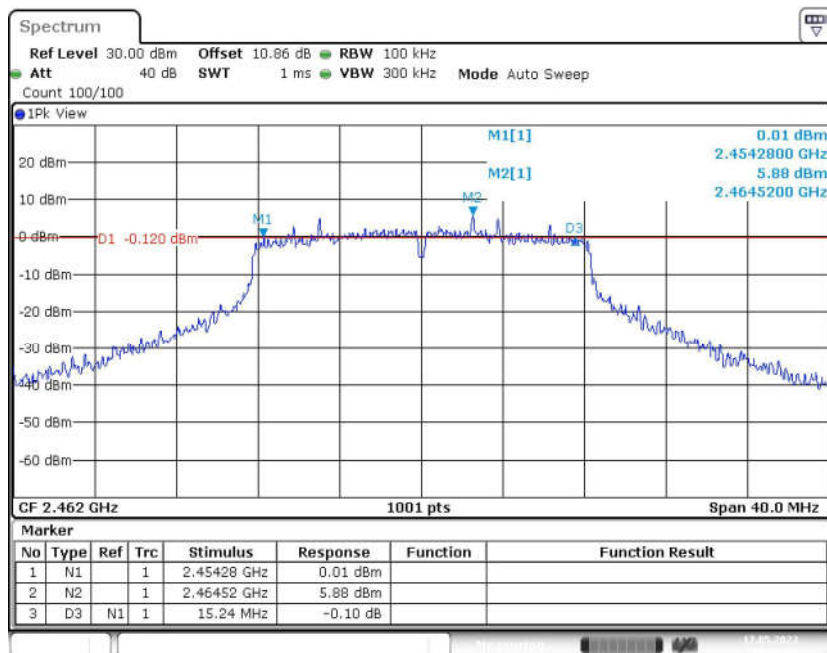


Fig.18 6dB Bandwidth (802.11g, CH11)

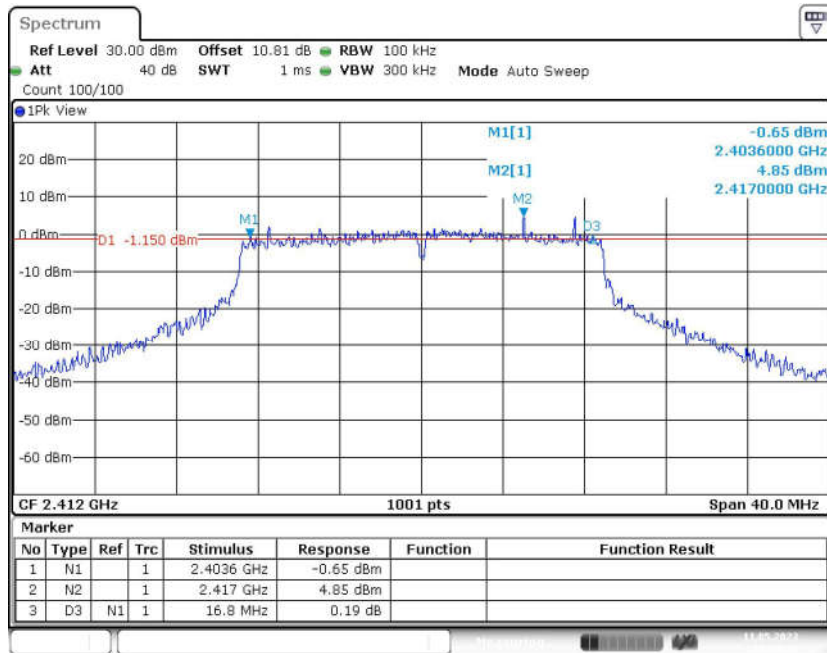


Fig.19 6dB Bandwidth (802.11n-HT20, CH1)

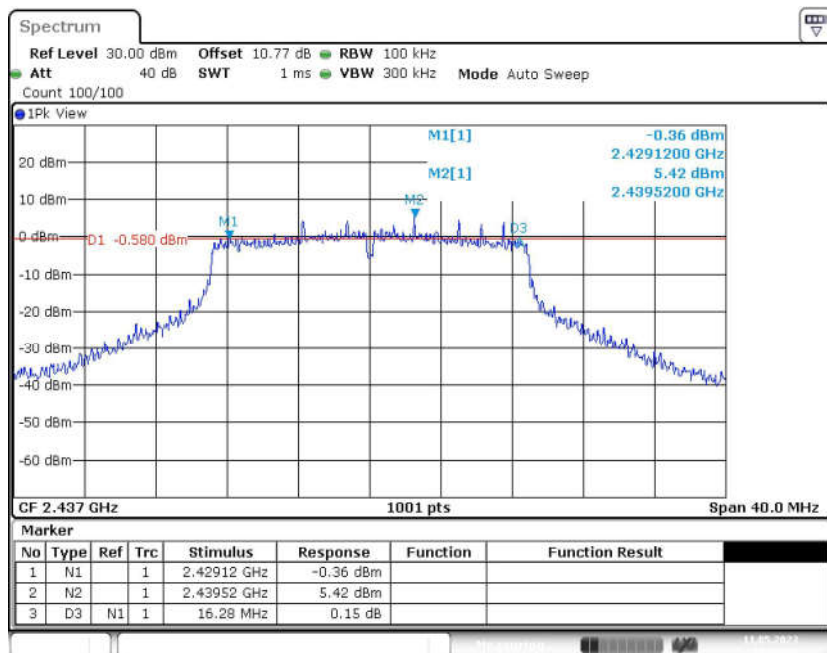


Fig.20 6dB Bandwidth (802.11n-HT20, CH6)

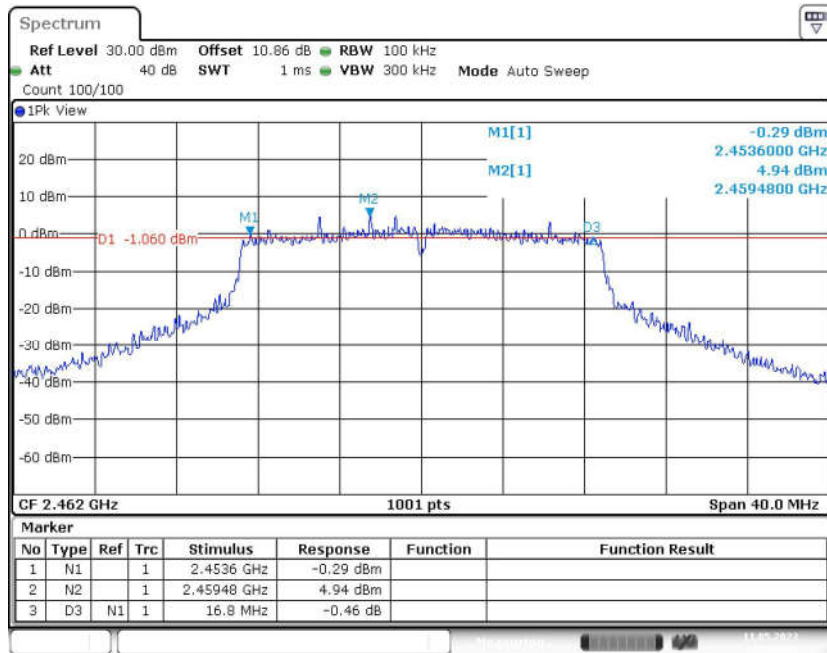


Fig.21 6dB Bandwidth (802.11n-HT20, CH11)

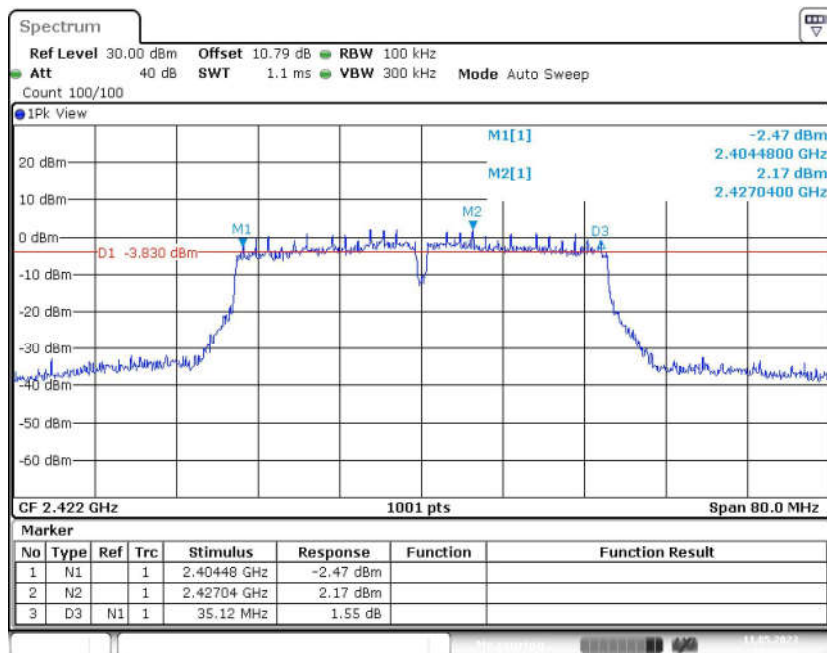


Fig.22 6dB Bandwidth (802.11n-HT40, CH3)

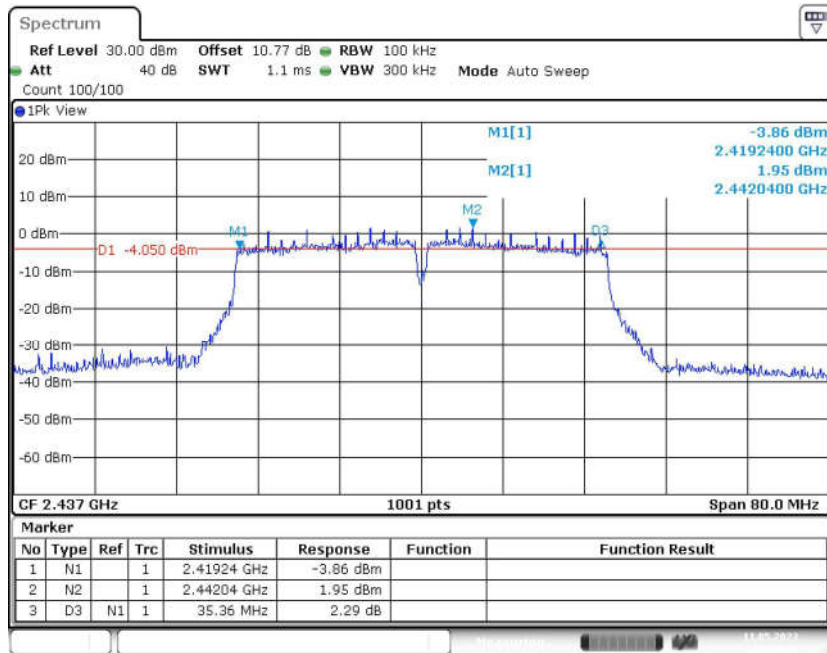


Fig.23 6dB Bandwidth (802.11n-HT40, CH6)

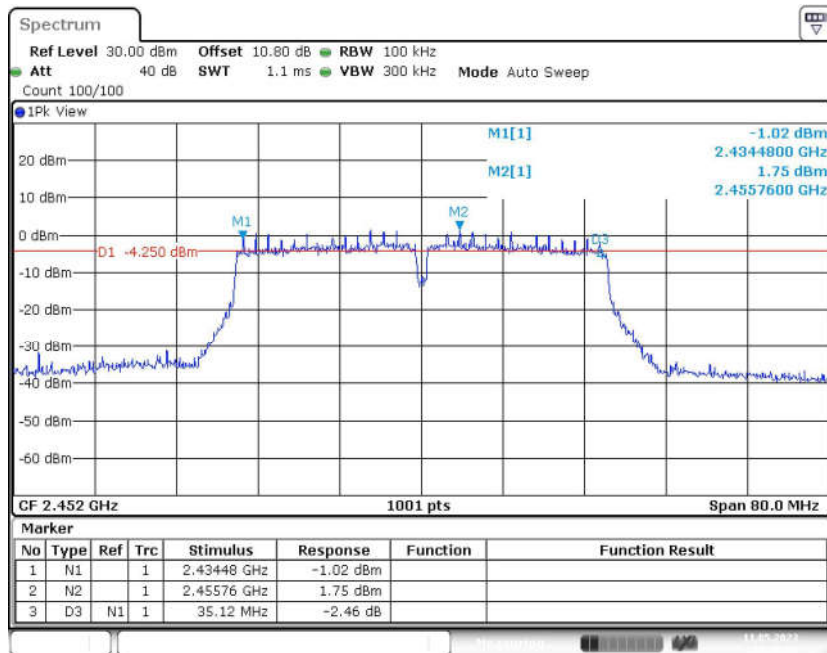


Fig.24 6dB Bandwidth (802.11n-HT40, CH9)

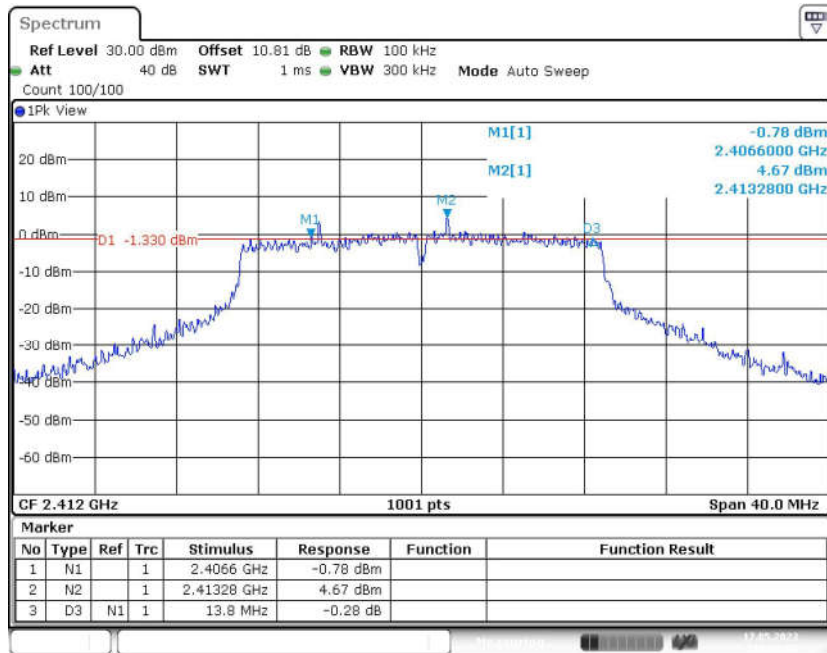


Fig.25 6dB Bandwidth (802.11-VHT20, CH1)

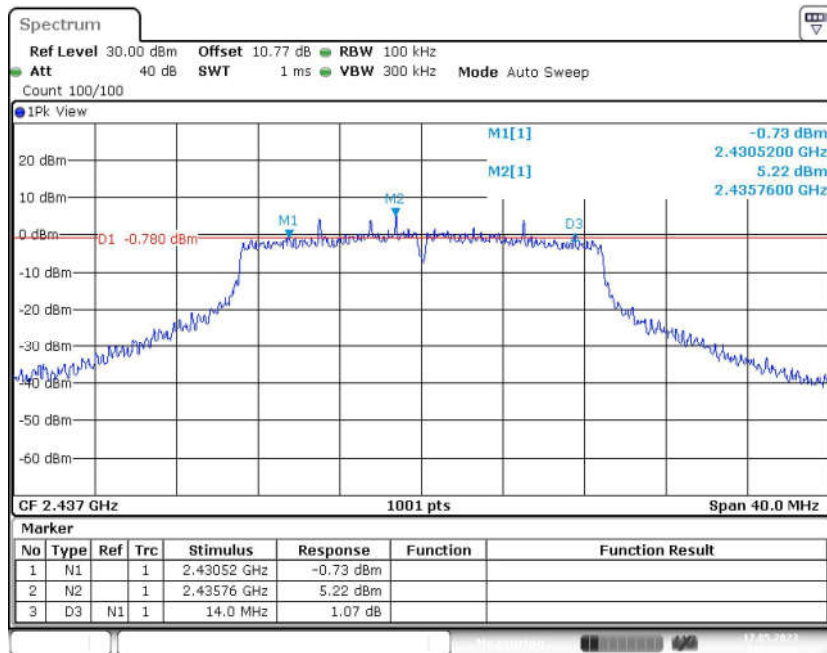


Fig.26 6dB Bandwidth (802.11-VHT20, CH6)

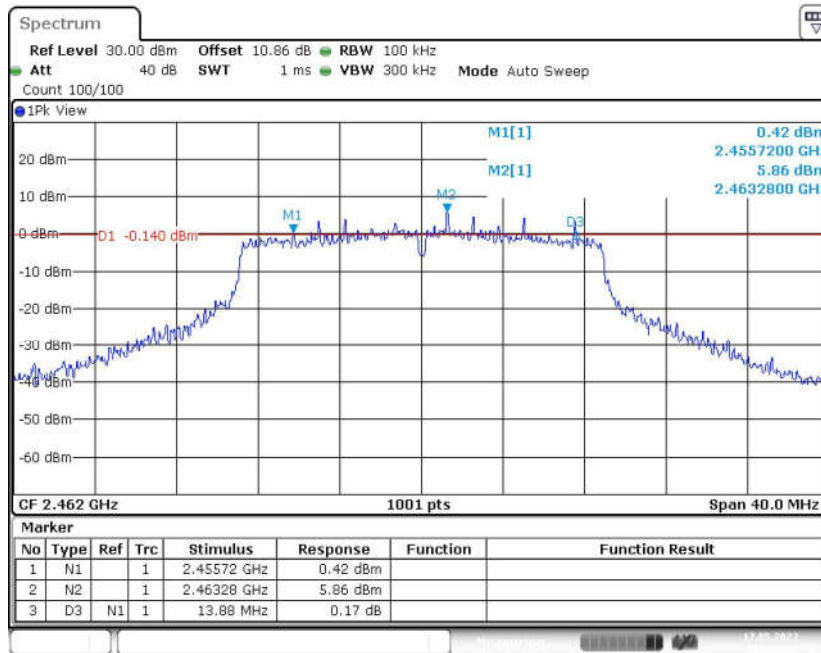


Fig.27 6dB Bandwidth (802.11-VHT20, CH11)

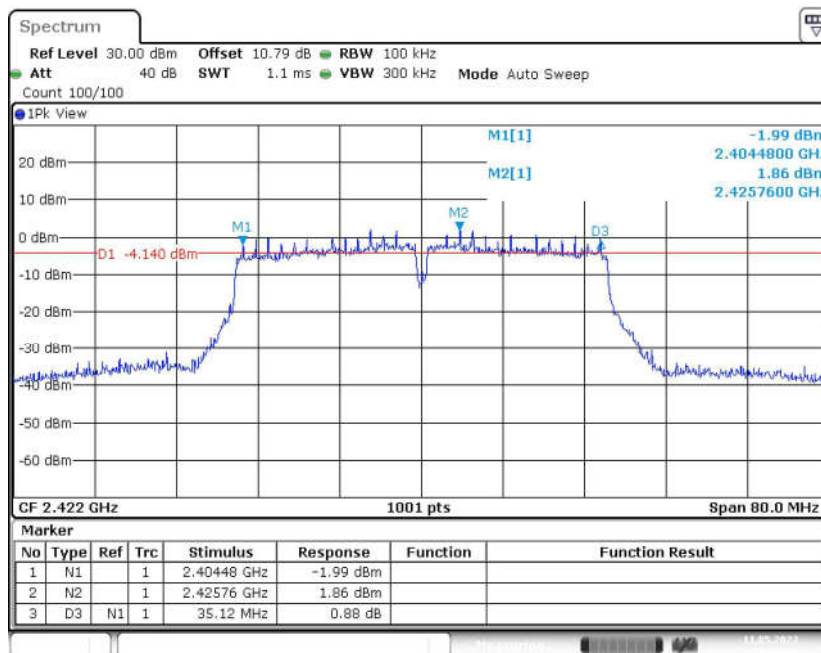


Fig.28 6dB Bandwidth (802.11-VHT40, CH3)

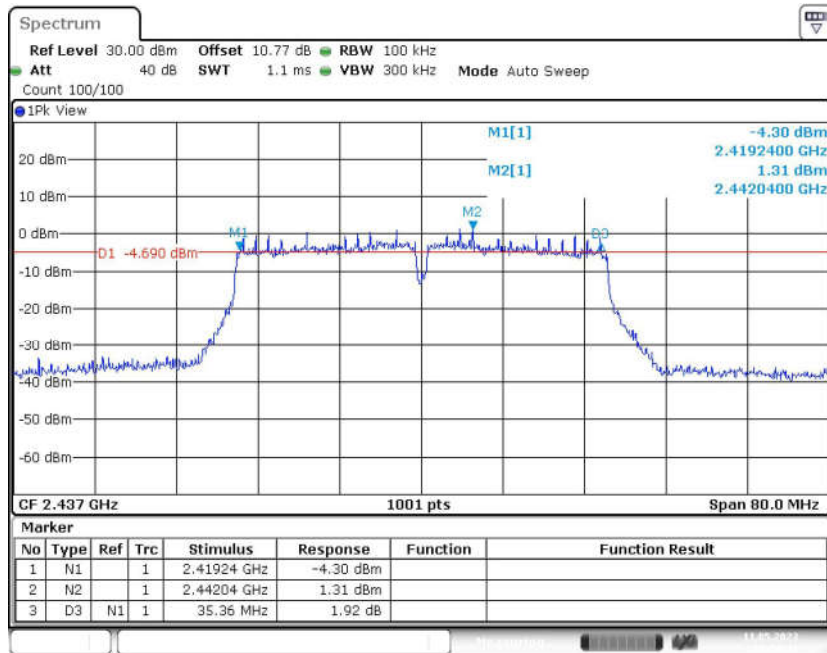


Fig.29 6dB Bandwidth (802.11-VHT40, CH6)

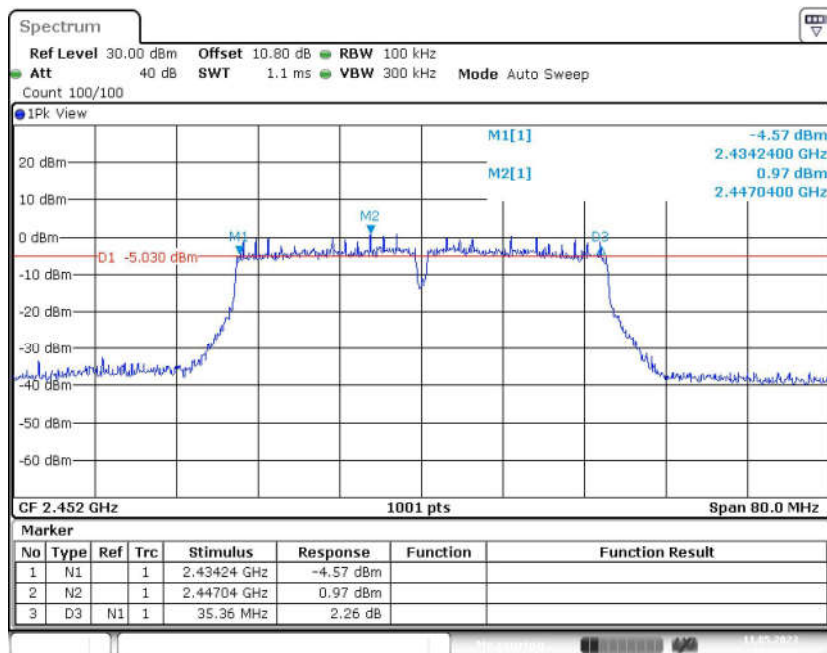


Fig.30 6dB Bandwidth (802.11-VHT40, CH9)



A.4 Band Edges Compliance

Method of Measurement: See ANSI C63.10-clause 11.13.3.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

Mode	Frequency (MHz)	Test Results (dBc)		Conclusion
		Fig.	Value	
802.11b	2412(CH1)	Fig.31	44.08	P
	2462(CH11)	Fig.32	54.27	P
802.11g	2412(CH1)	Fig.33	30.66	P
	2462(CH11)	Fig.34	50.56	P
802.11n-HT20	2412(CH1)	Fig.35	28.01	P
	2462(CH11)	Fig.36	49.41	P
802.11n-HT40	2422(CH3)	Fig.37	32.76	P
	2452(CH9)	Fig.38	40.53	P
802.11-VHT20	2412(CH1)	Fig.39	29.11	P
	2462(CH11)	Fig.40	49.90	P
802.11-VHT40	2422(CH3)	Fig.41	33.46	P
	2452(CH9)	Fig.42	42.03	P

See below for test graphs.

Conclusion: PASS

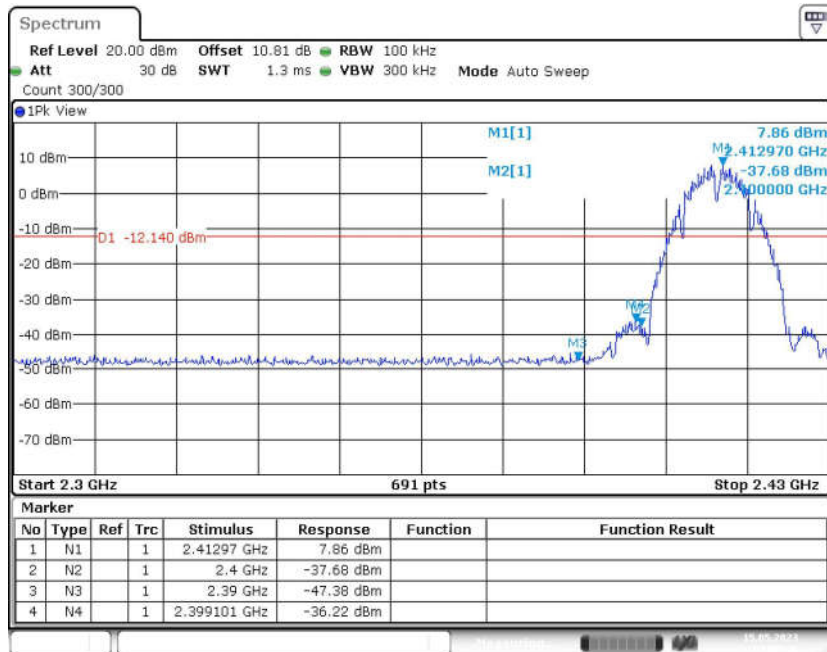


Fig.31 Band Edges (802.11b, CH1)

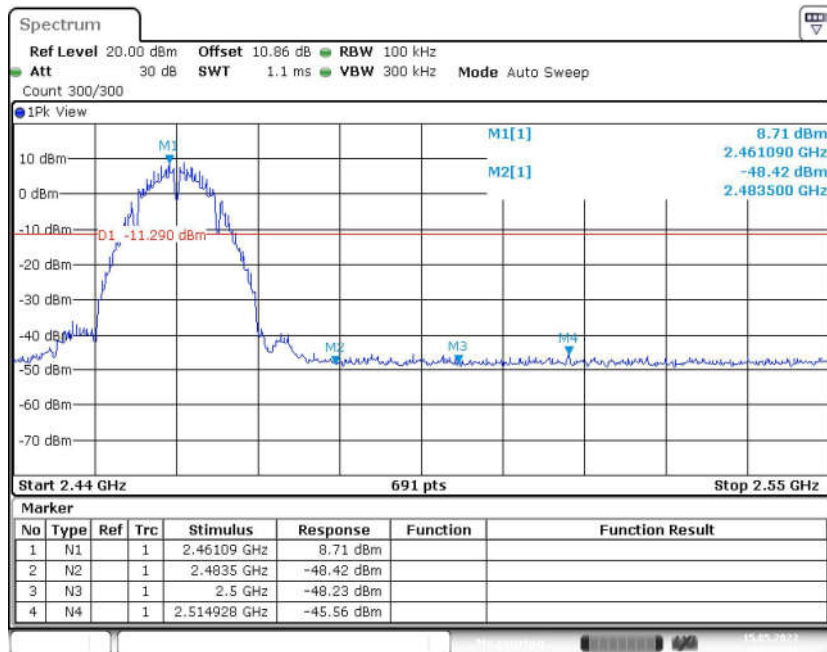


Fig.32 Band Edges (802.11b, CH11)

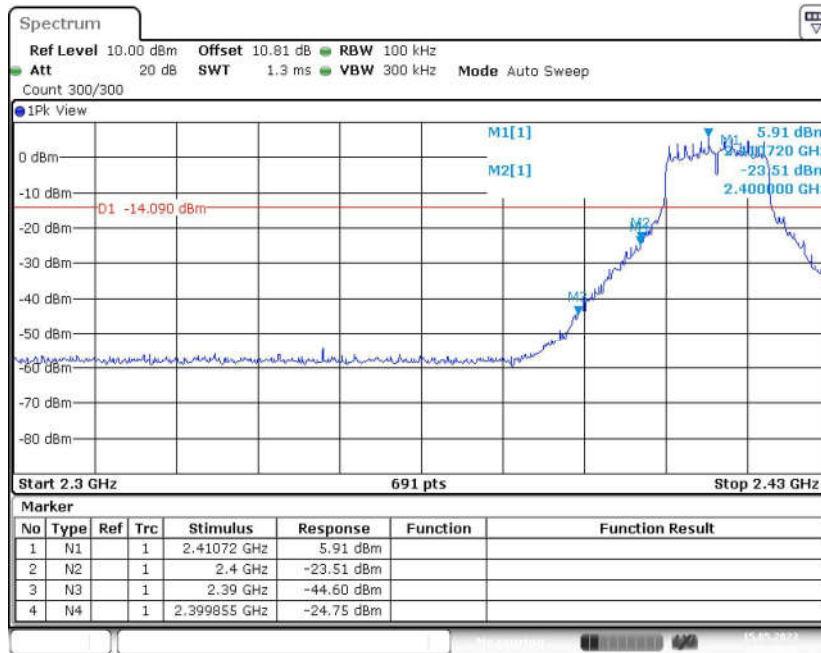


Fig.33 Band Edges (802.11g, CH1)

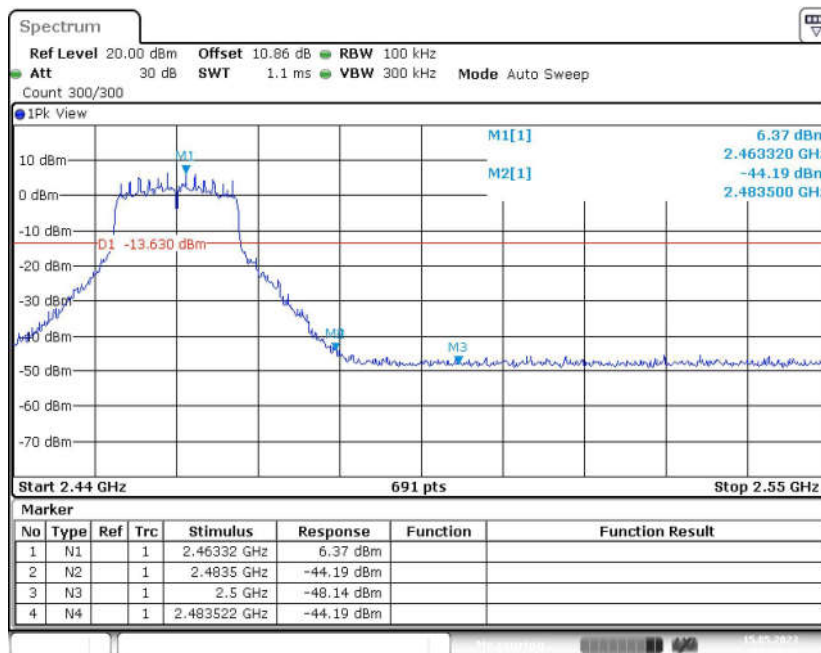


Fig.34 Band Edges (802.11g, CH11)

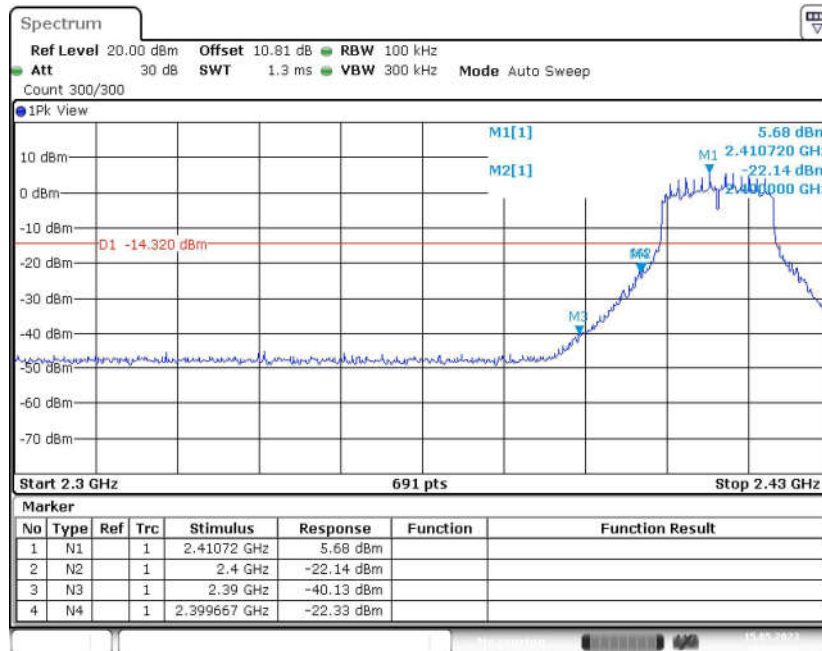


Fig.35 Band Edges (802.11n-HT20, CH1)

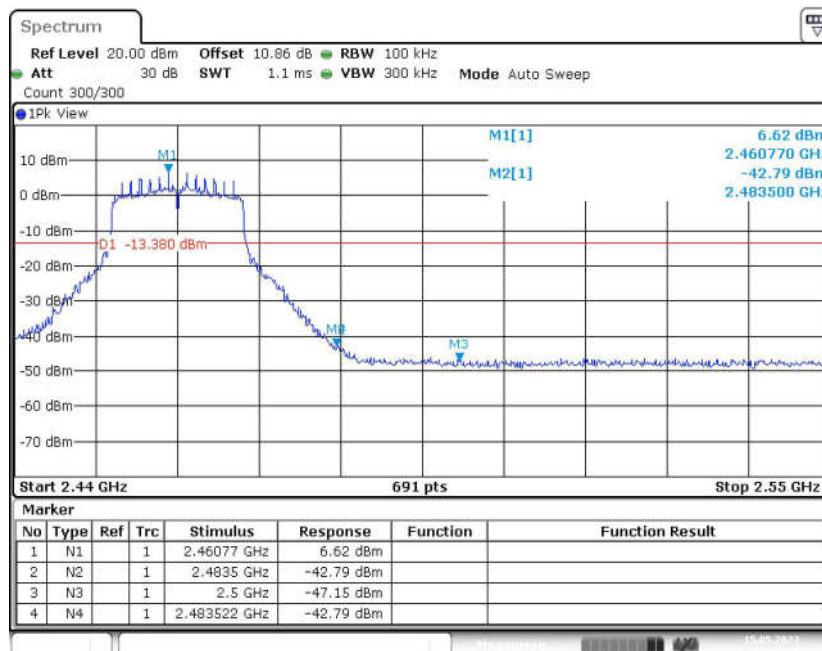


Fig.36 Band Edges (802.11n-HT20, CH11)

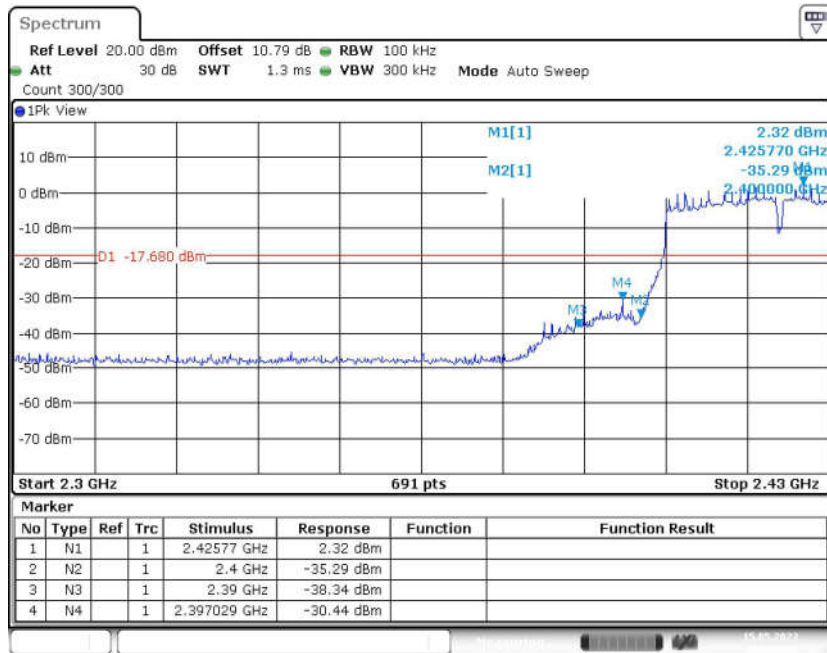


Fig.37 Band Edges (802.11n-HT40, CH3)

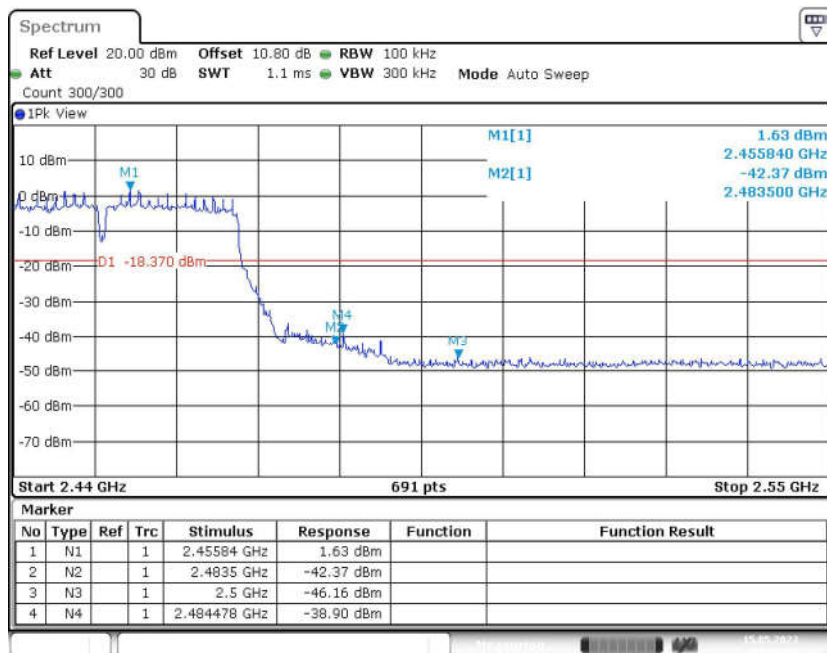


Fig.38 Band Edges (802.11n-HT40, CH9)

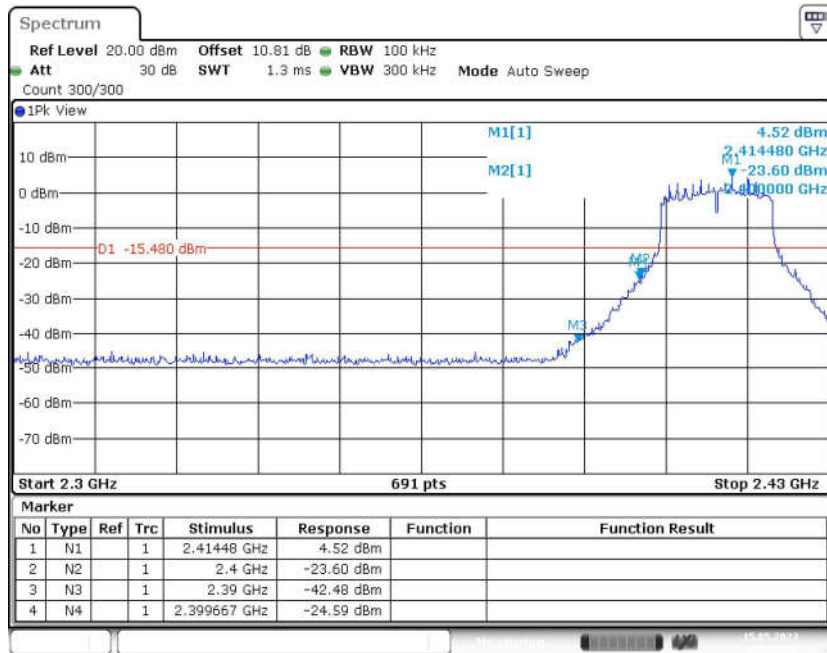


Fig.39 Band Edges (802.11-VHT20, CH1)

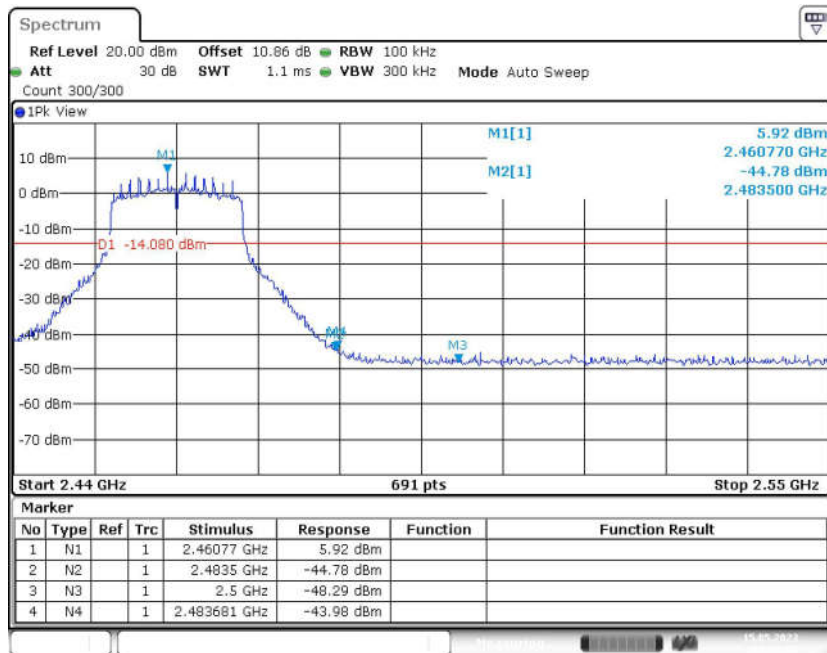


Fig.40 Band Edges (802.11-VHT20, CH11)

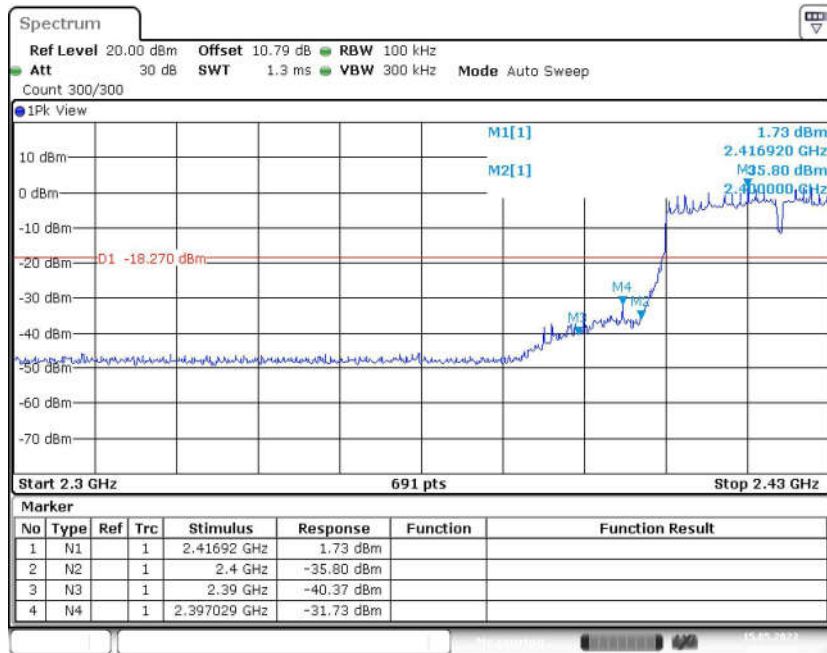


Fig.41 Band Edges (802.11-VHT40, CH3)

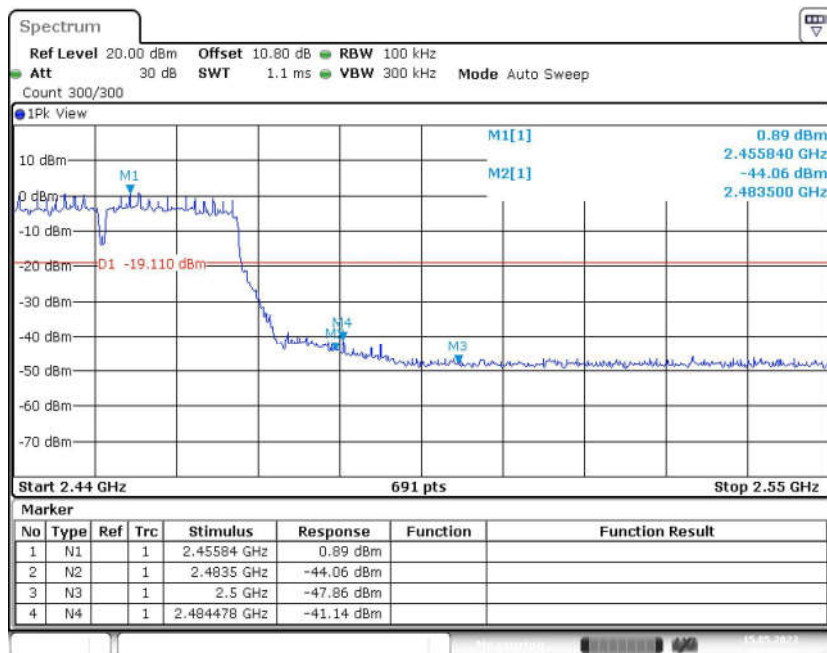


Fig.42 Band Edges (802.11-VHT40, CH9)



A.5 Conducted Emission

Method of Measurement: See ANSI C63.10-clause 11.11.

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CFR Part 15.247 (d)	30dBm below peak output power in 100kHz bandwidth

Measurement Results:

Mode	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	2412(CH1)	1GHz-26.5GHz	Fig.43	P
	2437(CH6)	1GHz-26.5GHz	Fig.44	P
	2462(CH11)	1GHz-26.5GHz	Fig.45	P
802.11g	2412(CH1)	1GHz-26.5GHz	Fig.46	P
	2437(CH6)	1GHz-26.5GHz	Fig.47	P
	2462(CH11)	1GHz-26.5GHz	Fig.48	P
802.11n-HT20	2412(CH1)	1GHz-26.5GHz	Fig.49	P
	2437(CH6)	1GHz-26.5GHz	Fig.50	P
	2462(CH11)	1GHz-26.5GHz	Fig.51	P
802.11n-HT40	2422(CH3)	1GHz-26.5GHz	Fig.52	P
	2437(CH6)	1GHz-26.5GHz	Fig.53	P
	2452(CH9)	1GHz-26.5GHz	Fig.54	P
802.11-VHT20	2412(CH1)	1GHz-26.5GHz	Fig.55	P
	2437(CH6)	1GHz-26.5GHz	Fig.56	P
	2462(CH11)	1GHz-26.5GHz	Fig.57	P
802.11-VHT40	2422(CH3)	1GHz-26.5GHz	Fig.58	P
	2437(CH6)	1GHz-26.5GHz	Fig.59	P
	2452(CH9)	1GHz-26.5GHz	Fig.60	P
/	All channels	30MHz -1GHz	Fig.61	P

See below for test graphs.

Conclusion: PASS

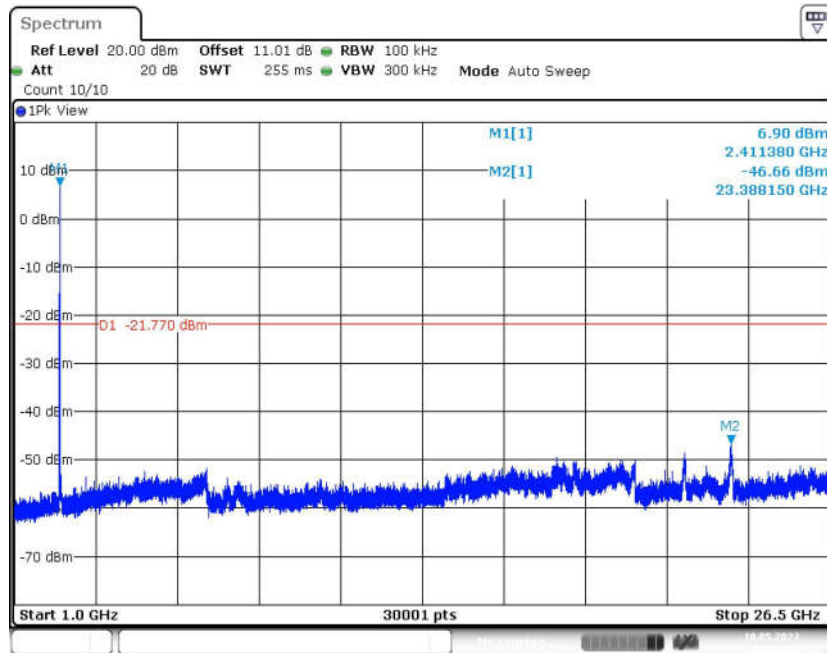


Fig.43 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH1)

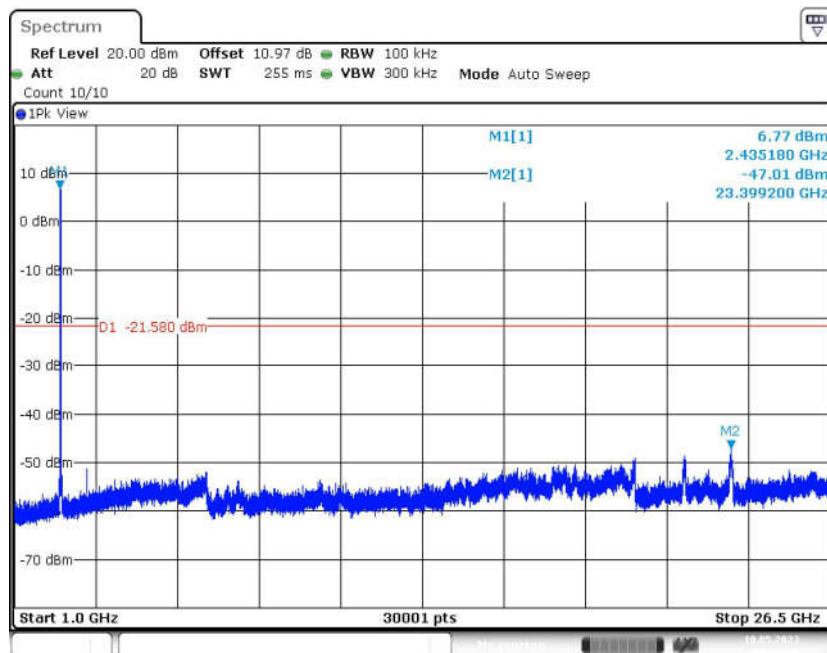


Fig.44 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH6)

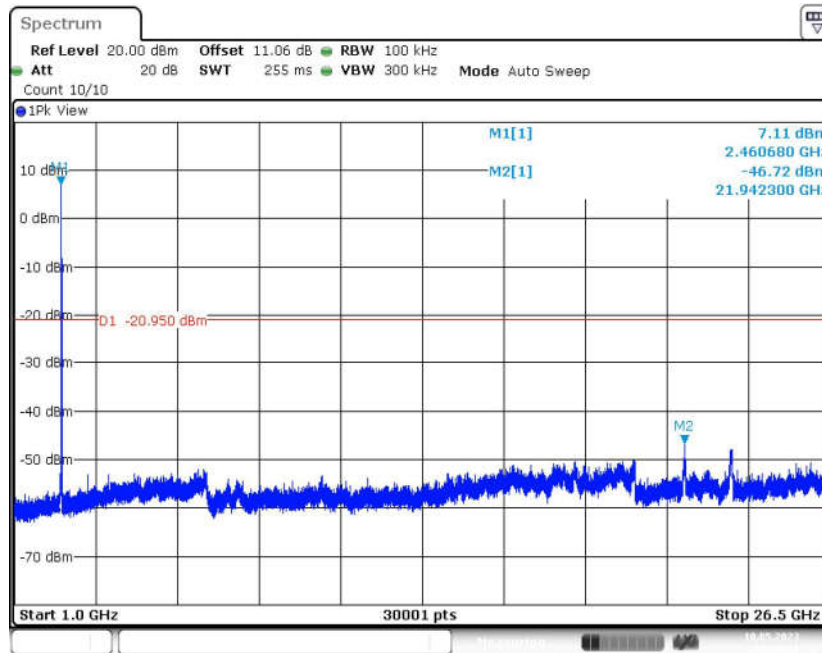


Fig.45 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH11)

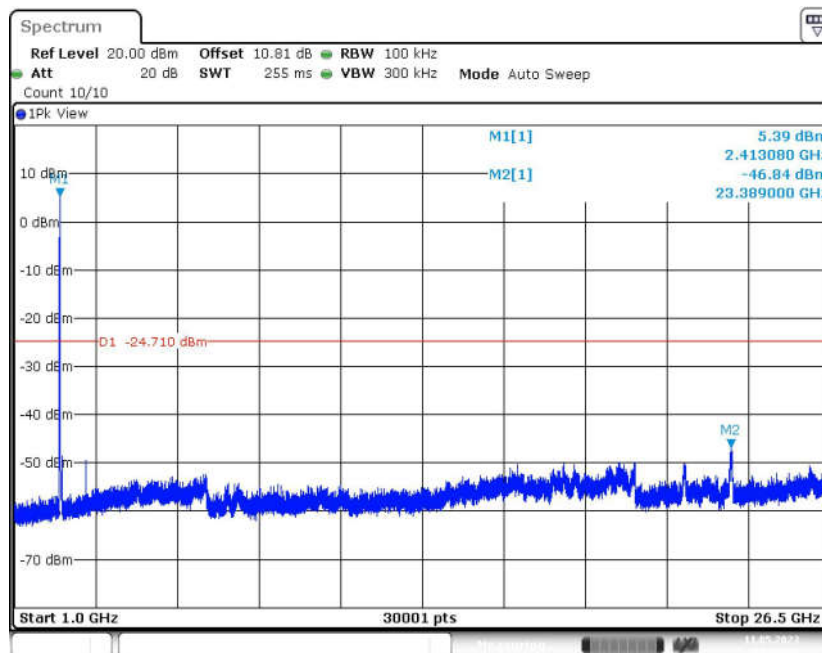


Fig.46 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH1)

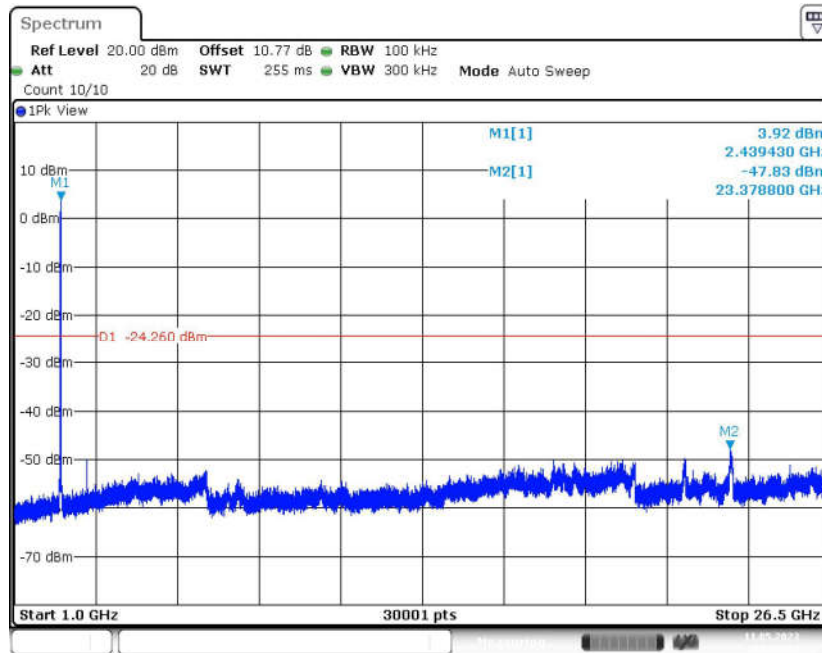


Fig.47 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH6)

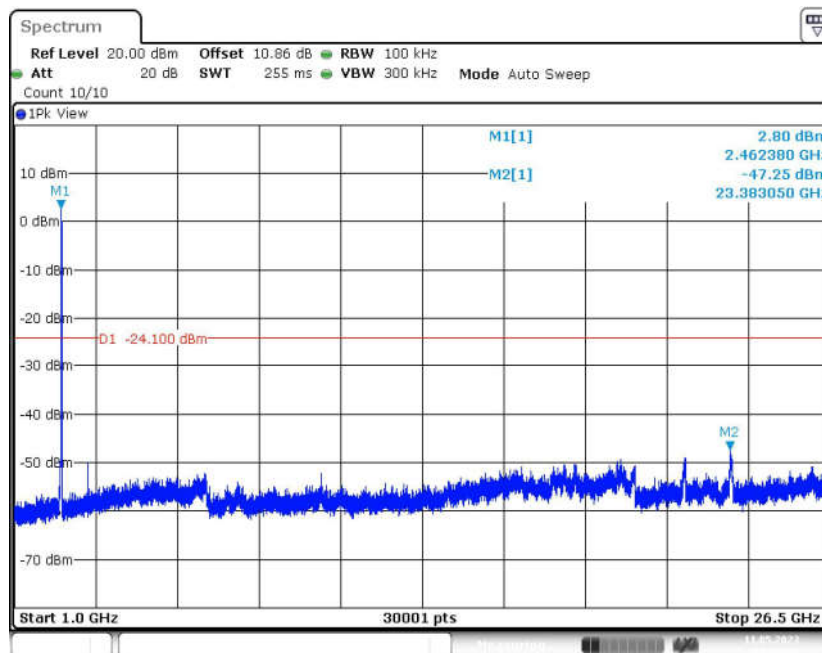


Fig.48 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH11)

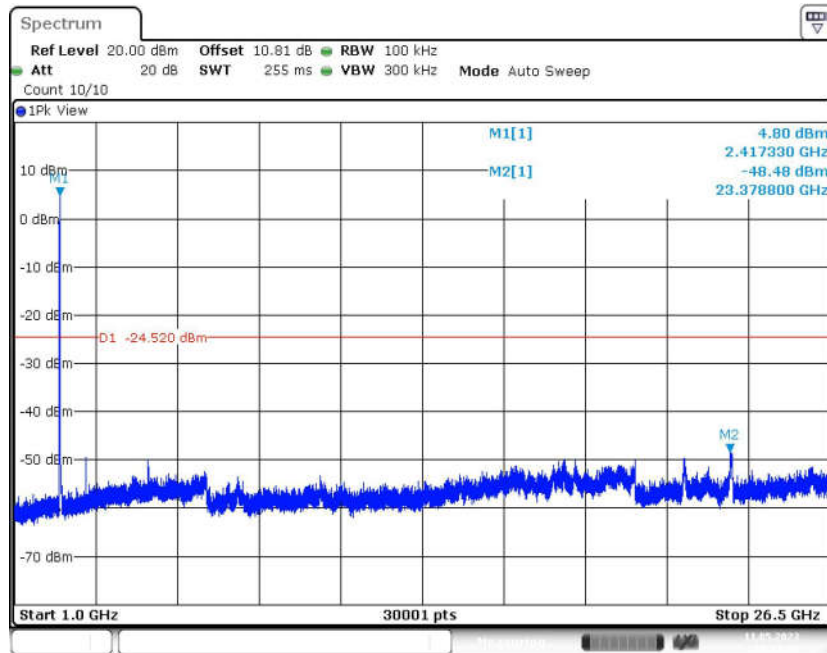


Fig.49 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH1)

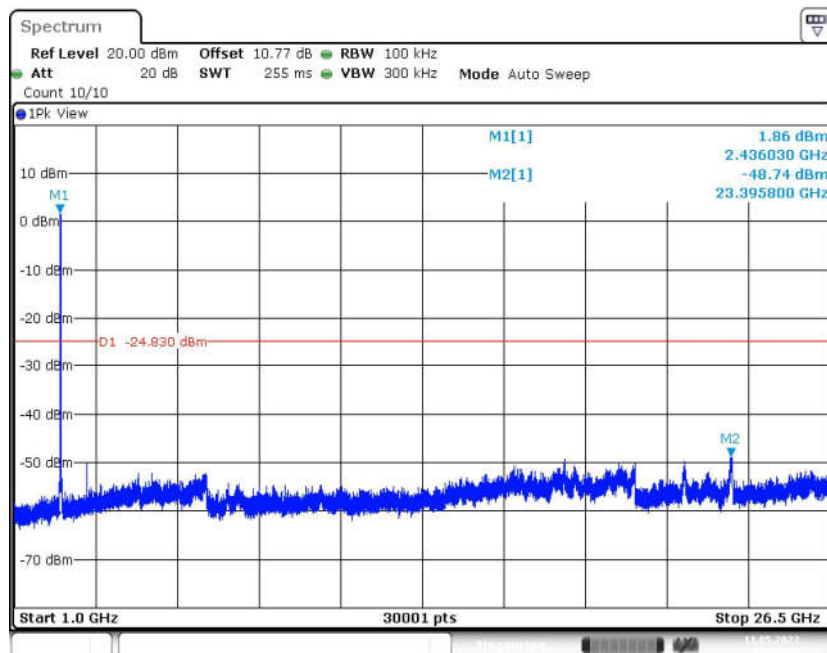


Fig.50 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH6)

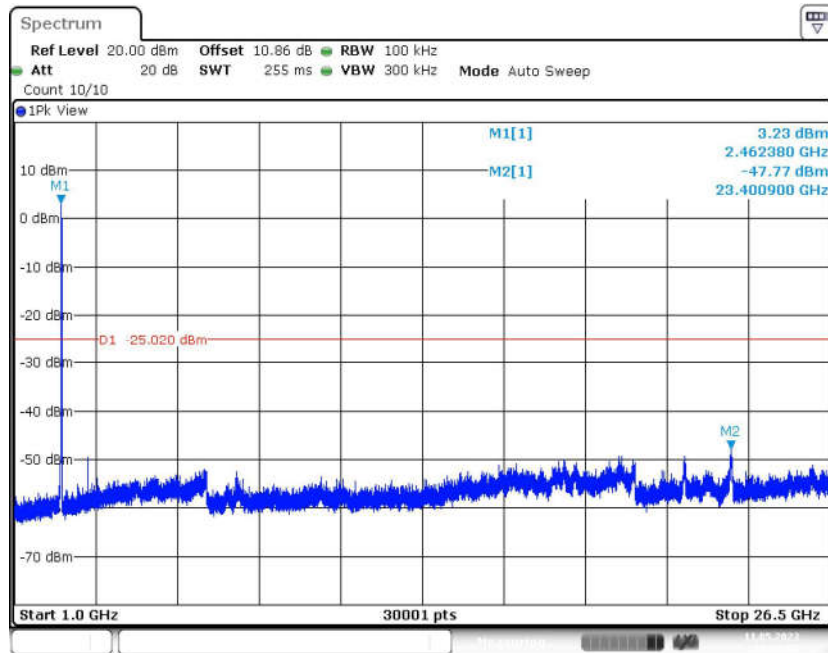


Fig.51 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH11)

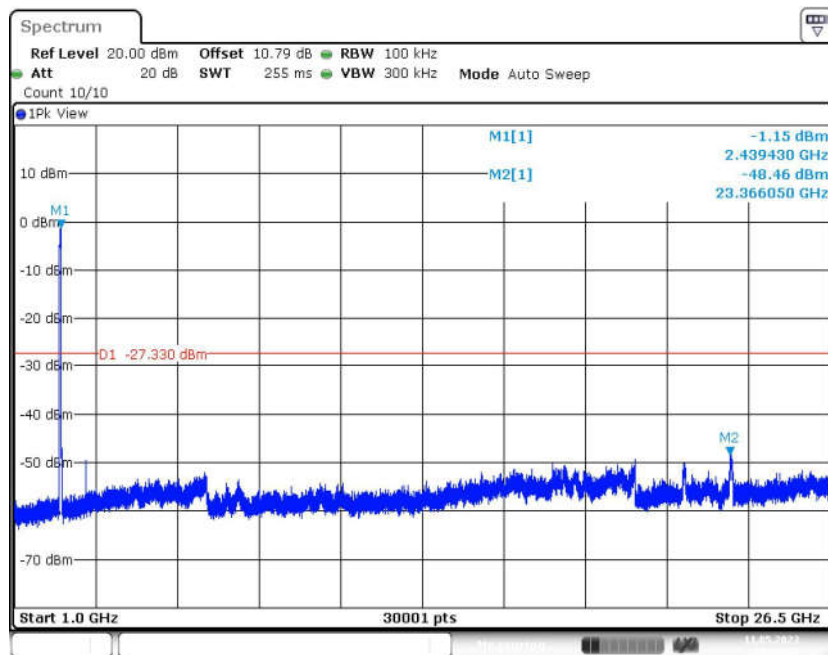


Fig.52 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT40, CH3)

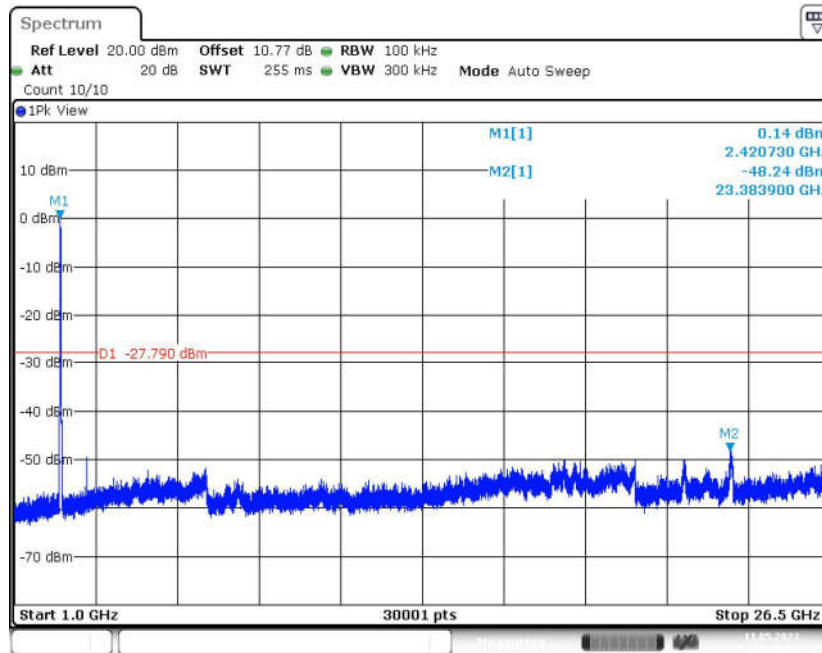


Fig.53 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT40, CH6)

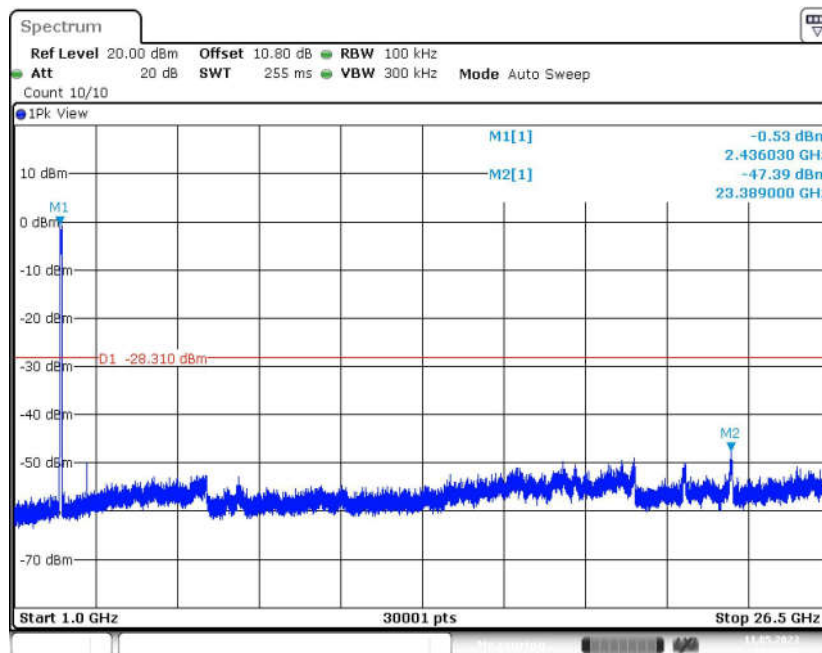


Fig.54 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT40, CH9)

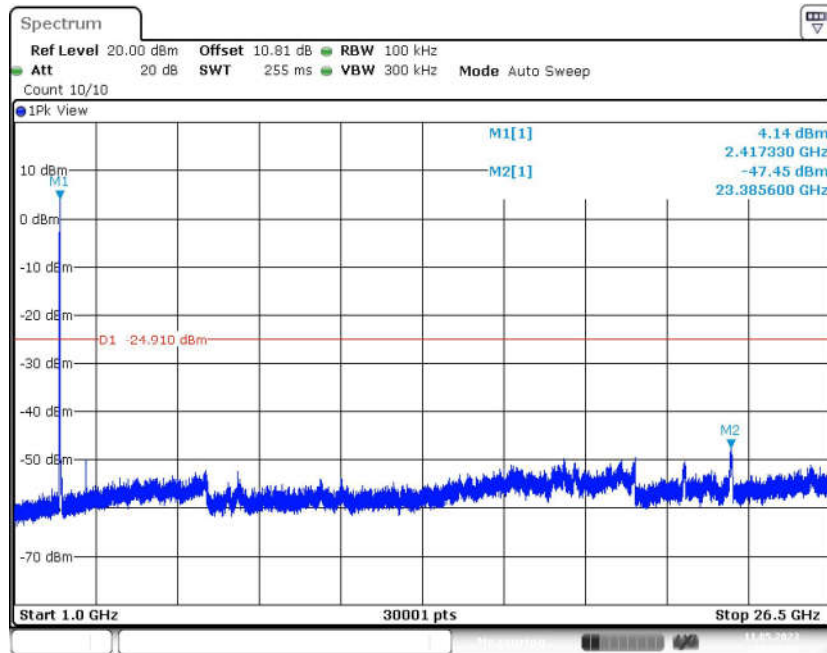


Fig.55 Conducted Spurious Emission (1GHz-26.5GHz, 802.11-VHT20, CH1)

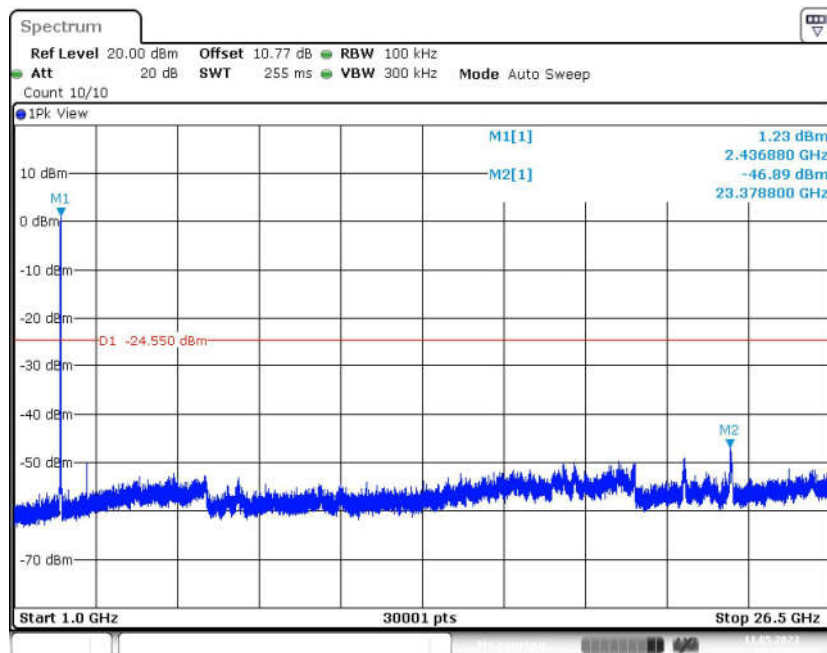


Fig.56 Conducted Spurious Emission (1GHz-26.5GHz, 802.11-VHT20, CH6)

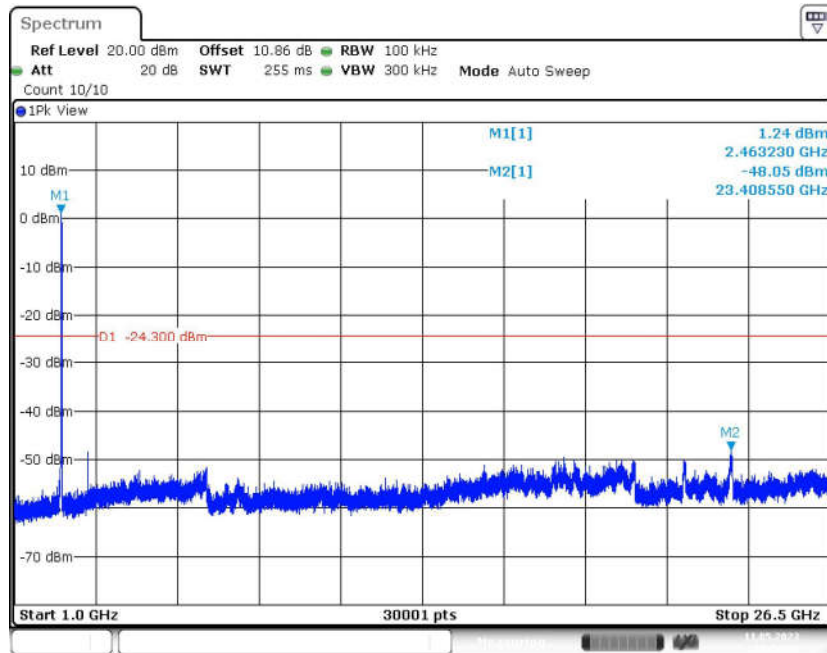


Fig.57 Conducted Spurious Emission (1GHz-26.5GHz, 802.11-VHT20, CH11)

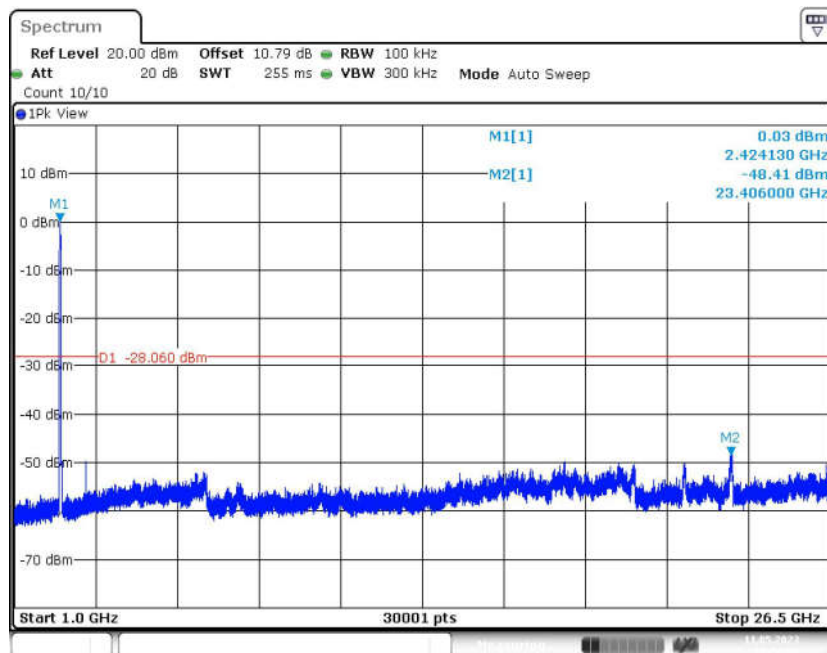


Fig.58 Conducted Spurious Emission (1GHz-26.5GHz, 802.11-VHT40, CH3)

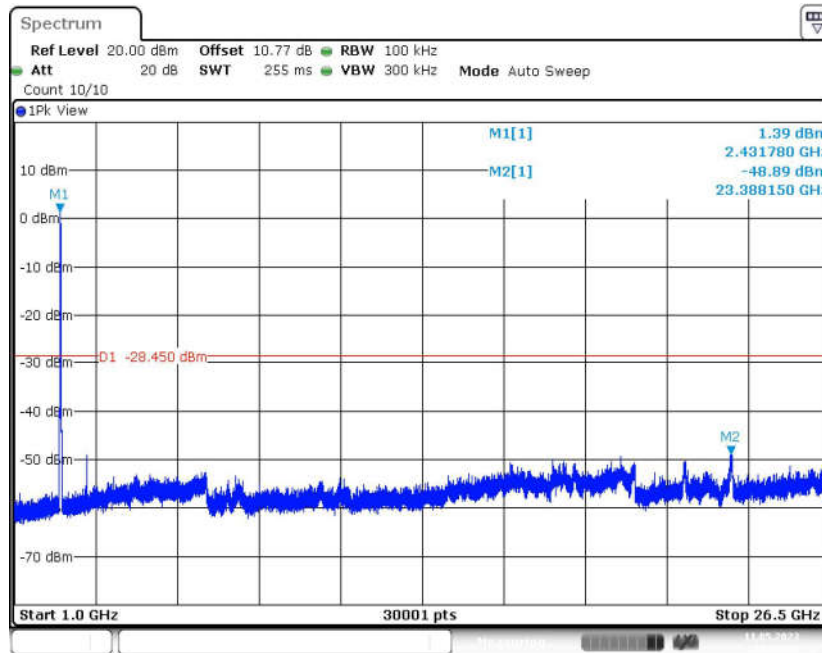


Fig.59 Conducted Spurious Emission (1GHz-26.5GHz, 802.11-VHT40, CH6)

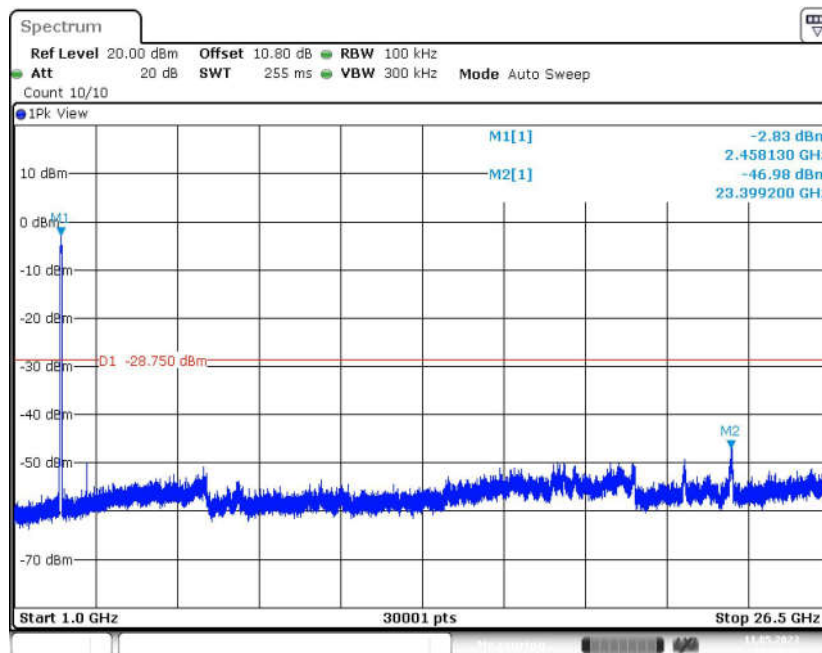


Fig.60 Conducted Spurious Emission (1GHz-26.5GHz, 802.11-VHT40, CH9)

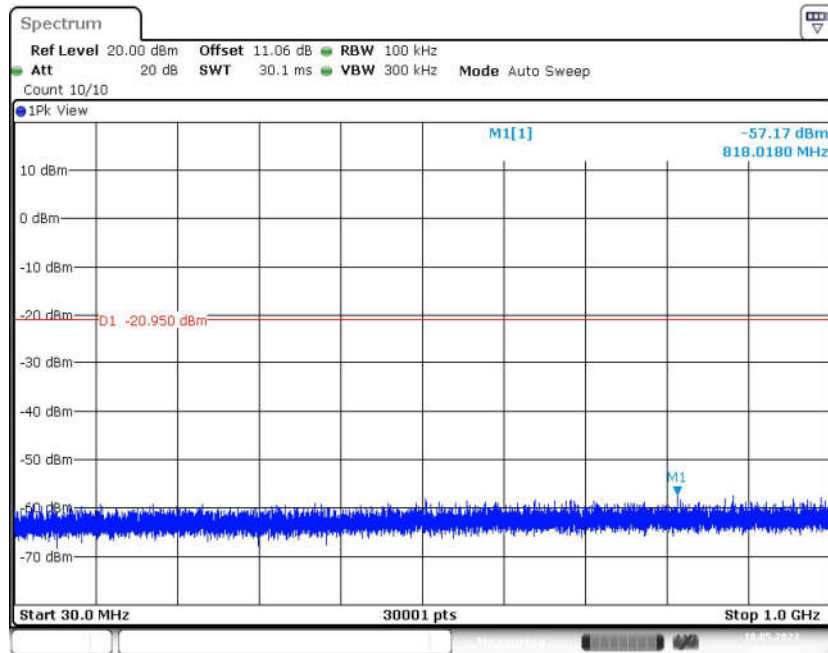


Fig.61 Conducted Spurious Emission (All Channels, 30MHz -1GHz)

**A.6 Radiated Emission****Method of Measurement: See ANSI C63.10-clause 11.11&11.12.****Measurement Limit:**

Standard	Limit (dBm)
FCC 47 CFR Part 15.247, 15.205, 15.209	20dBm below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μ V/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic. The measurement results include the horizontal polarization and vertical polarization measurements. For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.



Measurement Results:

Mode	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	2412(CH1)	1 GHz ~18 GHz	Fig.62	P
	2437(CH6)	1 GHz ~18 GHz	Fig.63	P
	2462(CH11)	1 GHz ~18 GHz	Fig.64	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.65	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.66	P
802.11g	2412(CH1)	1 GHz ~18 GHz	Fig.67	P
	2437(CH6)	1 GHz ~18 GHz	Fig.68	P
	2462(CH11)	1 GHz ~18 GHz	Fig.69	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.70	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.71	P
802.11n- HT20	2412(CH1)	1 GHz ~18 GHz	Fig.72	P
	2437(CH6)	1 GHz ~18 GHz	Fig.73	P
	2462(CH11)	1 GHz ~18 GHz	Fig.74	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.75	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.76	P
802.11n- HT40	2422(CH3)	1 GHz ~18 GHz	Fig.77	P
	2437(CH6)	1 GHz ~18 GHz	Fig.78	P
	2452(CH9)	1 GHz ~18 GHz	Fig.79	P
	Restricted Band (CH3)	2.38 GHz ~ 2.45 GHz	Fig.80	P
	Restricted Band (CH9)	2.45 GHz ~ 2.5 GHz	Fig.81	P
802.11- VHT20	2412(CH1)	1 GHz ~18 GHz	Fig.82	P
	2437(CH6)	1 GHz ~18 GHz	Fig.83	P
	2462(CH11)	1 GHz ~18 GHz	Fig.84	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.85	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.86	P
802.11- VHT40	2422(CH3)	1 GHz ~18 GHz	Fig.87	P
	2437(CH6)	1 GHz ~18 GHz	Fig.88	P
	2452(CH9)	1 GHz ~18 GHz	Fig.89	P
	Restricted Band (CH3)	2.38 GHz ~ 2.45 GHz	Fig.90	P
	Restricted Band (CH9)	2.45 GHz ~ 2.5 GHz	Fig.91	P
/	All Channels	9 kHz ~30 MHz	Fig.92	P
		30 MHz ~1 GHz	Fig.93	P
		18 GHz ~26.5 GHz	Fig.94	P



Worst-Case Result:

802.11b CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
8260.285714	44.83	74.00	29.17	V	5.9
10462.714286	45.38	74.00	28.62	V	9.0
12457.285714	46.61	74.00	27.39	H	11.4
14830.285714	48.91	74.00	25.09	H	12.9
16928.571429	52.35	74.00	21.65	V	18.2
17940.428571	53.63	74.00	20.37	H	19.0

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
8260.285714	33.32	54.00	20.68	V	5.9
10462.714286	35.15	54.00	18.85	V	9.0
12457.285714	36.45	54.00	17.55	H	11.4
14830.285714	38.56	54.00	15.44	H	12.9
16928.571429	42.29	54.00	11.71	V	18.2
17940.428571	42.61	54.00	11.39	H	19.0

802.11g CH11 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
2955.714286	52.48	74.00	22.52	V	6.7
5805.900000	49.06	74.00	25.94	H	4.5
12361.285714	49.29	74.00	25.71	V	11.2
15189.000000	51.46	74.00	23.54	H	12.5
17007.857143	54.70	74.00	19.30	H	18.4
17972.571429	54.91	74.00	19.09	V	19.1

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
2955.714286	40.28	54.00	14.72	V	6.7
5805.900000	36.86	54.00	18.14	H	4.5
12361.285714	37.36	54.00	17.64	V	11.2
15189.000000	39.37	54.00	15.63	H	12.5
17007.857143	43.26	54.00	11.74	H	18.4
17972.571429	43.66	54.00	11.34	V	19.1



802.11n-HT20 CH11 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
2953.214286	50.99	74.00	23.01	V	6.6
5501.700000	47.88	74.00	26.12	V	3.8
7780.714286	46.00	74.00	28.00	V	5.8
10929.857143	47.75	74.00	26.25	V	9.5
16968.428571	55.06	74.00	18.94	H	18.3
17916.000000	54.96	74.00	19.04	H	18.9

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
2953.214286	41.11	54.00	12.89	V	6.6
5501.700000	37.05	54.00	16.95	V	3.8
7780.714286	34.55	54.00	19.45	V	5.8
10929.857143	37.48	54.00	16.52	V	9.5
16968.428571	42.50	54.00	11.50	H	18.3
17916.000000	42.73	54.00	11.27	H	18.9

802.11n-HT40 CH3 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
2978.214286	51.74	74.00	22.26	H	6.8
5818.800000	48.44	74.00	25.56	V	4.6
9536.571429	45.76	74.00	28.24	V	7.1
12259.285714	48.75	74.00	25.25	V	10.9
16880.571429	54.11	74.00	19.89	H	18.0
17915.142857	54.09	74.00	18.91	H	18.9

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
2978.214286	39.50	54.00	14.50	H	6.8
5818.800000	35.70	54.00	18.30	V	4.6
9536.571429	33.70	54.00	20.30	V	7.1
12259.285714	36.15	54.00	17.85	V	10.9
16880.571429	41.98	54.00	12.02	H	18.0
17915.142857	42.71	54.00	11.29	H	18.9



802.11-VHT20 CH11 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
5914.500000	49.40	74.00	24.60	V	4.6
8850.428572	45.59	74.00	28.41	H	6.5
10427.571429	47.36	74.00	26.64	V	9.0
12462.857143	49.86	74.00	24.14	H	11.4
16557.857143	53.82	74.00	20.18	H	16.6
17909.142857	54.70	74.00	19.30	H	18.9

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
5914.500000	37.62	54.00	16.38	V	4.6
8850.428572	35.69	54.00	18.31	H	6.5
10427.571429	38.22	54.00	15.78	V	9.0
12462.857143	38.68	54.00	15.32	H	11.4
16557.857143	43.60	54.00	10.40	H	16.6
17909.142857	44.34	54.00	9.66	H	18.9

802.11-VHT40 CH3 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
2985.714286	51.86	74.00	22.14	H	6.7
5961.000000	48.80	74.00	25.20	V	4.7
12312.000000	47.82	74.00	26.18	V	11.1
15024.857143	49.54	74.00	24.46	V	12.8
15861.428571	50.74	74.00	23.26	H	14.0
16941.000000	54.18	74.00	19.82	H	18.2

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
2985.714286	40.62	54.00	15.38	H	6.7
5961.000000	36.71	54.00	17.29	V	4.7
12312.000000	39.12	54.00	14.88	V	11.1
15024.857143	39.17	54.00	14.83	V	12.8
15861.428571	42.25	54.00	11.75	H	14.0
16941.000000	43.98	54.00	10.02	H	18.2

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument. The measurement results are obtained as described below:

Result= P_{Mea} +Cable Loss +Antenna Factor-Gain of the preamplifier.

See below for test graphs.

Conclusion: PASS

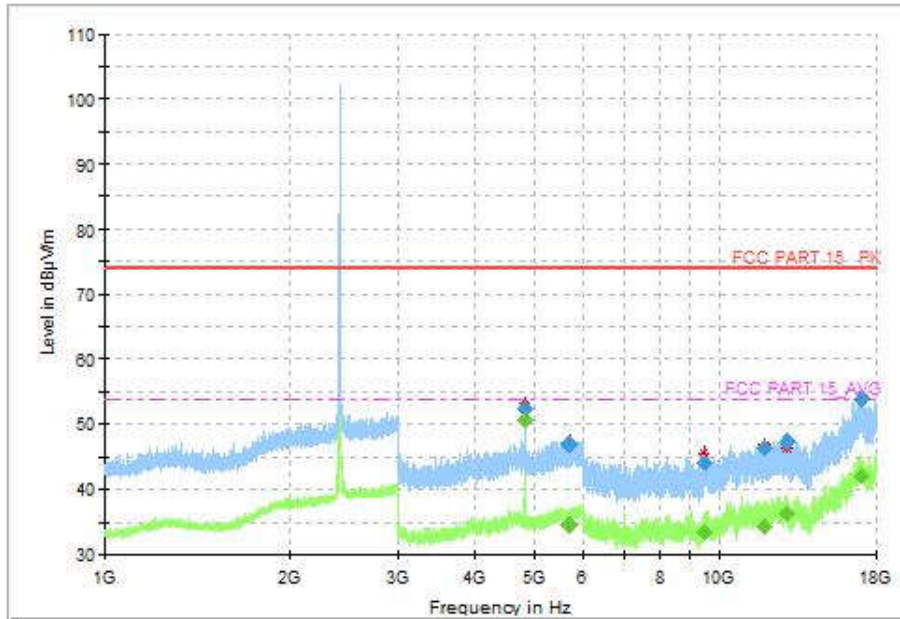


Fig.62 Radiated Spurious Emission (802.11b, CH1, 1GHz-18GHz)

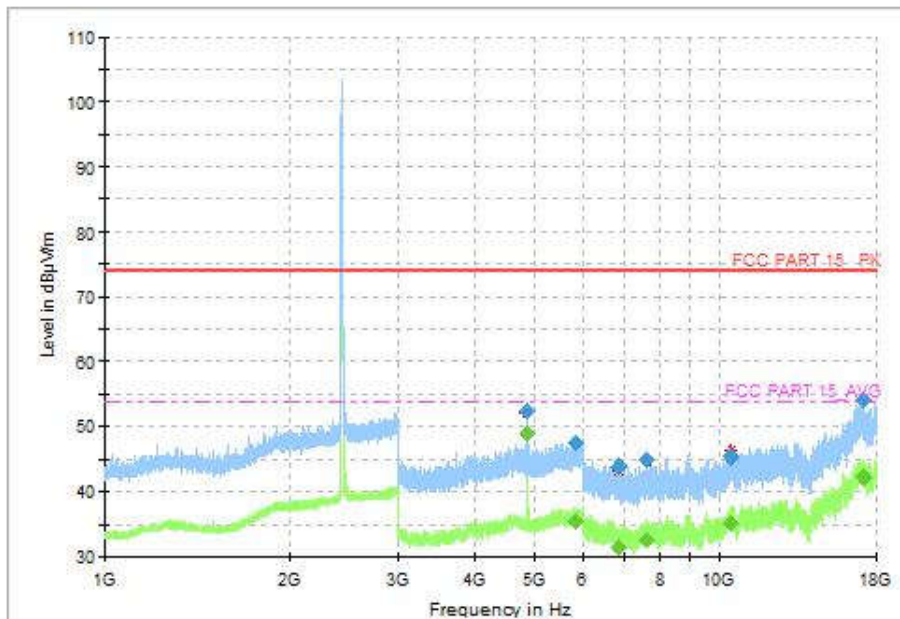


Fig.63 Radiated Spurious Emission (802.11b, CH6, 1GHz-18GHz)

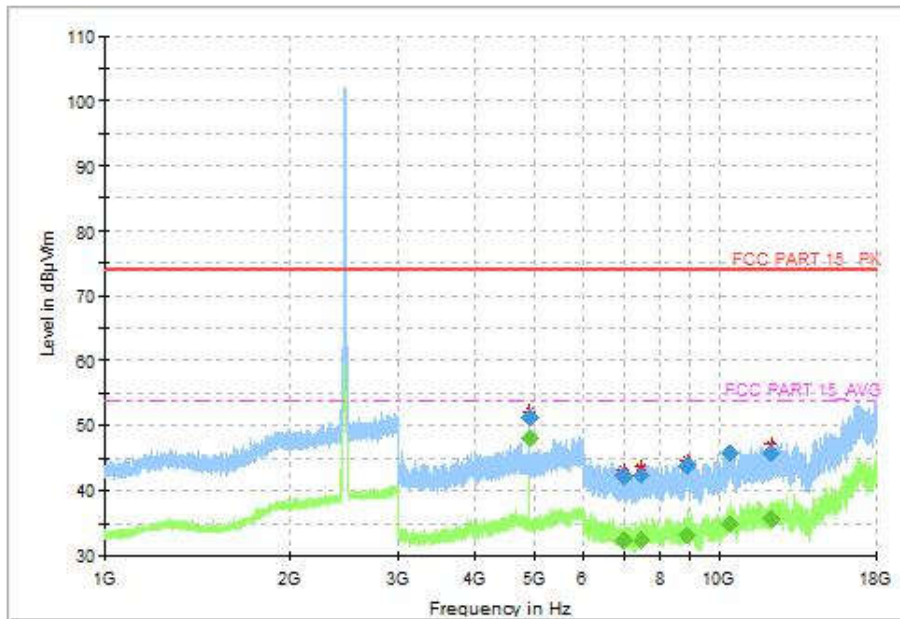


Fig.64 Radiated Spurious Emission (802.11b, CH11, 1GHz-18GHz)

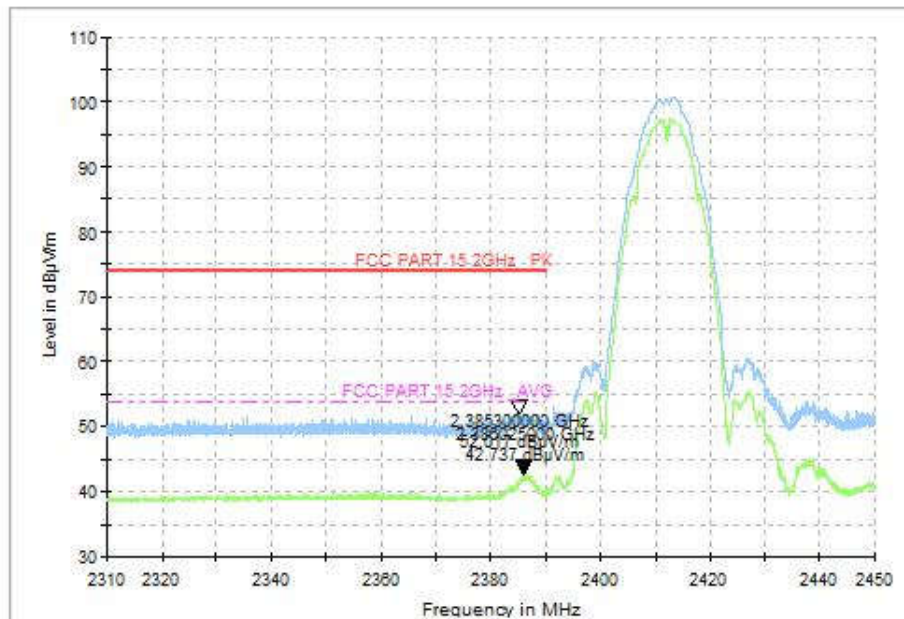


Fig.65 Radiated Restricted Band (802.11b, CH1, 2.38GHz~2.45GHz)

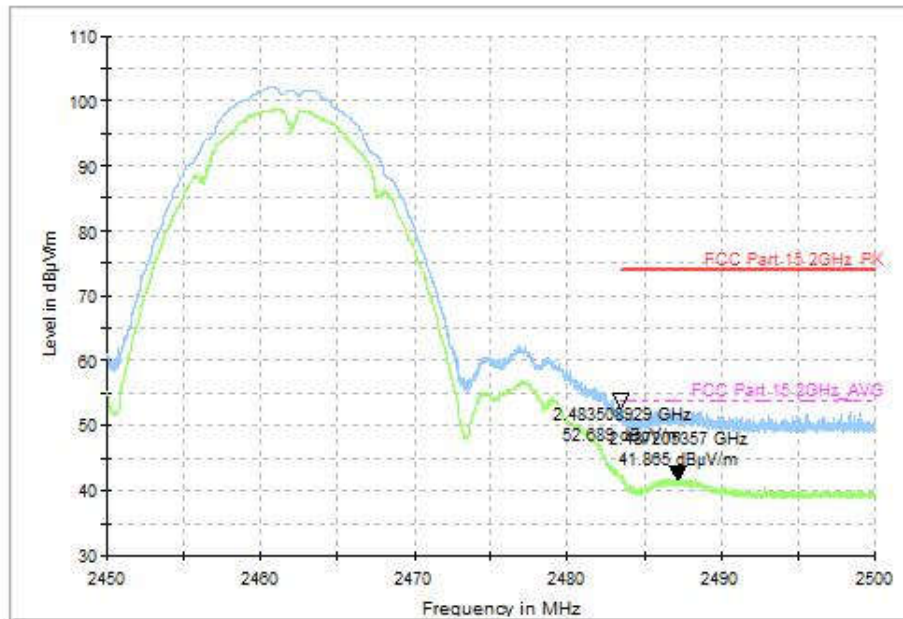


Fig.66 Radiated Restricted Band (802.11b, CH11, 2.45GHz~2.50GHz)

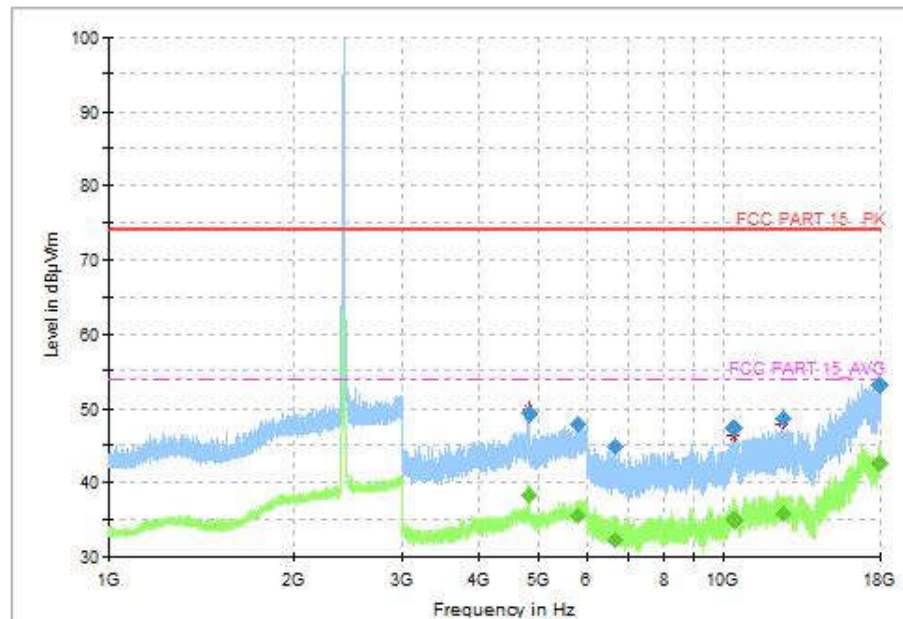


Fig.67 Radiated Spurious Emission (802.11g, CH1, 1GHz-18GHz)

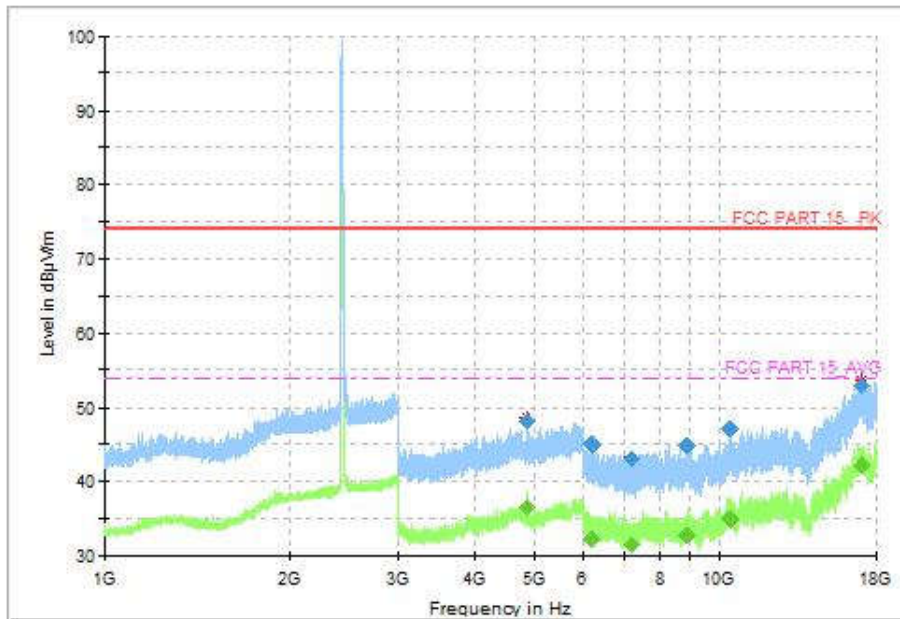


Fig.68 Radiated Spurious Emission (802.11g, CH6, 1GHz-18GHz)

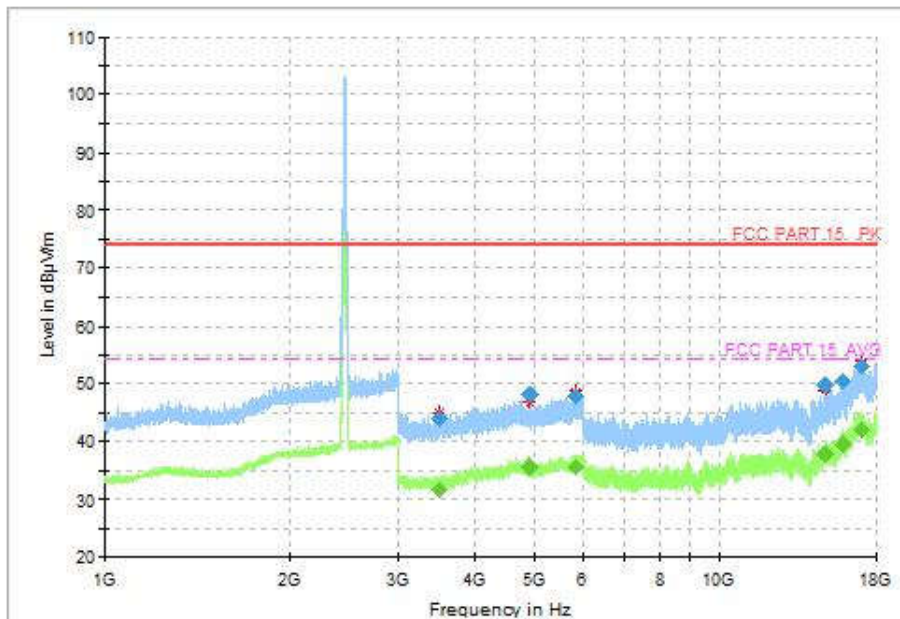


Fig.69 Radiated Spurious Emission (802.11g, CH11, 1GHz-18GHz)

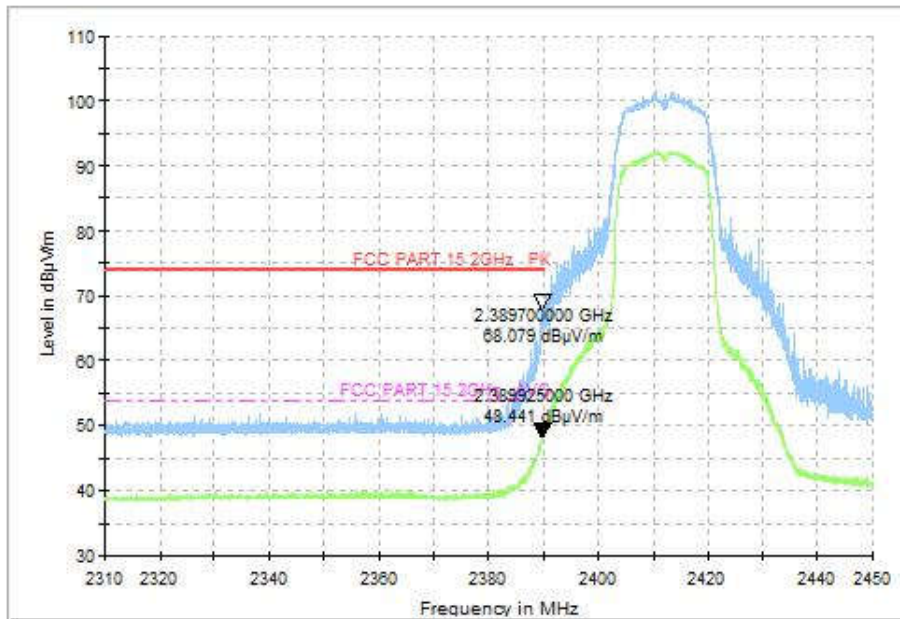


Fig.70 Radiated Restricted Band (802.11g, CH1, 2.38GHz~2.45GHz)

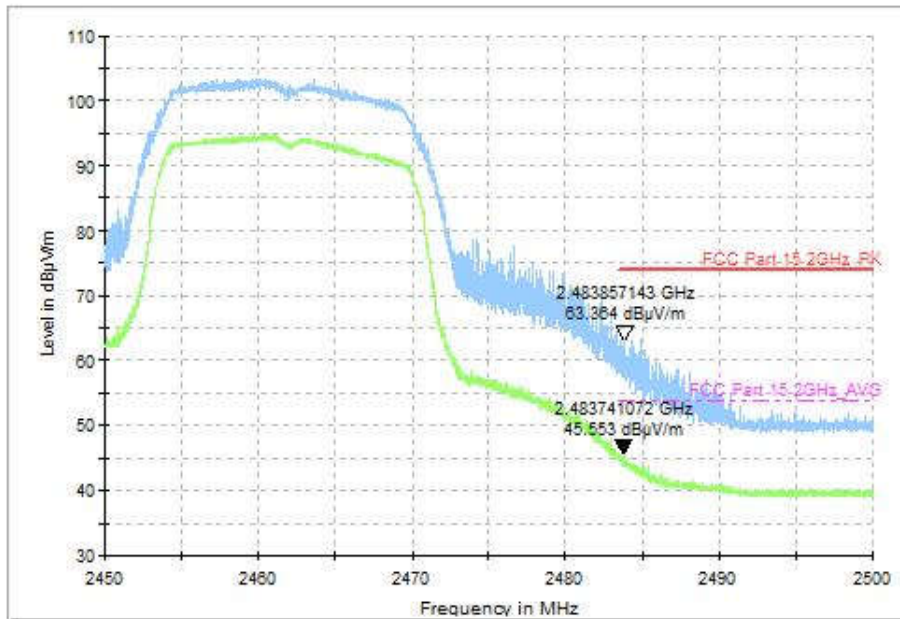


Fig.71 Radiated Restricted Band (802.11g, CH11, 2.45GHz~2.50GHz)

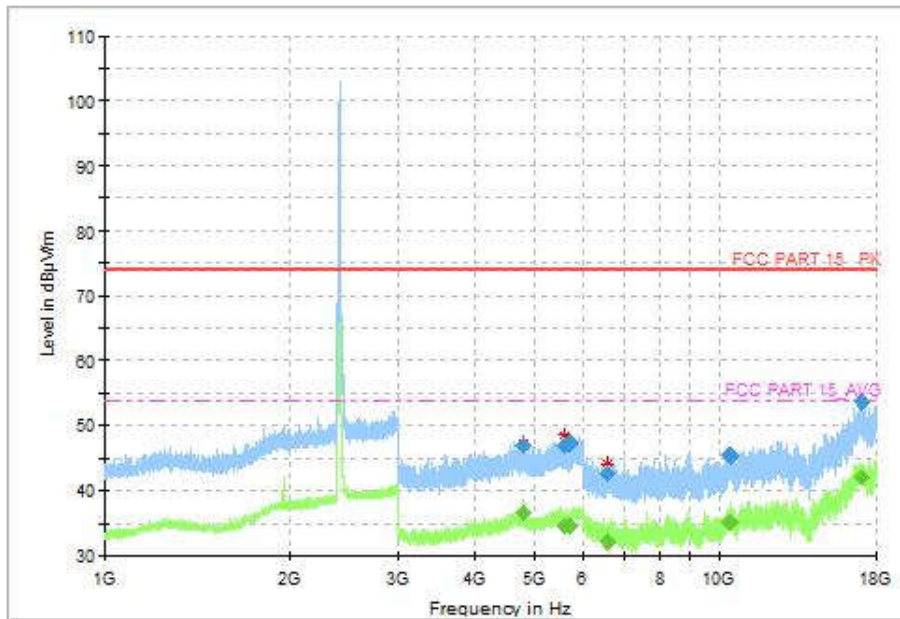


Fig.72 Radiated Spurious Emission (802.11n-HT20, CH1, 1GHz-18GHz)

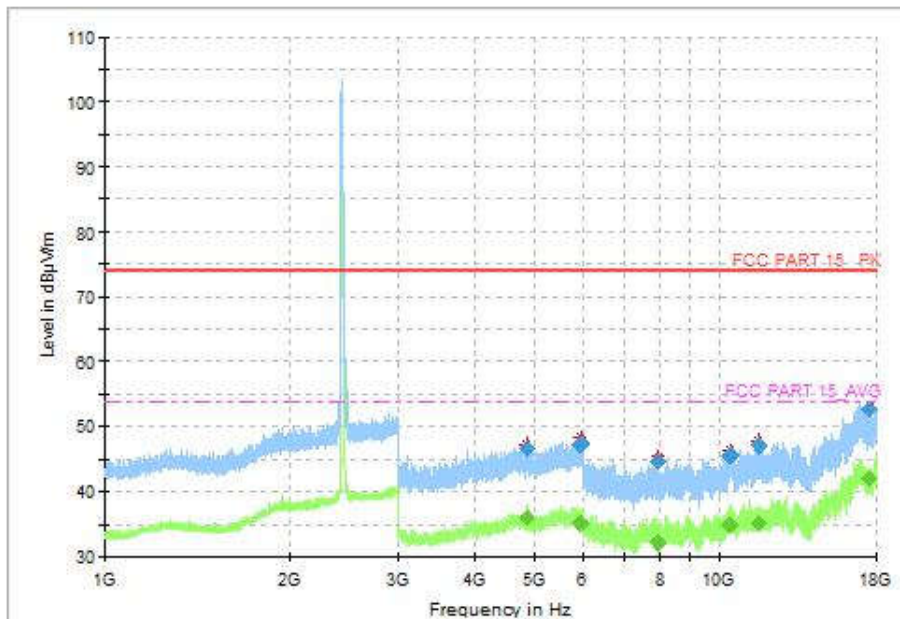


Fig.73 Radiated Spurious Emission (802.11n-HT20, CH6, 1GHz-18GHz)

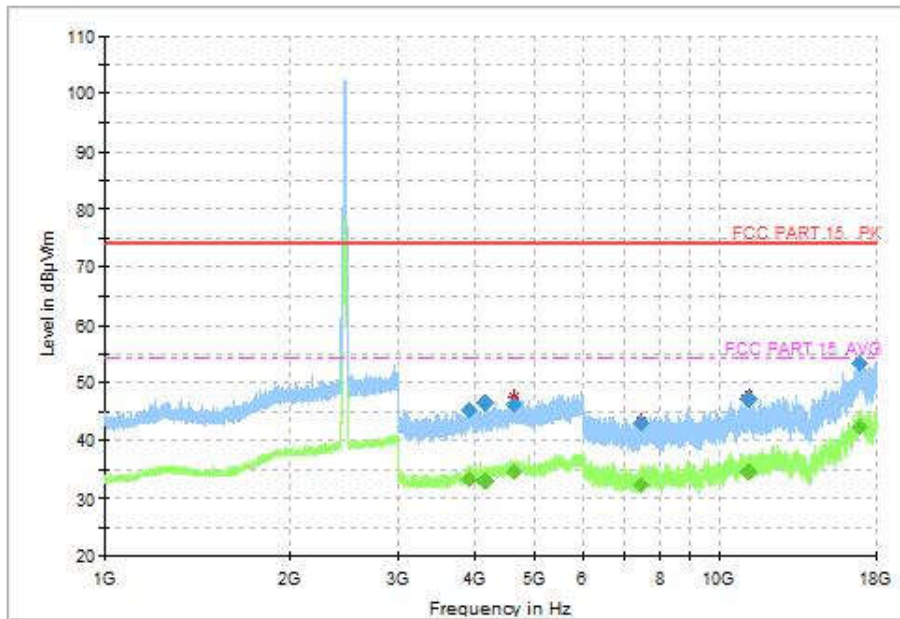


Fig.74 Radiated Spurious Emission (802.11n-HT20, CH1, 1GHz-18GHz)

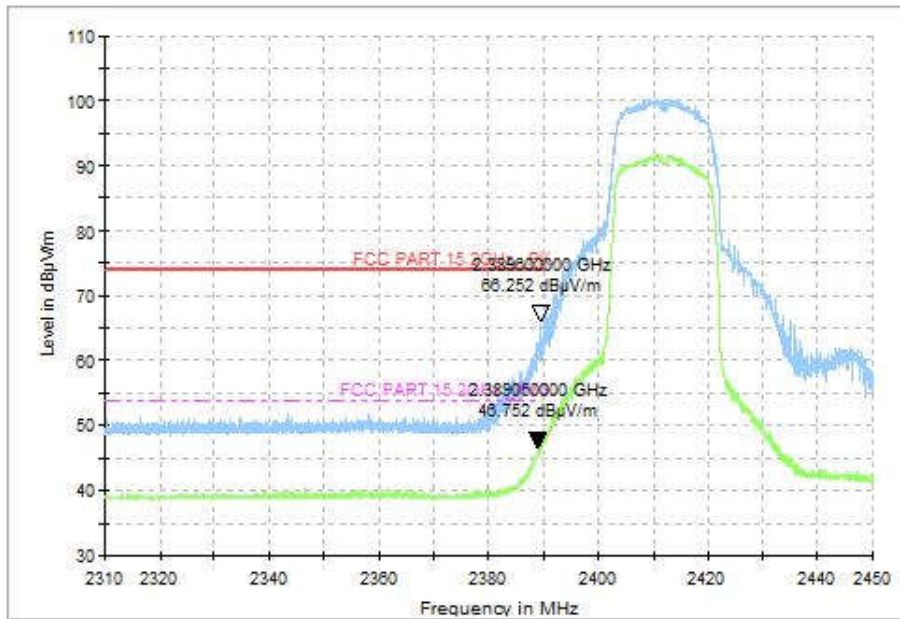


Fig.75 Radiated Restricted Band (802.11n-HT20, CH1, 2.38GHz~2.45GHz)

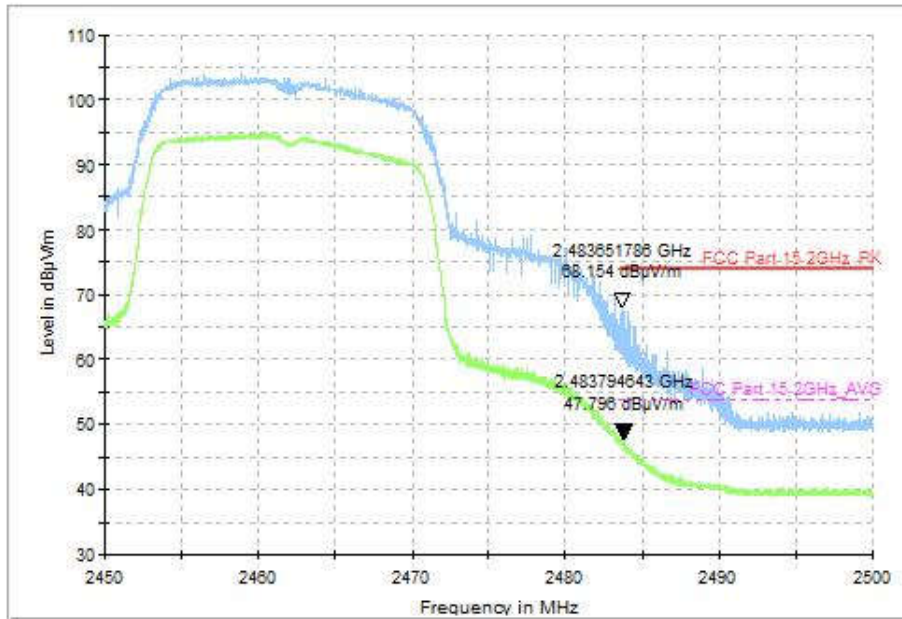


Fig.76 Radiated Spurious Emission (802.11n-HT20, CH11, 2.45GHz~2.50GHz)

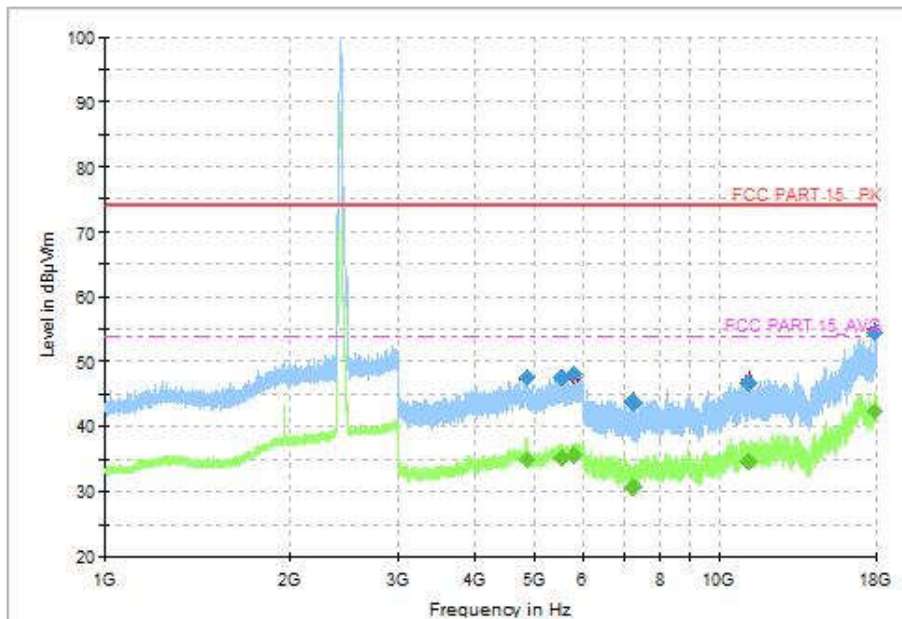


Fig.77 Radiated Spurious Emission (802.11n-HT40, CH3, 1GHz~18GHz)

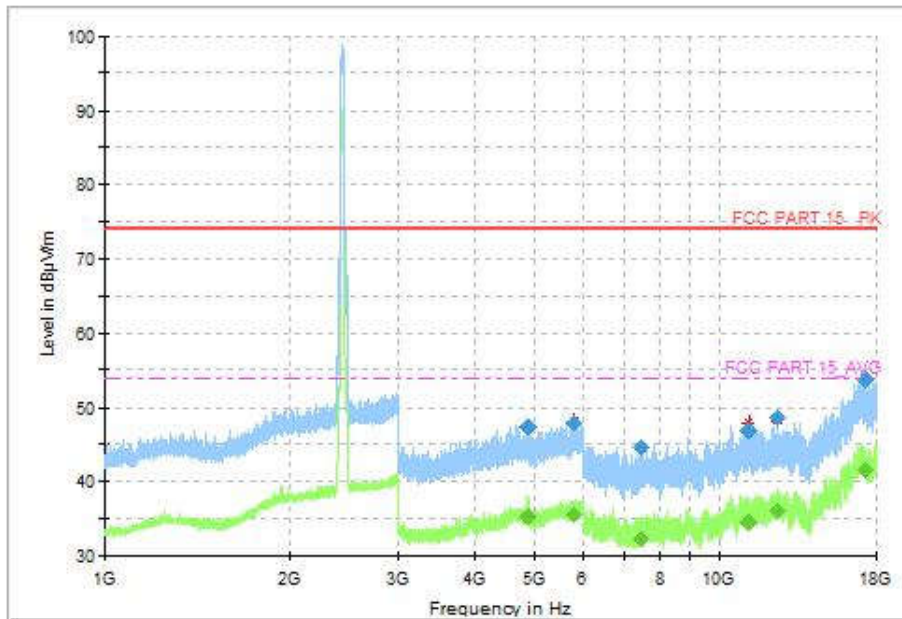


Fig.78 Radiated Spurious Emission (802.11n-HT40, CH6, 1GHz-18GHz)

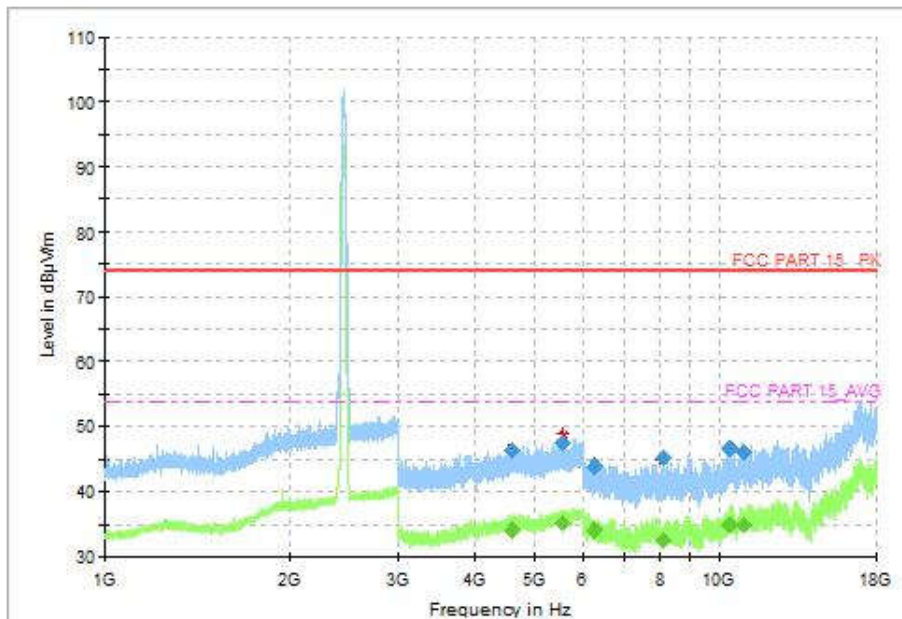


Fig.79 Radiated Spurious Emission (802.11n-HT40, CH9, 1GHz-18GHz)

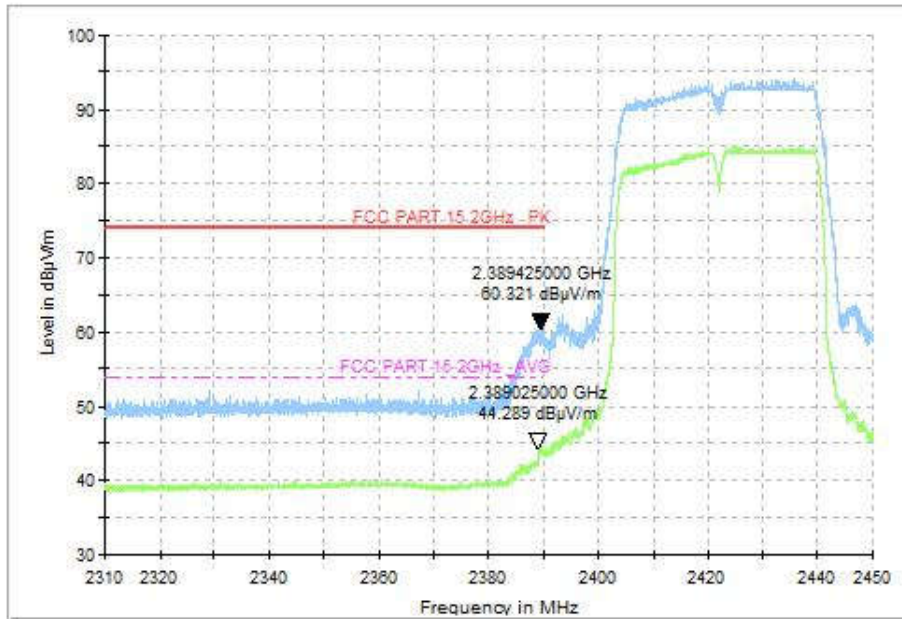


Fig.80 Radiated Restricted Band (802.11n-HT40, CH3, 2.38GHz~2.45GHz)

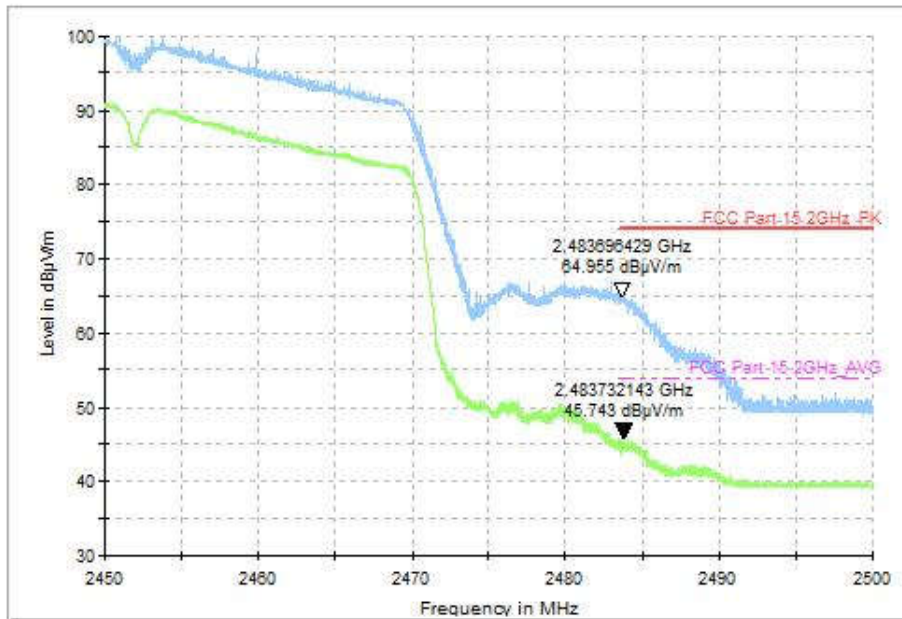


Fig.81 Radiated Spurious Emission (802.11n-HT40, CH9, 2.45GHz~2.50GHz)

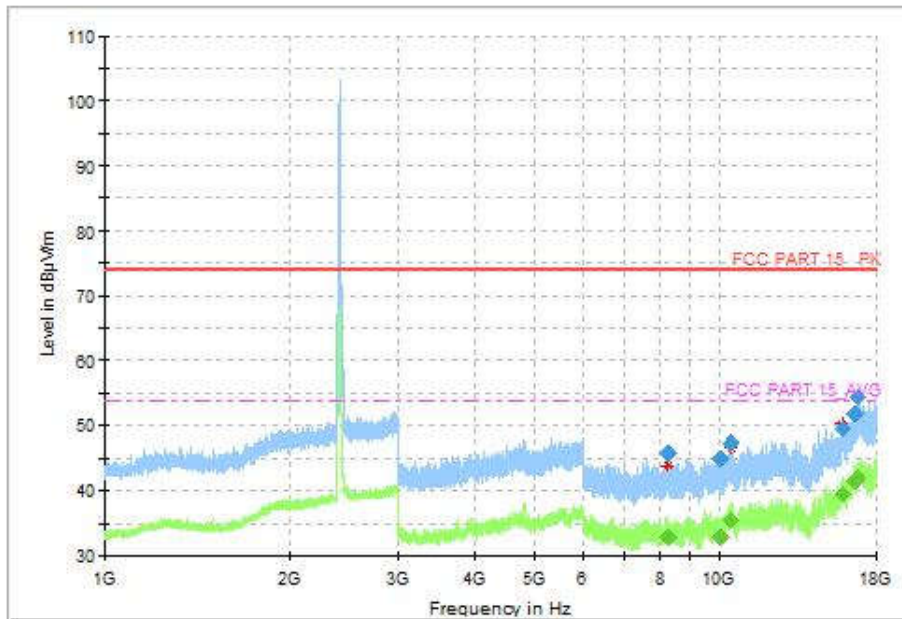


Fig.82 Radiated Spurious Emission (802.11-VHT20, CH1, 1GHz-18GHz)

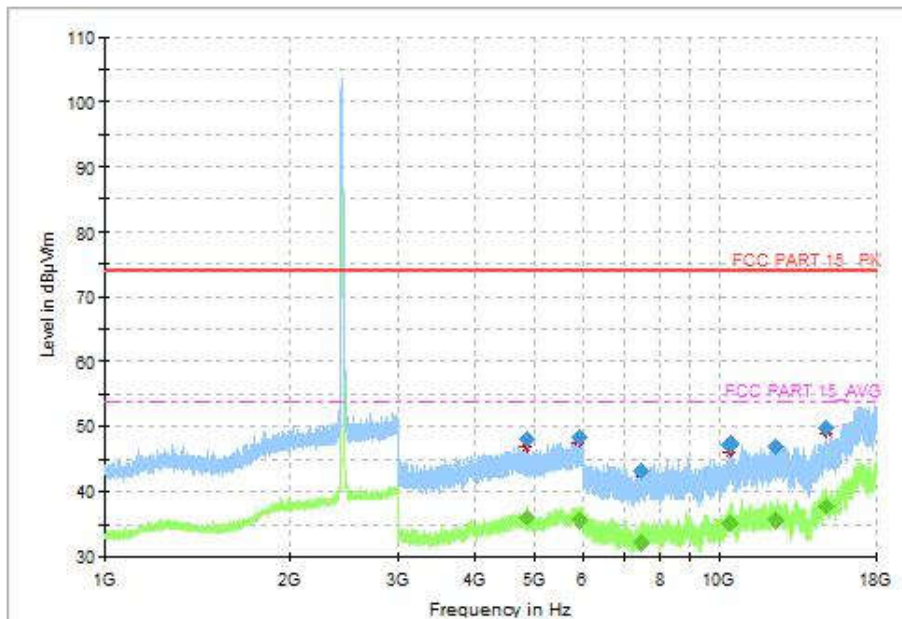


Fig.83 Radiated Spurious Emission (802.11-VHT20, CH6, 1GHz-18GHz)

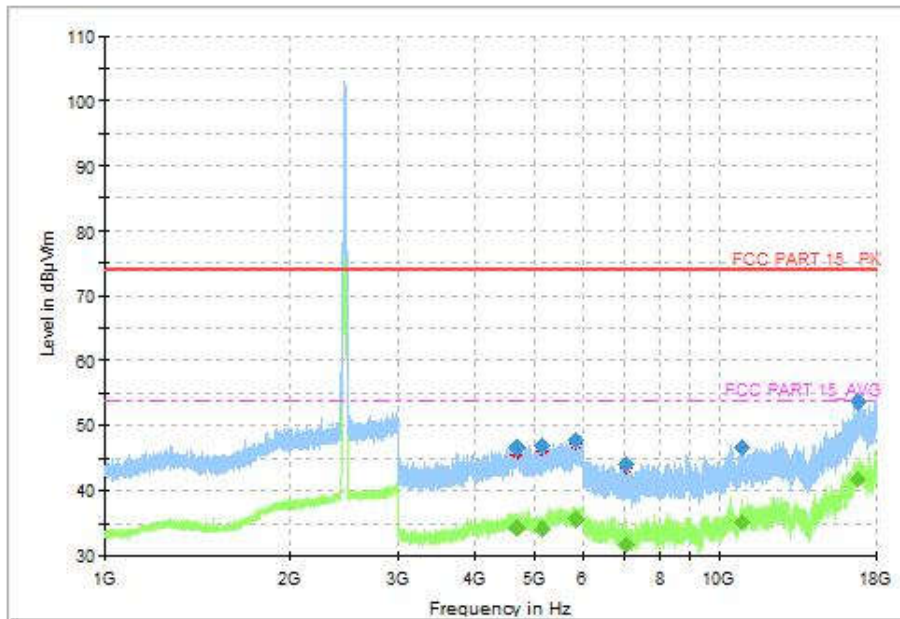


Fig.84 Radiated Spurious Emission (802.11-VHT20, CH11, 1GHz-18GHz)

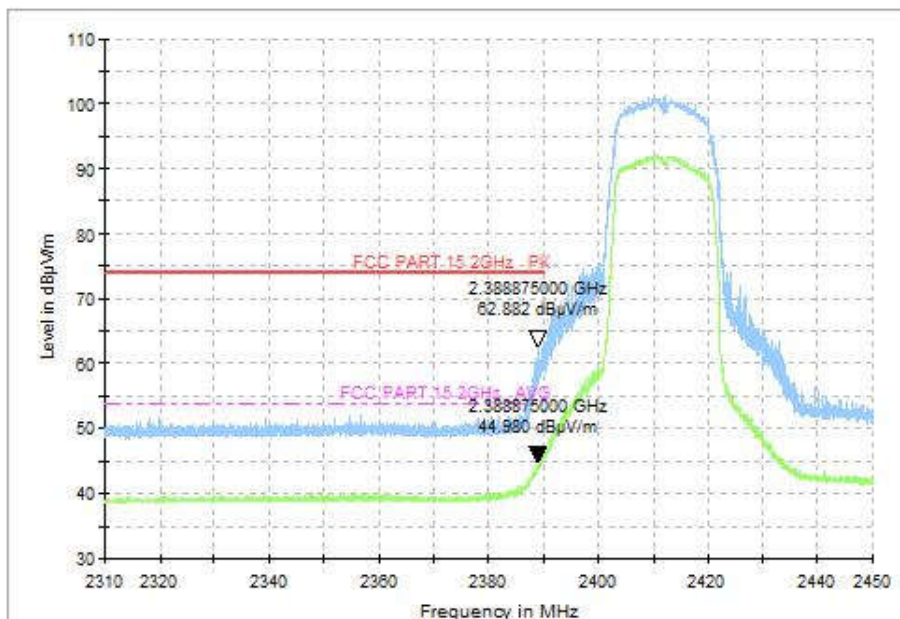


Fig.85 Radiated Restricted Band (802.11-VHT20, CH1, 2.38GHz~2.45GHz)

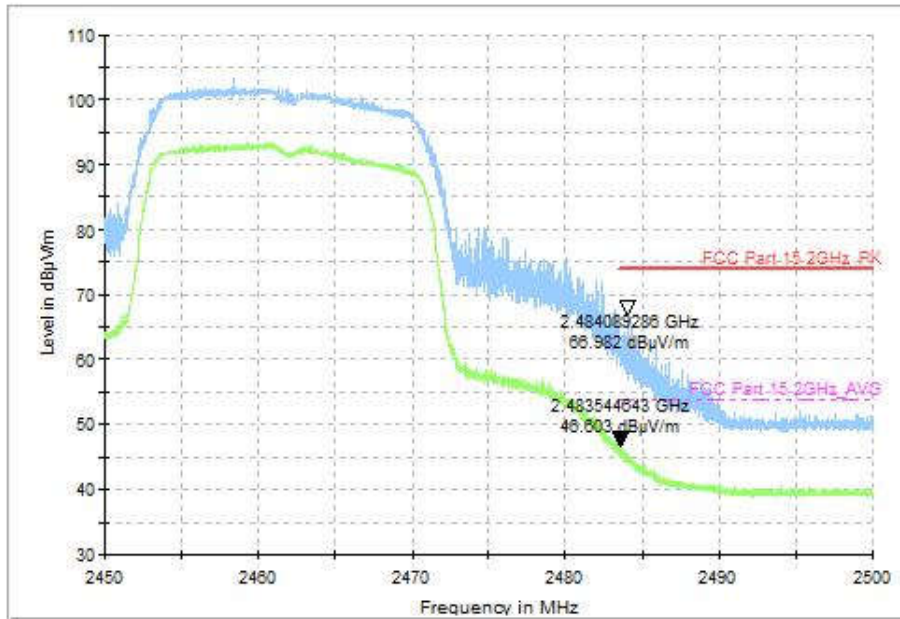


Fig.86 Radiated Spurious Emission (802.11-VHT20, CH11, 2.45GHz~2.50GHz)

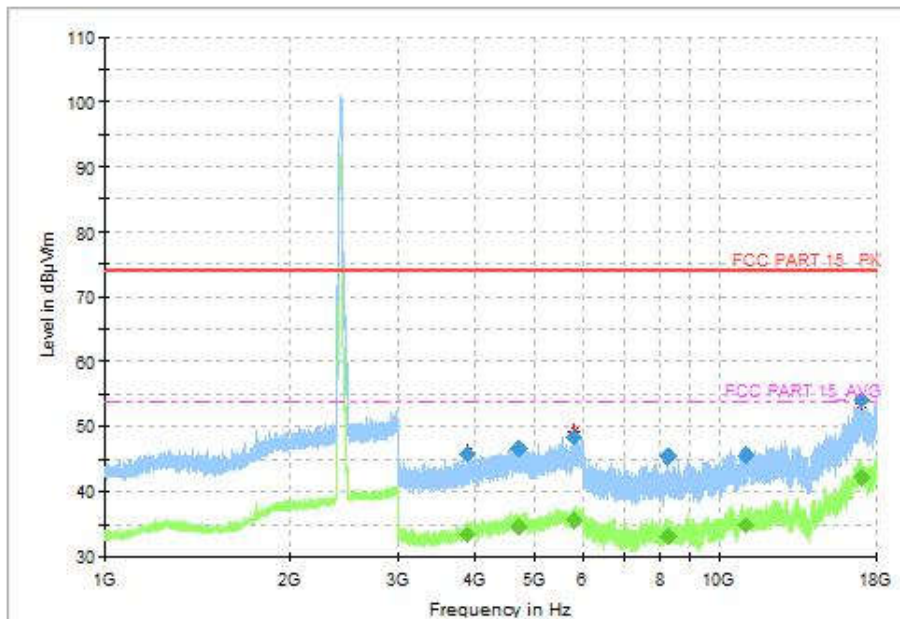


Fig.87 Radiated Spurious Emission (802.11-VHT40, CH3, 1GHz-18GHz)

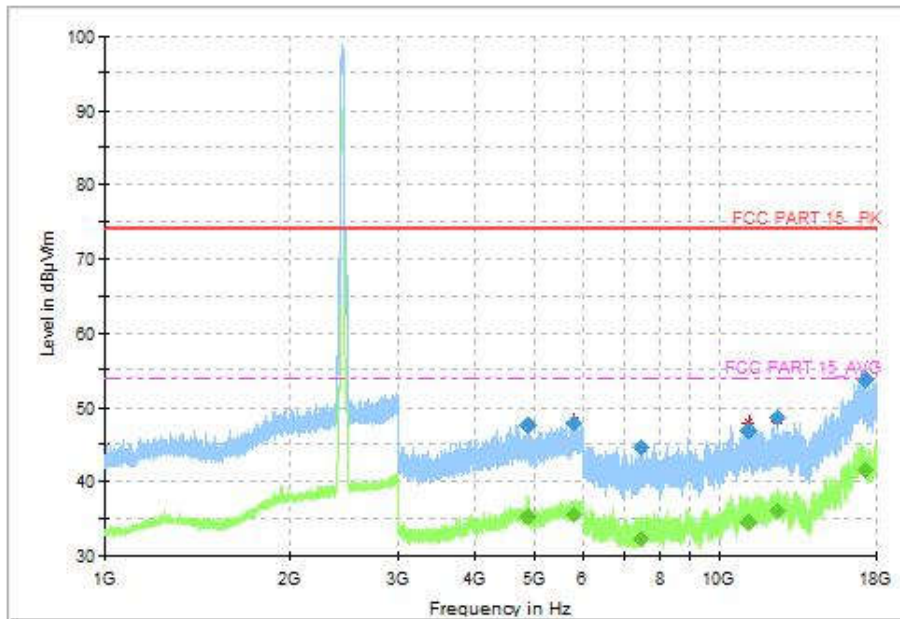


Fig.88 Radiated Spurious Emission (802.11-VHT40, CH6, 1GHz-18GHz)

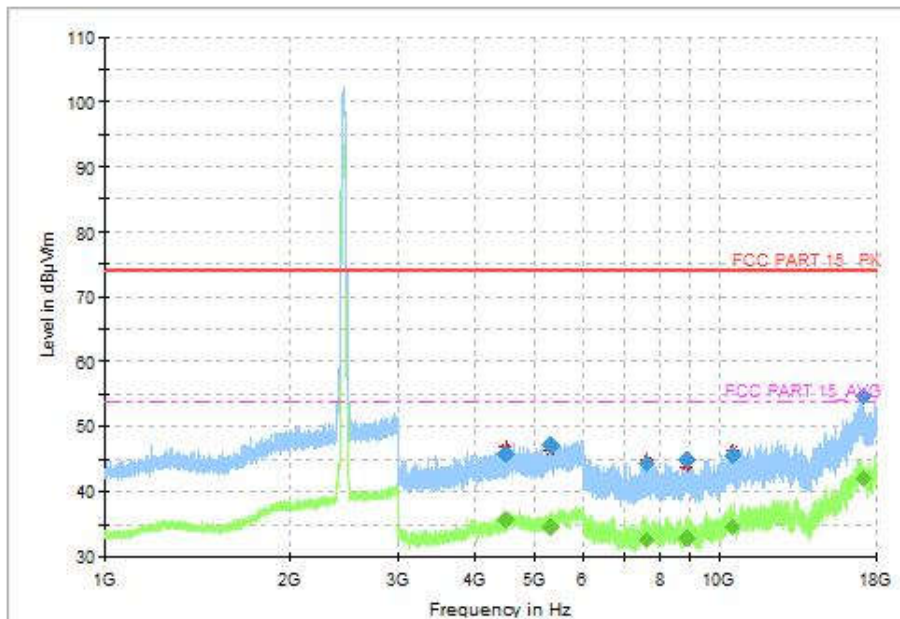


Fig.89 Radiated Spurious Emission (802.11-VHT40, CH9, 1GHz-18GHz)

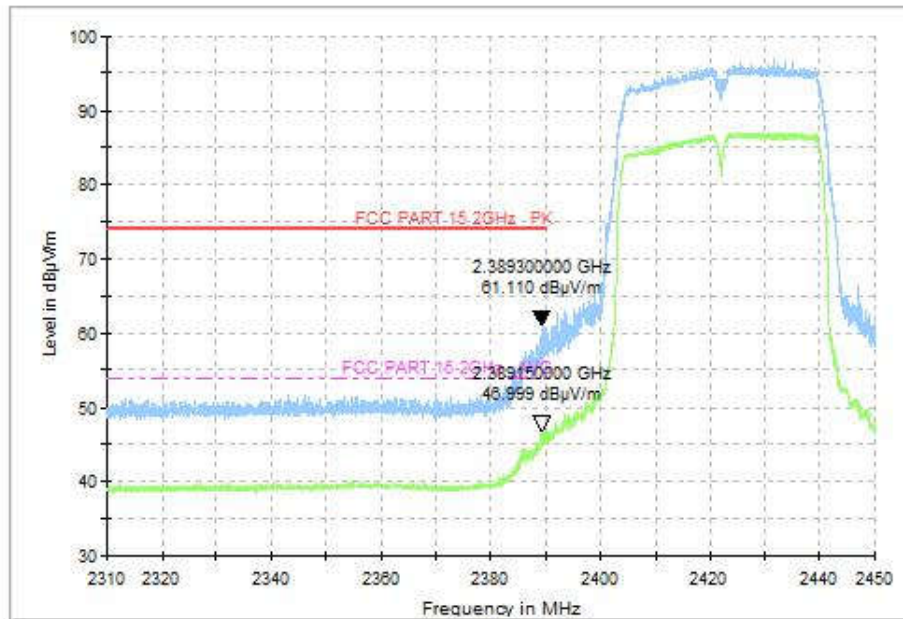


Fig.90 Radiated Restricted Band (802.11-VHT40, CH3, 2.38GHz~2.45GHz)

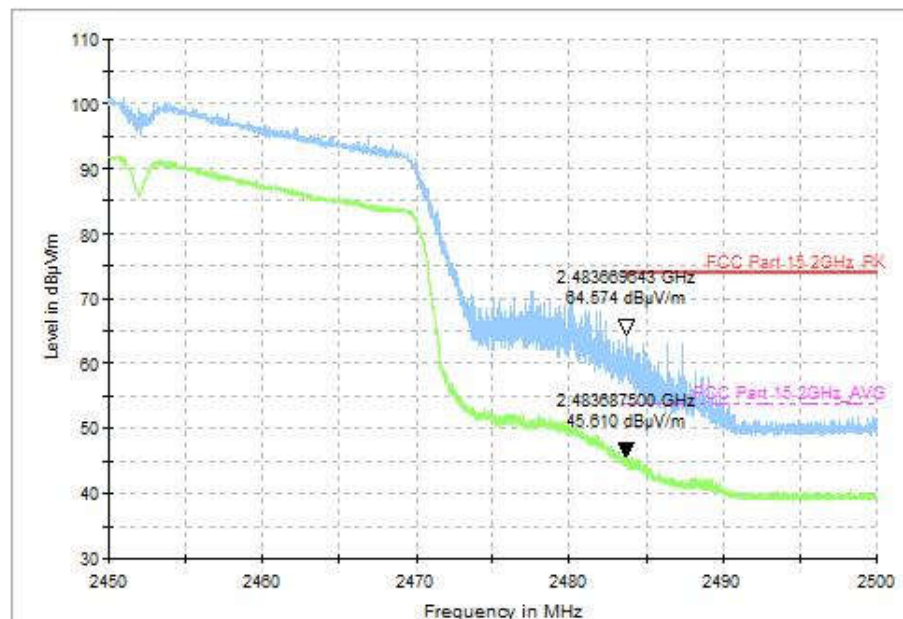


Fig.91 Radiated Spurious Emission (802.11-VHT40, CH9, 2.45GHz~2.50GHz)

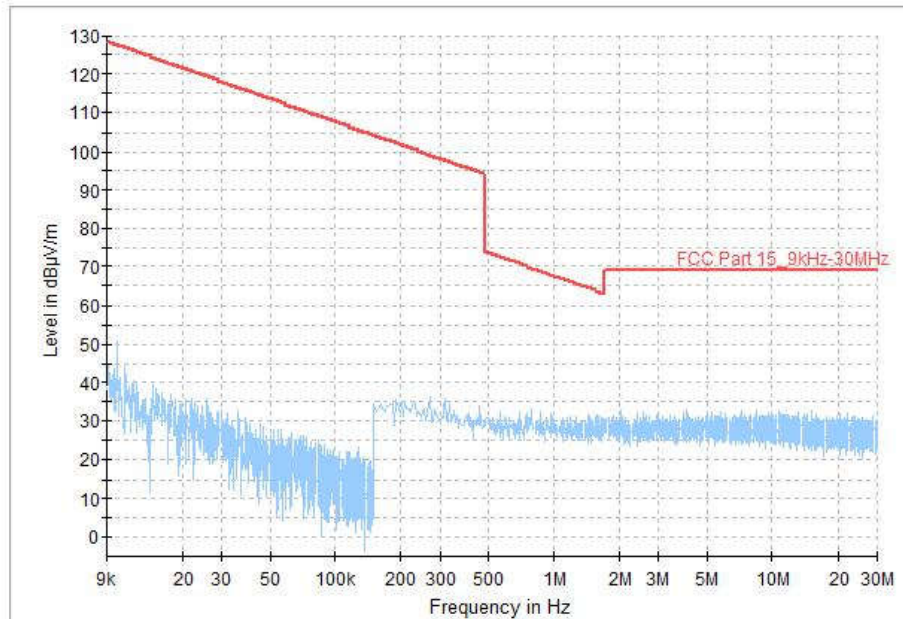


Fig.92 Radiated Spurious Emission (All channel, 9kHz~30MHz)

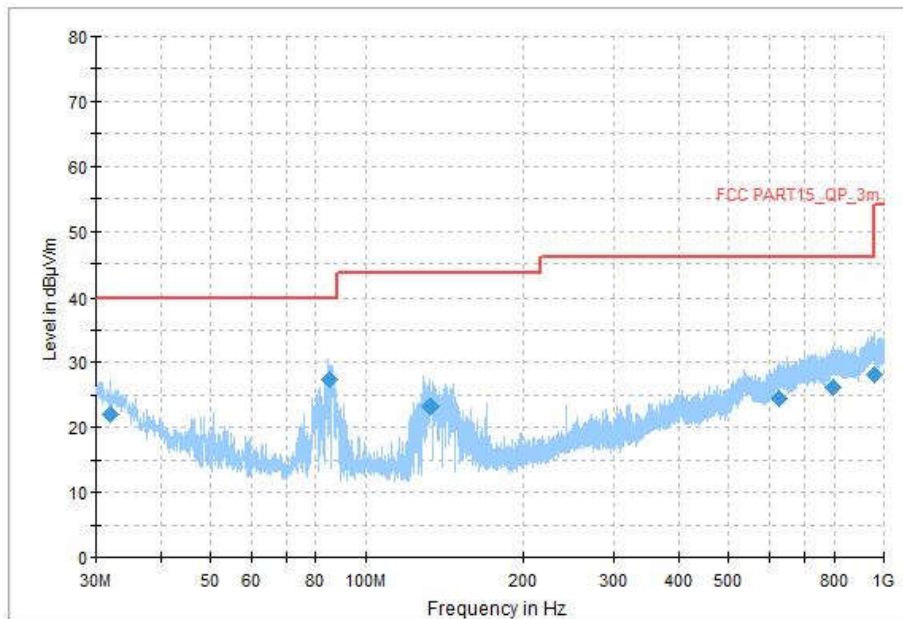


Fig.93 Radiated Spurious Emission (All channel, 30MHz~1GHz)

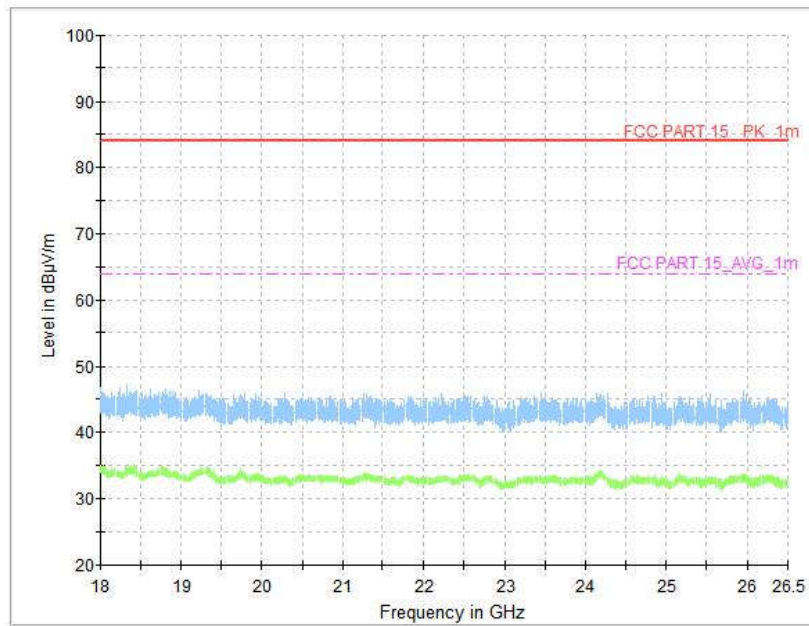


Fig.94 Radiated Spurious Emission (All channel, 18GHz~26.5GHz)



A.7 AC Power line Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN 2.4GHz - AE2, AE3

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
			Traffic	Idle	
0.15 to 0.5	66 to 56	56 to 46	Fig.95	Fig.96	P
0.5 to 5	56	46			
5 to 30	60	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: **PASS**

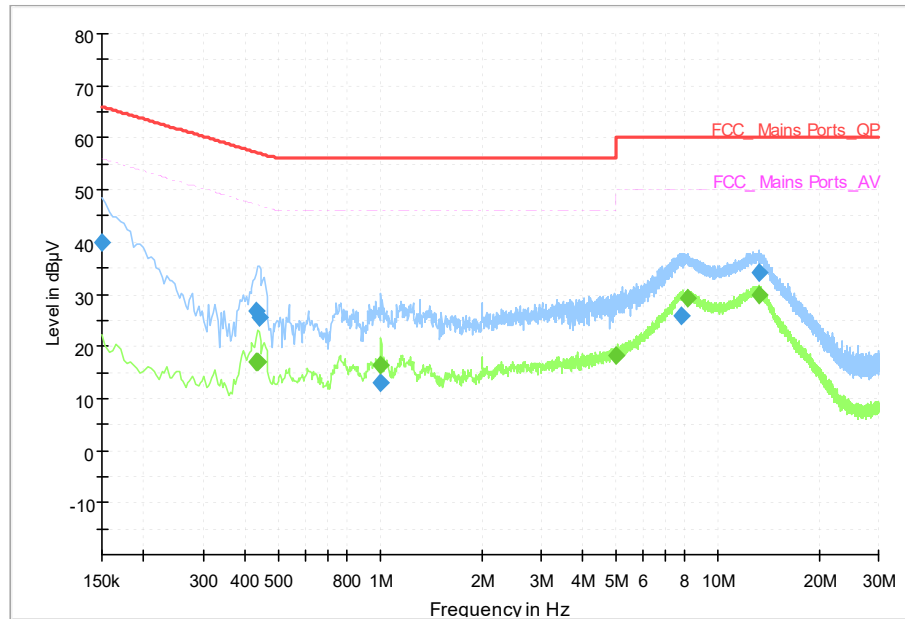


Fig.95 AC Power line Conducted Emission (Traffic)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	40.01	66.00	25.99	L1	ON	10
0.430000	26.82	57.25	30.44	N	ON	10
0.438000	25.43	57.10	31.67	N	ON	10
1.006000	13.05	56.00	42.95	L1	ON	10
7.782000	25.94	60.00	34.06	L1	ON	10
13.254000	34.05	60.00	25.95	N	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.430000	16.89	47.25	30.37	L1	ON	10
0.434000	17.09	47.18	30.08	L1	ON	10
1.006000	16.26	46.00	29.74	N	ON	10
4.978000	18.09	46.00	27.91	L1	ON	10
8.182000	29.22	50.00	20.78	N	ON	10
13.246000	29.87	50.00	20.13	N	ON	10

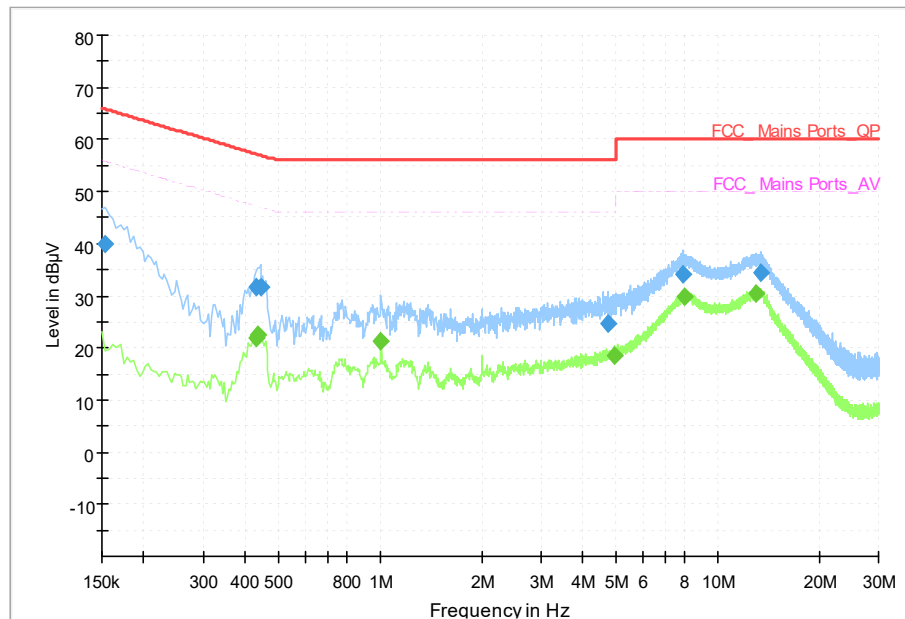


Fig.96 AC Power line Conducted Emission (Idle)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	39.93	65.78	25.85	N	ON	10
0.430000	31.75	57.25	25.50	N	ON	10
0.442000	31.69	57.02	25.34	N	ON	10
4.746000	24.68	56.00	31.32	N	ON	10
7.930000	34.17	60.00	25.83	N	ON	10
13.434000	34.52	60.00	25.48	N	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.430000	21.82	47.25	25.43	L1	ON	10
0.434000	22.64	47.18	24.54	L1	ON	10
1.006000	21.33	46.00	24.67	L1	ON	10
4.946000	18.65	46.00	27.35	N	ON	10
7.990000	29.76	50.00	20.24	N	ON	10
12.938000	30.31	50.00	19.69	L1	ON	10

*****END OF REPORT*****