



FCC TEST REPORT

Issued to

GUANGDONG OPPO MOBILE
TELECOMMUNICATIONS CORP.,LTD

For

Mobile Phone

Model Name: OPPO R1001
Trade Name: OPPO
Brand Name: OPPO
FCC ID : R9C-R1001
Standard: 47 CFR Part 22 Subpart H
47 CFR Part 24 Subpart E
Test date: 2014-2-24 to 2014-3-12
Issue date: 2014-3-19

By

Shenzhen Morlab Communications Technology Co., Ltd.

FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District,
ShenZhen, GuangDong Province, P. R. China 518101

Tested by Liu Zhisen
Liu Zhisen
(Test Engineer)

Date 2014.3.19




Reviewed by Peng Huarui
Peng Huarui
(Project Manager)
Date 2014.3.19

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer, Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



TABLE OF CONTENTS

GENERAL INFORMATION.....	3
1.1 EUT DESCRIPTION.....	3
1.2 TEST STANDARDS AND RESULTS.....	5
1.3 FACILITIES AND ACCREDITATIONS	6
2. 47 CFR PART 2, PART 22H,24E REQUIREMENTS.....	7
2.1 CONDUCTED RF OUTPUT POWER	7
2.2 PEAK TO AVERAGE RATIO	19
2.3 99% OCCUPIED BANDWIDTH.....	24
2.4 FREQUENCY STABILITY	41
2.5 CONDUCTED OUT OF BAND EMISSIONS.....	46
2.6 BAND EDGE	72
2.7 TRANSMITTER RADIATED POWER (EIRP/ERP).....	81
2.8 RADIATED OUT OF BAND EMISSIONS	90

Change History		
Issue	Date	Reason for change
1.0	2014-3-19	First edition



GENERAL INFORMATION

1.1 EUT Description

EUT Type : Mobile Phone
Serial No. : (n.a, marked #1 by test site)
Hardware Version : 213076
Software Version..... : R1001_11_140214
Applicant : GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP.,LTD
NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN, GUANGDONG, CHINA
Manufacturer..... : GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP.,LTD
NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN, GUANGDONG, CHINA
Frequency Range : GSM 850MHz:
Tx: 824.20 - 848.80MHz (at intervals of 200kHz);
Rx: 869.20 - 893.80MHz (at intervals of 200kHz)
GSM 1900MHz:
Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);
Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)
WCDMA 850MHz
Tx: 826.4 - 846.6MHz (at intervals of 200kHz);
Rx: 871.4 - 891.6MHz (at intervals of 200kHz)
Modulation Type..... : GSM,GPRS Mode with GMSK Modulation
EDGE Mode with 8PSK Modulation
WCDMA Mode with QPSK Modulation
HSDPA Mode with QPSK Modulation
HSUPA Mode with QPSK Modulation
HSPA+ Mode with QPSK Modulation
Multislot Class : GPRS: Multislot Class12,EGPRS: Multislot Class12
Antenna Type..... : PIFA Antenna
Emission Designators : GSM 850:247KGXW,GSM 1900:250KGXW
EGPRS850:249KG7W, EGPRS1900:252KG7W,
WCDMA 850:4M16F9W

Note 1: The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCNs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be



represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCNs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest, middle and highest channel numbers (ARFCNs) used and tested in this report are separately 4132 (826.4MHz), 4175(835MHz) and 4233 (846.6MHz).

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 5: After pre-scan test, the SIM Card 1 was the worst case, so we did the testing and recorded the results according to SIM card 1.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-13 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-13 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-13 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2.	24.232(d)	Peak to average radio	PASS
2	2.1049,22.917 24.238	99% Occupied Bandwidth	PASS
3	2.1055,22.355 24.235	Frequency Stability	PASS
4	2.1051,2.1057 22.917,24.238	Conducted Out of Band Emissions	PASS
5	2.1051,2.1057 22.917,24.238	Band Edge	PASS
6	22.913,24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053,2.1057 22.917,24.238	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010



1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China 518101. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 695796.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 2, PART 22H,24E REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

1. Test Setup:

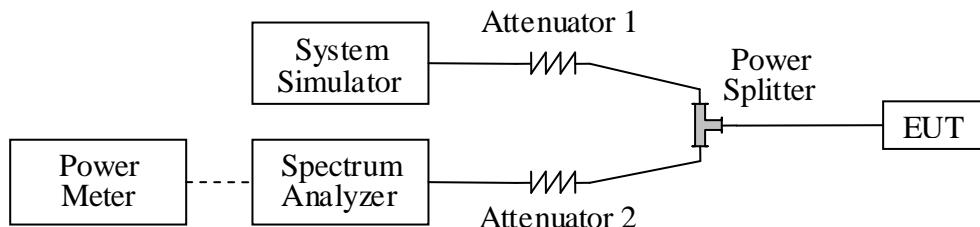

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

The Power Meter was just used for the Conducted RF Output Power test of WCDMA Model.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2013.05.12	2014.05.11
Spectrum Analyzer	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Power Meter	Agilent	E4418B	GB43318055	2013.05.12	2014.05.11
Power Sensor	Agilent	8482A	MY41091706	2013.05.12	2014.05.11
Power Splitter	Weinschel	1506A	NW521	2013.05.12	2014.05.11
Attenuator 1	Resnet	20dB	(n.a.)	2013.05.12	2014.05.11
Attenuator 2	Resnet	3dB	(n.a.)	2013.05.12	2014.05.11

2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

1. GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power		Limit dBm	Verdict
			dBm	Refer to Plot		
GSM 850MHz	128	824.2	32.57	Plot A1 to A3	35	PASS
	190	836.6	32.45			PASS
	251	848.8	32.38			PASS
GSM 1900MHz	512	1850.2	29.14	Plot B1 to B3	32	PASS
	661	1880.0	28.92			PASS
	810	1909.8	28.87			PASS
GPRS 850MHz	128	824.2	30.91	Plot C1 to C3 ^{Note 1}	35	PASS
	190	836.6	30.80			PASS
	251	848.8	30.72			PASS
GPRS 1900MHz	512	1850.2	27.47	Plot D1 to D3 ^{Note 1}	32	PASS
	661	1880.0	27.26			PASS
	810	1909.8	27.24			PASS
EGPRS 850MHz	128	824.2	30.00	Plot E1 to E3 ^{Note 1}	35	PASS
	190	836.6	29.83			PASS
	251	848.8	29.62			PASS
EGPRS 1900MHz	512	1850.2	28.55	Plot F1 to F3 ^{Note 1}	32	PASS
	661	1880.0	28.33			PASS
	810	1909.8	28.24			PASS


Note 1: For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.




2. WCDMA Model Test Verdict:

Item	band	WCDMA 850		
	ARFCN	4132	4175	4233
	subtest	dBm		
5.2(WCDMA)	non	24.55	24.35	24.48
HSDPA	1	24.45	24.25	24.48
	2	24.48	24.30	24.43
	3	23.95	23.76	23.96
	4	23.91	23.72	23.94
HSUPA	1	24.50	24.26	24.42
	2	22.47	22.28	22.39
	3	23.52	23.22	23.41
	4	22.54	22.24	22.41
	5	24.49	24.25	24.37
HSPA+	1	24.55	24.27	24.40
Note:	The Conducted RF Output Power test of WCDMA/HSDPA/HSUPA /HSPA+ was tested by power meter.			


3. GSM Model Test Plots:

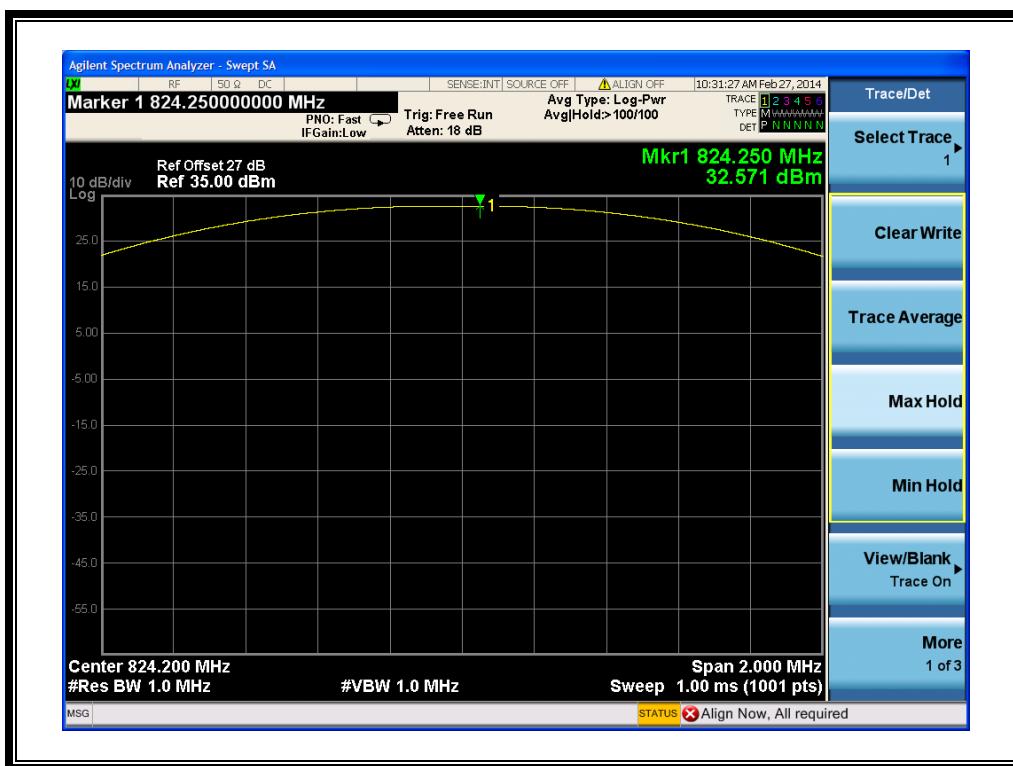


(Plot A1: GSM 850MHz Channel = 128)

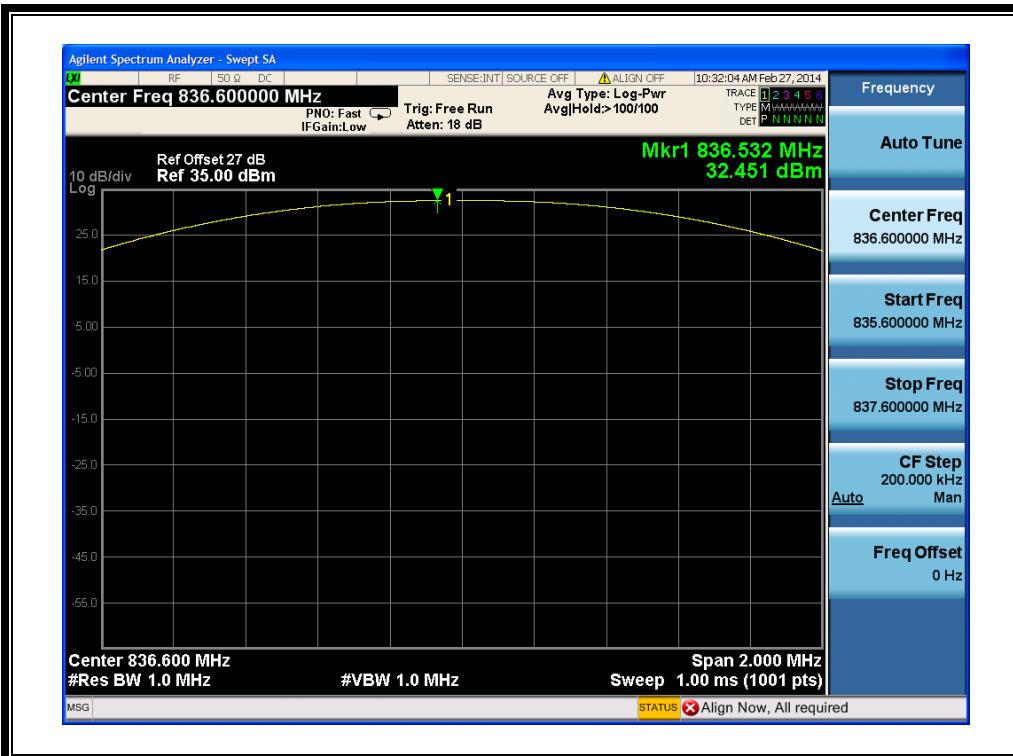


(Plot A2: GSM 850MHz Channel = 190)

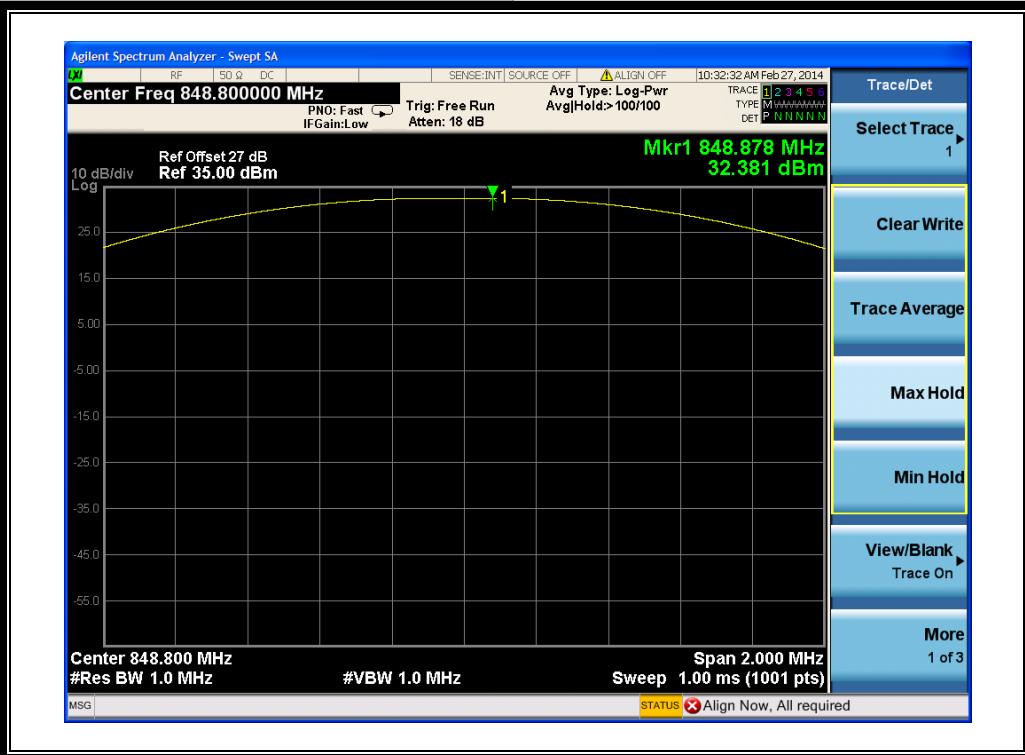


(Plot A3: GSM 850MHz Channel = 251)

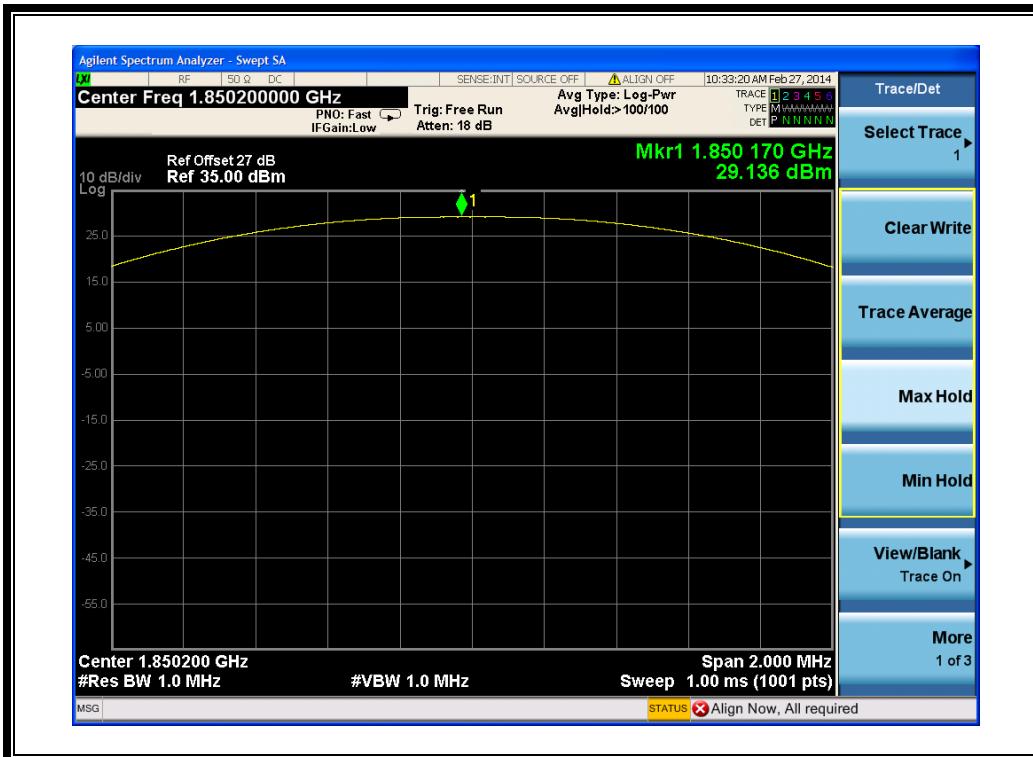


(Plot B1: GSM 1900MHz Channel = 512)

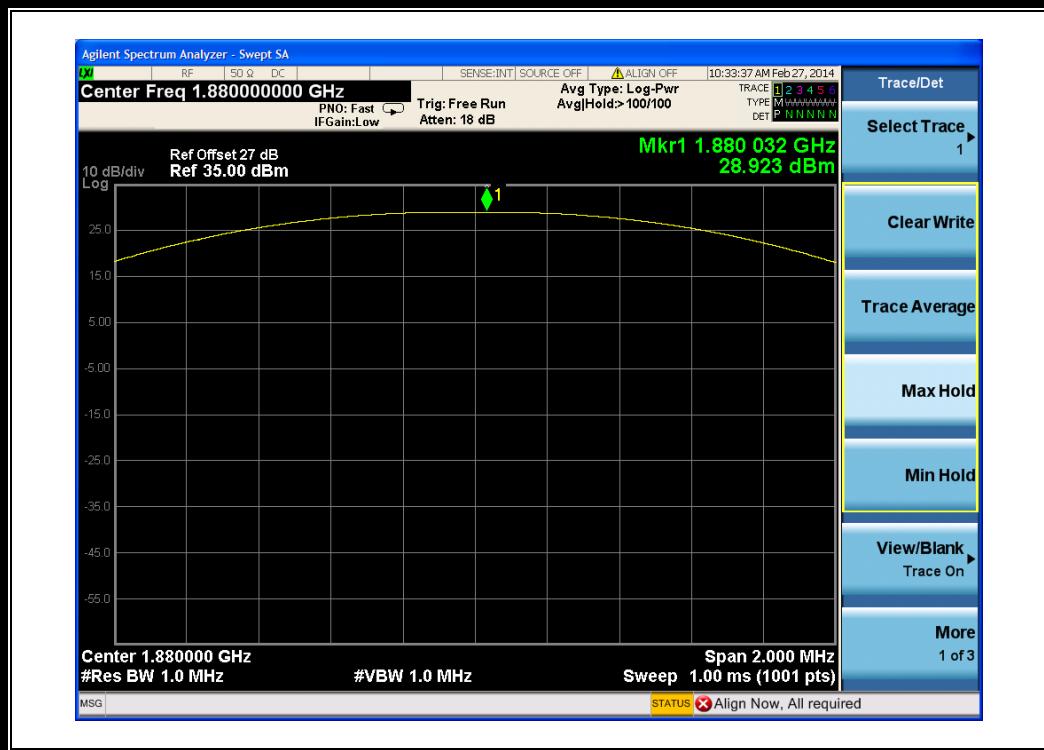


(Plot B2: GSM 1900MHz Channel = 661)

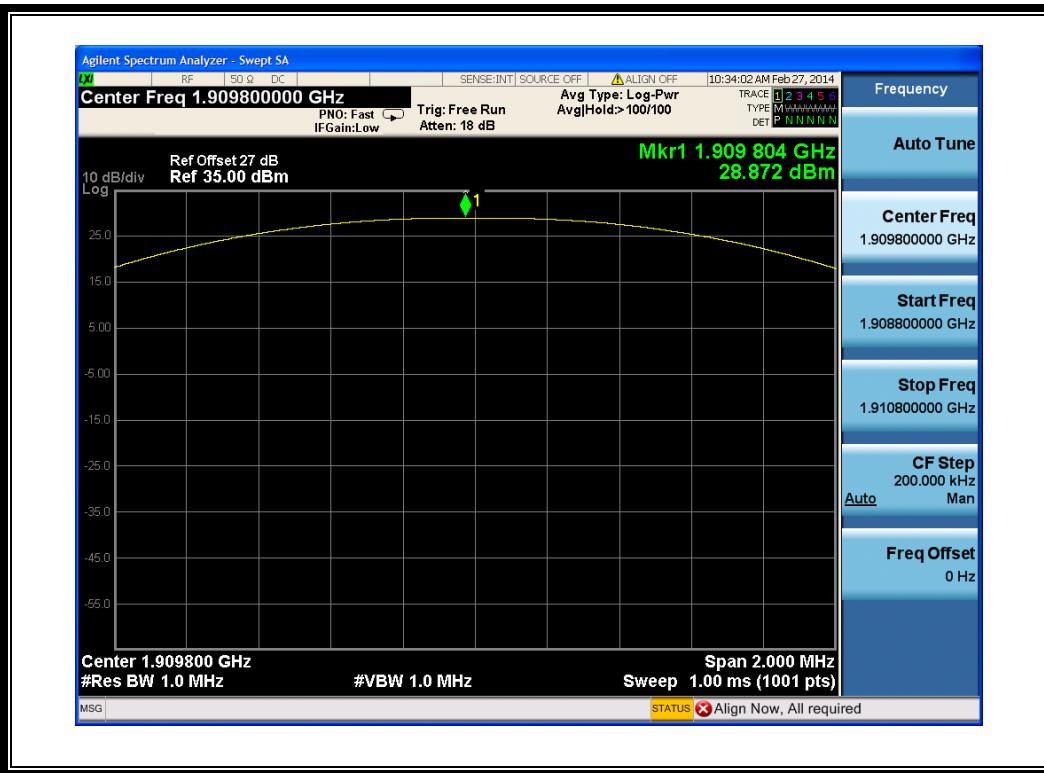


(Plot B3: GSM 1900Hz Channel = 810)

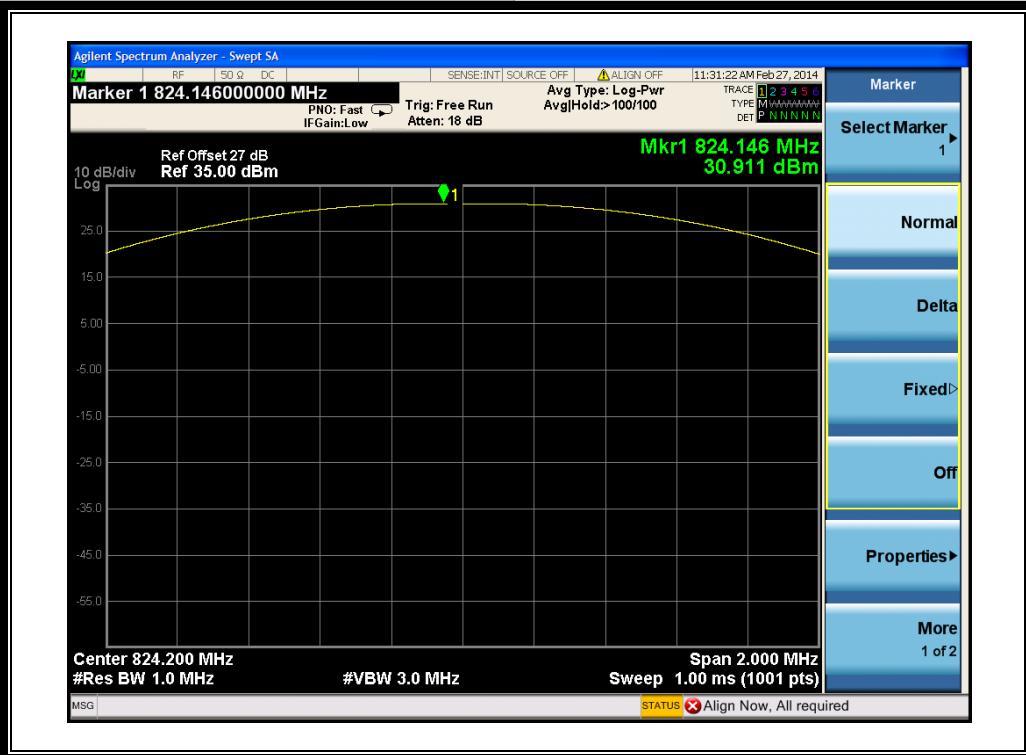


(Plot C 1: GPRS 850MHz Channel = 128)

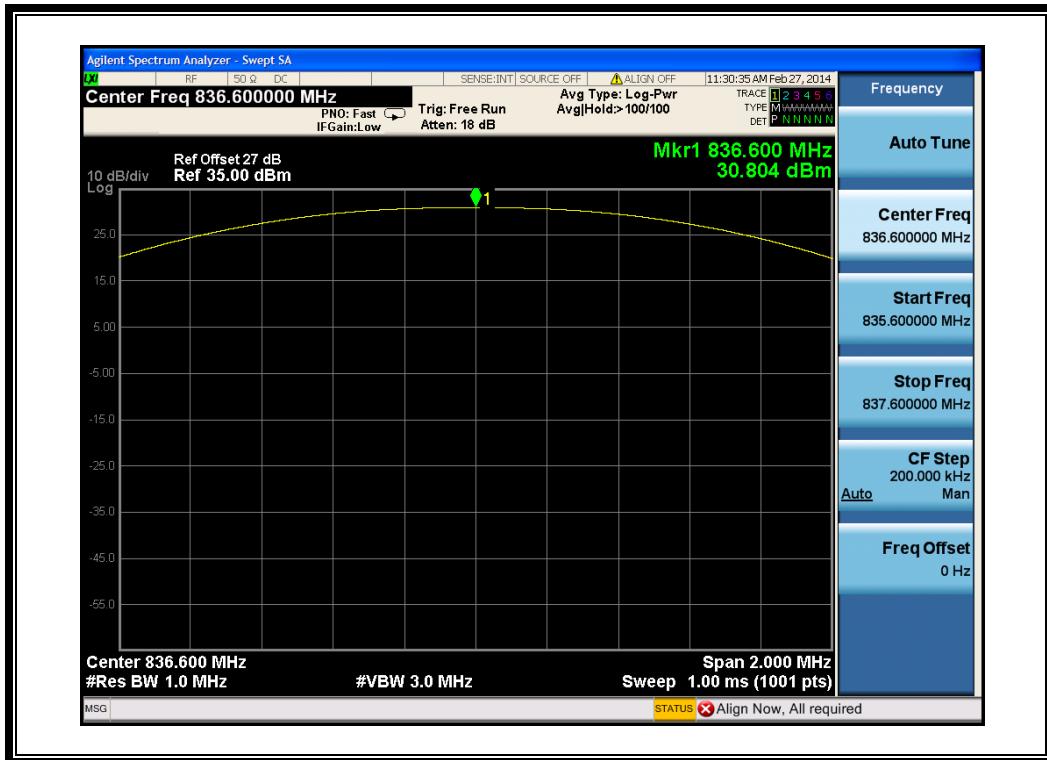


(Plot C 2: GPRS 850MHz Channel = 190)

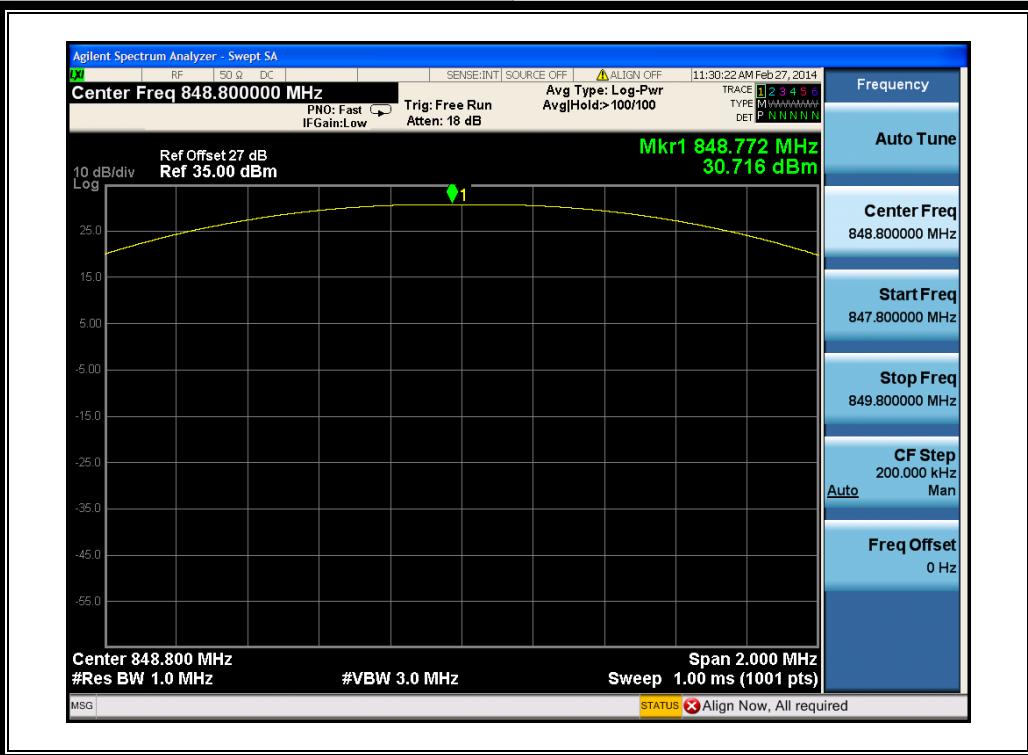


(Plot C 3: GPRS 850MHz Channel = 251)

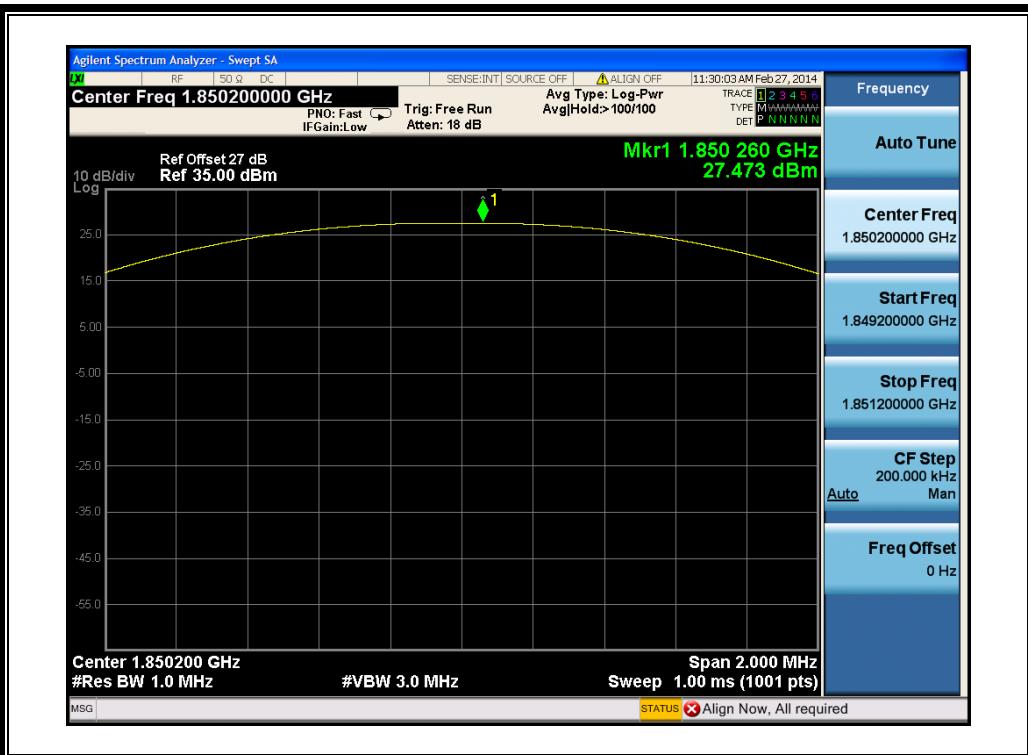


(Plot D 1: GPRS 1900MHz Channel = 512)

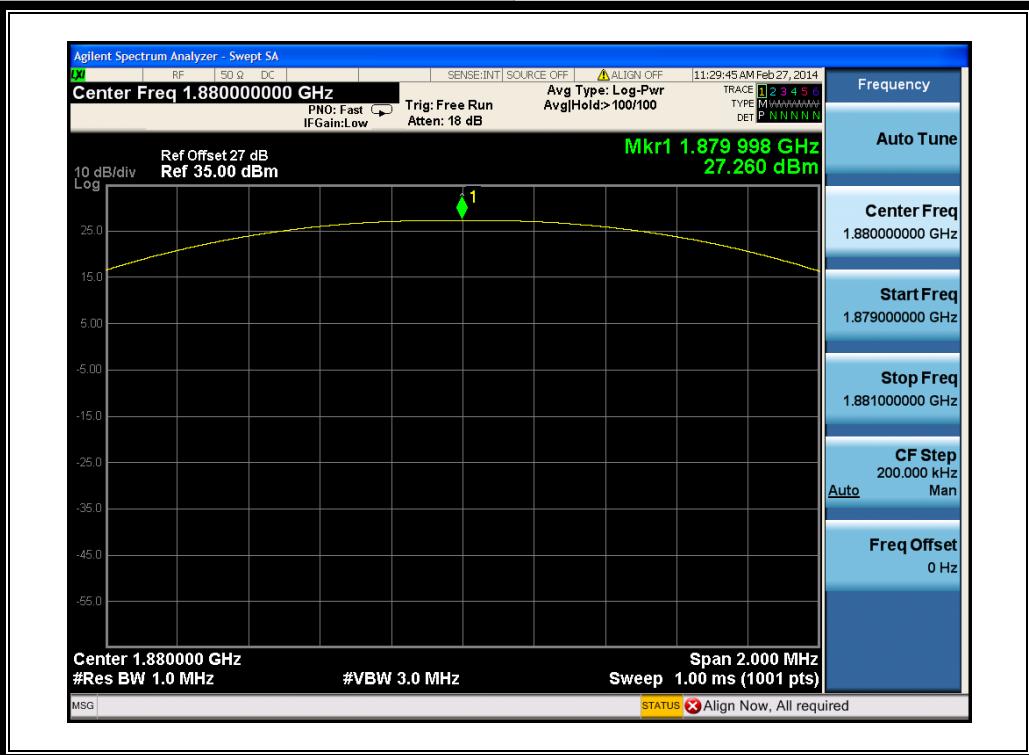


(Plot D 2: GPRS 1900MHz Channel = 661)

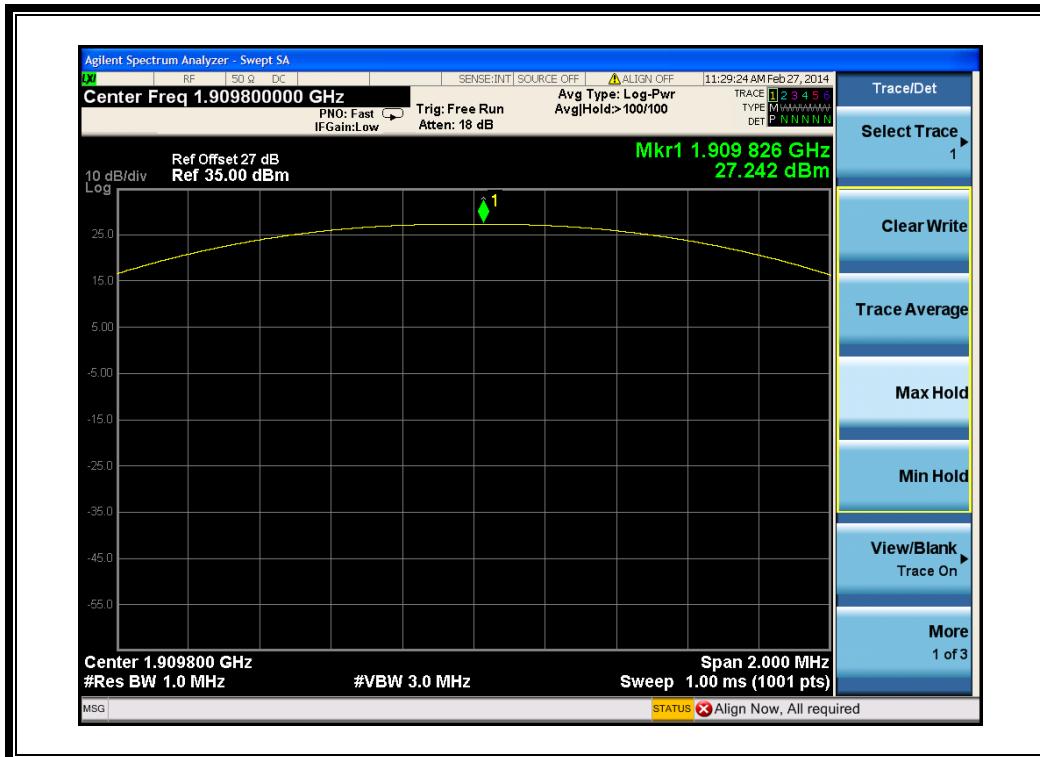


(Plot D 3: GPRS 1900MHz Channel = 810)

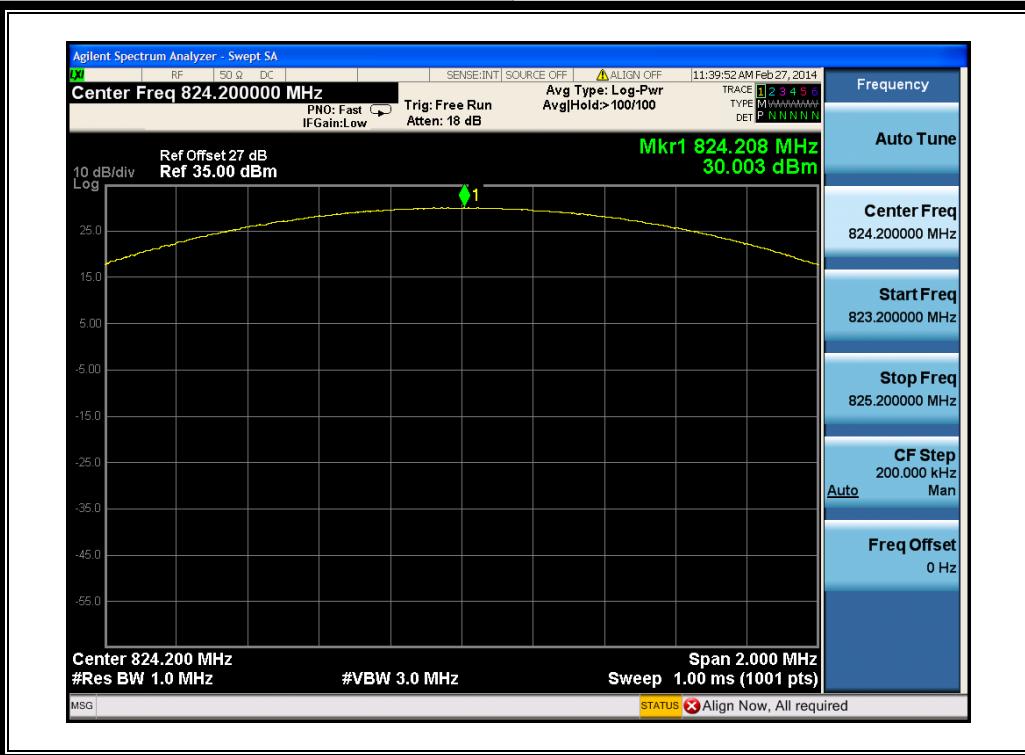


(Plot E1: EGPRS 850MHz Channel = 128)

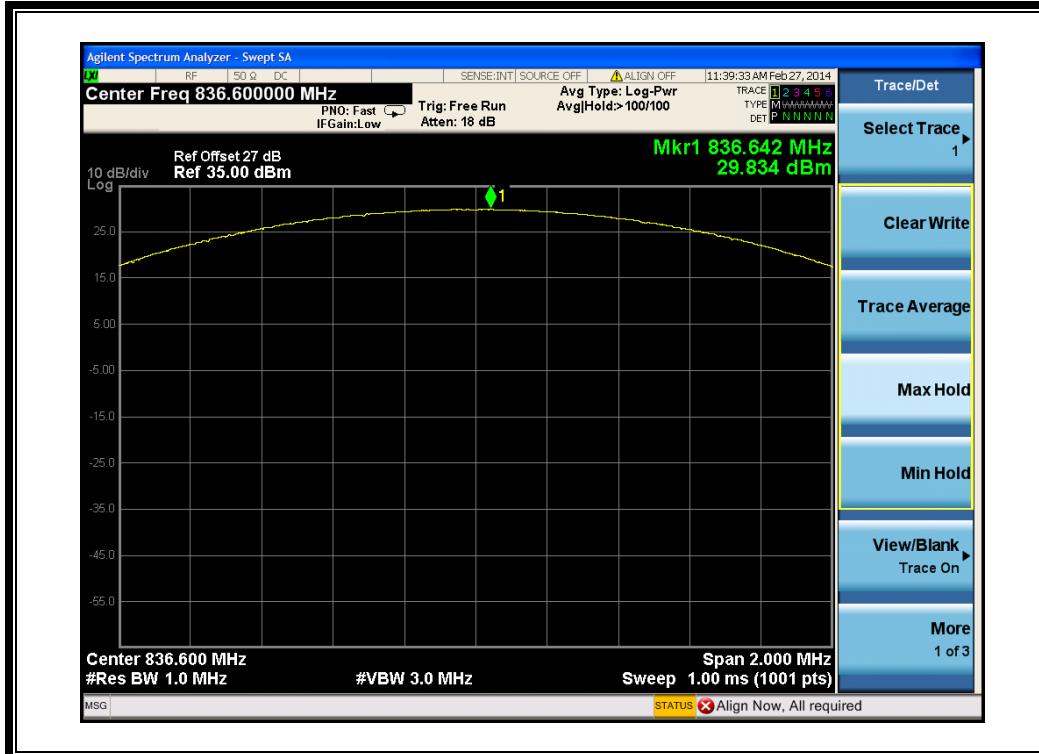


(Plot E2: EGPRS 850MHz Channel = 190)

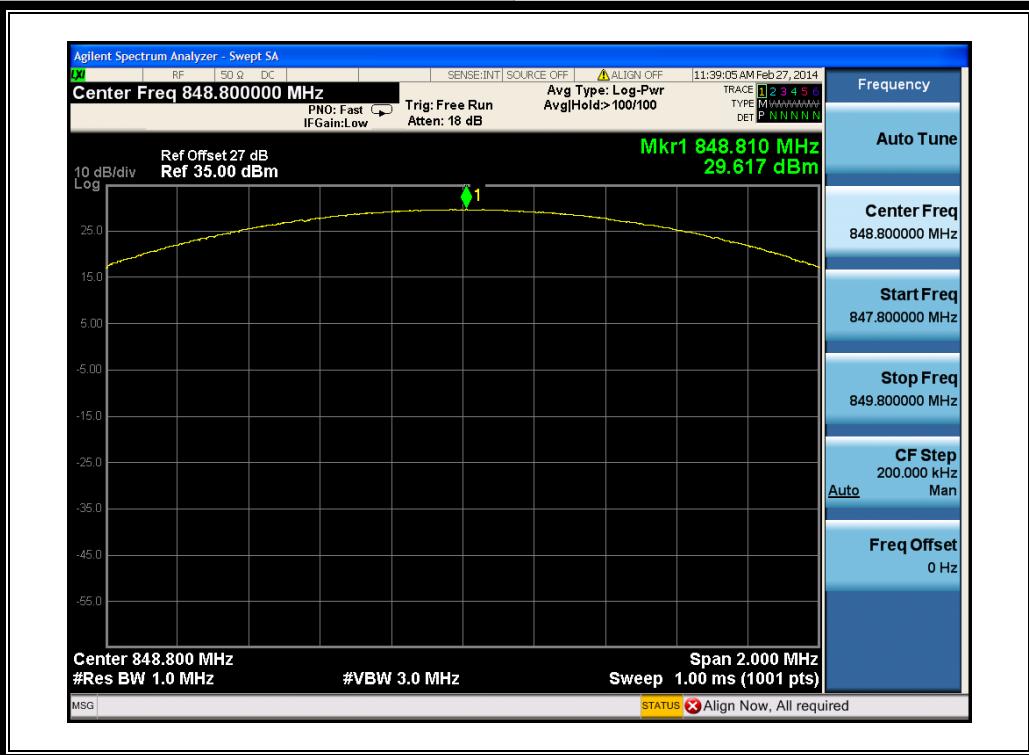


(Plot E3: EGPRS 850MHz Channel = 251)

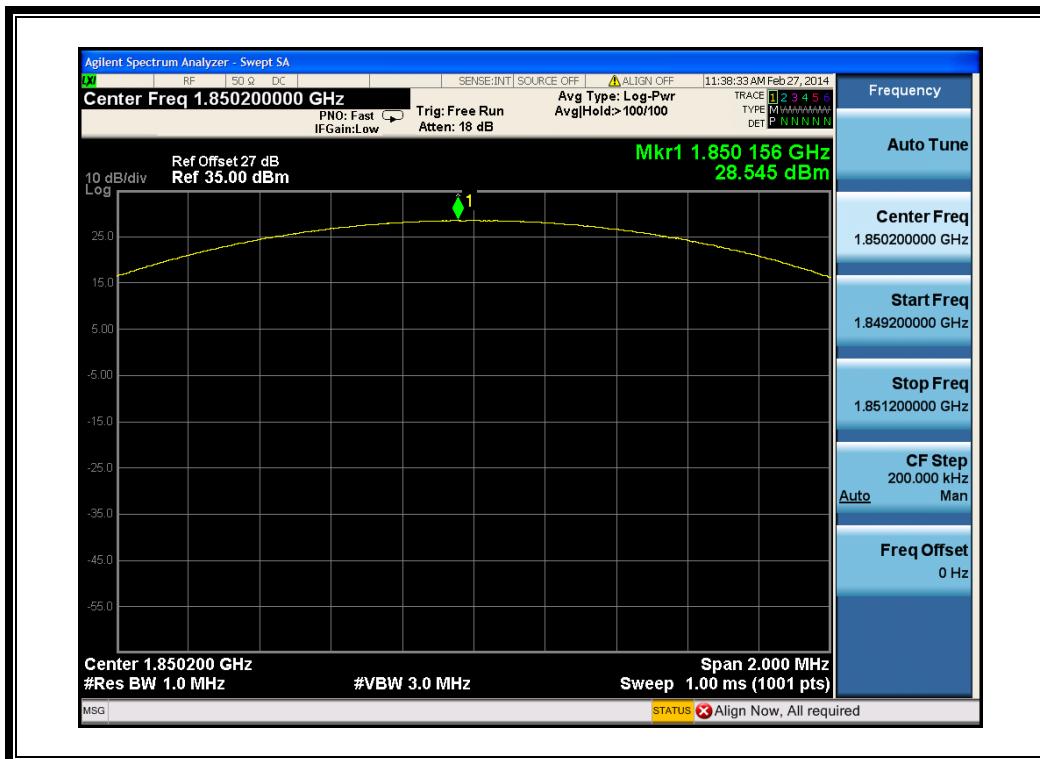

(Plot F1:EGPRS 1900MHz Channel = 512)

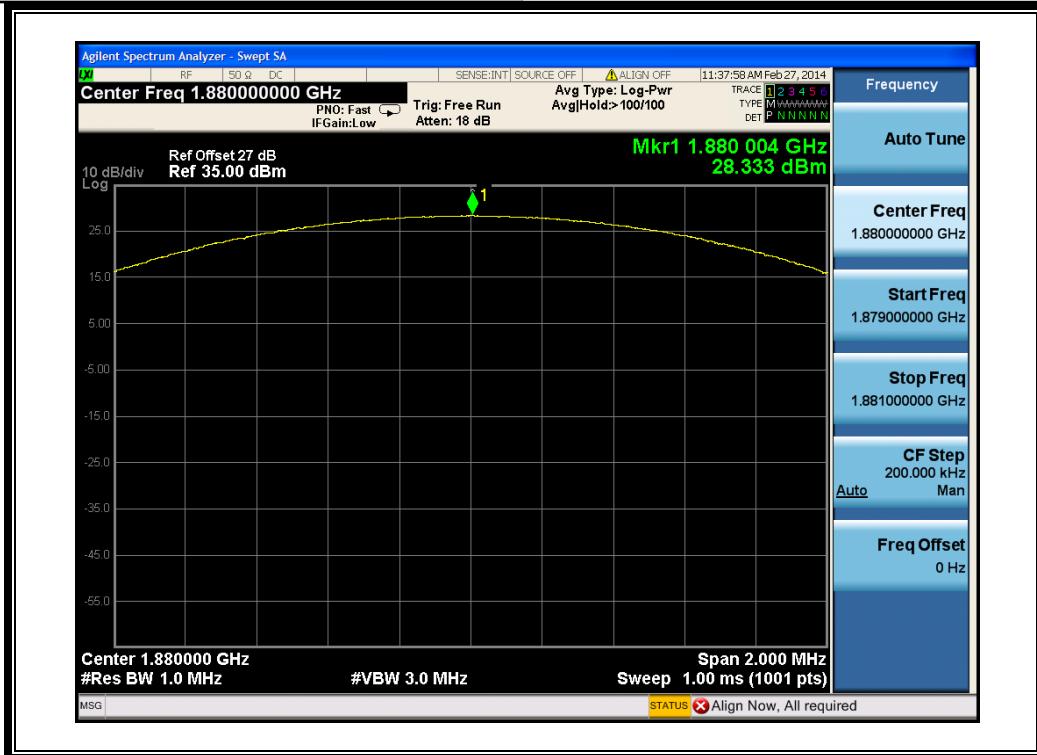

(Plot F2:EGPRS 1900MHz Channel = 661)

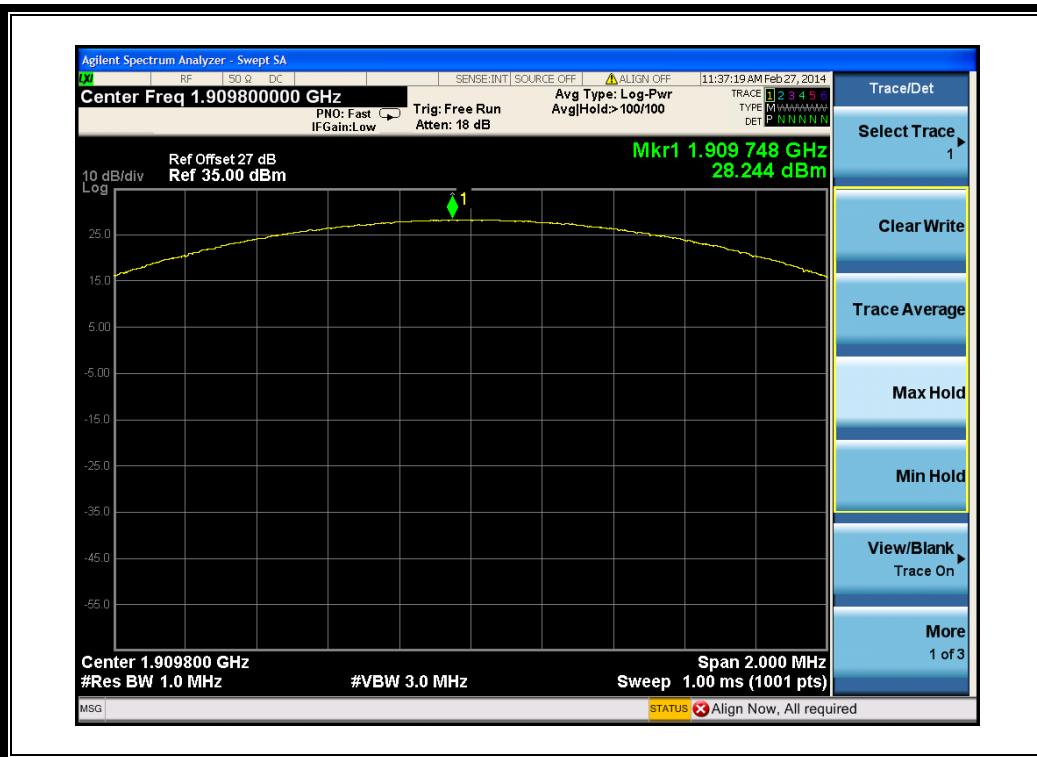

(Plot F3:EGPRS 1900Hz Channel = 810)

2.2 Peak to Average Ratio

2.2.1 Definition

According to FCC section 2.1049 and FCC 24.232(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A. For GSM/EGPRS operating mode:


- a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
- b. Set EUT in maximum output power, and triggered the burst signal.
- c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.

B. For UMTS operating mode:


- a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Peak to Average radio		Limit dBm	Verdict
			dBm	Refer to Plot		
GSM 1900MHz	512	1850.2	0.02	Plot A1 to A3	13	PASS
	661	1880.0	0.02			PASS
	810	1909.8	0.21			PASS
EGPRS 1900MHz	512	1850.2	0.04	Plot B1 to B3	13	PASS
	661	1880.0	0.04			PASS
	810	1909.8	0.01			PASS

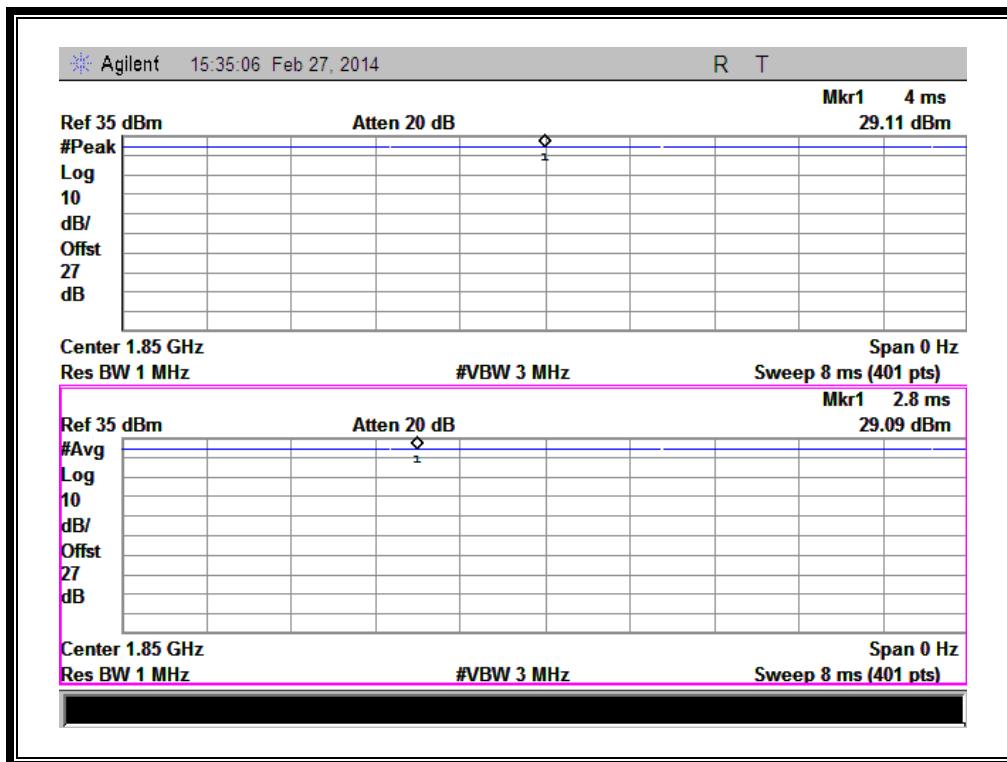


(Plot A1: GSM 1900 MHz Channel = 512)

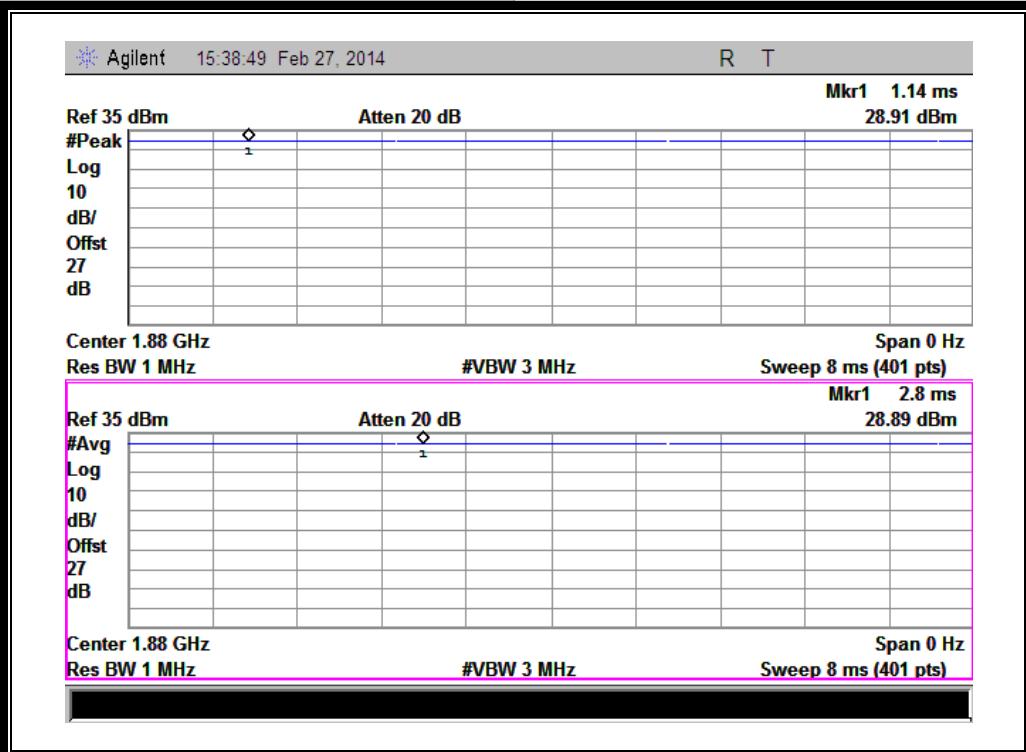


(Plot A2: GSM 1900 MHz Channel = 661)

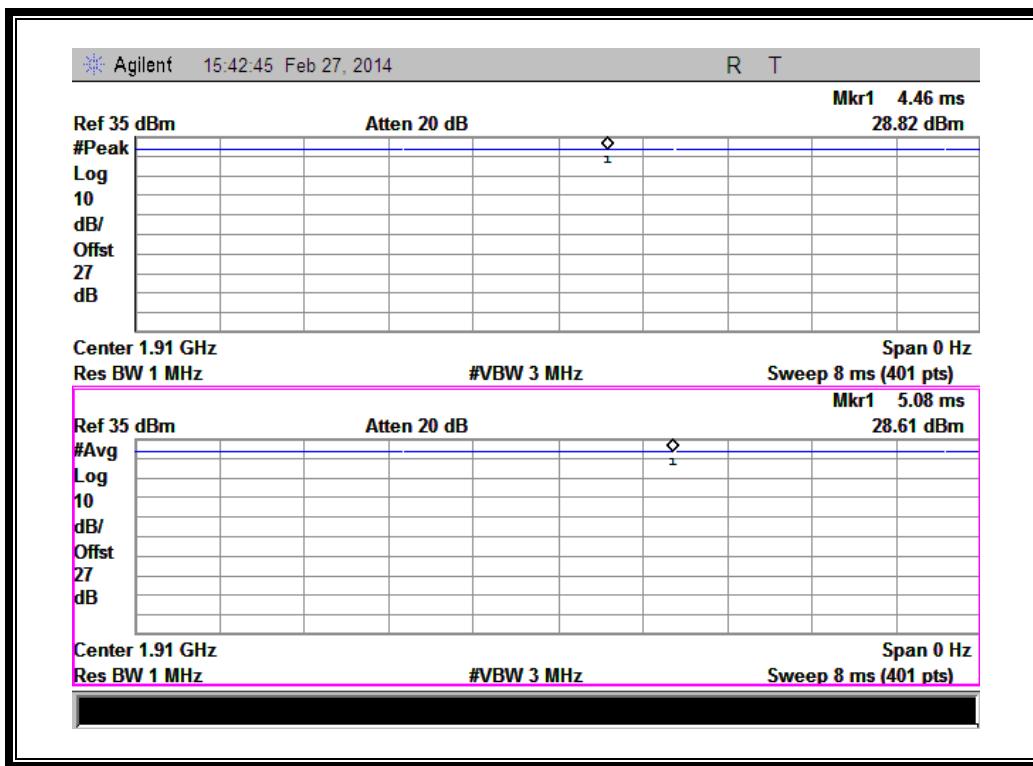


(Plot A3: GSM 1900MHz Channel = 810)

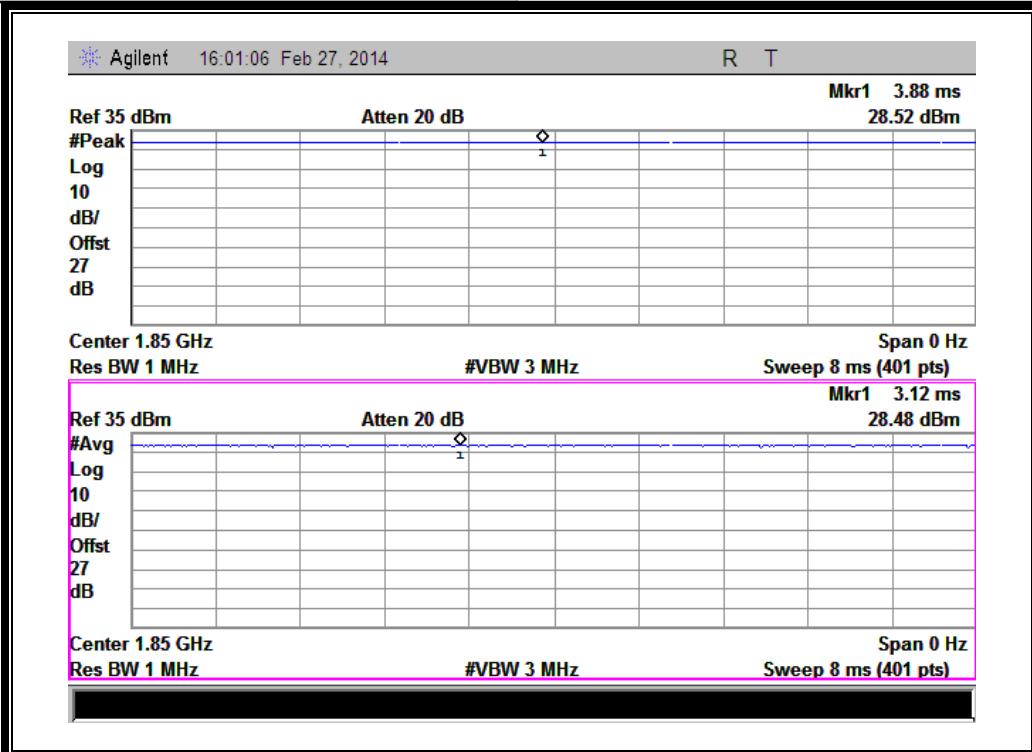

(Plot B1: EGPRS 1900MHz Channel = 512)

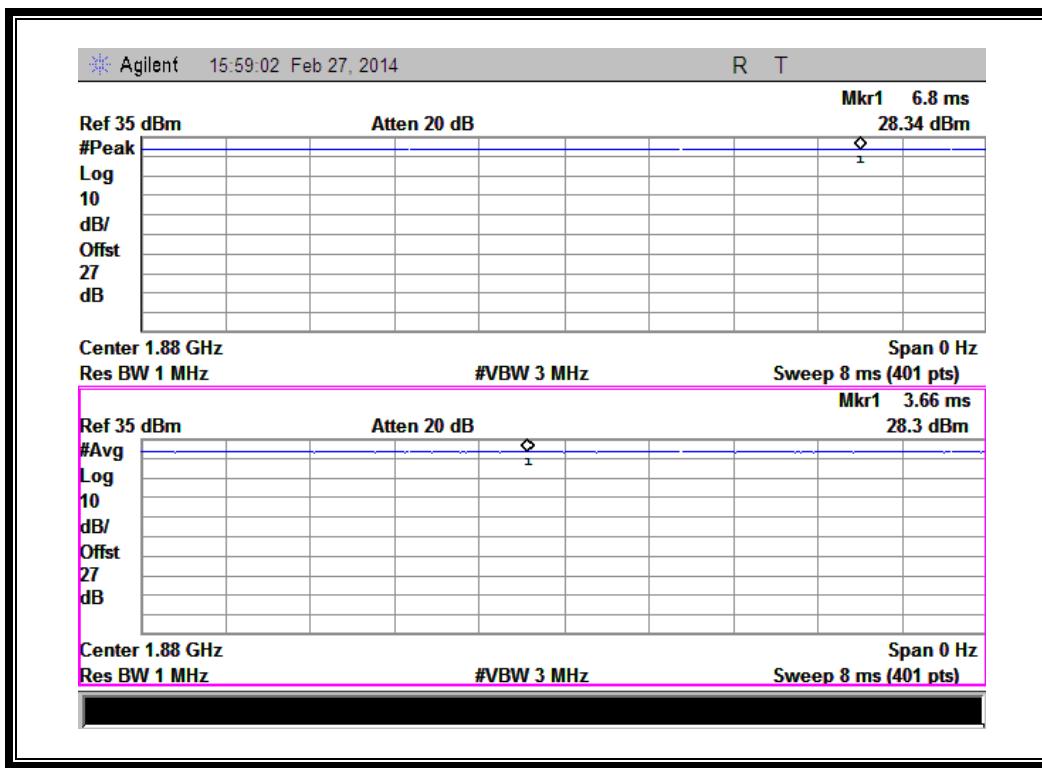

(Plot B2: EGPRS 1900MHz Channel = 661)

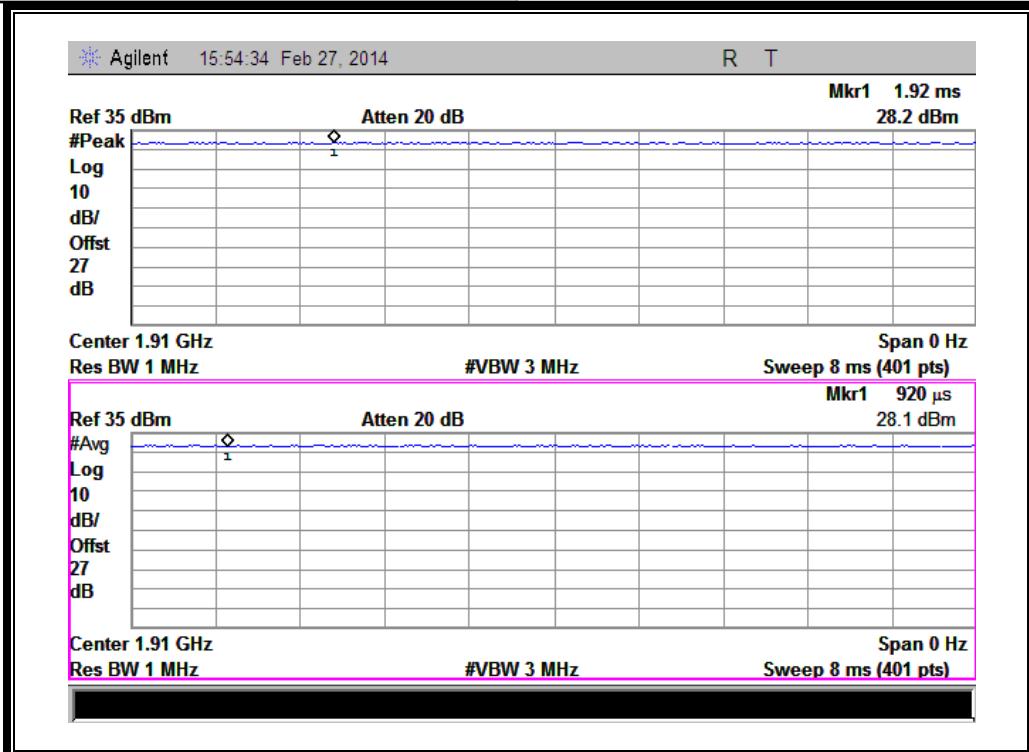

(Plot B3: EGPRS 1900MHz Channel = 810)

2.3 99% Occupied Bandwidth

2.3.1 Definition

According to FCC section 2.1049 and FCC § 22.917 &24.238, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.


2. Test Verdict:

Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
EDGE 850MHz	128	824.2	314.1 KHz	248.99 KHz	Plot A
	190	836.6	311.7 KHz	247.06 KHz	Plot B
	251	848.8	312.2 KHz	248.19 KHz	Plot C
EDGE 1900MHz	512	1850.2	311.4 KHz	249.17 KHz	Plot D
	661	1880.0	318.0 KHz	252.43 KHz	Plot E
	810	1909.8	309.2 KHz	250.86 KHz	Plot F
WCDMA 850MHz	4132	826.4	4.645 MHz	4.1444 MHz	Plot G
	4175	835	4.646 MHz	4.1538 MHz	Plot H
	4233	846.6	4.649 MHz	4.1403 MHz	Plot I
HSDPA 850MHz	4132	826.4	4.646 MHz	4.1438 MHz	Plot J
	4175	835	4.642 MHz	4.1598 MHz	Plot K
	4233	846.6	4.645 MHz	4.1558 MHz	Plot L
HSUPA 850MHz	4132	826.4	4.651 MHz	4.1509 MHz	Plot M
	4175	835	4.660 MHz	4.1589 MHz	Plot N
	4233	846.6	4.636 MHz	4.1381 MHz	Plot O
HSPA+ 850MHz	4132	826.4	4.648 MHz	4.1582 MHz	Plot P
	4175	835	4.646 MHz	4.1421 MHz	Plot Q
	4233	846.6	4.646 MHz	4.1323 MHz	Plot R
GSM 850MHz	128	824.2	304.5 KHz	240.39 KHz	Plot S
	190	836.6	310.9 KHz	246.97 KHz	Plot T
	251	848.8	314.0 KHz	245.58 KHz	Plot U
GSM 1900MHz	512	1850.2	316.2 KHz	246.60 KHz	Plot V




Band	Chann el	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
	661	1880.0	322.4 KHz	249.96 KHz	Plot W
	810	1909.8	322.3 KHz	245.91 KHz	Plot X
GPRS 850MHz	128	824.2	313.0 KHz	245.13 KHz	Plot Y
	190	836.6	317.9 KHz	242.17 KHz	Plot Z
	251	848.8	312.5 KHz	244.35 KHz	Plot A1
GPRS 1900MHz	512	1850.2	314.5 KHz	242.52 KHz	Plot B1
	661	1880.0	323.5 KHz	244.21 KHz	Plot C1
	810	1909.8	318.8 KHz	246.42 KHz	Plot D1


3. Test Plots:

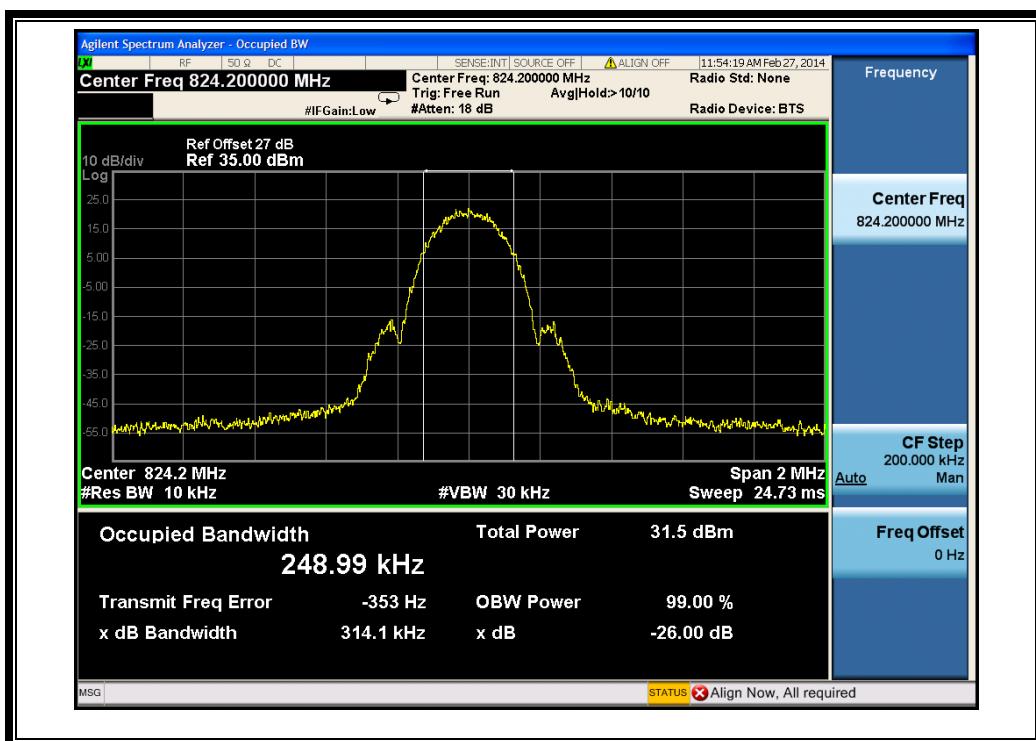


(Plot A: EGPRS 850MHz Channel = 128)

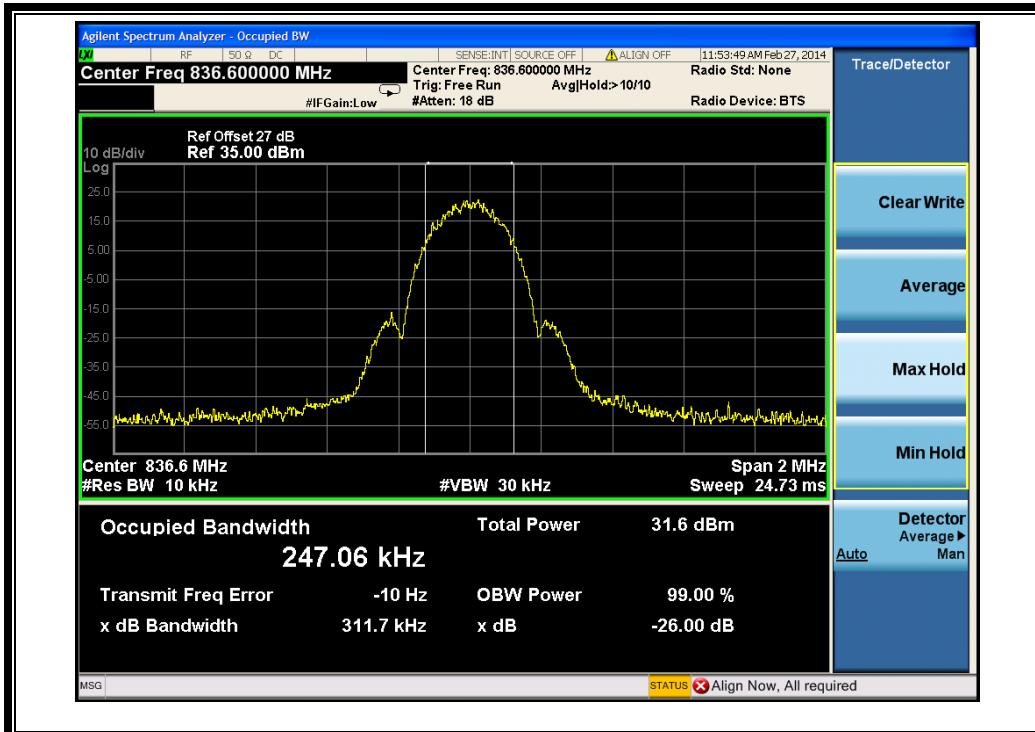


(Plot B: EGPRS 850MHz Channel = 190)

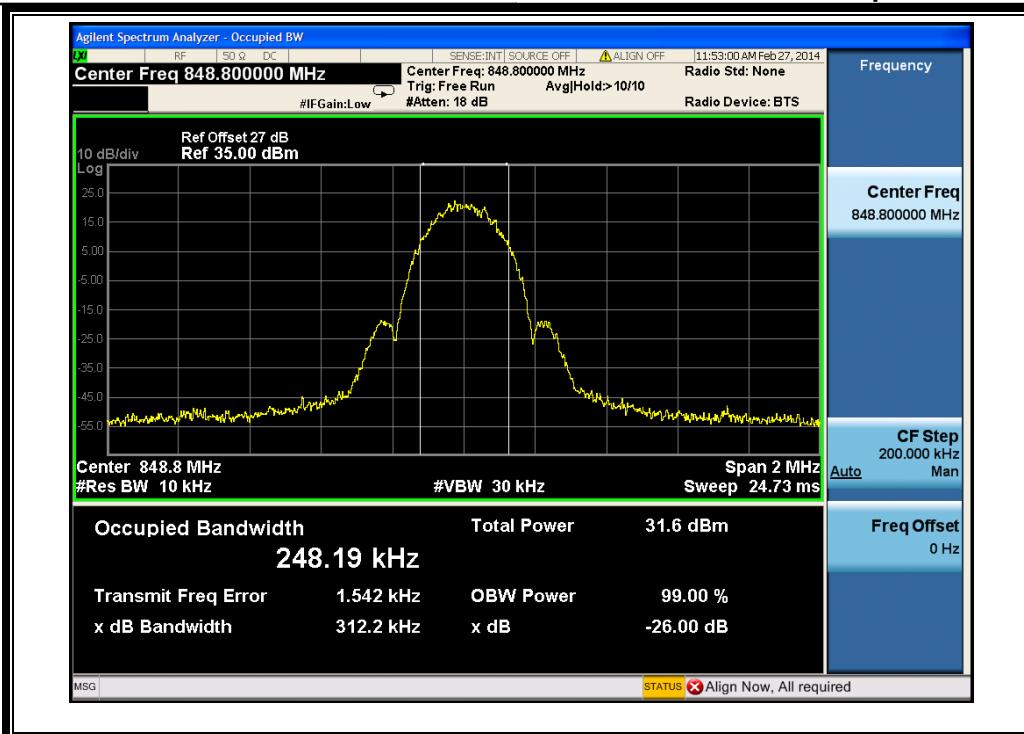


(Plot C: EGPRS 850MHz Channel = 251)

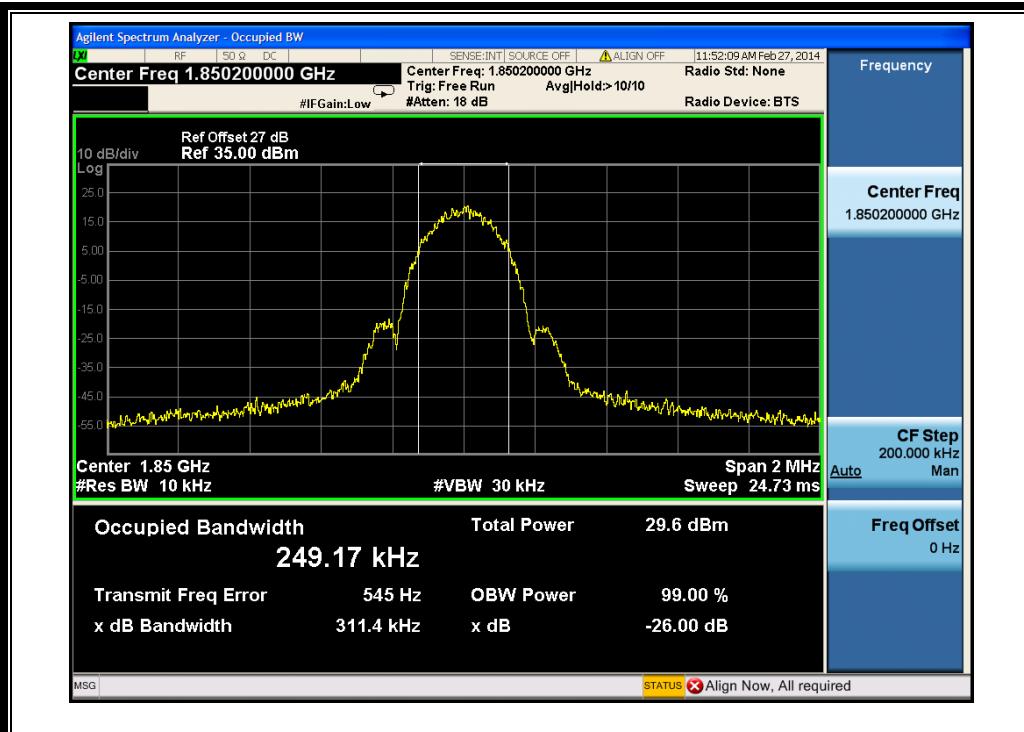


(Plot D: EGPRS1900MHz Channel = 512)

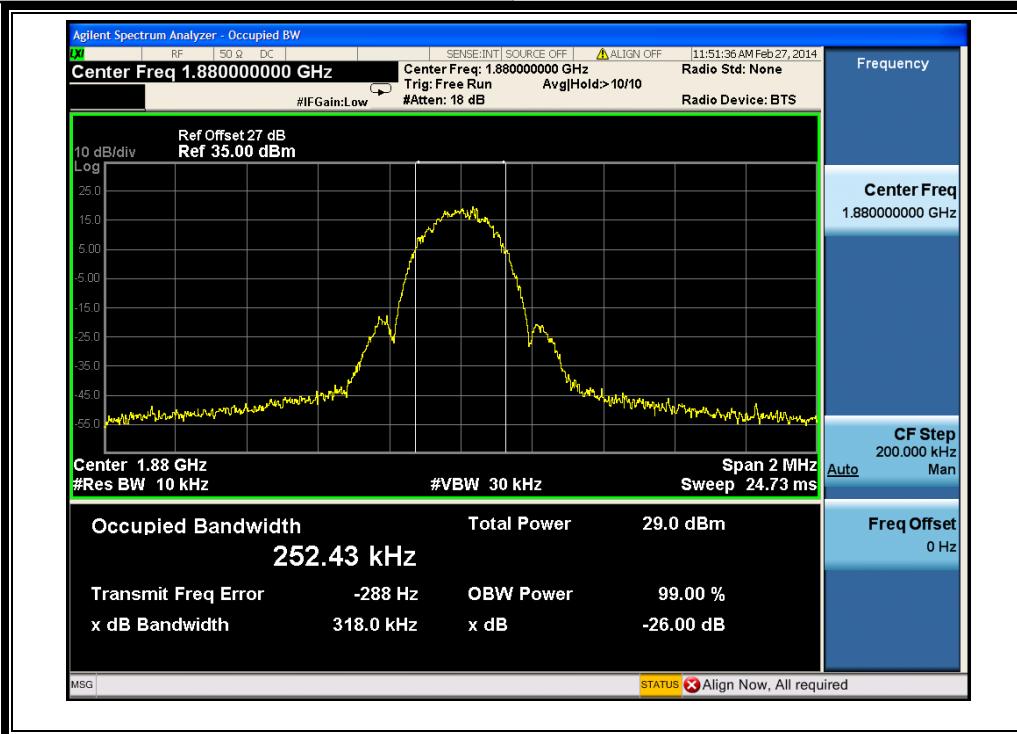


(Plot E: EGPRS1900MHz Channel = 661)

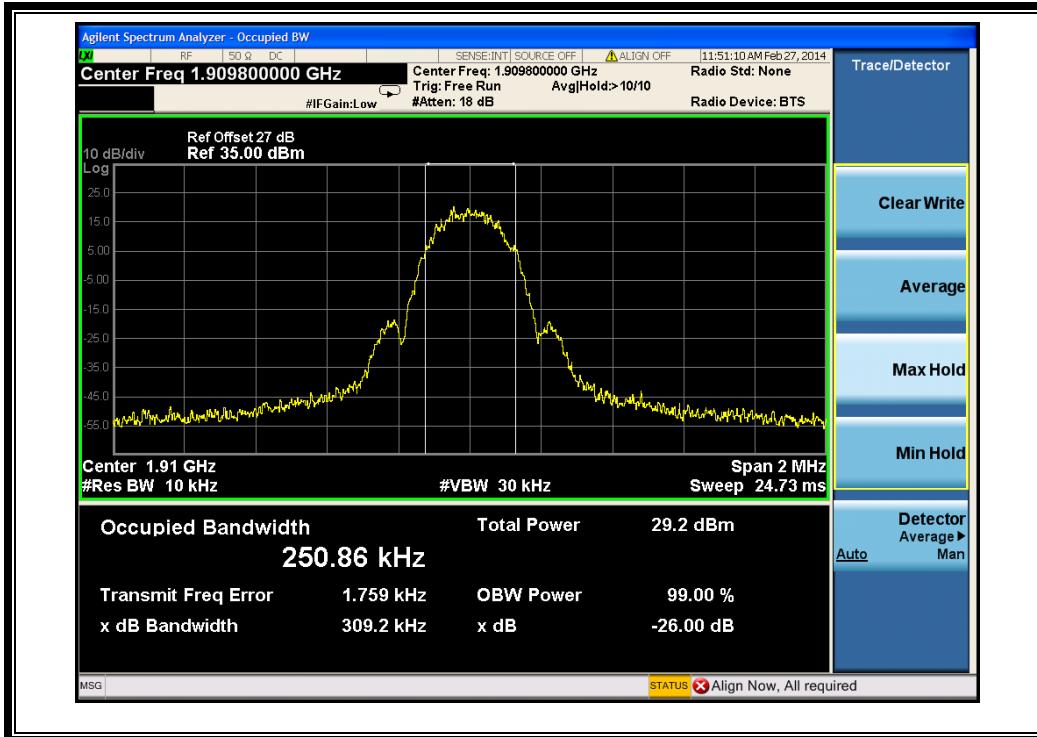


(Plot F: EGPRS 1900MHz Channel = 810)

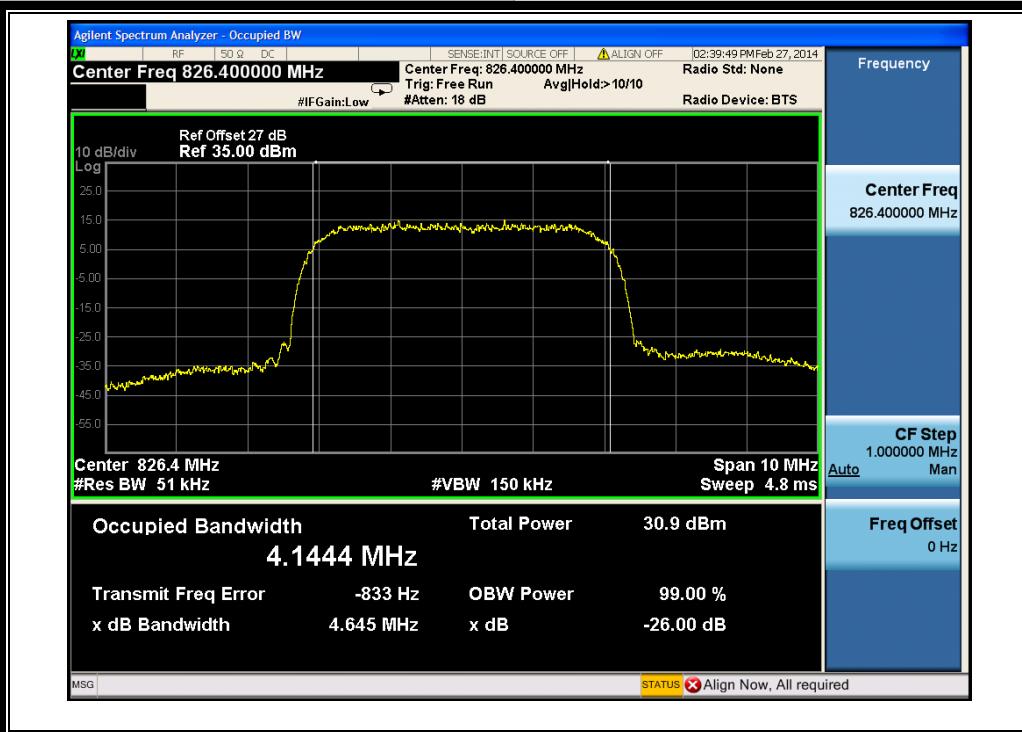


(Plot G: WCDMA 850MHz Channel = 4132)

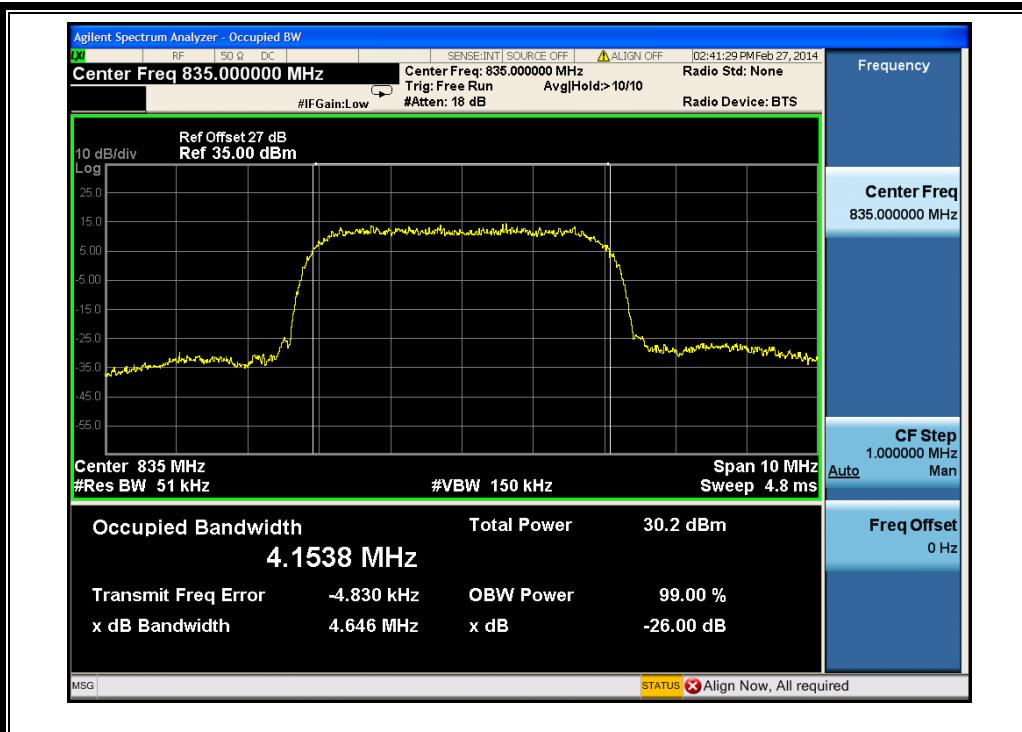


(Plot H: WCDMA 850 MHz Channel = 4175)

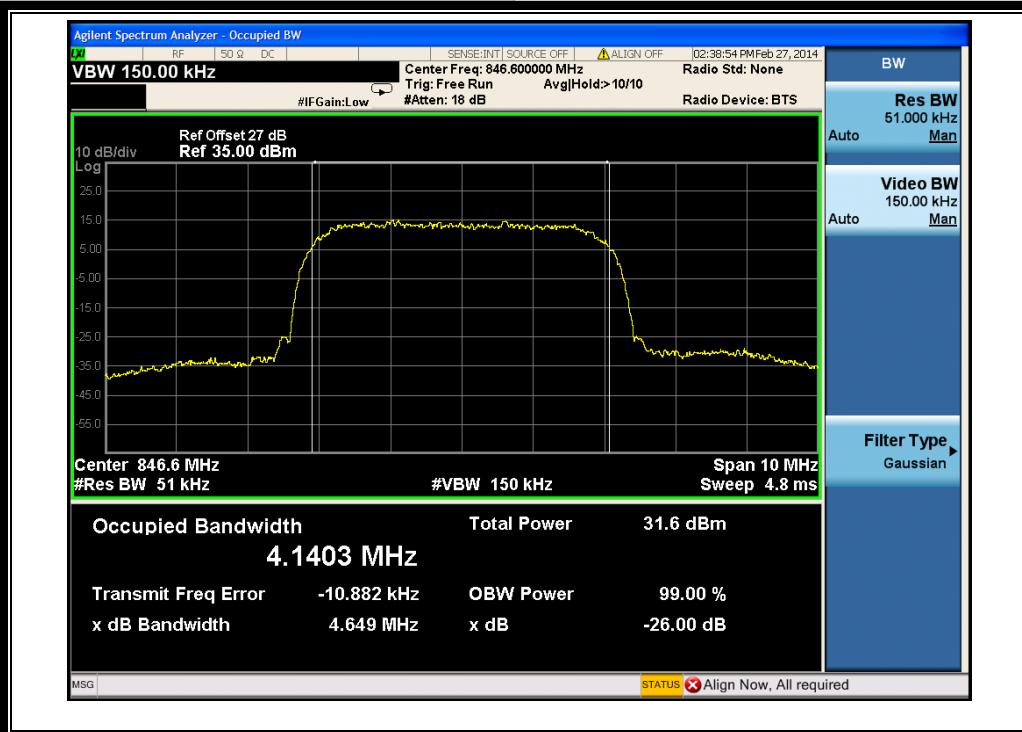


(Plot I: WCDMA 850MHz Channel = 4233)

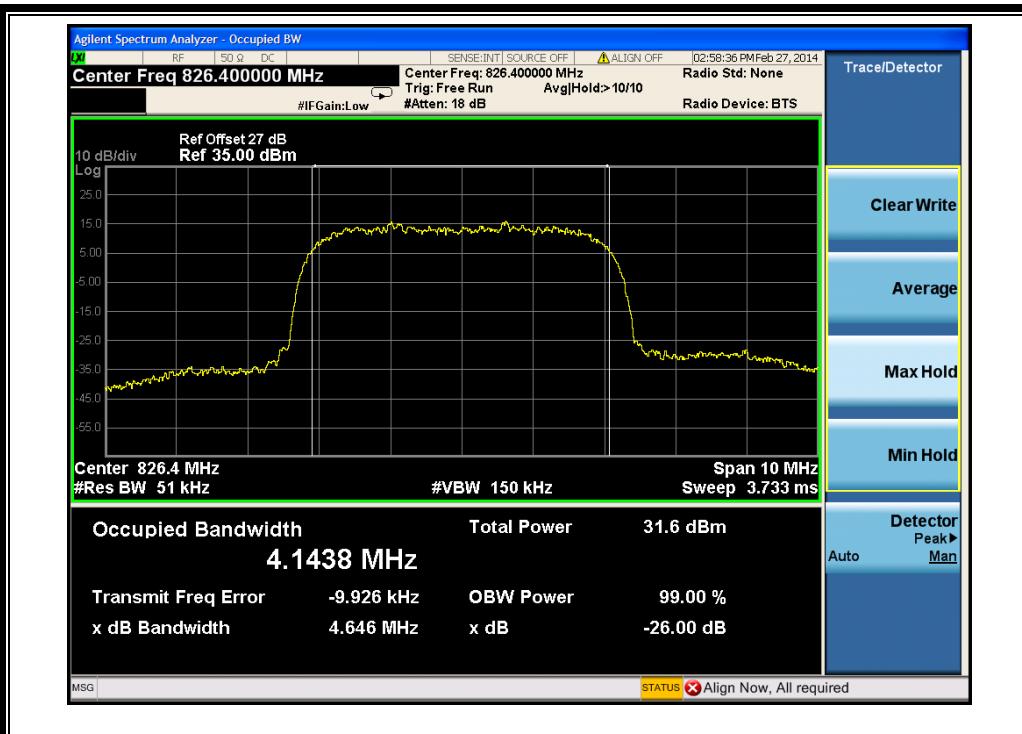


(Plot J: HSDPA 850MHz Channel = 4132)

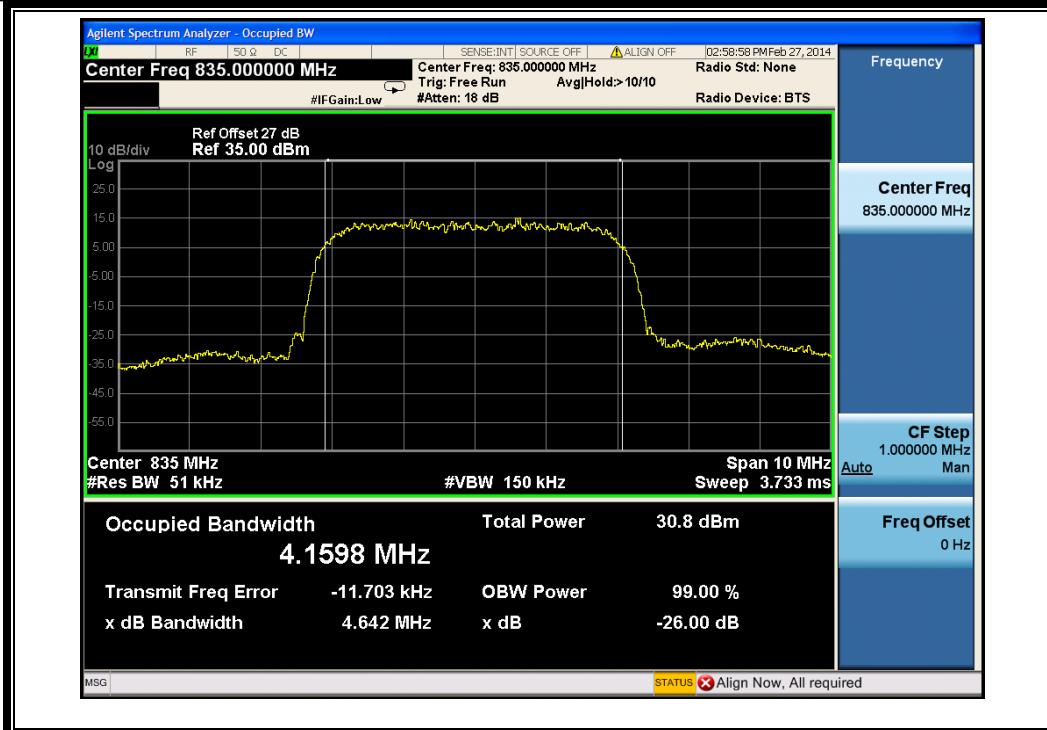


(Plot K: HSDPA850 MHz Channel = 4175)

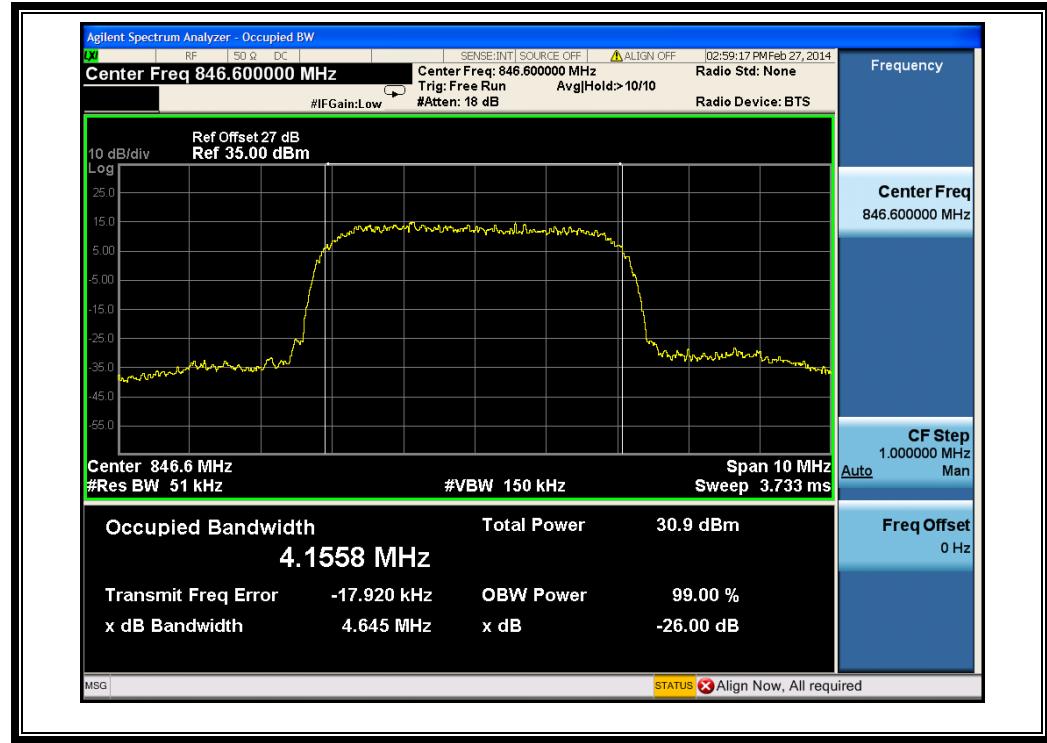


(Plot L: HSDPA 850 MHz Channel = 4233)

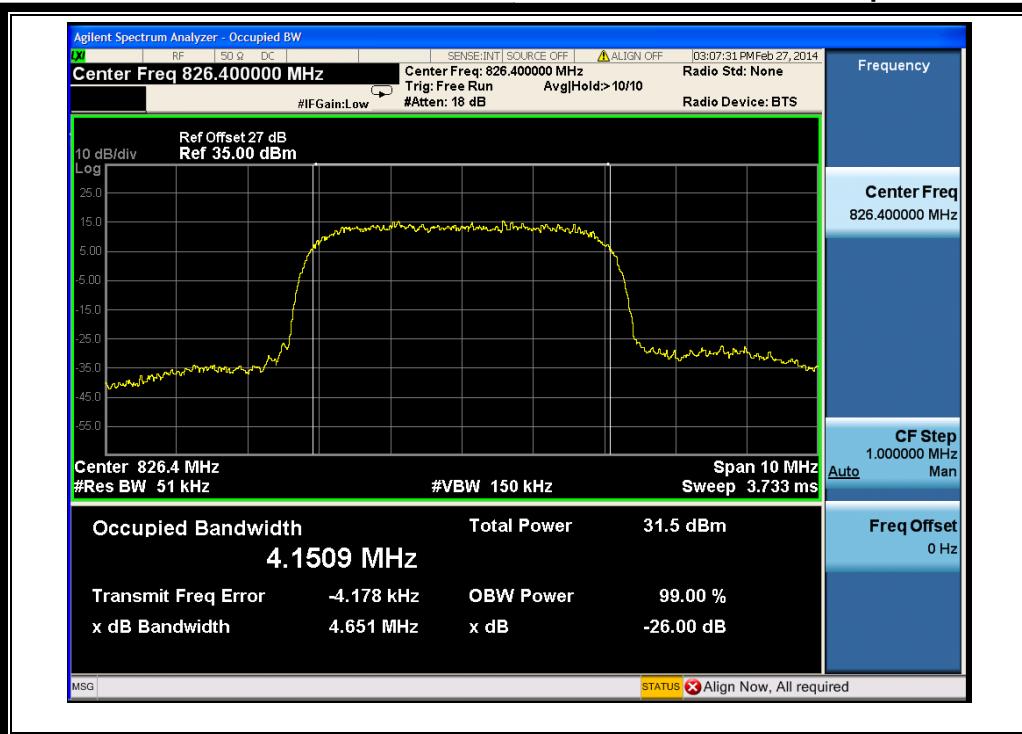


(Plot M: HSUPA850 MHz Channel = 4132)

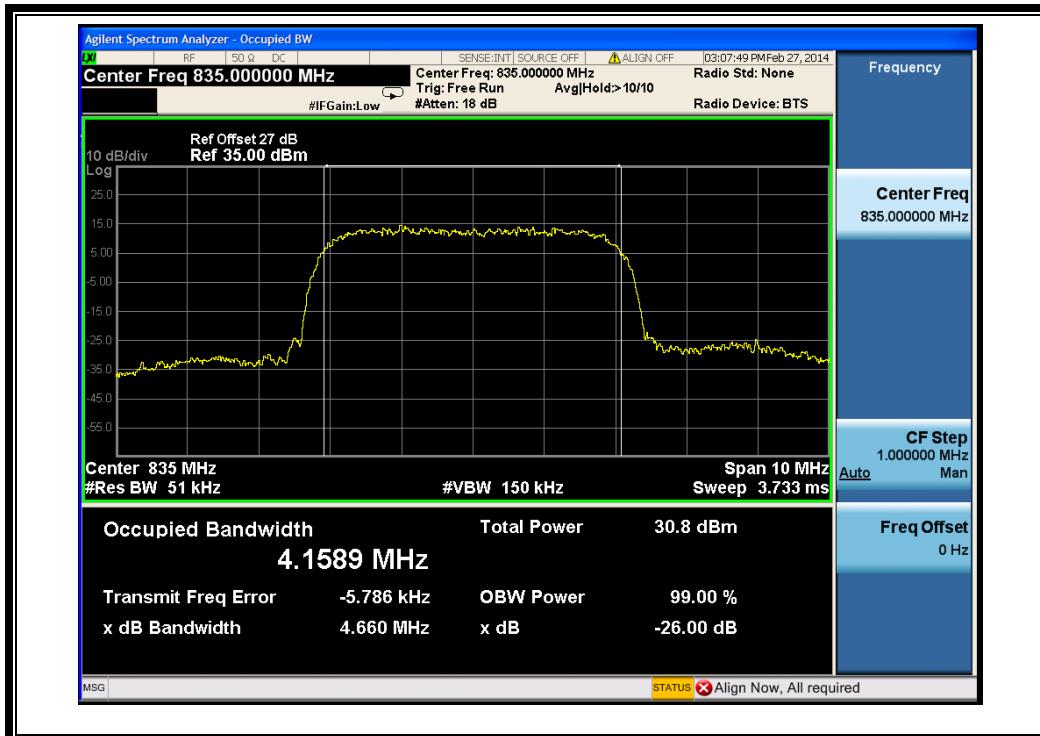


(Plot N: HSUPA850 MHz Channel = 4175)

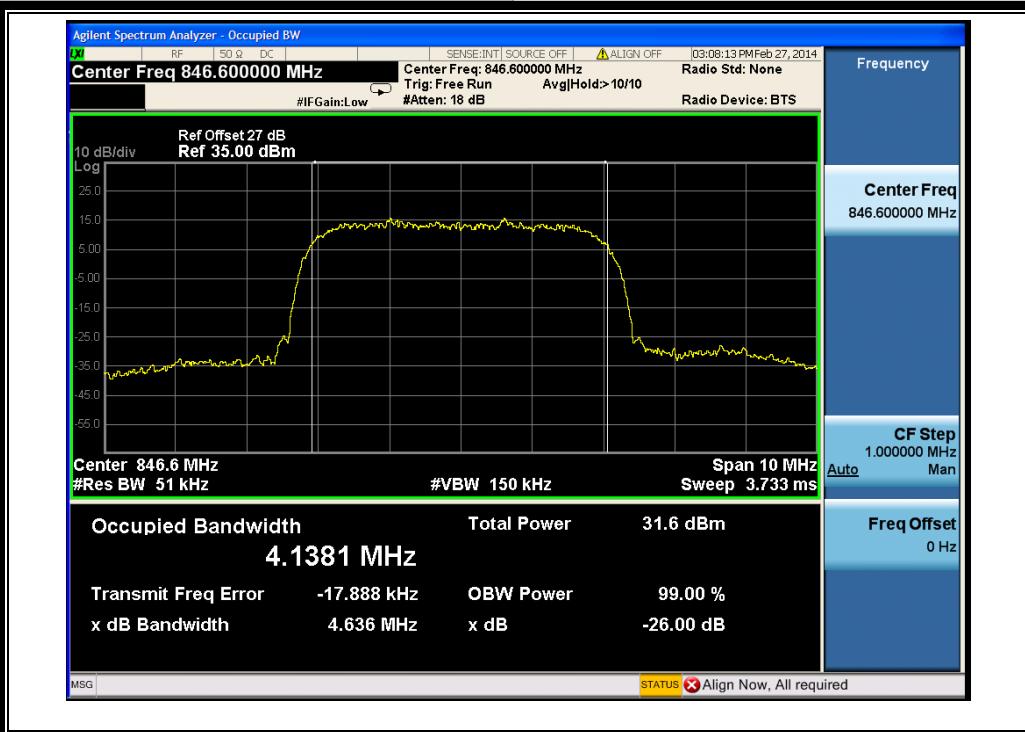


(Plot O: HSUPA850 MHz Channel = 4233)

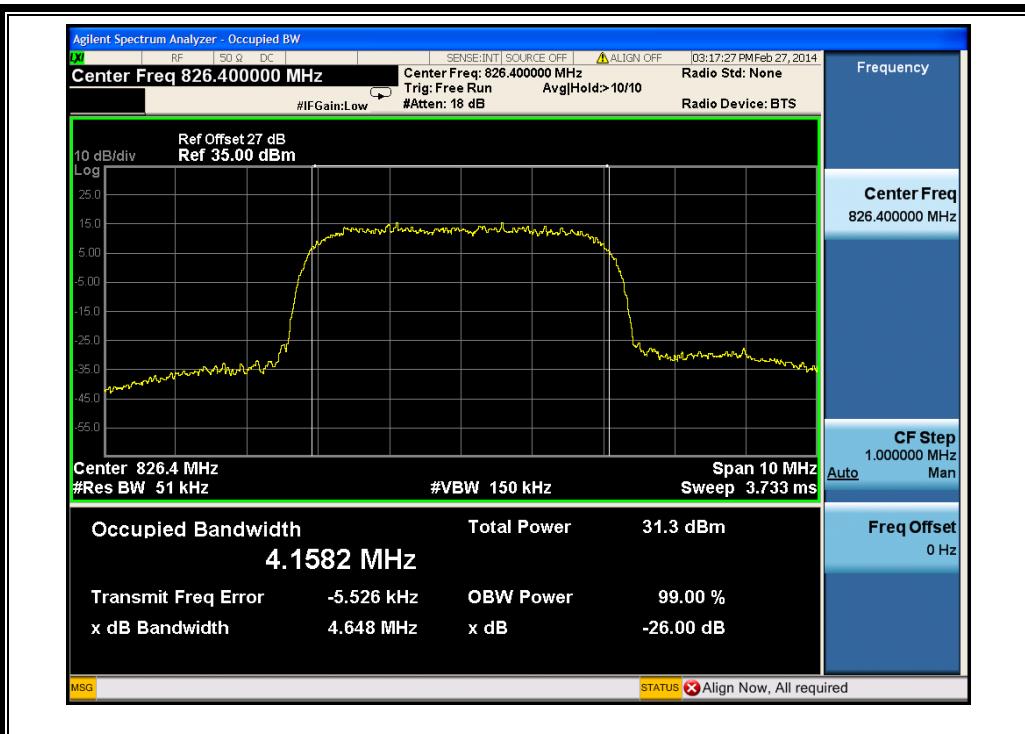


(Plot P: HSPA+ 850 MHz Channel = 4132)

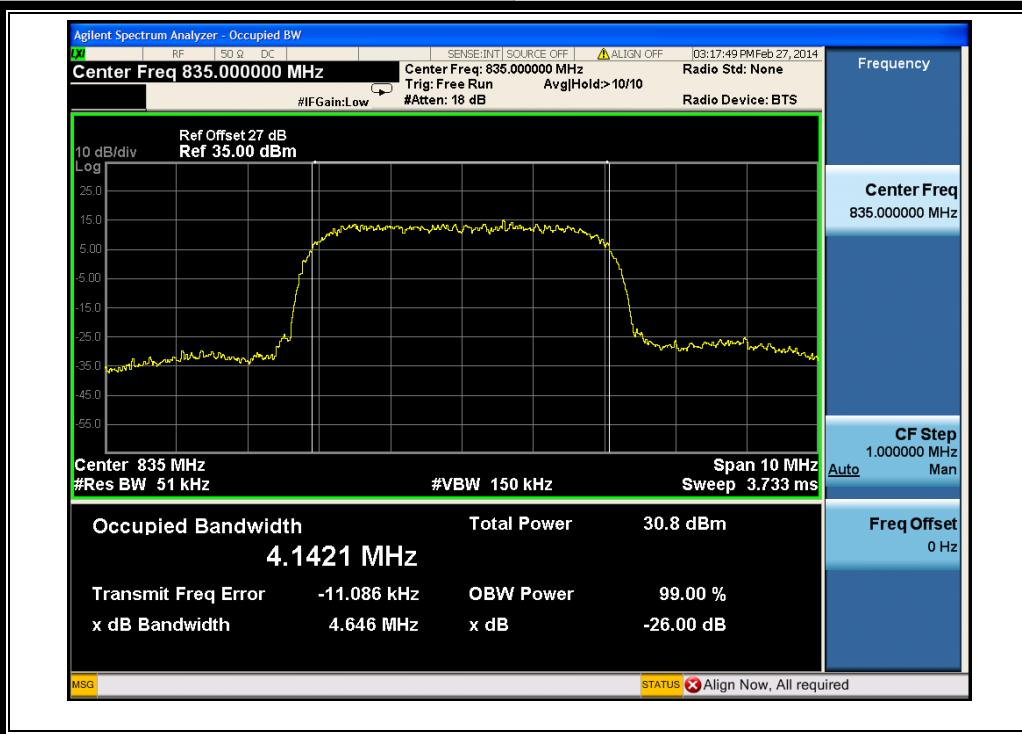


(Plot Q: HSPA+850 MHz Channel = 4175)

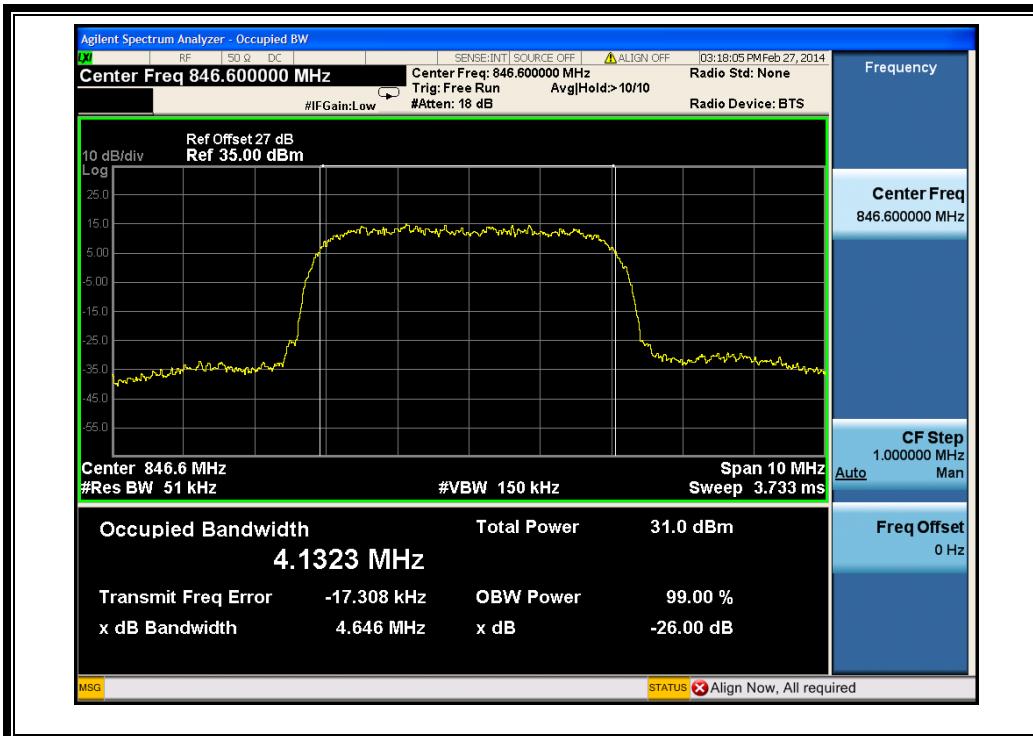


(Plot R: HSPA+ 850 MHz Channel = 4233)

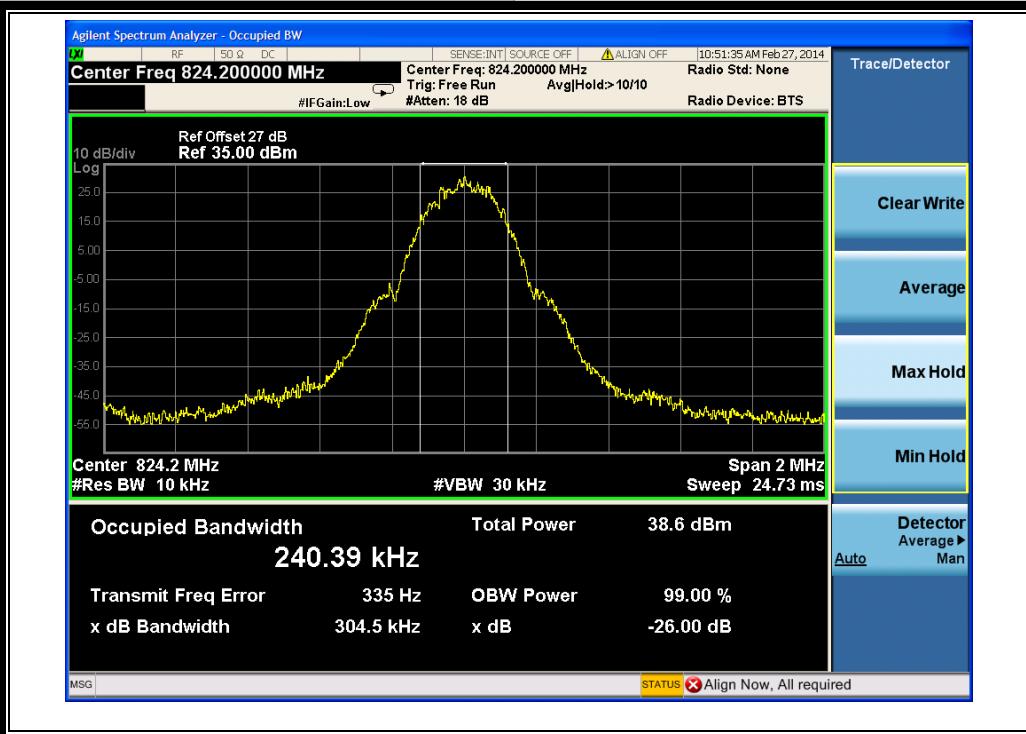


(Plot S: GSM 850MHz Channel = 128)

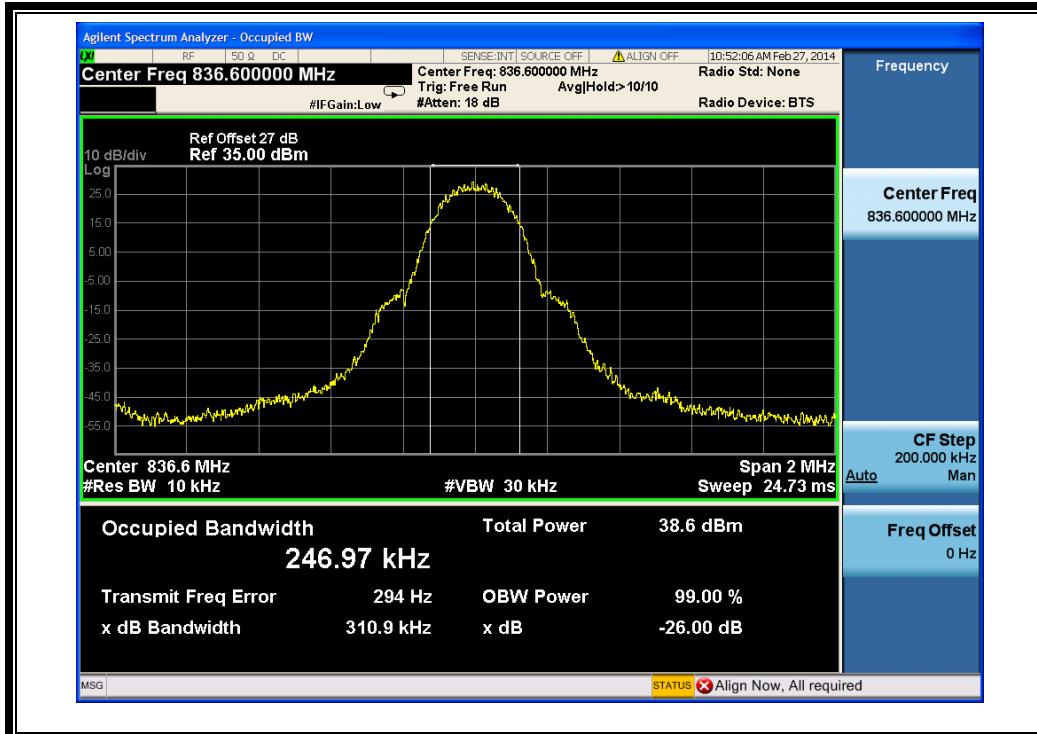


(Plot T: GSM 850MHz Channel = 190)

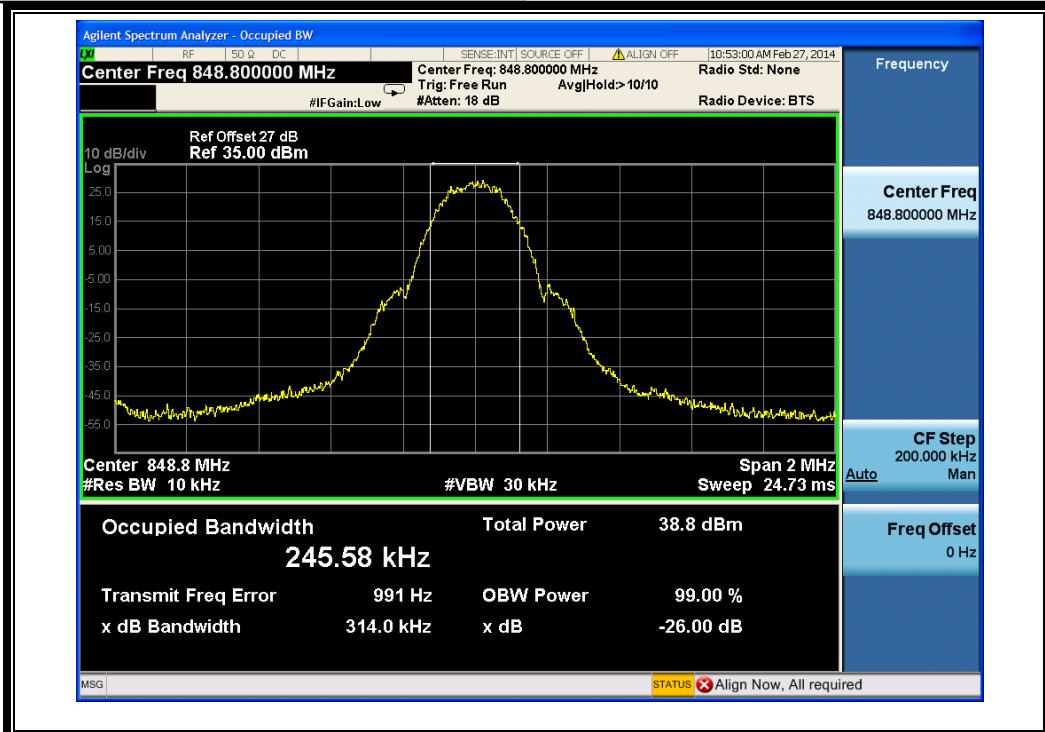


(Plot U: GSM 850MHz Channel = 251)

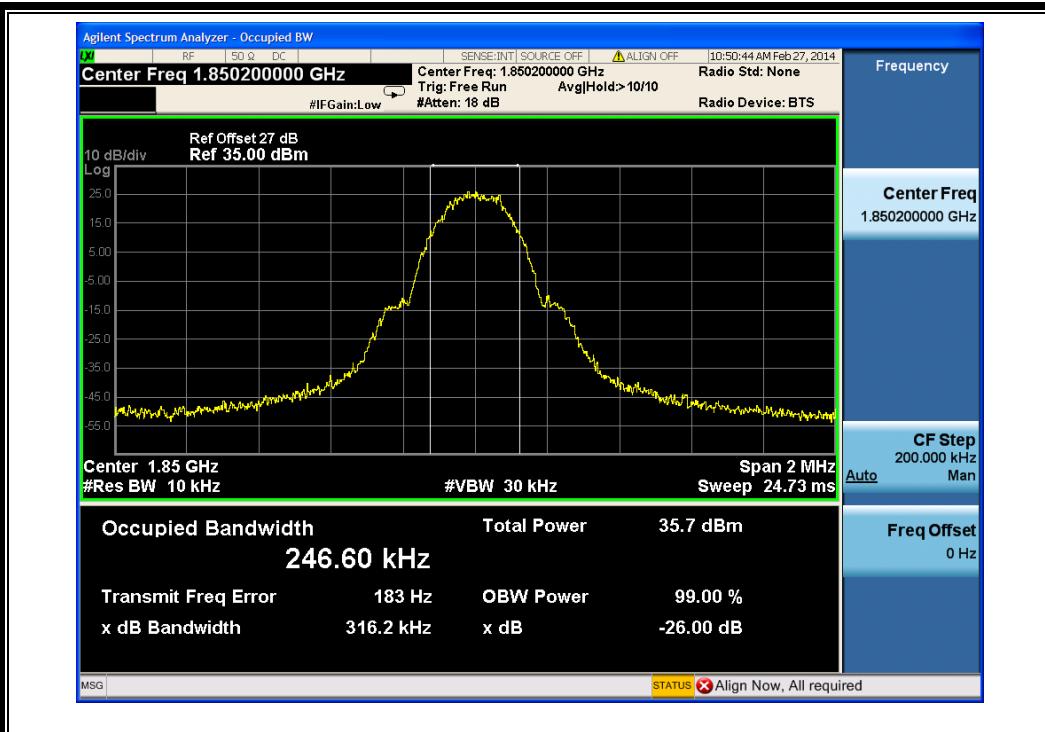


(Plot V: GSM 1900MHz Channel = 512)

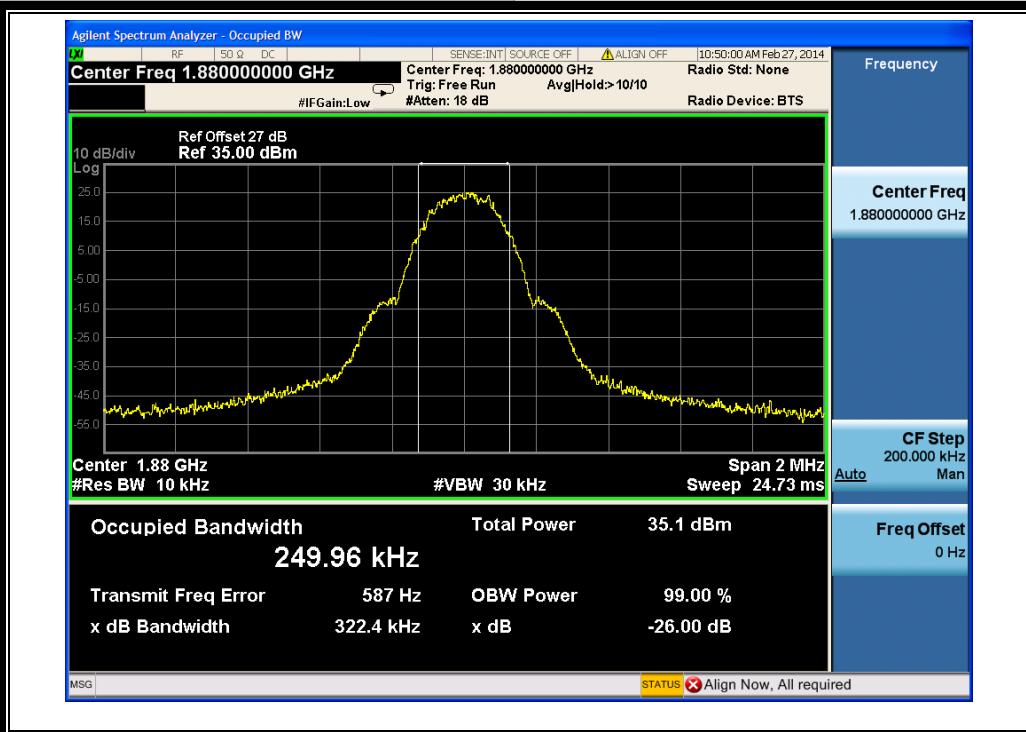


(Plot W: GSM 1900MHz Channel = 661)

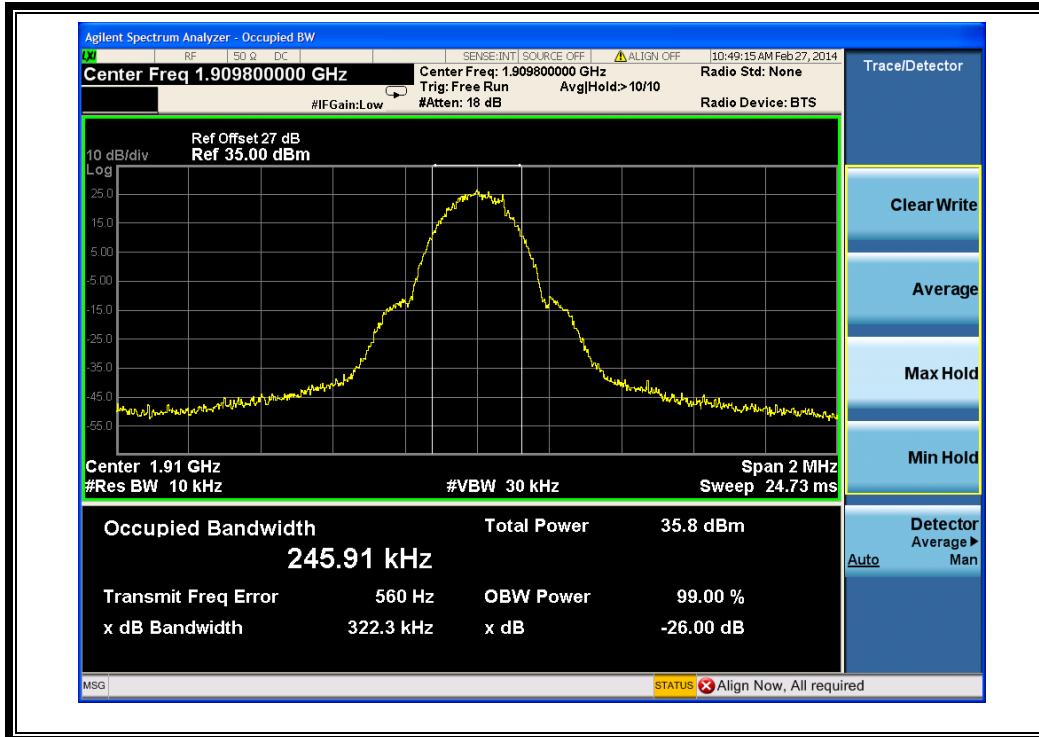


(Plot X: GSM 1900MHz Channel = 810)

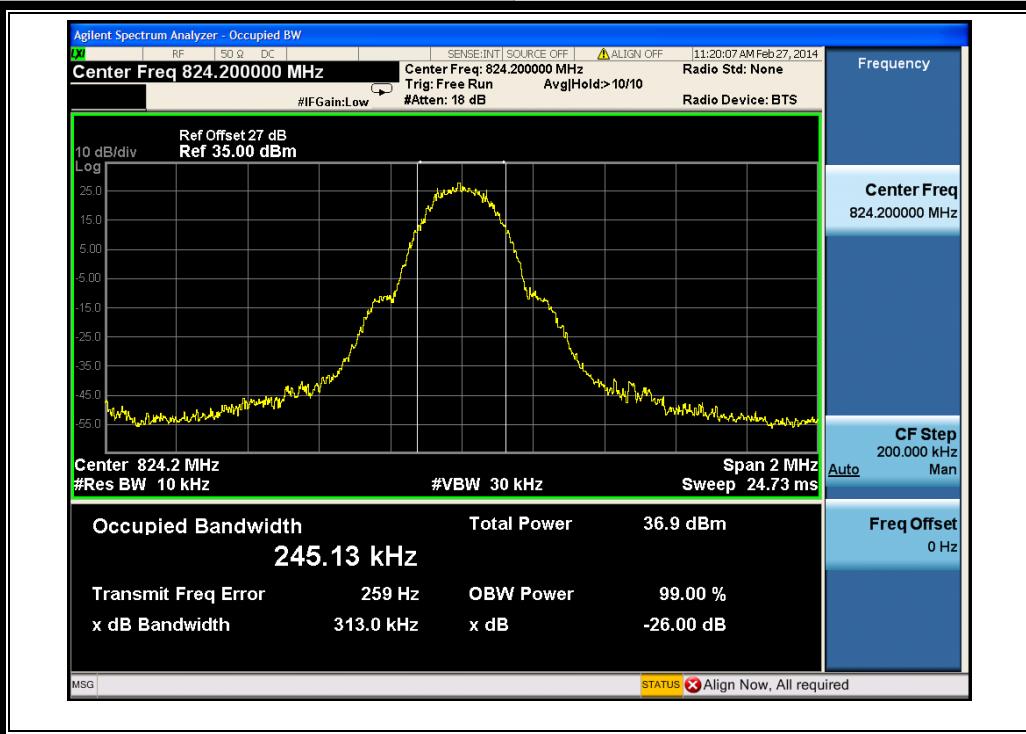


(Plot Y: GPRS 850MHz Channel = 128)

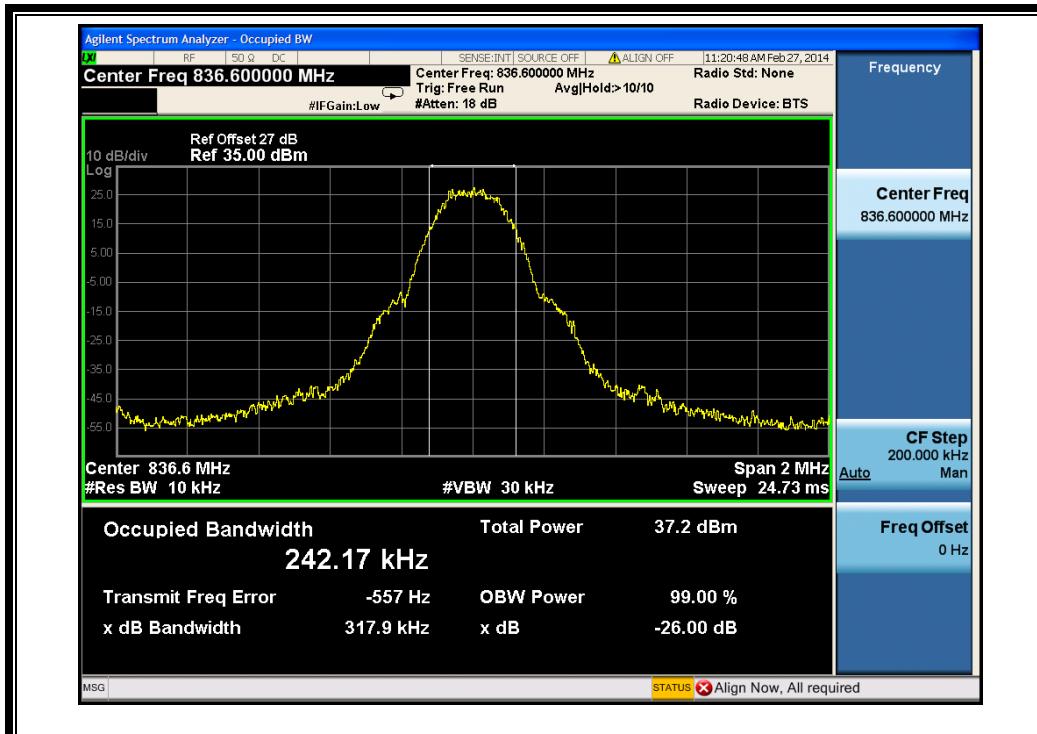


(Plot Z: GPRS 850MHz Channel = 190)

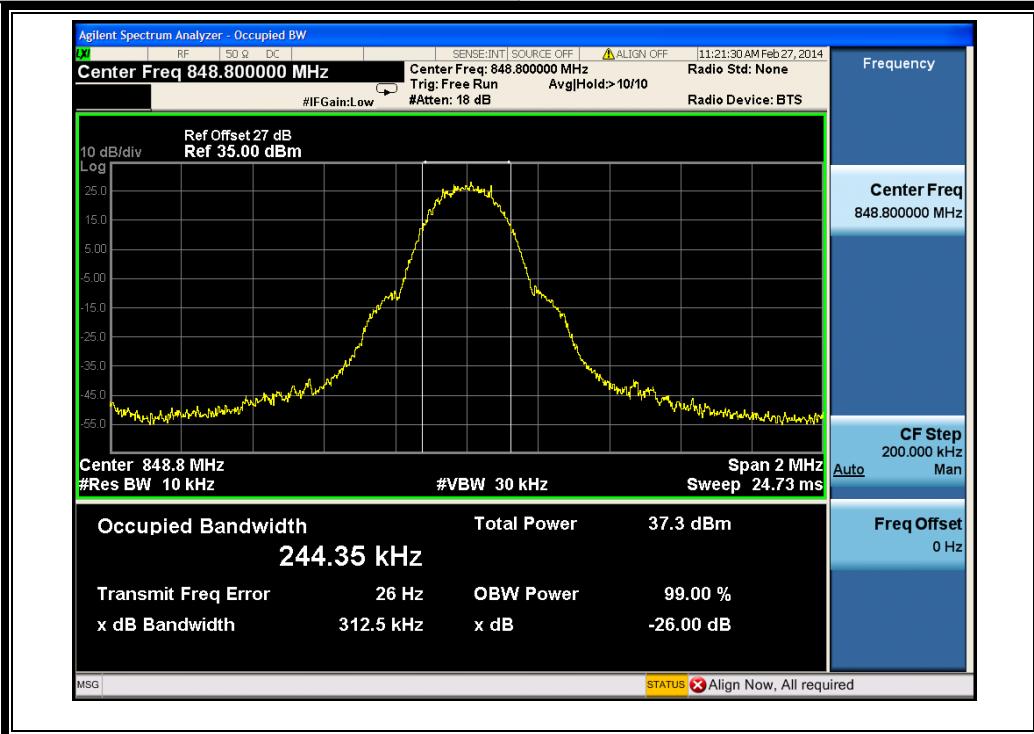


(Plot A1: GPRS850MHz Channel = 251)

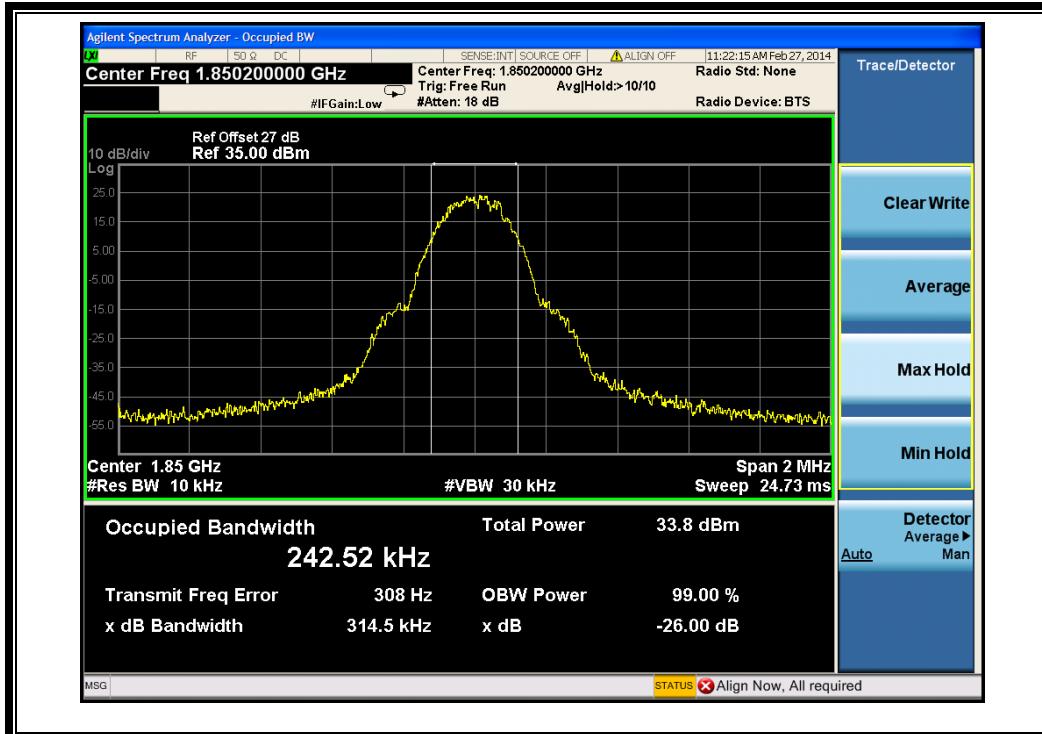

(Plot B1: GPRS 1900MHz Channel = 512)

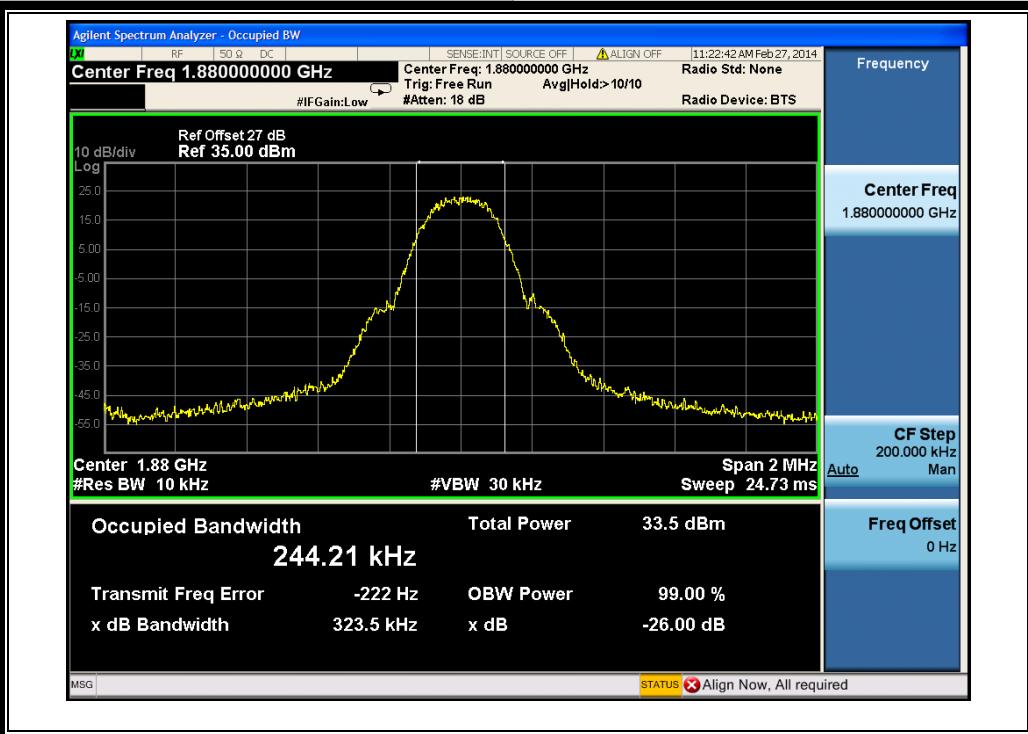

(Plot C1: GPRS 1900MHz Channel = 661)

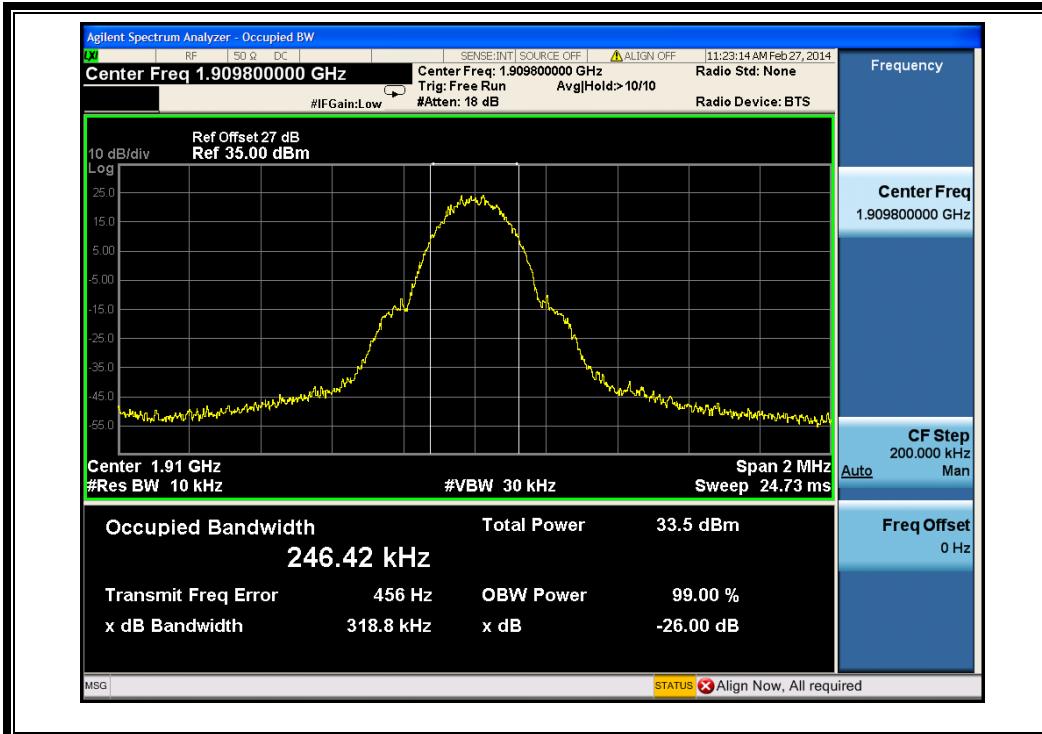

(Plot D1: GPRS 1900MHz Channel = 810)

2.4 Frequency Stability


2.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Test Description

1. Test Setup:

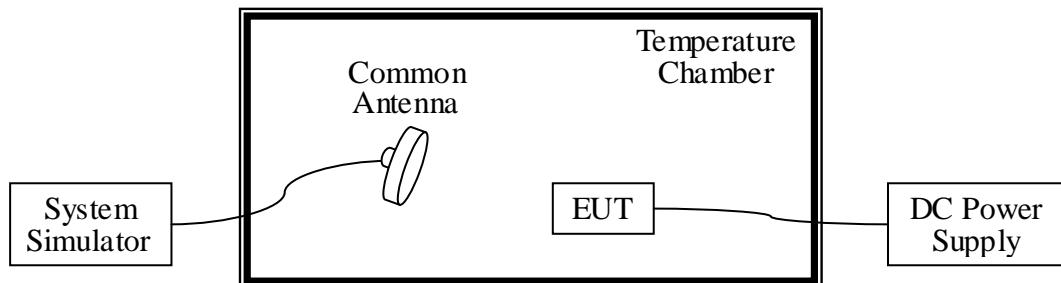

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2013.05	2014.05
DC Power Supply	Good Will	GPS-3030DD	EF920938	2013.05	2014.05
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2013.05	2014.05

2.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.8 VDC, 4.35 VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit of



850MHz band is ± 2.5 ppm, and 1900MHz is ± 1 ppm.

1. GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperature ($^{\circ}$ C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
3.8	-30	-16.71	± 2060.5	19.42	± 2091.5	-16.32	± 2122	PASS	
	-20	-16.25		25.31		19.32			
	-10	11.32		30.26		25.31			
	0	21.31		-29.21		30.26			
	+10	30.26		17.33		-29.21			
	+20	-29.21		-19.33		19.33			
	+30	19.33		26.29		-19.27			
	+40	-19.27		18.97		-16.22			
	+55	25.29		19.32		19.32			
	4.35	+25		28.95		25.31			
	3.6	+25		32.23		30.26			

2. GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperatur e ($^{\circ}$ C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
3.8	-30	-0.69	± 1850.2	-15.67	± 1880.0	11.64	± 1909.8	PASS	
	-20	21.45		17.31		-19.71			
	-10	13.45		22.31		-16.25			
	0	1.31		30.22		15.32			
	+10	-12.52		-29.21		25.31			
	+20	30.62		19.33		30.26			
	+30	13.45		-19.27		-29.21			
	+40	-12.52		26.29		19.33			
	+55	30.62		18.97		-19.27			
	4.35	+25		-16.28		25.29			
	3.6	+25		11.32		11.92			



3. EDGE 850MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
3.8	-30	31.75	±2060.5	25.12	±2091.5	18.51	±2122	PASS	
	-20	2.47		12.56		11.33			
	-10	-17.76		-13.59		-17.55			
	0	-2.11		37.10		38.10			
	+10	13.33		-20.03		-22.06			
	+20	5.33		-11.31		-16.11			
	+30	-22.56		13.76		17.76			
	+40	13.60		12.22		15.64			
	+55	1.65		10.07		3.67			
	4.35	+25		13.95		13.95			
3.6	+25	-10.76		6.23		11.33			

4. EDGE 1900MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperatur e (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
3.8	-30	-13.87	±1850.2	23.62	±1880.0	2.47	±1909.8	PASS	
	-20	0.62		7.23		-11.76			
	-10	21.63		-24.78		-12.21			
	0	12.07		-1.26		13.33			
	+10	-11.76		-18.68		5.33			
	+20	-2.11		-21.61		35.26			
	+30	13.33		14.58		-26.78			
	+40	5.33		-0.68		19.54			
	+55	-2.56		36.87		-16.67			
	4.35	+25		3.88		26.79			
3.6	+25	-8.09		13.12		19.93			



5. WCDMA 850MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperatur e (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)			
		Hz	Limit	Hz	Limit	Hz	Limit		
3.8	-30	17.49	±2066	11.87	±2087.5	-12.21	±2116.5	PASS	
	-20	-7.32		-0.59		13.33			
	-10	-3.40		21.45		5.33			
	0	16.47		13.45		35.26			
	+10	30.18		1.31		-26.78			
	+20	32.07		-12.52		19.54			
	+30	-7.98		30.62		-16.67			
	+40	26.21		13.45		-12.21			
	+55	11.10		-12.52		13.33			
	4.35	+25		30.62		23.19			
3.6	+25	18.66		-18.07		-17.75			

6. HSDPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperatur e (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)			
		Hz	Limit	Hz	Limit	Hz	Limit		
3.8	-30	-16.45	±2066	-14.06	±2087.5	15.81	±2116.5	PASS	
	-20	20.12		18.79		14.41			
	-10	-3.01		22.39		21.57			
	0	21.71		37.27		-24.37			
	+10	20.12		2.37		-13.96			
	+20	-15.01		-13.47		35.23			
	+30	22.71		-5.71		-8.31			
	+40	16.32		14.58		-13.95			
	+55	-23.61		26.37		26.37			
	4.35	+25		-14.06		7.90			
3.6	+25	17.51		18.79		1.78			



7. HSUPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)			
		Hz	Limit	Hz	Limit	Hz	Limit		
3.8	-30	-8.38	±2066	17.56	±2087.5	13.55	±2116.5	PASS	
	-20	-13.02		-19.33		27.42			
	-10	-8.51		-11.79		37.01			
	0	5.64		-0.44		-7.32			
	+10	-3.85		0.01		-4.91			
	+20	9.57		-6.64		21.35			
	+30	27.54		24.25		-5.94			
	+40	-12.52		9.63		13.78			
	+55	-2.83		23.76		28.45			
	4.35	+25		-4.57		29.11			
3.6	+25	1.54		5.25		-7.70			

8. HSPA+ 850MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)			
		Hz	Limit	Hz	Limit	Hz	Limit		
3.8	-30	2.01	±2066	-12.45	±2087.5	15.51	±2116.5	PASS	
	-20	-4.75		0.77		21.32			
	-10	16.38		-16.31		31.37			
	0	-1.76		-11.79		-17.22			
	+10	23.52		-0.44		-14.51			
	+20	-0.38		0.01		21.35			
	+30	-11.85		23.76		-5.94			
	+40	-5.91		-4.57		13.78			
	+55	2.01		-2.44		28.45			
	4.35	+25		0.01		29.11			
3.6	+25	11.54		-16.31		-6.75			

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	< -25	Plot A1toA1.1	-13	PASS
	190	836.6	< -25	Plot A2toA2.1		PASS
	251	848.8	< -25	Plot A3toA3.1		PASS
GSM 1900MHz	512	1850.2	< -25	Plot B1toB1.1	-13	PASS
	661	1880.0	< -25	Plot B2toB2.1		PASS
	810	1909.8	< -25	Plot B3toB3.1		PASS
EDGE 850MHz	128	824.2	< -25	Plot C1toC1.1	-13	PASS
	190	836.6	< -25	Plot C2toC2.1		PASS
	251	848.8	< -25	Plot C3toC3.1		PASS
EDGE 1900MHz	512	1850.2	< -25	Plot D1toD1.1	-13	PASS
	661	1880.0	< -25	Plot D2toD2.1		PASS
	810	1909.8	< -25	Plot D3toD3.1		PASS
WCDMA 850MHz	4132	826.4	< -25	Plot E1toE1.1	-13	PASS
	4175	835	< -25	Plot E2toE2.1		PASS
	4233	846.6	< -25	Plot E3toE3.1		PASS
HSDPA 850MHz	4132	826.4	< -25	Plot F1toF1.1	-13	PASS
	4175	835	< -25	Plot F2toF2.1		PASS
	4233	846.6	< -25	Plot F3toF3.1		PASS
HSUPA	4132	826.4	< -25	Plot G1toG1.1	-13	PASS




Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
850MHz	4175	835	< -25	Plot G2toG2.1		PASS
	4233	846.6	< -25	Plot G3toG3.1		PASS
HSPA+ 850MHz	4132	826.4	< -25	Plot H1toH1.1	-13	PASS
	4175	835	< -25	Plot H2toH2.1		PASS
	4233	846.6	< -25	Plot H3toH3.1		PASS

2. Test Plots for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

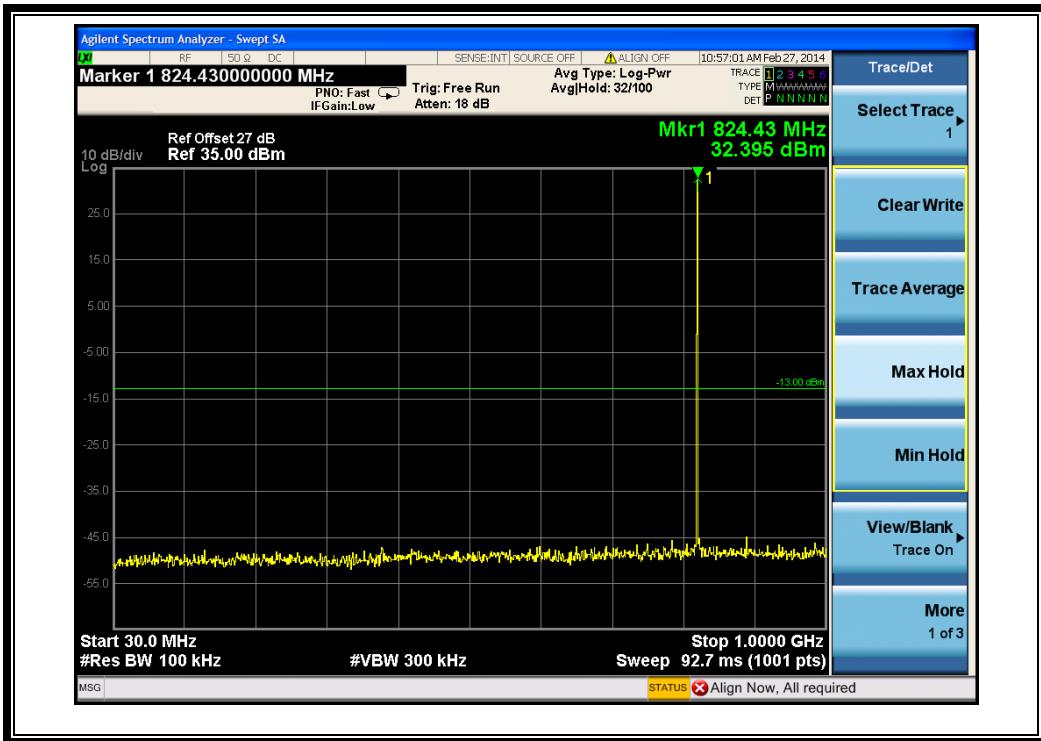


(Plot A1: GSM 850MHz Channel = 128, 30MHz to 1GHz)

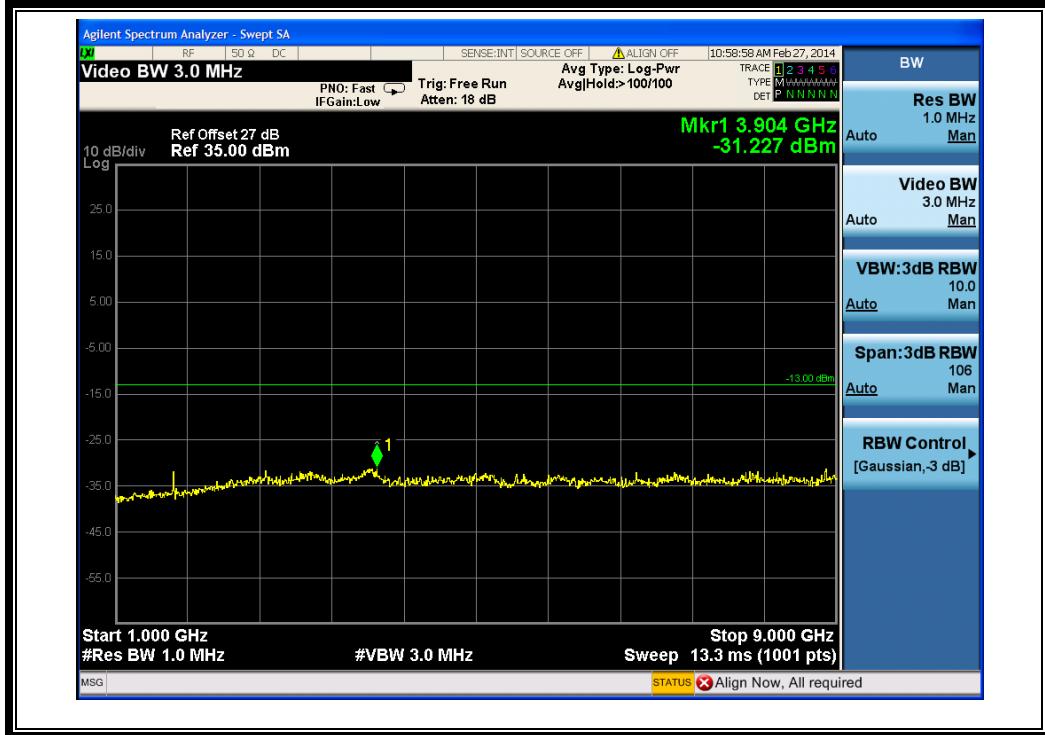


(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)

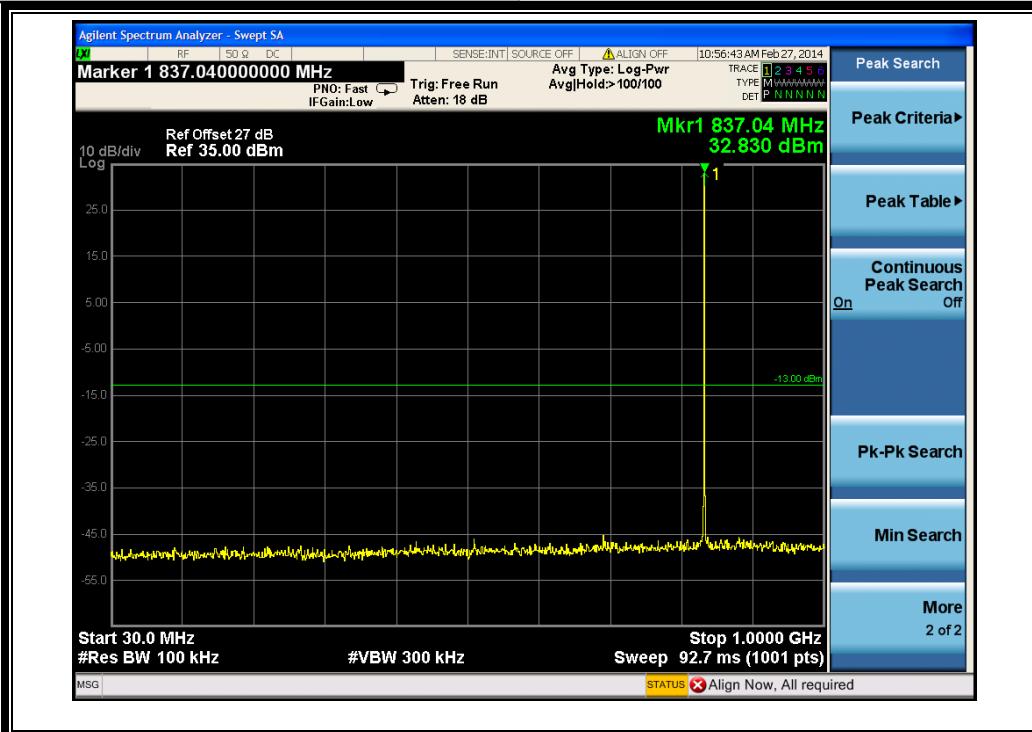

(Plot A2: GSM 850MHz Channel = 190, 30MHz to 1GHz)

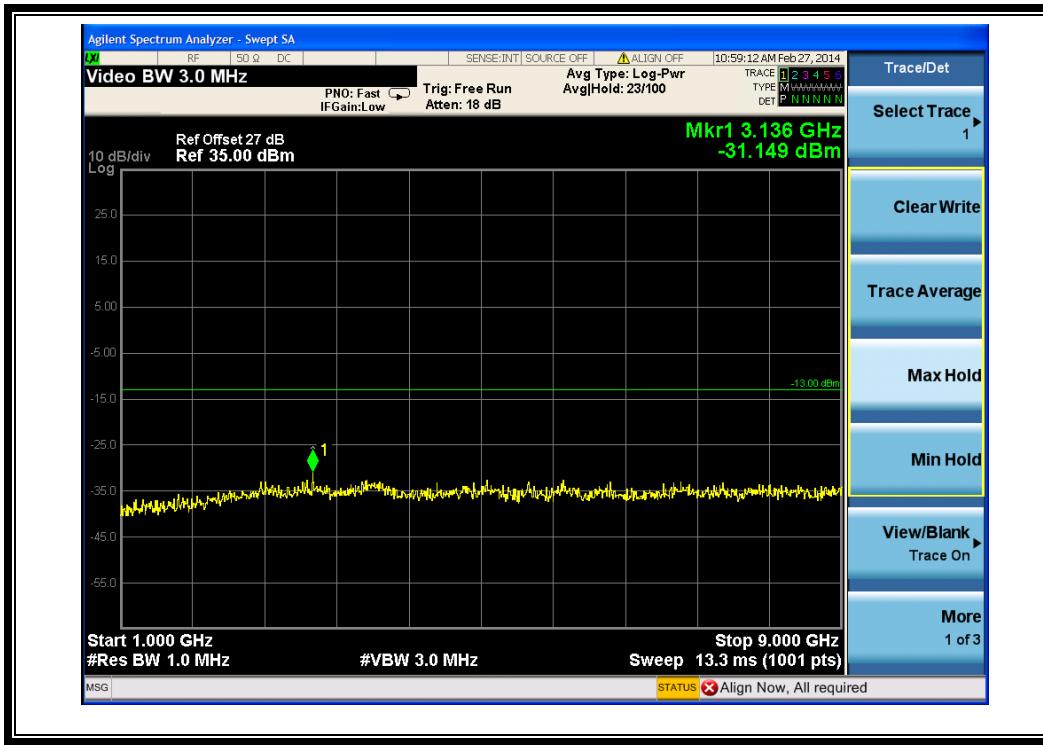


(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)

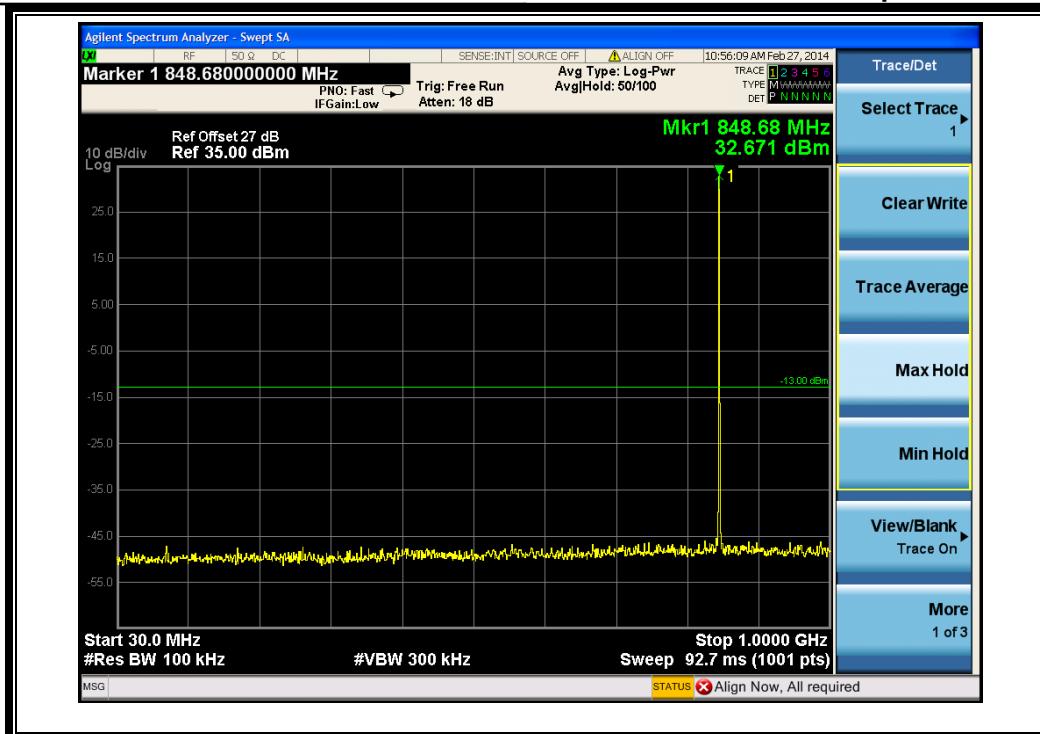


(Plot A3: GSM 850MHz Channel = 251, 30MHz to 1GHz)




(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)

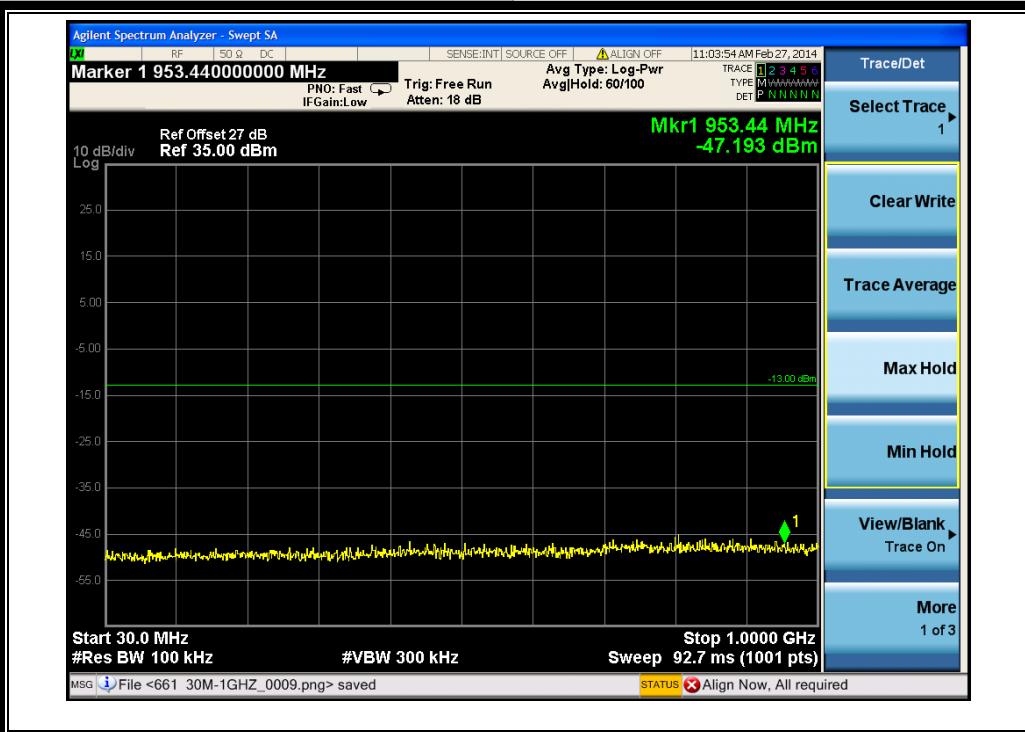


(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

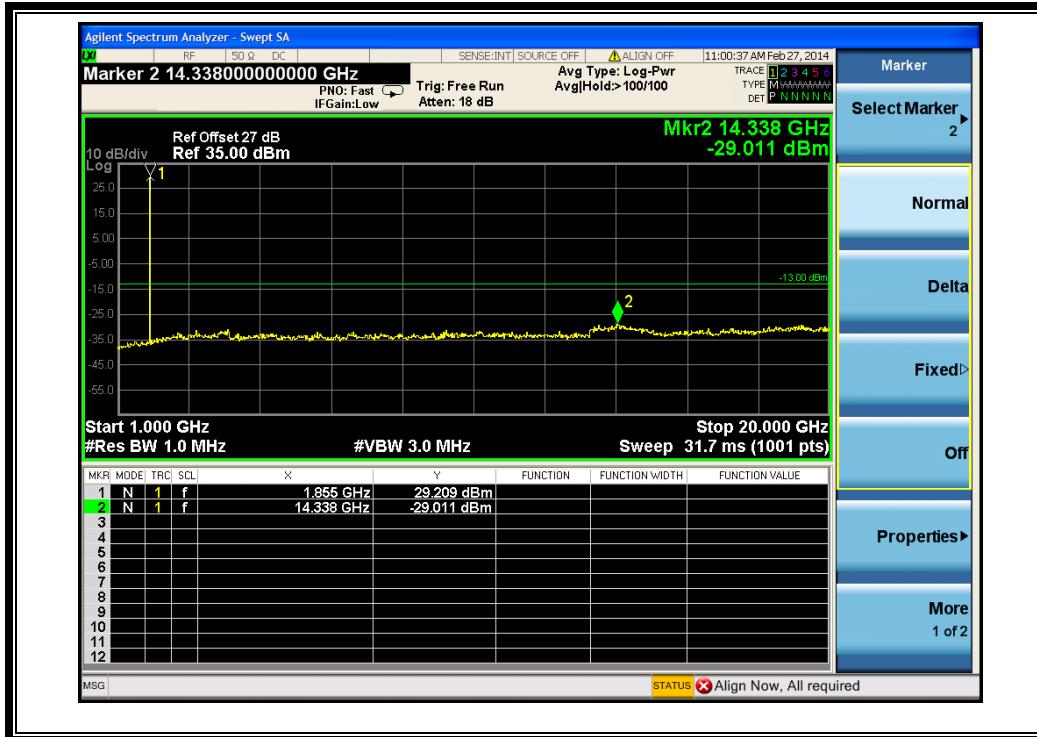


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)

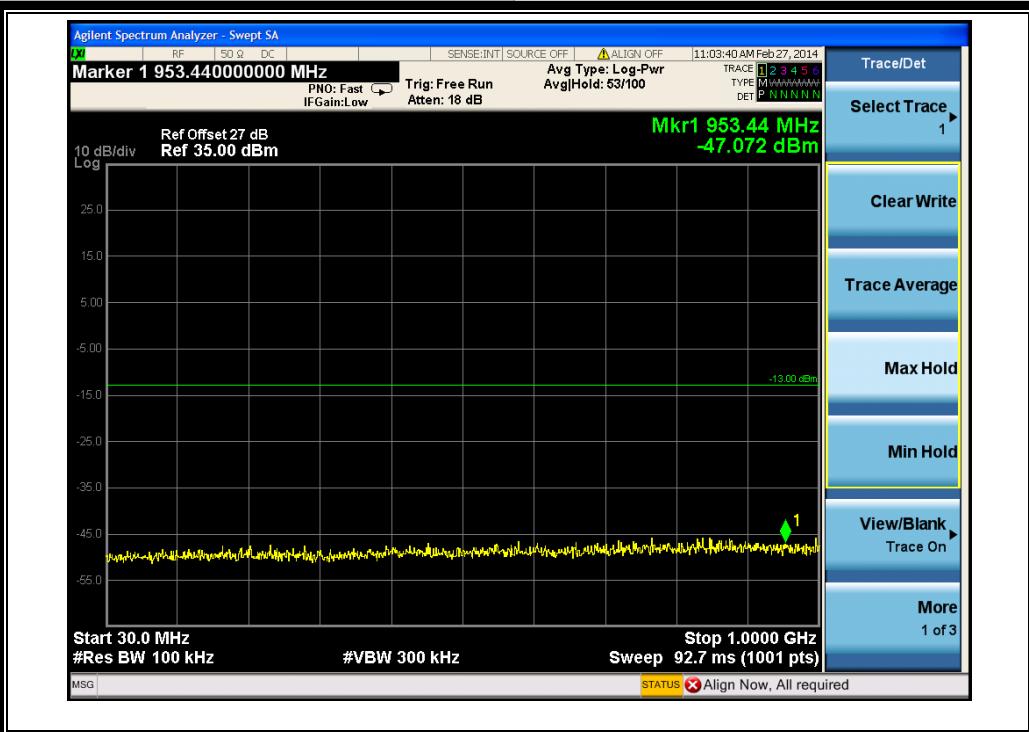


(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

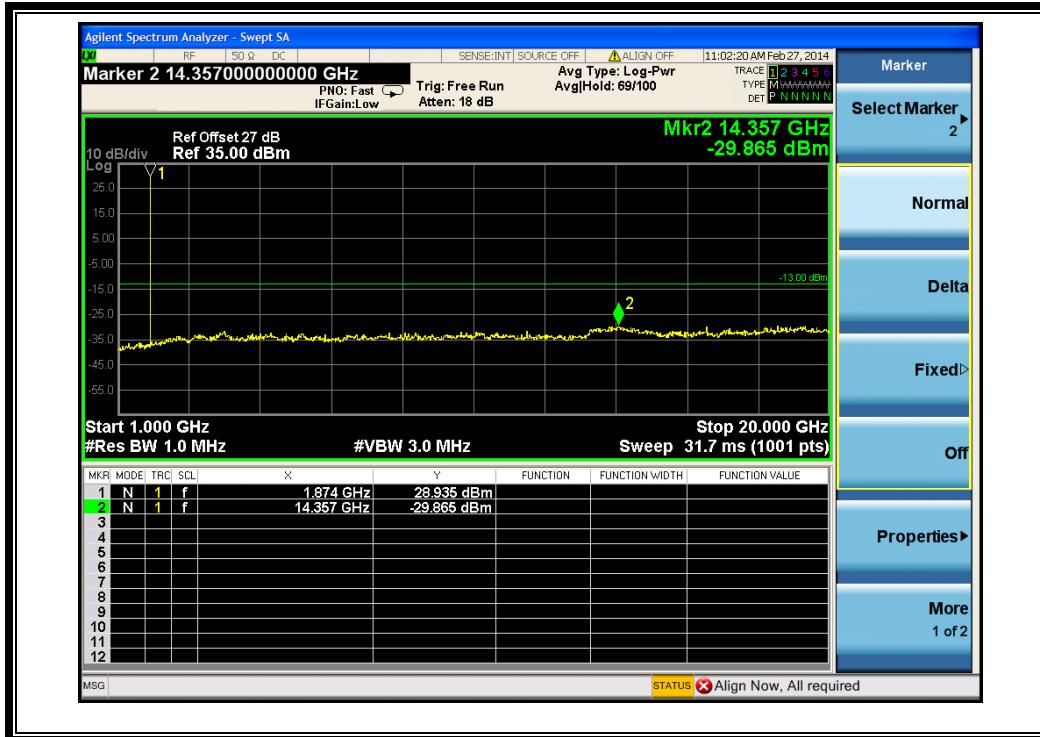


(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)

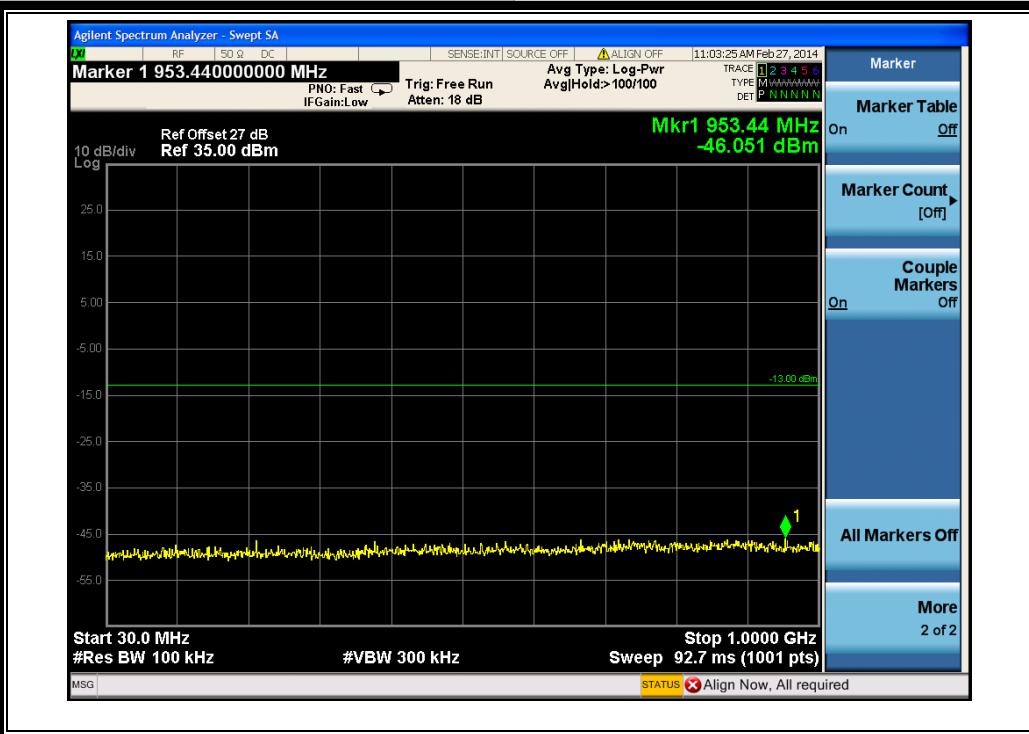


(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

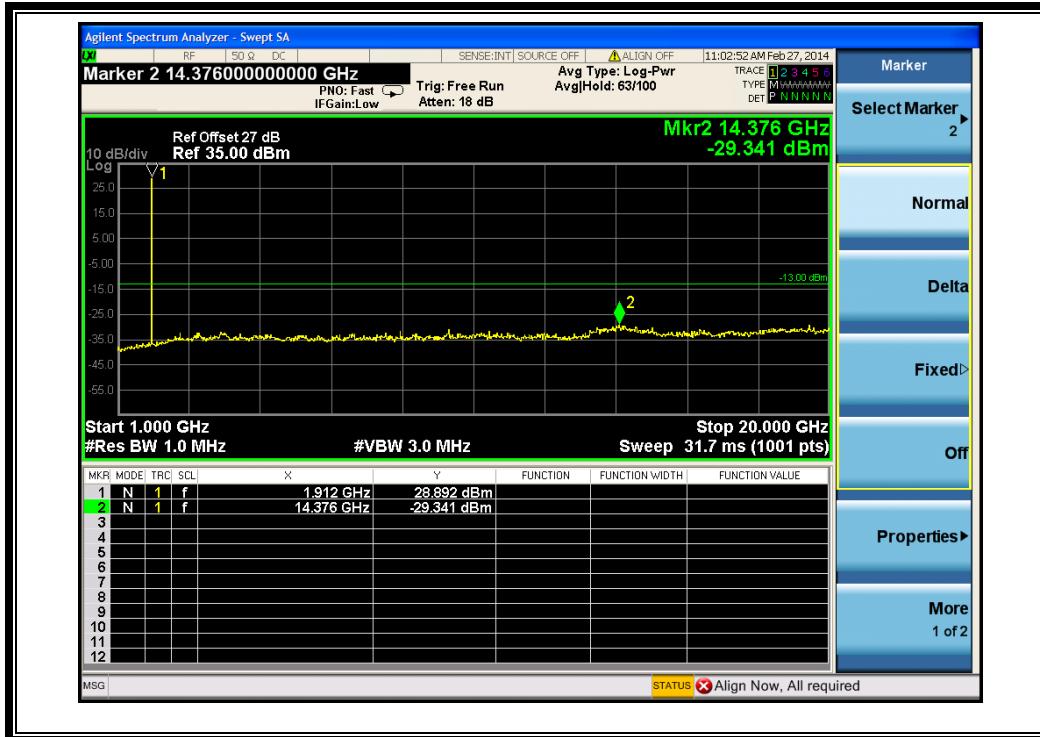


(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)

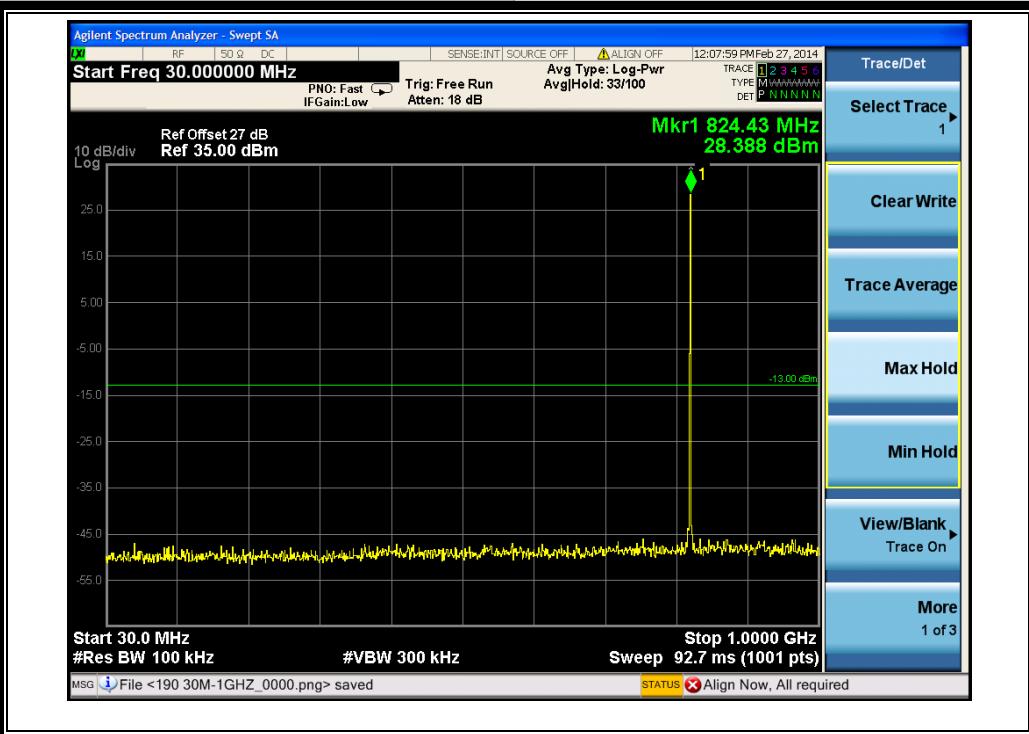

(Plot C1: EDGE 850MHz Channel = 128, 30MHz to 1GHz)

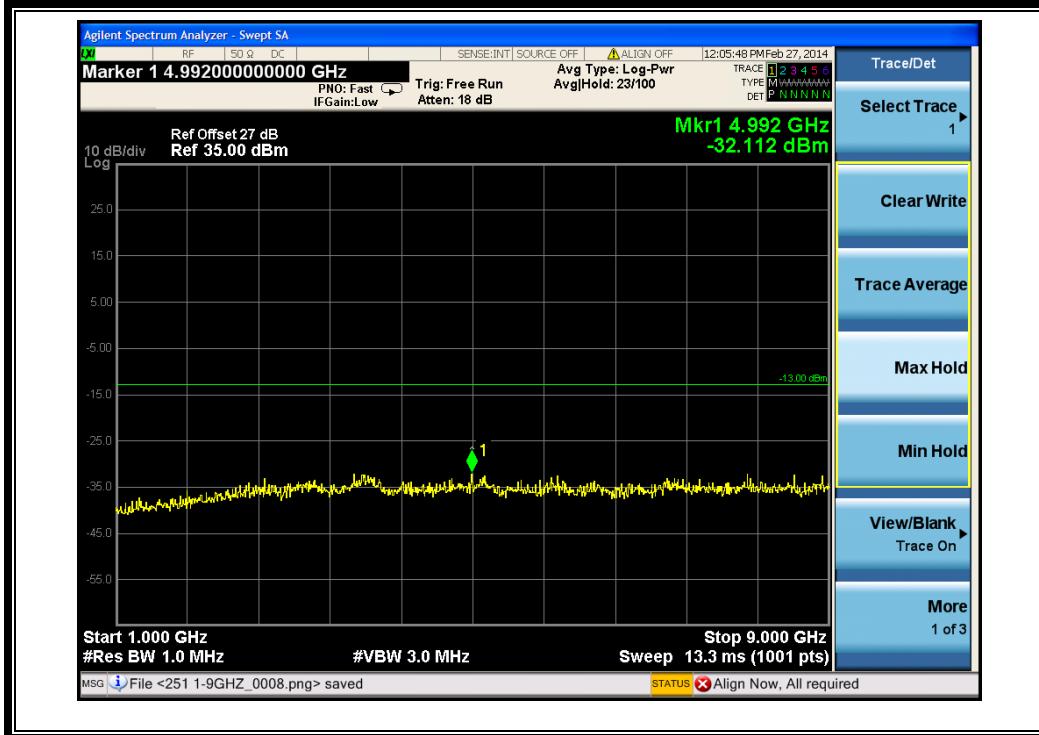


(Plot C1.1: EDGE 850MHz Channel = 128, 1GHz to 9GHz)

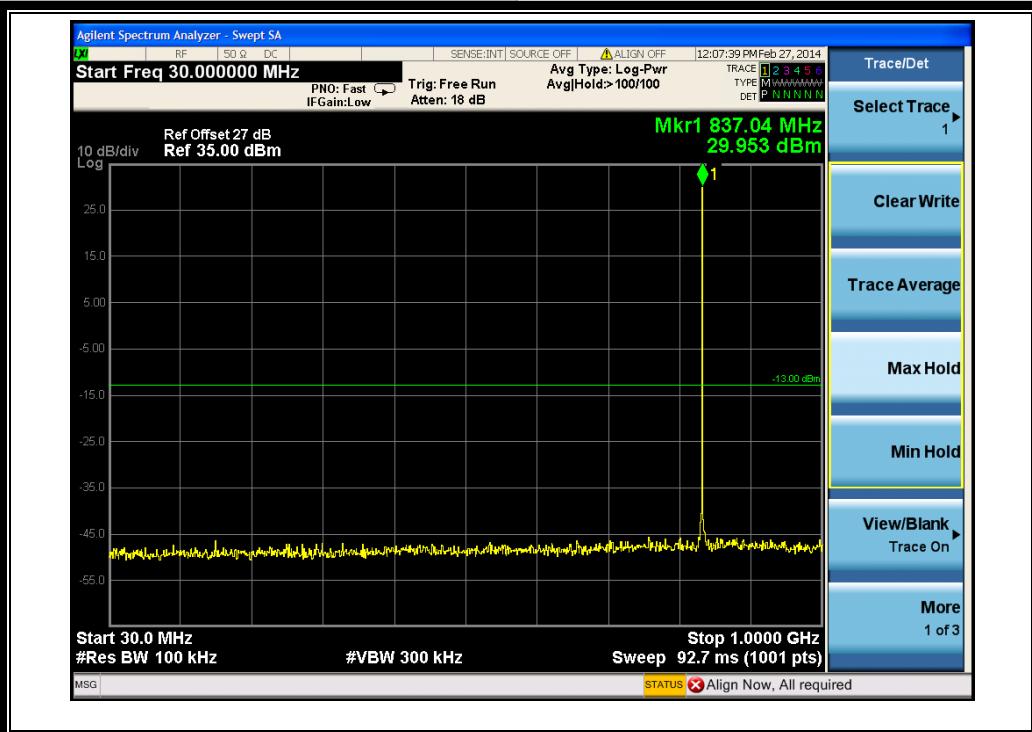


(Plot C2: EDGE 850MHz Channel = 190, 30MHz to 1GHz)




(Plot C2.1: EDGE 850MHz Channel = 190, 1GHz to 9GHz)

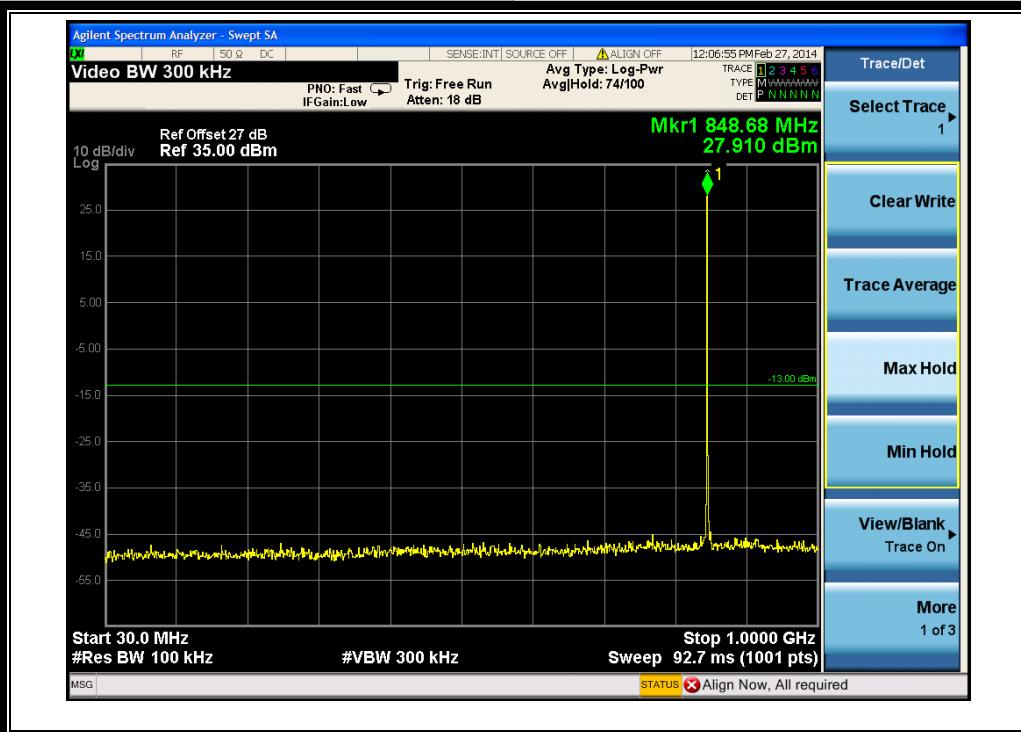


(Plot C3: EDGE 850MHz Channel = 251, 30MHz to 1GHz)

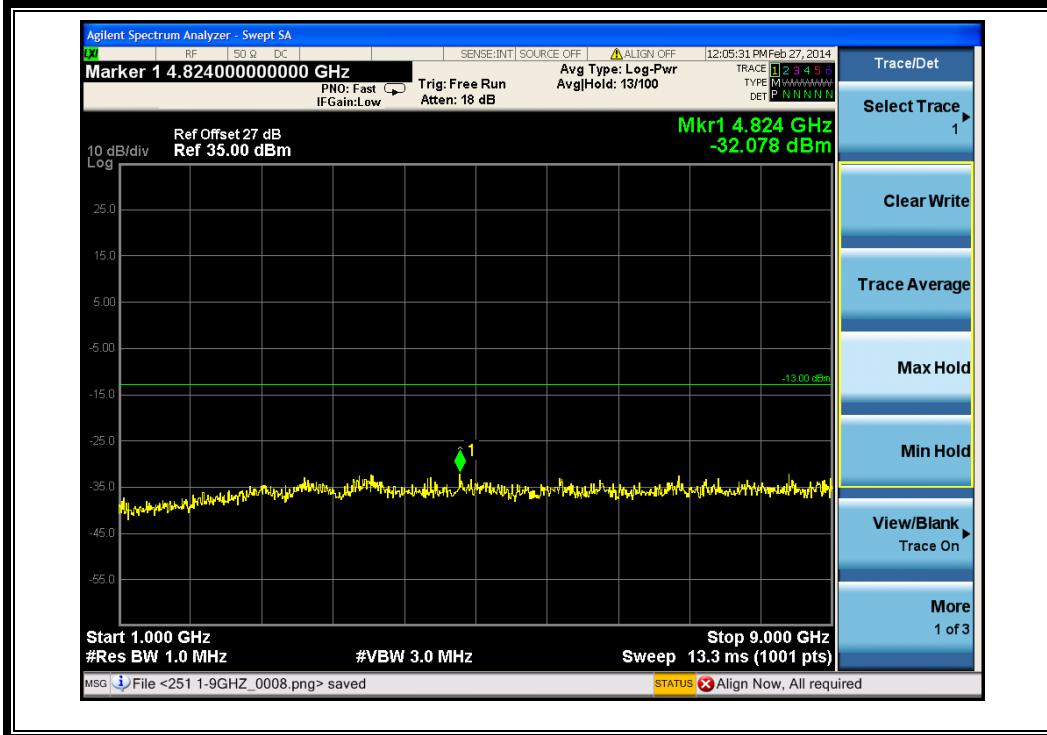


(Plot C3.1: EDGE 850MHz Channel = 251, 1GHz to 9GHz)

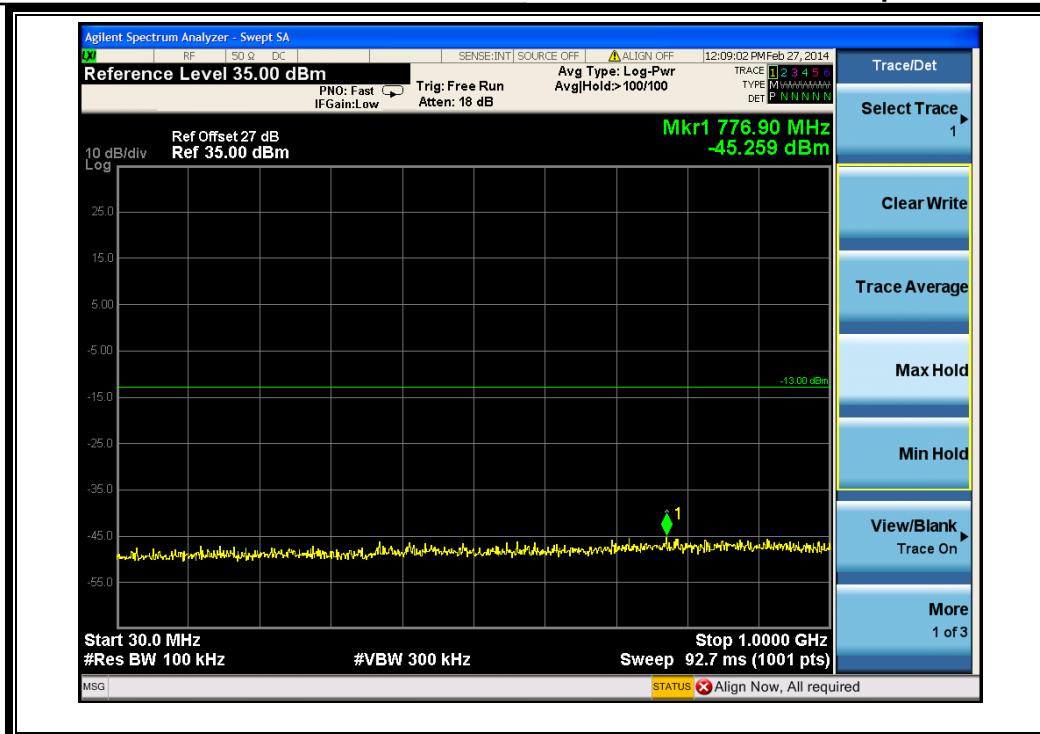


(Plot D1: EDGE 1900MHz Channel = 512, 30MHz to 1GHz)

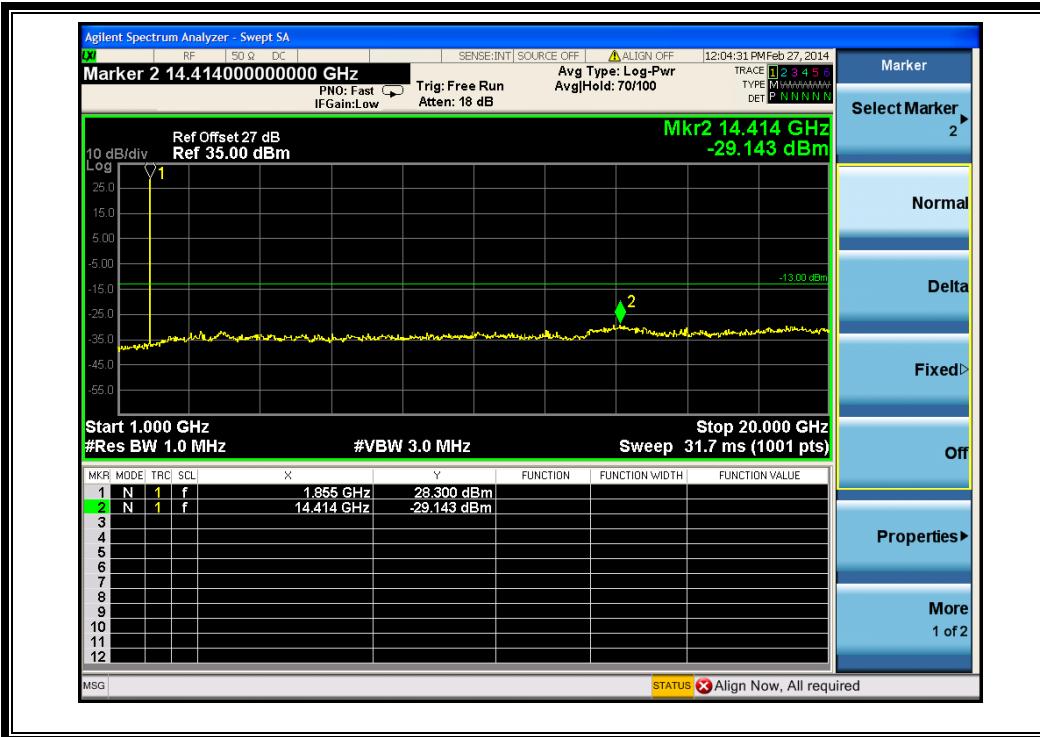


(Plot D1.1: EDGE 1900MHz Channel = 512, 1GHz to 20GHz)

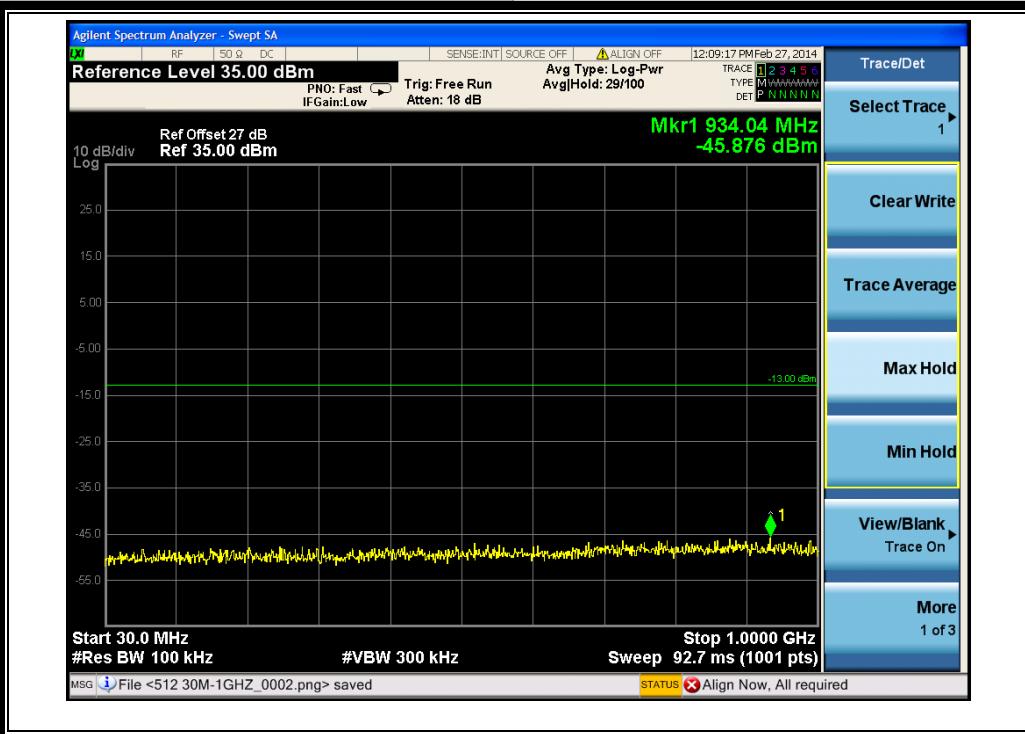


(Plot D2: EDGE 1900MHz Channel = 661, 30MHz to 1GHz)

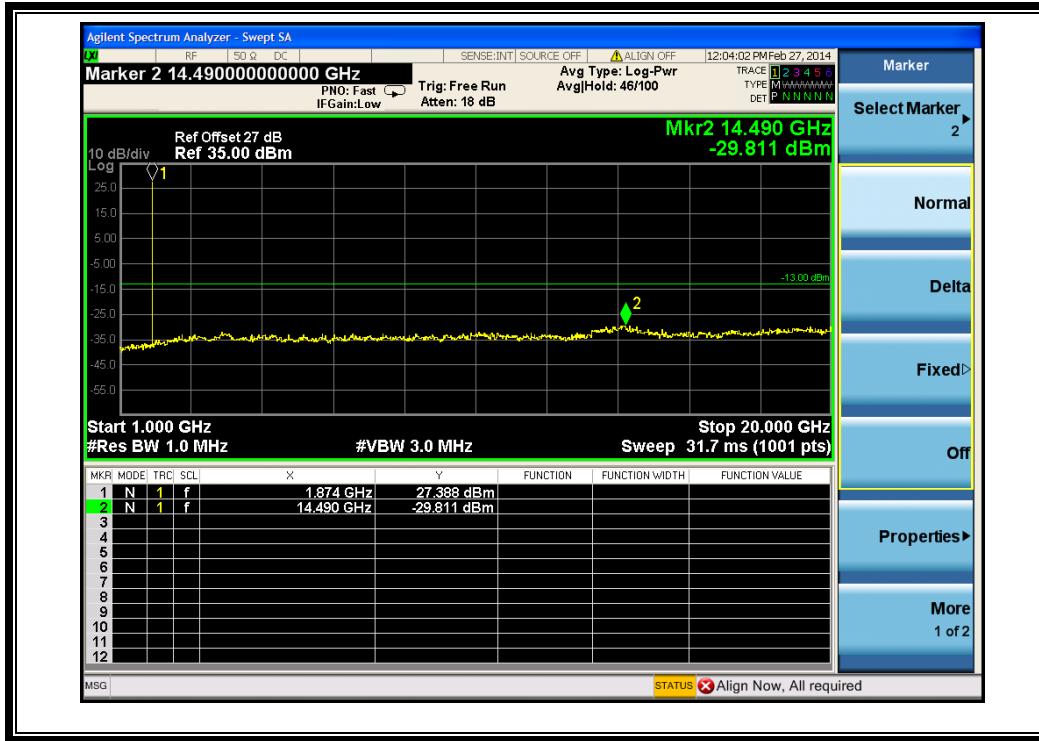


(Plot D2.1: EDGE 1900MHz Channel = 661, 1GHz to 20GHz)

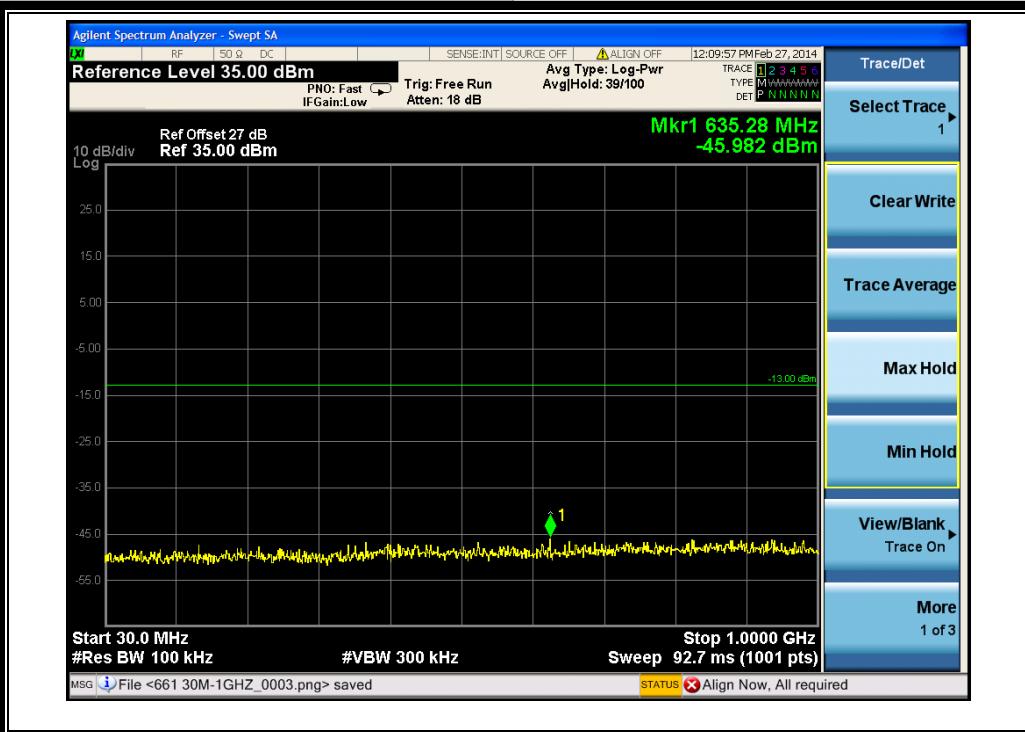


(Plot D3: EDGE 1900MHz Channel = 810, 30MHz to 1GHz)

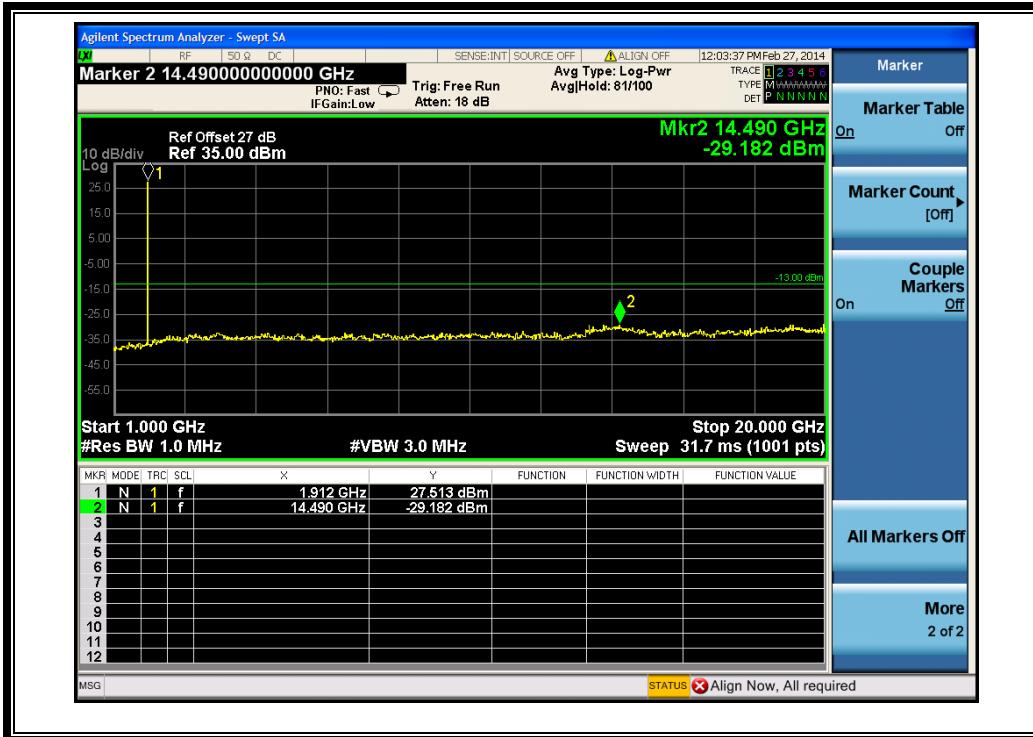

(Plot D3.1: EDGE 1900MHz Channel = 810, 1GHz to 20GHz)

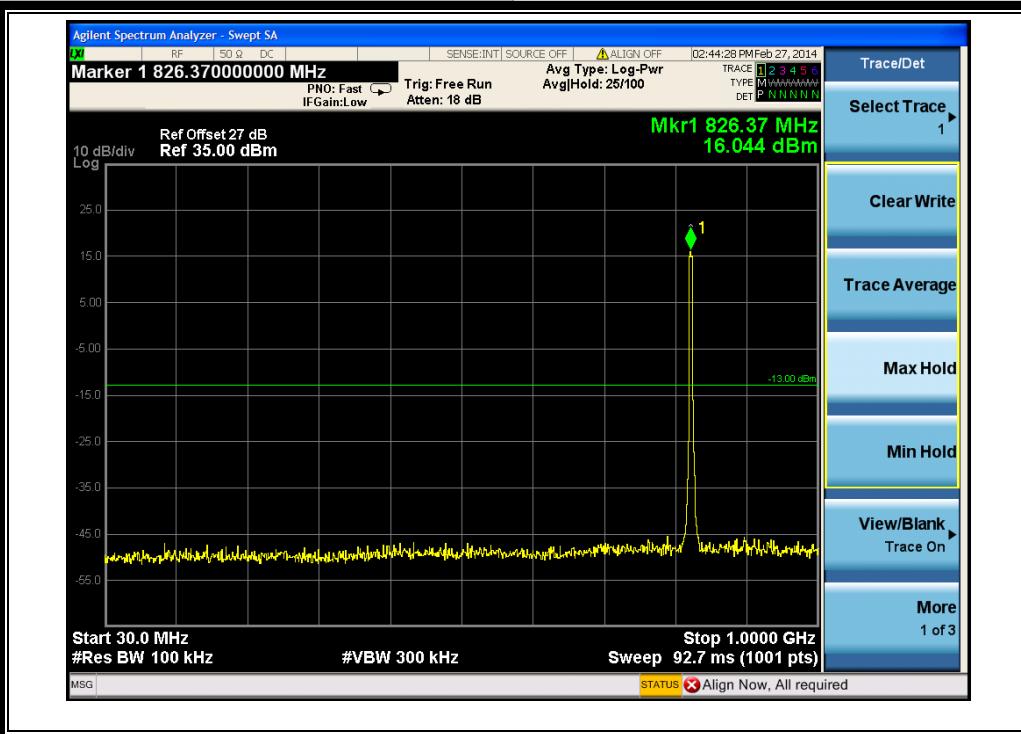

(Plot E1: WCDMA850MHz Channel = 4132, 30MHz to 1GHz)

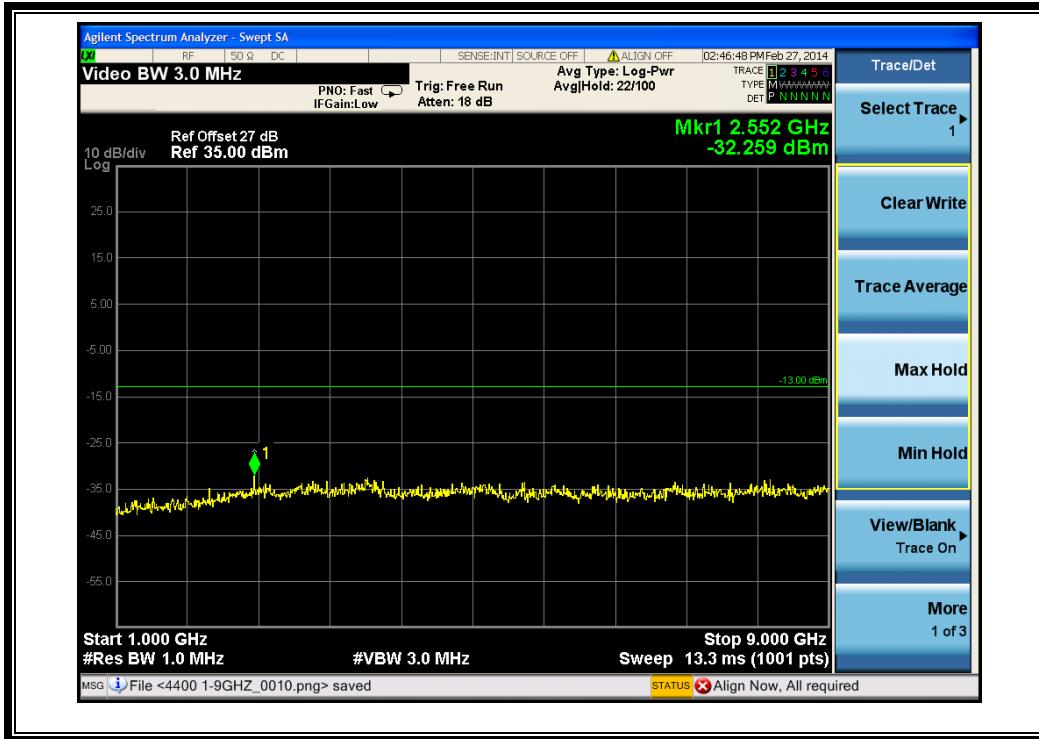

(Plot E1.1: WCDMA850MHz Channel = 4132, 1GHz to 9GHz)