



TTI-P-G 158



Appendix for the Report
Dosimetric Assessment of the
Alcatel One Touch 756
(FCC ID: RAD004)
According to the FCC Requirements



Calibration Data

April 26, 2004
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Alcatel Business Systems
32, avenue Kléber
F-92707-Colombes Cedex

This report shall not be reproduced except in full without the written approval of the testing laboratory.

Client **IMST**

| CALIBRATION CERTIFICATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|---|--|------------|------|---|-----------------------|------------------------|------------|-------------------------------|--------|---------------------|------------|-------------------------------|--------|----------------------------|----------------|--------------------------------|--------|-----------------------------------|-------------|-------------------------------------|--------|-----------------------|------------|--|------------------------|-----------------------|--------------|---|------------------------|---------------------------|------------|--|------------------------|
| Object(s) | ET3DV6 - SN:1669 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibration procedure(s) | QA CAL-01.v2 Calibration procedure for dosimetric E-field probes | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibration date: | March 18, 2004 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Condition of the calibrated item | In Tolerance (according to the specific calibration document) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Model Type</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM E4419B</td> <td>GB41293874</td> <td>2-Apr-03 (METAS, No 252-0250)</td> <td>Apr-04</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>2-Apr-03 (METAS, No 252-0250)</td> <td>Apr-04</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20b)</td> <td>3-Apr-03 (METAS, No. 251-0340)</td> <td>Apr-04</td> </tr> <tr> <td>Fluke Process Calibrator Type 702</td> <td>SN: 6295803</td> <td>8-Sep-03 (Sintrel SCS No. E-030020)</td> <td>Sep-04</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>MY41092180</td> <td>18-Sep-02 (SPEAG, in house check Oct-03)</td> <td>In house check: Oct 05</td> </tr> <tr> <td>RF generator HP 8684C</td> <td>US3642U01700</td> <td>4-Aug-99 (SPEAG, in house check Aug-02)</td> <td>In house check: Aug-05</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (SPEAG, in house check Oct-03)</td> <td>In house check: Oct 05</td> </tr> </tbody> </table> | | | | Model Type | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration | Power meter EPM E4419B | GB41293874 | 2-Apr-03 (METAS, No 252-0250) | Apr-04 | Power sensor E4412A | MY41495277 | 2-Apr-03 (METAS, No 252-0250) | Apr-04 | Reference 20 dB Attenuator | SN: 5086 (20b) | 3-Apr-03 (METAS, No. 251-0340) | Apr-04 | Fluke Process Calibrator Type 702 | SN: 6295803 | 8-Sep-03 (Sintrel SCS No. E-030020) | Sep-04 | Power sensor HP 8481A | MY41092180 | 18-Sep-02 (SPEAG, in house check Oct-03) | In house check: Oct 05 | RF generator HP 8684C | US3642U01700 | 4-Aug-99 (SPEAG, in house check Aug-02) | In house check: Aug-05 | Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-03) | In house check: Oct 05 |
| Model Type | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power meter EPM E4419B | GB41293874 | 2-Apr-03 (METAS, No 252-0250) | Apr-04 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power sensor E4412A | MY41495277 | 2-Apr-03 (METAS, No 252-0250) | Apr-04 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference 20 dB Attenuator | SN: 5086 (20b) | 3-Apr-03 (METAS, No. 251-0340) | Apr-04 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fluke Process Calibrator Type 702 | SN: 6295803 | 8-Sep-03 (Sintrel SCS No. E-030020) | Sep-04 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power sensor HP 8481A | MY41092180 | 18-Sep-02 (SPEAG, in house check Oct-03) | In house check: Oct 05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RF generator HP 8684C | US3642U01700 | 4-Aug-99 (SPEAG, in house check Aug-02) | In house check: Aug-05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-03) | In house check: Oct 05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibrated by: | Name Nico Vetterli | Function Technician | Signature  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Approved by: | Name Katja Pokovic | Function Laboratory Director | Signature  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Date issued: March 19, 2004 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Probe ET3DV6

SN:1669

| | |
|------------------|------------------|
| Manufactured: | February 8, 2002 |
| Last calibrated: | March 21, 2003 |
| Recalibrated: | March 18, 2004 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1669

| Sensitivity in Free Space | | Diode Compression ^A | | |
|---------------------------|--|--------------------------------|----|----|
| NormX | 1.83 $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP X | 96 | mV |
| NormY | 1.93 $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Y | 96 | mV |
| NormZ | 1.81 $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Z | 96 | mV |

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

Boundary Effect

| Head | 900 MHz | Typical SAR gradient: 5 % per mm | | |
|------|--|-----------------------------------|--------|--|
| | Sensor Center to Phantom Surface Distance | 3.7 mm | 4.7 mm | |
| | SAR _{be} [%] Without Correction Algorithm | 9.7 | 5.2 | |
| | SAR _{be} [%] With Correction Algorithm | 0.1 | 0.3 | |
| Head | 1800 MHz | Typical SAR gradient: 10 % per mm | | |
| | Sensor to Surface Distance | 3.7 mm | 4.7 mm | |
| | SAR _{be} [%] Without Correction Algorithm | 14.1 | 9.8 | |
| | SAR _{be} [%] With Correction Algorithm | 0.2 | 0.2 | |

Sensor Offset


| | |
|----------------------------|--------------|
| Probe Tip to Sensor Center | 2.7 mm |
| Optical Surface Detection | in tolerance |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.




^A numerical linearization parameter; uncertainty not required

Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22)


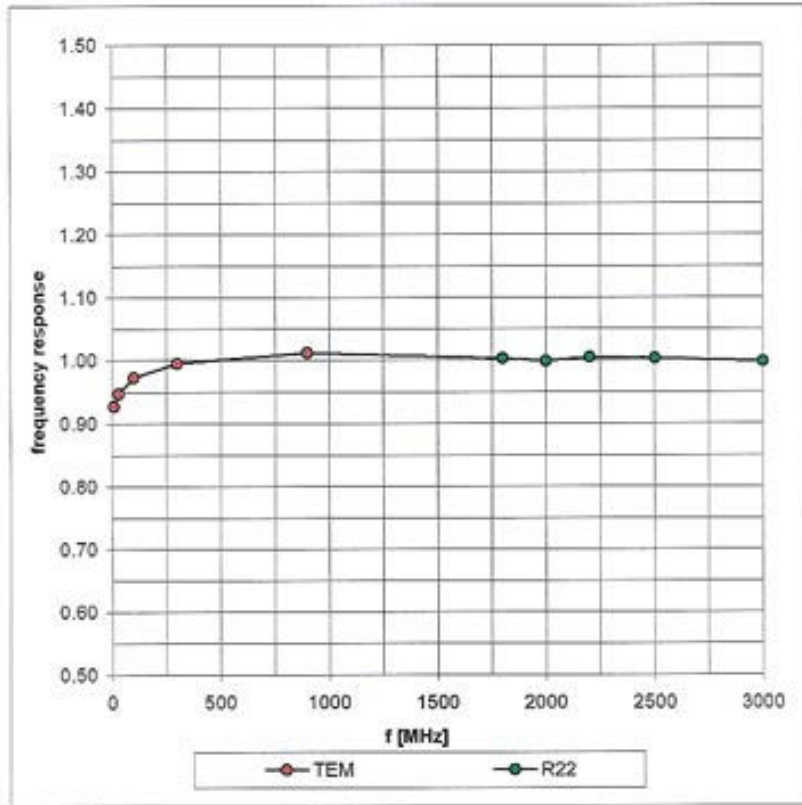


Receiving Pattern (ϕ) , $\theta = 0^\circ$

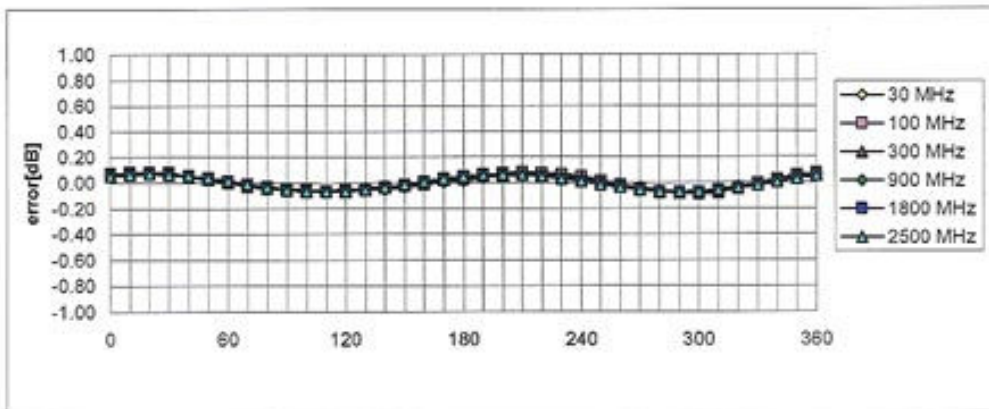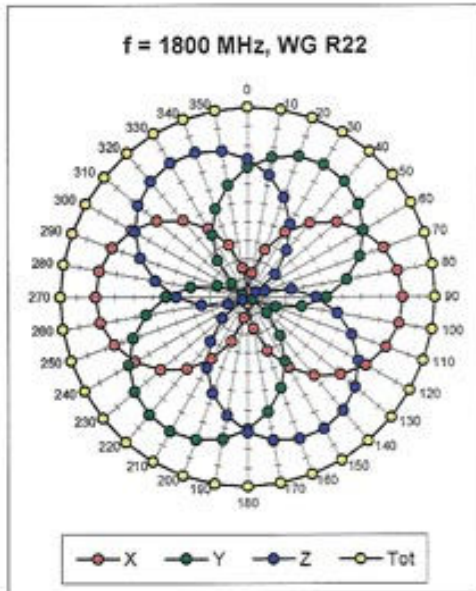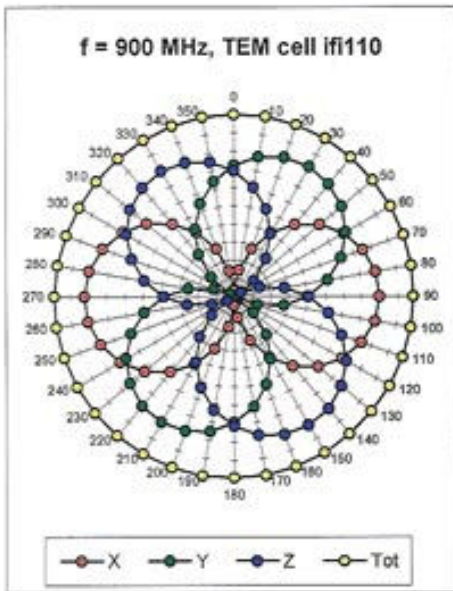


Axial Isotropy Error $< \pm 0.2$ dB

Dynamic Range f(SAR_{head}) (Waveguide R22)

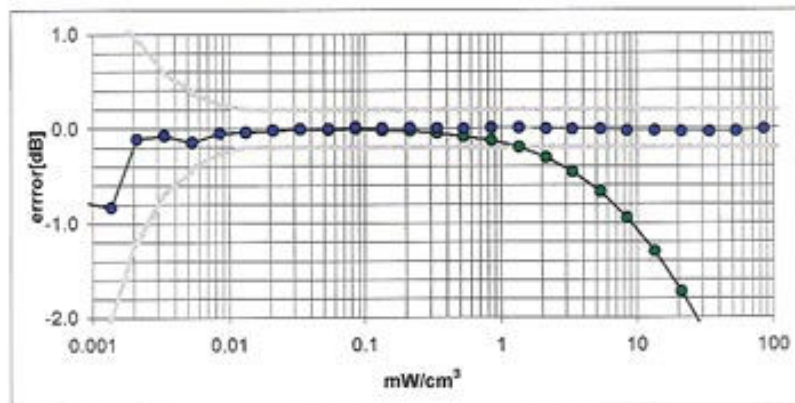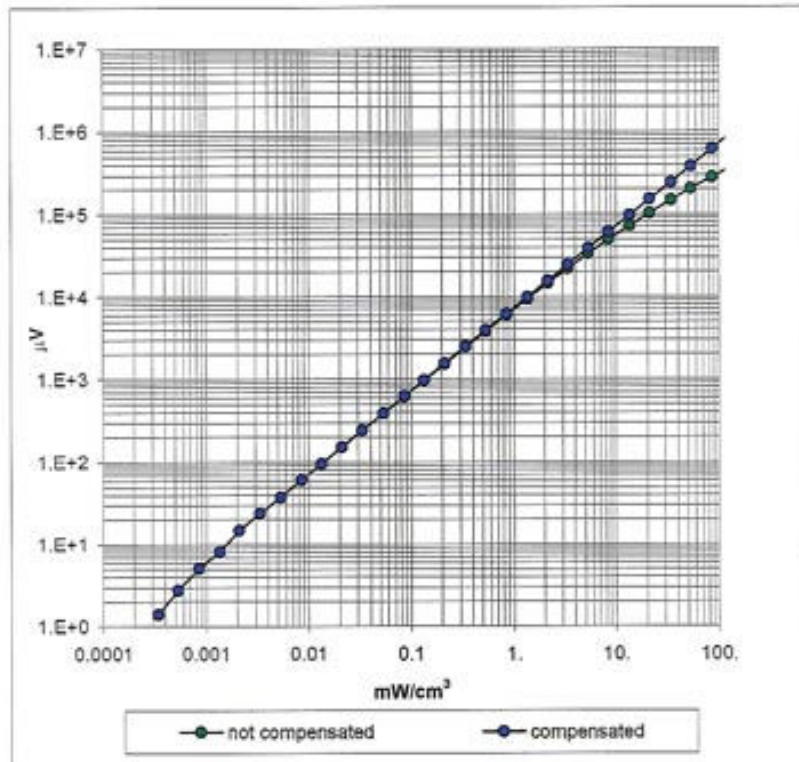

Probe Linearity <math>\pm 0.2 dB

Conversion Factor Assessment

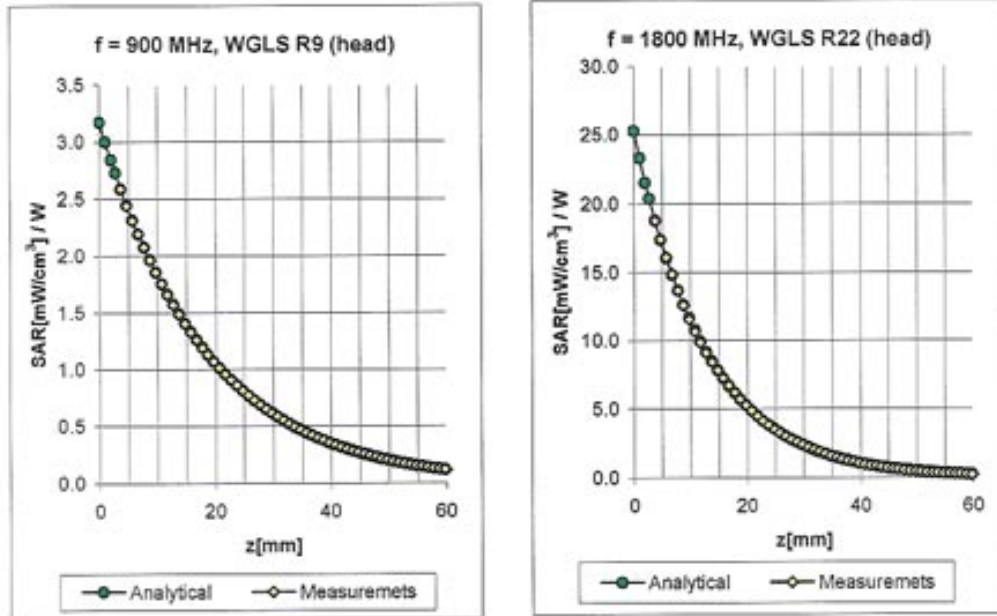


| f [MHz] | Validity [MHz] ⁸ | Tissue | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty |
|---------|-----------------------------|--------|--------------|--------------|-------|-------|-------------------|
| 835 | 785-885 | Head | 41.5 ± 5% | 0.90 ± 5% | 0.54 | 2.00 | 6.67 ± 9.7% (k=2) |
| 900 | 850-950 | Head | 41.5 ± 5% | 0.97 ± 5% | 0.61 | 1.91 | 6.47 ± 9.7% (k=2) |
| 1750 | 1700-1800 | Head | 40.0 ± 5% | 1.40 ± 5% | 0.48 | 2.73 | 5.38 ± 9.7% (k=2) |
| 1900 | 1850-1950 | Head | 40.0 ± 5% | 1.40 ± 5% | 0.51 | 2.81 | 5.19 ± 9.7% (k=2) |
| 1950 | 1900-2000 | Head | 40.0 ± 5% | 1.40 ± 5% | 0.53 | 2.73 | 4.88 ± 9.7% (k=2) |
| 835 | 785-885 | Body | 56.2 ± 5% | 0.97 ± 5% | 0.41 | 2.51 | 6.32 ± 9.7% (k=2) |
| 900 | 850-950 | Body | 56.0 ± 5% | 1.05 ± 5% | 0.48 | 2.23 | 6.13 ± 9.7% (k=2) |
| 1750 | 1700-1800 | Body | 53.3 ± 5% | 1.52 ± 5% | 0.56 | 2.85 | 4.66 ± 9.7% (k=2) |
| 1900 | 1850-1950 | Body | 53.3 ± 5% | 1.52 ± 5% | 0.61 | 2.80 | 4.54 ± 9.7% (k=2) |
| 1950 | 1900-2000 | Body | 53.3 ± 5% | 1.52 ± 5% | 0.67 | 2.46 | 4.35 ± 9.7% (k=2) |

⁸ The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

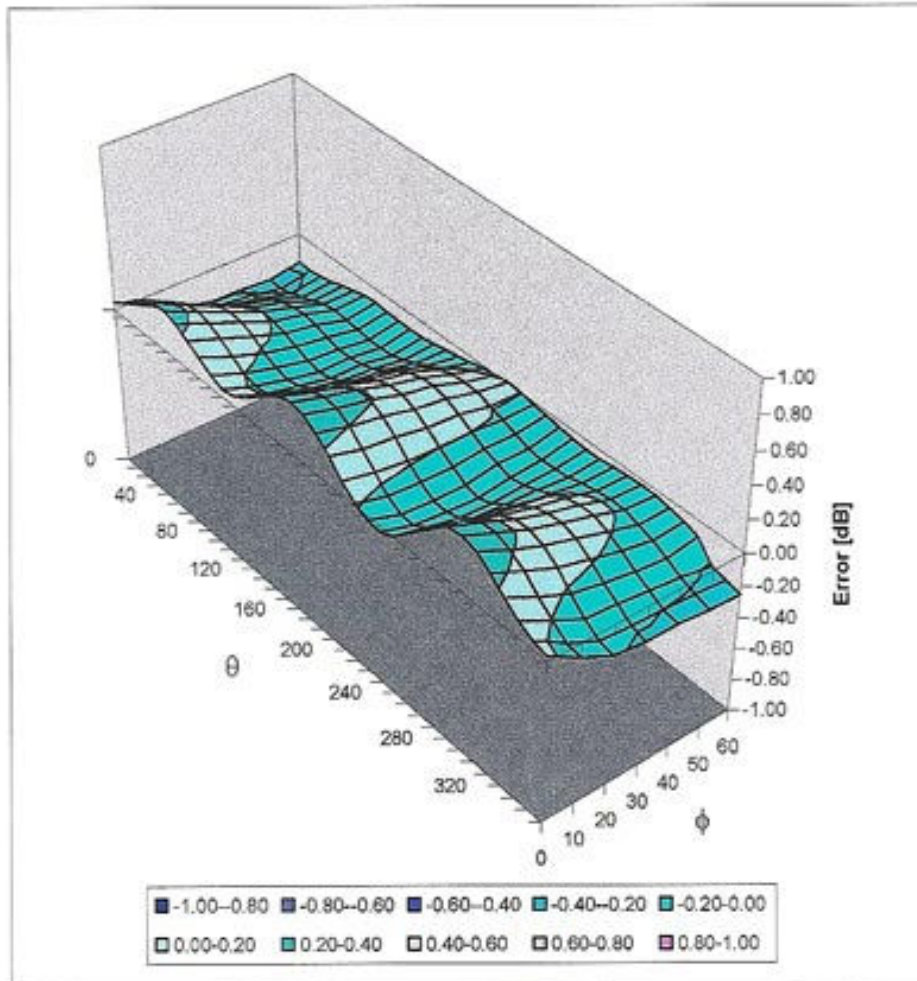

Spherical Isotropy Error < ± 0.4 dB

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

1900 MHz System Validation Dipole

Type:

D1900V2

Serial Number:

535

Place of Calibration:

Zurich

Date of Calibration:

November 14, 2002

Calibration Interval:

24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Vetterli

Approved by:

R. Kistler

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

DASY

Dipole Validation Kit

Type: D1900V2

Serial: 535

Manufactured: March 22, 2001
Calibrated: November 14, 2002

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with head simulating glycol solution of the following electrical parameters at 1900 MHz:

| | | |
|------------------------|-------------------|-----------|
| Relative Dielectricity | 39.8 | $\pm 5\%$ |
| Conductivity | 1.45 mho/m | $\pm 5\%$ |

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 5.2 at 1900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was $250\text{mW} \pm 3\%$. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

| | |
|--|------------------|
| averaged over 1 cm^3 (1 g) of tissue: | 40.8 mW/g |
| averaged over 10 cm^3 (10 g) of tissue: | 20.7 mW/g |

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

| | | |
|----------------------|------------------|---------------------------------------|
| Electrical delay: | 1.2184 ns | (one direction) |
| Transmission factor: | 0.995 | (voltage transmission, one direction) |

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

| | |
|----------------------------------|--------------------------------|
| Feedpoint impedance at 1900 MHz: | $\text{Re}\{Z\} = 50.9 \Omega$ |
| | $\text{Im}\{Z\} = 3.6 \Omega$ |
| Return Loss at 1900 MHz | -28.6 dB |

4. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with body simulating glycol solution of the following electrical parameters at 1900 MHz:

| | | |
|------------------------|-------------------|-----------|
| Relative Dielectricity | 52.2 | $\pm 5\%$ |
| Conductivity | 1.57 mho/m | $\pm 5\%$ |

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 4.9 at 1900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

5. SAR Measurement with DASy4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

| | |
|--|------------------|
| averaged over 1 cm ³ (1 g) of tissue: | 41.2 mW/g |
| averaged over 10 cm ³ (10 g) of tissue: | 21.0 mW/g |

6. Dipole Impedance and Return Loss

The dipole was positioned at the flat phantom sections according to section 4 and the distance holder was in place during impedance measurements.

| | |
|----------------------------------|--------------------------------|
| Feedpoint impedance at 1900 MHz: | $\text{Re}\{Z\} = 46.5 \Omega$ |
| | $\text{Im}\{Z\} = 3.4 \Omega$ |
| Return Loss at 1900 MHz | -26.0 dB |

7. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

8. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

Small end caps have been added to the dipole arms in order to improve matching when loaded according to the position as explained in Section 1. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

9. Power Test

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN535caps_SN1507_HSL1900_141102.da4


DUT: Dipole 1900 MHz Type & Serial Number: D1900V2 - SN535
Program: Dipole Calibration; Pin = 250 mW; d = 10 mm

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL 1900 MHz ($\sigma = 1.45$ mho/m, $\epsilon = 39.75$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 94 V/m
Peak SAR = 18.5 mW/g
SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.18 mW/g
Power Drift = -0.01 dB

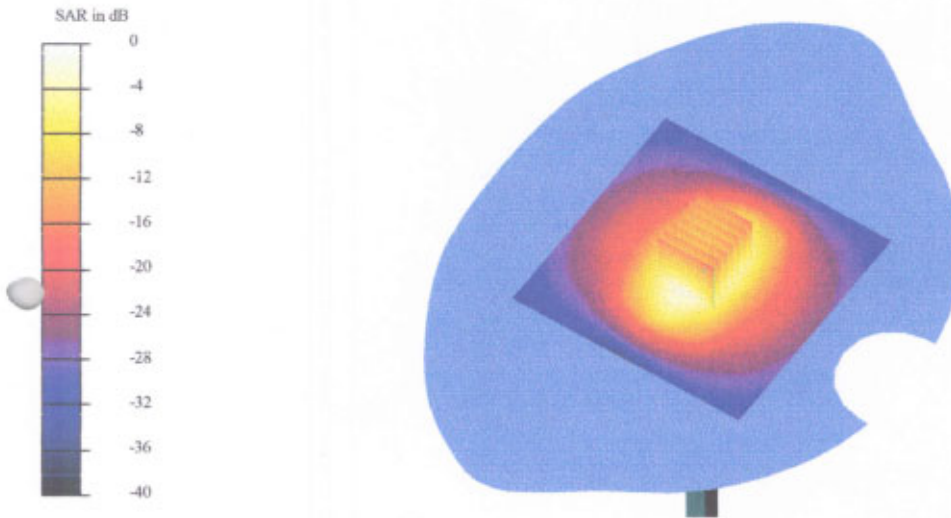

14 Nov 2002 16:58:38

CH1 S11 1 U FS 1: 58.945 Ω 3.6445 Ω 305.29 pH 1 900.000 000 MHz

y

Del


PRn

Cor

Avg

15

↑

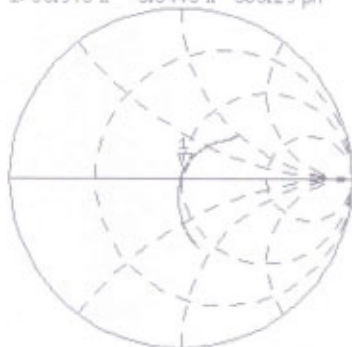


CH2 S11 LOG 5 dB/REF 0 dB 1: -28.617 dB 1 900.000 000 MHz

PRn

Cor

↑

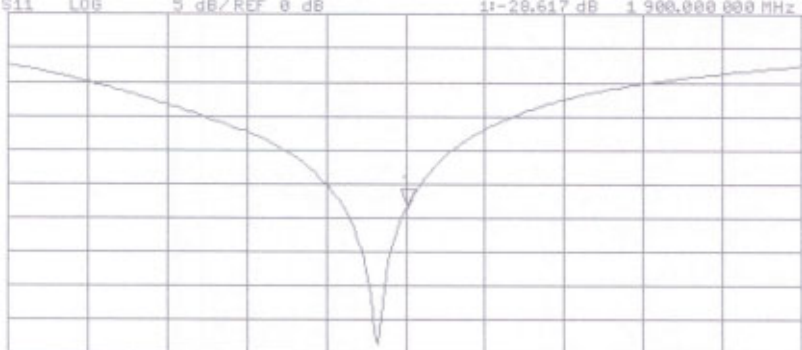

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN535_SN1507_M1900_141102.da4

DUT: Dipole 1900 MHz Type & Serial Number: D1900V2 - SN535
Program: Dipole Calibration; Pin = 250 mW; d = 10 mm

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: Muscle 1900 MHz ($\sigma = 1.57$ mho/m, $\epsilon = 52.15$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.9, 4.9, 4.9); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm

Reference Value = 90.7 V/m

Peak SAR = 18.8 mW/g

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.26 mW/g

Power Drift = -0.03 dB

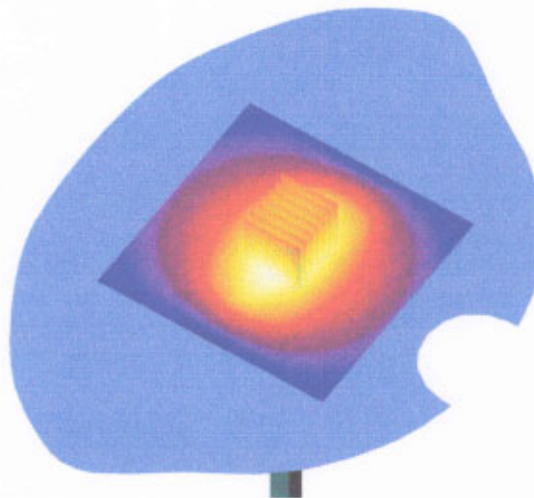

Muscle

14 Nov 2002 18:07:45

CH1 S11 1 U FS 1: 46.463 Ω 3.3906 Ω 284.82 μ H 1 900.000 000 MHz

y

Del


PRM

Cor

Avg

16

↑

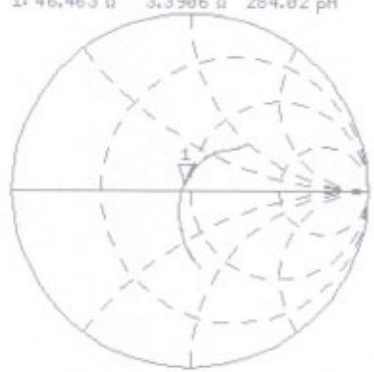


CH2 S11 LOG 5 dB/REF 0 dB 1: -25.952 dB 1 900.000 000 MHz

PRM

Cor

↑

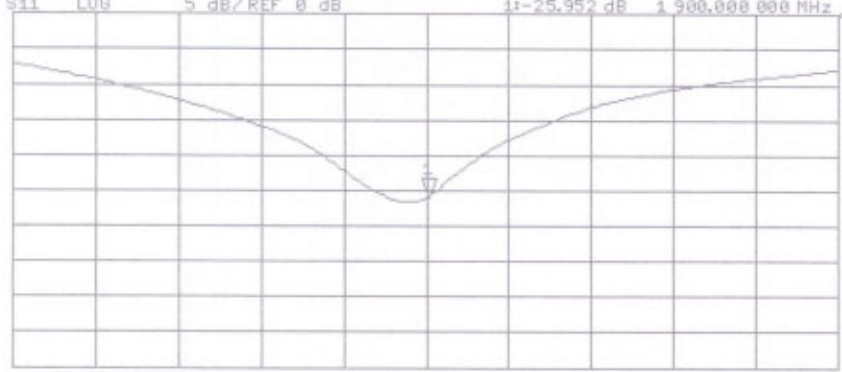

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz