

SAR TEST REPORT

Equipment Under Test :	GSM 850/1900 mobile phone
Model No. :	U7CA
Market name:	OT-E221A
FCC ID :	RAD060
Applicant :	T&A Mobile Phones
Address of Applicant :	3/F,B2 Block, Digital Technology Yard, Gaoxin Nan Qi Road,Nan Shan District, Shenzhen, Guangdong, P.R. China
Date of Receipt :	2007.07.05
Date of Test :	2007.07.13 ~2007.07.20
Date of Issue :	2007.07.23

Standards:

**FCC OET Bulletin 65 supplement C,
ANSI/IEEE C95.1, C95.3, IEEE 1528-2003**

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS-CSTC Shanghai GSM Lab or testing done by SGS-CSTC Shanghai GSM Lab must approve SGS Shanghai GSM Lab in connection with distribution or use of the product described in this report in writing.

Tested by :		Date :	2007.07.23
Approved by :		Date :	2007.07.23

Contents

1. General Information	6
1.1 Test Laboratory.....	6
1.2 Details of Applicant	6
1.3 Description of EUT(s).....	6
1.4 Test Environment	7
1.5 Operation Configuration	7
1.6 The SAR Measurement System.....	7
1.7 SAR System Verification.....	9
1.8 Tissue Simulant Fluid for the Frequency Band 850MHZ and 1900MHz	10
1.9 Test Standards and Limits	10
2. Summary of Results	12
3. Instruments List	15
4. Measurements	16
4.1 For BYD Battery.....	16
4.1.1 GSM850-LeftHandSide-Cheek-Middle	16
GSM850-LeftHandSide-Cheek-Middle(BYD)	16
4.1.2 GSM850-LeftHandSide-Tilt-Middle	17
GSM850-LeftHandSide-Tilt-Middle(BYD).....	17
4.1.3 GSM850-LeftHandSide-WorstCase-Low	19
GSM850-LeftHandSide-Cheek-Low(BYD)	19
4.1.4 GSM850-LeftHandSide-WorstCase-High	21
GSM850-LeftHandSide-Cheek-High(BYD).....	21
4.1.5 GSM850-RightHandSide-Cheek-Middle	23
GSM850-RightHandSide-Cheek-Middle(BYD)	23
4.1.6 GSM850-RightHandSide-Tilt-Middle	25
GSM850-RightHandSide-Tilt-Middle(BYD).....	25
4.1.7 GSM850-RightHandSide-WorstCase-Low	27
GSM850-RightHandSide-Cheek-Low(BYD)	27
4.1.8 GSM850-RightHandSide-WorstCase-High	29
GSM850-RightHandSide-Cheek-High(BYD).....	29
4.1.9 GSM850-Body-Worn -Low	31
GSM850-Body-Worn-Low-2.0cm(BYD)	31
4.1.10 GSM850-Body-Worn -Middle	33

GSM850-Body-Worn-Middle-2.0cm(BYD)	33
4.1.11 GSM850-Body-Worn -High	35
GSM850-Body-Worn-High-2.0cm(BYD).....	35
4.1.12 PCS1900-LeftHandSide-Cheek-Middle.....	37
PCS1900-LeftHandSide-Cheek-Middle(BYD)	37
4.1.13 PCS1900-LeftHandSide-Tilt-Middle	39
PCS1900-LeftHandSide-Tilt-Middle(BYD)	39
4.1.14 PCS1900-LeftHandSide-WorstCase-Low.....	41
PCS1900-LeftHandSide-Cheek-Low(BYD).....	41
4.1.15 PCS1900-LeftHandSide-WorstCase-High	43
PCS1900-LeftHandSide-Cheek-High(BYD)	43
4.1.16 PCS1900-RightHandSide-Cheek-Middle	45
PCS1900-RightHandSide-Cheek-Middle(BYD)	45
4.1.17 PCS1900-RightHandSide-Tilt-Middle	47
PCS1900-RightHandSide-Tilt-Middle(BYD)	47
4.1.18 PCS1900-RightHandSide-WorstCase-Low	49
PCS1900-RightHandSide-Cheek-Low(BYD).....	49
4.1.19 PCS1900-RightHandSide-WorstCase-High	51
PCS1900-RightHandSide-Cheek-High(BYD)	51
4.1.20 PCS1900-Body-Worn -Low	53
PCS1900-Body-Worn-Low-2.0cm(BYD).....	53
4.1.21 PCS1900-Body-Worn -Middle	55
PCS1900-Body-Worn-Middle-2.0cm(BYD).....	55
4.1.22 PCS1900-Body-Worn -High.....	57
PCS1900-Body-Worn-High-2.0cm(BYD)	57
4.2 For JINNENGE Battery	59
4.2.1 GSM850-LeftHandSide-Cheek-Middle	59
GSM850-LeftHandSide-Cheek-Middle(JN)	59
4.2.2 GSM850-LeftHandSide-Tilt-Middle	61
GSM850-LeftHandSide-Tilt-Middle(JN).....	61
4.2.3 GSM850-LeftHandSide-WorstCase-Low	63
GSM850-LeftHandSide-Cheek-Low(JN)	63
4.2.4 GSM850-LeftHandSide-WorstCase-High	65
GSM850-LeftHandSide-Cheek-High(JN).....	65
4.2.5 GSM850-RightHandSide-Cheek-Middle	67

GSM850-RightHandSide-Cheek-Middle(JN)	67
4.2.6 GSM850-RightHandSide-Tilt-Middle.....	69
GSM850-RightHandSide-Tilt-Middle(JN)	69
4.2.7 GSM850-RightHandSide-WorstCase-Low	71
GSM850-RightHandSide-Cheek-Low(JN)	71
4.2.8 GSM850-RightHandSide-WorstCase-High.....	73
GSM850-RightHandSide-Cheek-High(JN)	73
4.2.9 GSM850-Body-Worn -Low.....	75
GSM850-Body-Worn-Low-2.0cm(JN)	75
4.2.10 GSM850-Body-Worn -Middle	77
GSM850-Body-Worn-Middle-2.0cm(JN)	77
4.2.11 GSM850-Body-Worn -High	79
GSM850-Body-Worn-High-2.0cm(JN)	79
4.2.12 PCS1900-LeftHandSide-Cheek-Middle.....	81
PCS1900-LeftHandSide-Cheek-Middle(JN).....	81
4.2.13 PCS1900-LeftHandSide-Tilt-Middle	83
PCS1900-LeftHandSide-Tilt-Middle(JN)	83
4.2.14 PCS1900-LeftHandSide-WorstCase-Low	85
PCS1900-LeftHandSide-Cheek-Low(JN).....	85
4.2.15 PCS1900-LeftHandSide-WorstCase-High	87
PCS1900-LeftHandSide-Cheek-High(JN)	87
4.2.16 PCS1900-RightHandSide-Cheek-Middle	89
PCS1900-RightHandSide-Cheek-Middle(JN).....	89
4.2.17 PCS1900-RightHandSide-Tilt-Middle	91
PCS1900-RightHandSide-Tilt-Middle(JN)	91
4.2.18 PCS1900-RightHandSide-WorstCase-Low	93
PCS1900-RightHandSide-Cheek-Low(JN).....	93
4.2.19 PCS1900-RightHandSide-WorstCase-High	95
PCS1900-RightHandSide-Cheek-High(JN)	95
4.2.20 PCS1900-Body-Worn -Low	97
PCS1900-Body-Worn-Low-2.0cm(JN)	97
4.2.21 PCS1900-Body-Worn -Middle	99
PCS1900-Body-Worn-Middle-2.0cm(JN)	99
4.2.22 PCS1900-Body-Worn -High.....	101
PCS1900-Body-Worn-High-2.0cm(JN)	101

Appendix	104
1. Photographs of Test Setup.....	104
2. Photographs of the EUT	107
3. Photographs of the battery.....	107
4. Photograph of the charger	108
5. Probe Calibration certificate.....	109
6. DAE Calibration certification.....	118
7. Dipole Calibration certification	123
8. Uncertainty analysis	141
9. Phantom description	142

1. General Information

1.1 Test Laboratory

GSM Lab

SGS-CSTC Standards Technical Services Co., Ltd Shanghai Branch
9F, the 3rd Building, No.889, Yishan Rd, Xuhui District, Shanghai, China
Zip code: 200233

Telephone: +86 (0) 21 6495 1616

Fax: +86 (0) 21 6495 3679

Internet: <http://www.cn.sgs.com>

1.2 Details of Applicant

Name: T&A Mobile Phones

Address: 3/F,B2 Block,Digital Technology Yard,
Gaoxin Nan Qi Road,Nan Shan District,
Shenzhen,Guangdong,P.R.China

1.3 Description of EUT(s)

Brand name	ALCATEL		
Model No.	U7CA		
Market Name	OT-E221A		
Hardware Version	LOT		
Software Version	094		
Serial No.	IMEI: 011163000026156		
Battery Type	Lithium-Ion	BYD	T5001298AAAA
		JINNENG	T5001298AAAA
Antenna Type	Inner Antenna		
Operation Mode	GSM850/PCS1900		
Modulation Mode	GMSK		
Frequency range	GSM850	Tx: 824~849 MHz	Rx: 869~894 MHz
		Tx: 1850~1910 MHz	Rx: 1930~1990 MHz
	PCS1900	GSM850: 31.7dBm, PCS1900: 30.1dBm	

1.4 Test Environment

Ambient temperature: 22.0° C

Tissue Simulating Liquid: 22° C

Relative Humidity: 45%~55%

1.5 Operation Configuration

Configuration 1: GSM 850, LeftHandSide Cheek & 15° Tilt Position

Configuration 2: GSM 850, RightHandSide Cheek & 15° Tilt Position

Configuration 3: GSM 850, BodyWorn (2.0cm between EUT and phantom)

Configuration 4: PCS 1900, LeftHandSide Cheek & 15° Tilt Position

Configuration 5: PCS 1900, RightHandSide Cheek & 15° Tilt Position

Configuration 6: PCS 1900, BodyWorn (2.0cm between EUT and phantom)

1.6 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a.

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ES3DV3 3088 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- ¥ A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).
- ¥ A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- ¥ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

- Y The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

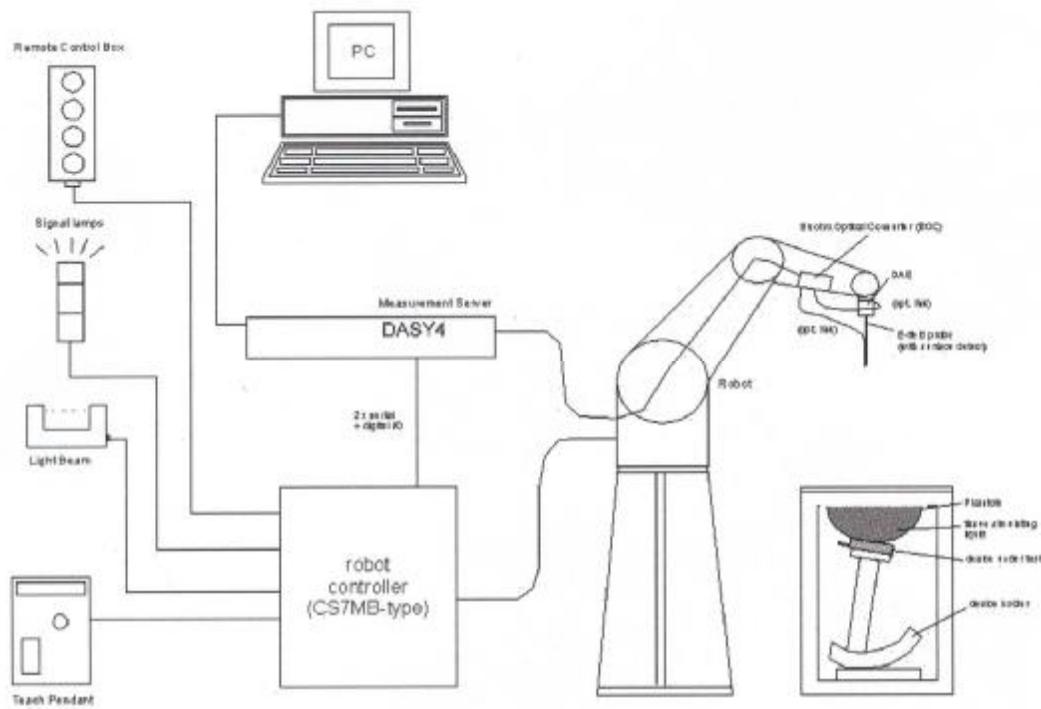


Fig. a SAR System Configuration

- Y The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- Y A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- Y A computer operating Windows 2000.
- Y DASY4 software.
- Y Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- Y The SAM twin phantom enabling testing left-hand, right-hand and body-worn usage.
- Y The device holder for handheld mobile phones.
- Y Tissue simulating liquid mixed according to the given recipes.

- ¶ Validation dipole kits allowing to validating the proper functioning of the system.

1.7 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 900&1800MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

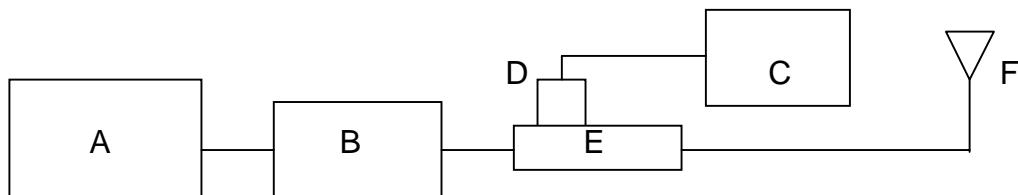


Fig. b the microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4438C Signal Generator
- B. Mini-Circuit Model ZHL-42 Preamplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8481H Power Sensor
- E. HT CP6100 20N Dual directional coupler
- F. Reference dipole antenna

Validation Kit	Frequency MHz	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured Date
D900V2 SN184	900 Head	2.72	1.75	2.78	1.76	2007-07-16
D900V2 SN184	900 Body	2.75	1.79	2.82	1.81	2007-07-13
				2.83	1.85	2007-07-14
D1900V2 SN5d028	1900 Head	9.36	4.96	9.27	4.86	2007-07-20
D1900V2 SN5d028	1900 Body	9.5	5.05	9.47	4.92	2007-07-18

Table 1. Result System Validation

1.8 Tissue Simulant Fluid for the Frequency Band 850MHZ and 1900MHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5071B Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Fluid was 22°C.

Frequency (MHz)	Tissue Type	Limit/Measured	Permittivity (ρ)	Conductivity (σ)	Simulated Tissue Temp (°C)
850	Head	Recommended Limit	42.0±5%	0.99±5%	20-24
		Measured, 2007-07-16	41.34	0.886	22.2
	Body	Recommended Limit	55.0±5%	1.05±5%	20-24
		Measured, 2007-07-13	55.12	0.995	21.8
1900	Head	Recommended Limit	40.0±5%	1.38±5%	20-24
		Measured, 2007-07-20	39.62	1.378	21.8
	Body	Recommended Limit	53.3±5%	1.52±5%	20-24
		Measured, 2007-07-18	52.66	1.489	22.0

Table 2. Dielectric parameters for the Frequency Band 850&1900MHZ

1.9 Test Standards and Limits

According to FCC 47 CFR §2.1093(d) the limits to be used for evaluation are based

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 11 of 142

generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3KHz to 300GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical & Electronics Engineers, Inc., New York, New York 10071.

Human Exposure	Uncontrolled Environment General Population
Spatial Peak SAR (Brain)	1.60 mW/g (averaged over a mass of 1g)

Table 3. RF Exposure Limits

2. Summary of Results

GSM850 SAR(T5001298AAAA BYD Battery)

Mode	Test Configuration		SAR, Averaged over 1g (W/kg)			Temperature (°C)	Verdict
	Channel/Power(dBm)		Low/31.5	Middle/31.5	High/31.4		
GSM850	Left	Cheek	0.852	0.873	0.929	22	Pass
		Tilt	-	0.108	-	22	Pass
	Right	Cheek	0.839	0.837	0.886	22	Pass
		Tilt	-	0.091	-	22	Pass
	Body	Distance 2.0cm	0.284	0.300	0.332	22	Pass

PCS1900 SAR(T5001298AAAA BYD Battery)

Mode	Test Configuration		SAR, Averaged over 1g (W/kg)			Temperature (°C)	Verdict
	Channel/Power(dBm)		Low/29.1	Middle/28.8	High/28.6		
PCS1900	Left	Cheek	0.323	0.370	0.333	22	Pass
		Tilt	-	0.045	-	22	Pass
	Right	Cheek	0.398	0.476	0.475	22	Pass
		Tilt	-	0.053	-	22	Pass
	Body	Distance 2.0cm	0.319	0.375	0.290	22	Pass

Maximum values with T5001298AAAA BYD Battery

Frequency Band (MHz)	EUT position	Conducted Output Power (dBm)	1g Average (W/kg)	Power Drift(dB)	Amb. Temp (°C)	Verdict
850	LeftHand, Cheek, High channel	31.4	0.929	0.220	22	PASS
	RightHand, Cheek, High channel	31.4	0.886	0.273	22	PASS
	BodyWorn, High Channel	31.4	0.332	0.000	22	PASS
1900	LeftHand, Cheek, Middle Channel	28.8	0.370	-0.105	22	PASS
	RightHand, Cheek, Middle Channel	28.8	0.476	0.029	22	PASS

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 13 of 142

	BodyWorn, Middle Channel	28.8	0.375	0.036	22	PASS
--	--------------------------	------	-------	-------	----	------

GSM850 SAR(T5001298AAAA JINNENG Battery)

Mode	Test Configuration		SAR, Averaged over 1g (W/kg)			Temperature (°C)	Verdict
	Channel/Power(dBm)		Low/31.5	Middle/31.5	High/31.4		
GSM850	Left	Cheek	0.889	0.915	0.969	22	Pass
		Tilt	-	0.089	-	22	Pass
	Right	Cheek	0.708	0.718	0.766	22	Pass
		Tilt	-	0.096	-	22	Pass
	Body	Distance 2.0cm	0.261	0.268	0.304	22	Pass

PCS1900 SAR(T5001298AAAA JINNENG Battery)

Mode	Test Configuration		SAR, Averaged over 1g (W/kg)			Temperature (°C)	Verdict
	Channel/Power(dBm)		Low/29.1	Middle/28.8	High/28.6		
PCS1900	Left	Cheek	0.450	0.493	0.433	22	Pass
		Tilt	-	0.076	-	22	Pass
	Right	Cheek	0.410	0.534	0.447	22	Pass
		Tilt	-	0.060	-	22	Pass
	Body	Distance 2.0cm	0.344	0.283	0.262	22	Pass

Maximum values with T5001298AAAA JINNENG Battery

Frequency Band (MHz)	EUT position	Conducted Output Power (dBm)	1g Average (W/kg)	Power Drift(dB)	Amb. Temp (°C)	Verdict
850	LeftHand, Cheek, High channel	31.4	0.969	0.134	22	PASS
	RightHand, Cheek, High channel	31.4	0.766	0.016	22	PASS
	BodyWorn, High Channel	31.4	0.304	0.031	22	PASS
1900	LeftHand, Cheek, Middle Channel	28.8	0.493	-0.068	22	PASS
	RightHand, Cheek, Middle Channel	28.8	0.534	-0.152	22	PASS
	BodyWorn, Low Channel	29.1	0.344	0.040	22	PASS

Note:

1. In GSM850 band, the low, middle and high channels are CH128/824.2MHz, CH189/836.4MHz and CH251/848.8MHz separately.
2. In PCS1900 band, the low, middle and high channels are CH512/1805.2MHz, CH661/1880.0MHz and CH810/1909.8MHz separately.
3. For the Bodyworn measurements the sample was only placed with the antenna toward the phantom since this position delivers the highest SAR values.
4. For the Bodyworn measurements, the distance from the sample to the phantom is 2.0 cm.
5. For all the tests, the maximum absolute value of the power drift which is under the PCS1900-LeftHandSide-Cheek-Low(BYD) configuration is 0.364dB.

3. Instruments List

Instrument	Model	Serial number	NO.	Date of last Calibration
Desktop PC	COMPAQ EVO	N/A	GSM-SAR-025	N/A
Dasy 4 software	V 4.7 build 44	N/A	GSM-SAR-001	N/A
Probe	ES3DV3	3088	GSM-SAR-034	2006.12.12
DAE	DAE3	569	GSM-SAR-023	2006.12.08
900MHz system validation dipole	D900V2	184	GSM-SAR-017	2006.12.06
1900MHz system validation dipole	D1900V2	5d028	GSM-SAR-020	2006.12.12
Phantom	SAM 12	TP-1283	GSM-SAR-005	N/A
Robot	RX90L	F03/5V32A1/A01	GSM-SAR-006	N/A
Dielectric probe kit	85070D	US01440168	GSM-SAR-016	2006.12.19
Agilent network analyzer	E5071B	MY42100549	GSM-SAR-007	2006.12.19
Agilent signal generator	E4438	14438CATO-19719	GSM-SAR-008	2006.12.19
Mini-Circuits preamplifier	ZHL-42	D041905	GSM-SAR-033	2007.04.26
Agilent power meter	E4416A	GB41292095	GSM-SAR-010	2006.12.19
Agilent power sensor	8481H	MY41091234	GSM-SAR-011	2006.12.19
HT CP6100 20N Coupling	6100	SCP301480120	GSM-SAR-012	2006.12.19
R&S Universal radio communication tester	CMU200	103633	GSM-AUD-002	2006.12.19

4. Measurements

4.1 For BYD Battery

4.1.1 GSM850-LeftHandSide-Cheek-Middle

Date/Time: 2007-7-16 18:58:43

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Middle(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Mid(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.994 mW/g


Cheek position - Mid(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.95 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.873 mW/g; SAR(10 g) = 0.568 mW/g

Maximum value of SAR (measured) = 0.955 mW/g

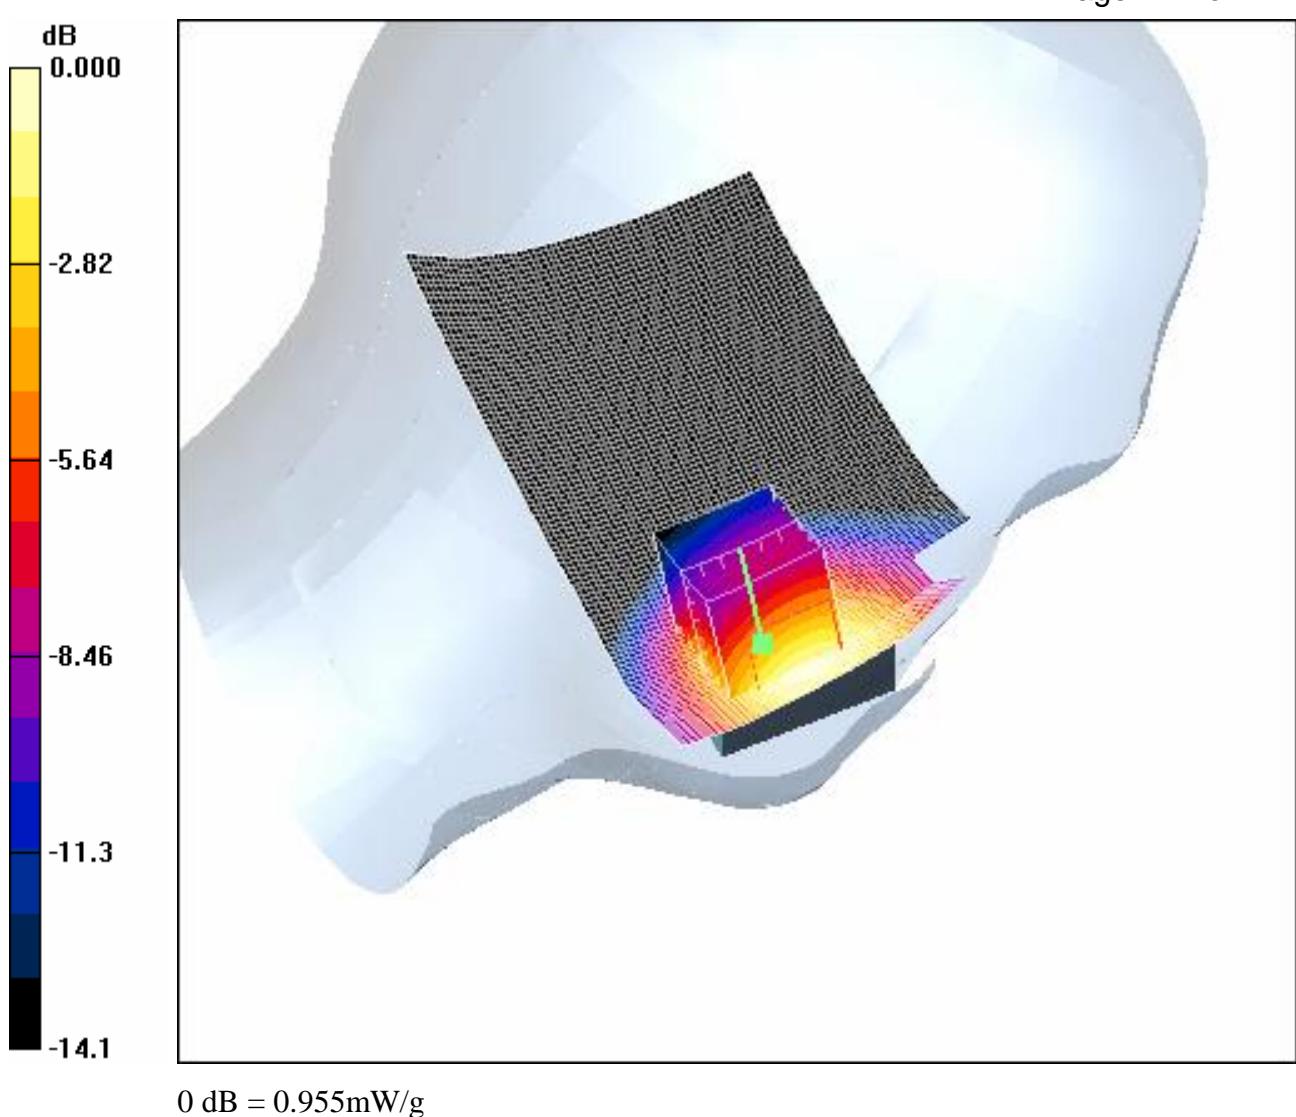

0 dB = 0.955mW/g

4.1.2 GSM850-LeftHandSide-Tilt-Middle

Date/Time: 2007-7-16 20:29:58

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Tilt-Middle(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 18 of 142

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Mid(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.113 mW/g


Tilt position - Mid(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.97 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.114 mW/g

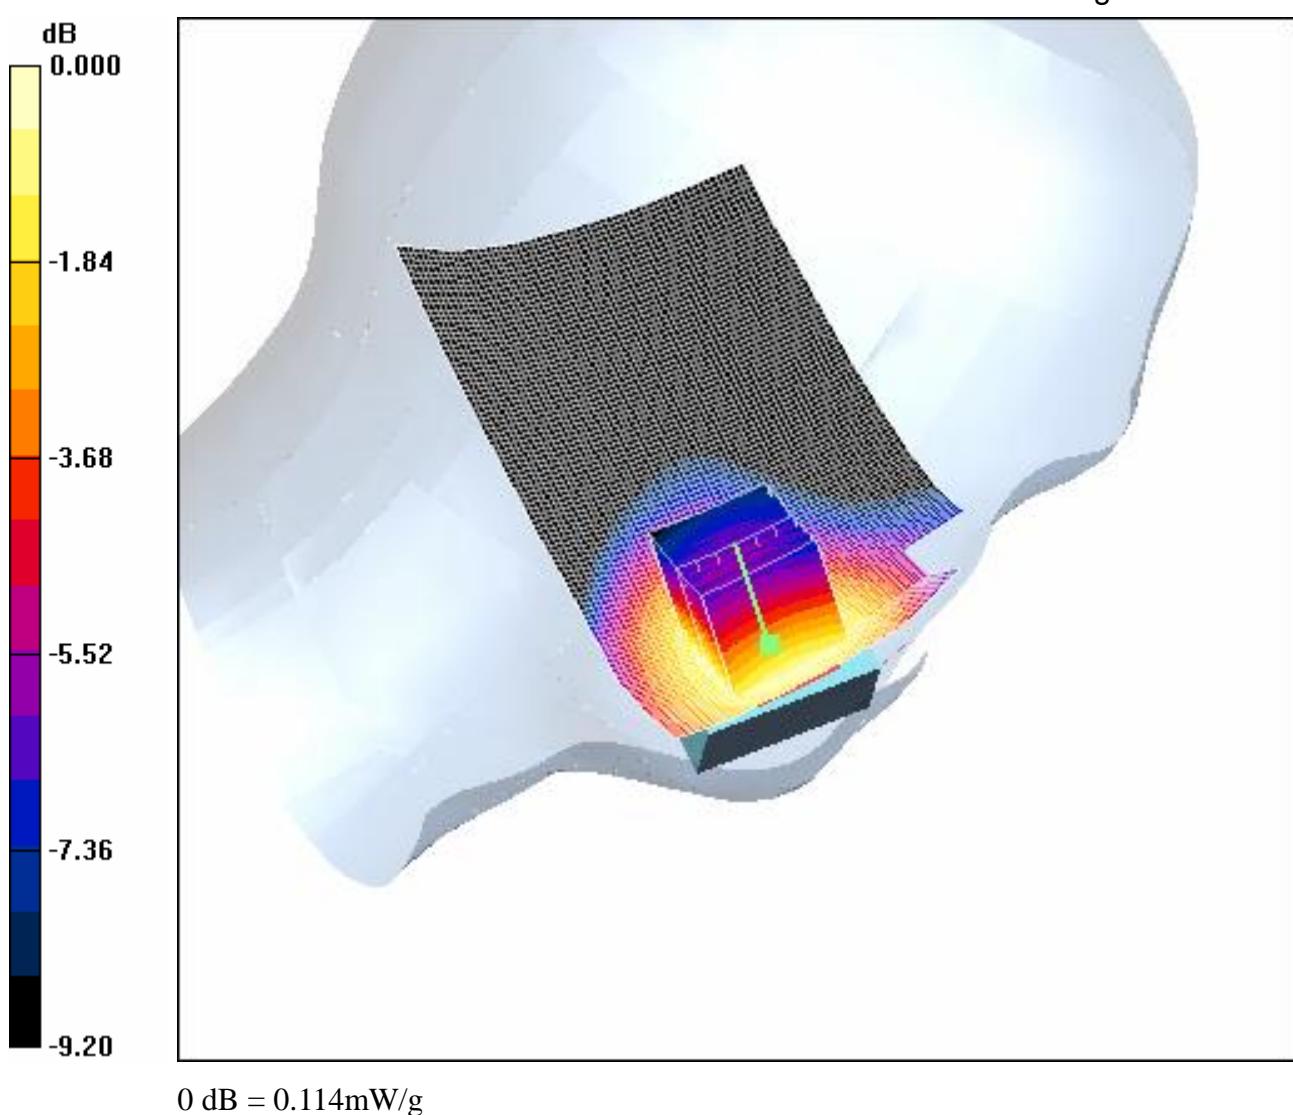

0 dB = 0.114mW/g

4.1.3 GSM850-LeftHandSide-WorstCase-Low

Date/Time: 2007-7-16 18:18:18

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Low(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 20 of 142

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low(BYD)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.959 mW/g


Cheek position - Low(BYD)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.60 V/m; Power Drift = 0.153 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.852 mW/g; SAR(10 g) = 0.529 mW/g

Maximum value of SAR (measured) = 0.933 mW/g

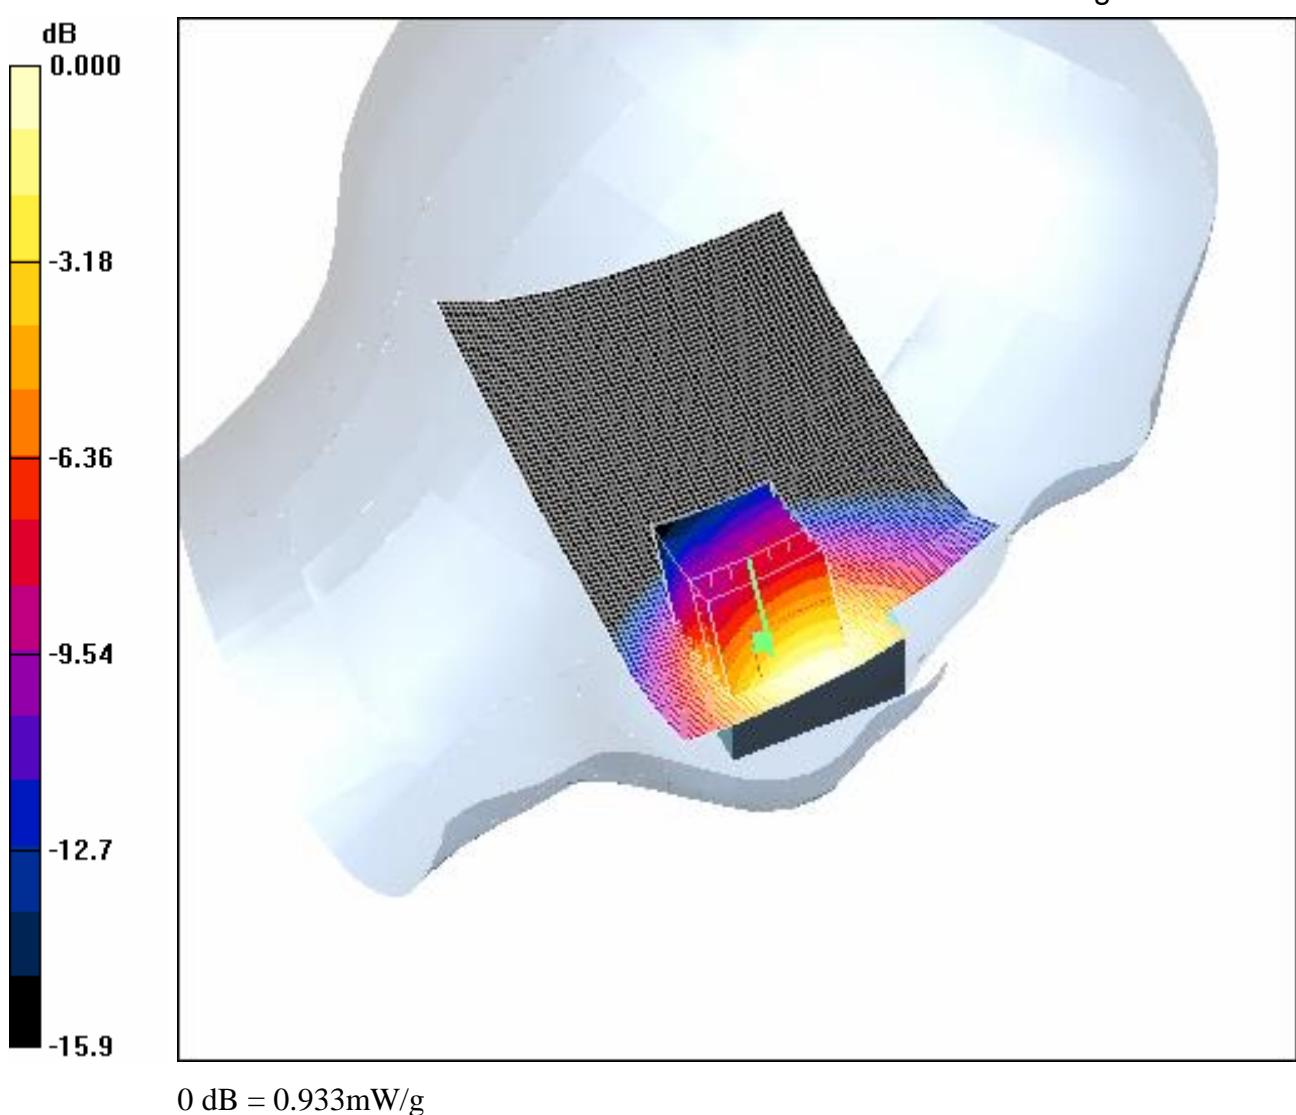

4.1.4 GSM850-LeftHandSide-WorstCase-High

Date/Time: 2007-7-16 19:51:53

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 43.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g


Cheek position - High(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.42 V/m; Power Drift = 0.220 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.929 mW/g; SAR(10 g) = 0.602 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

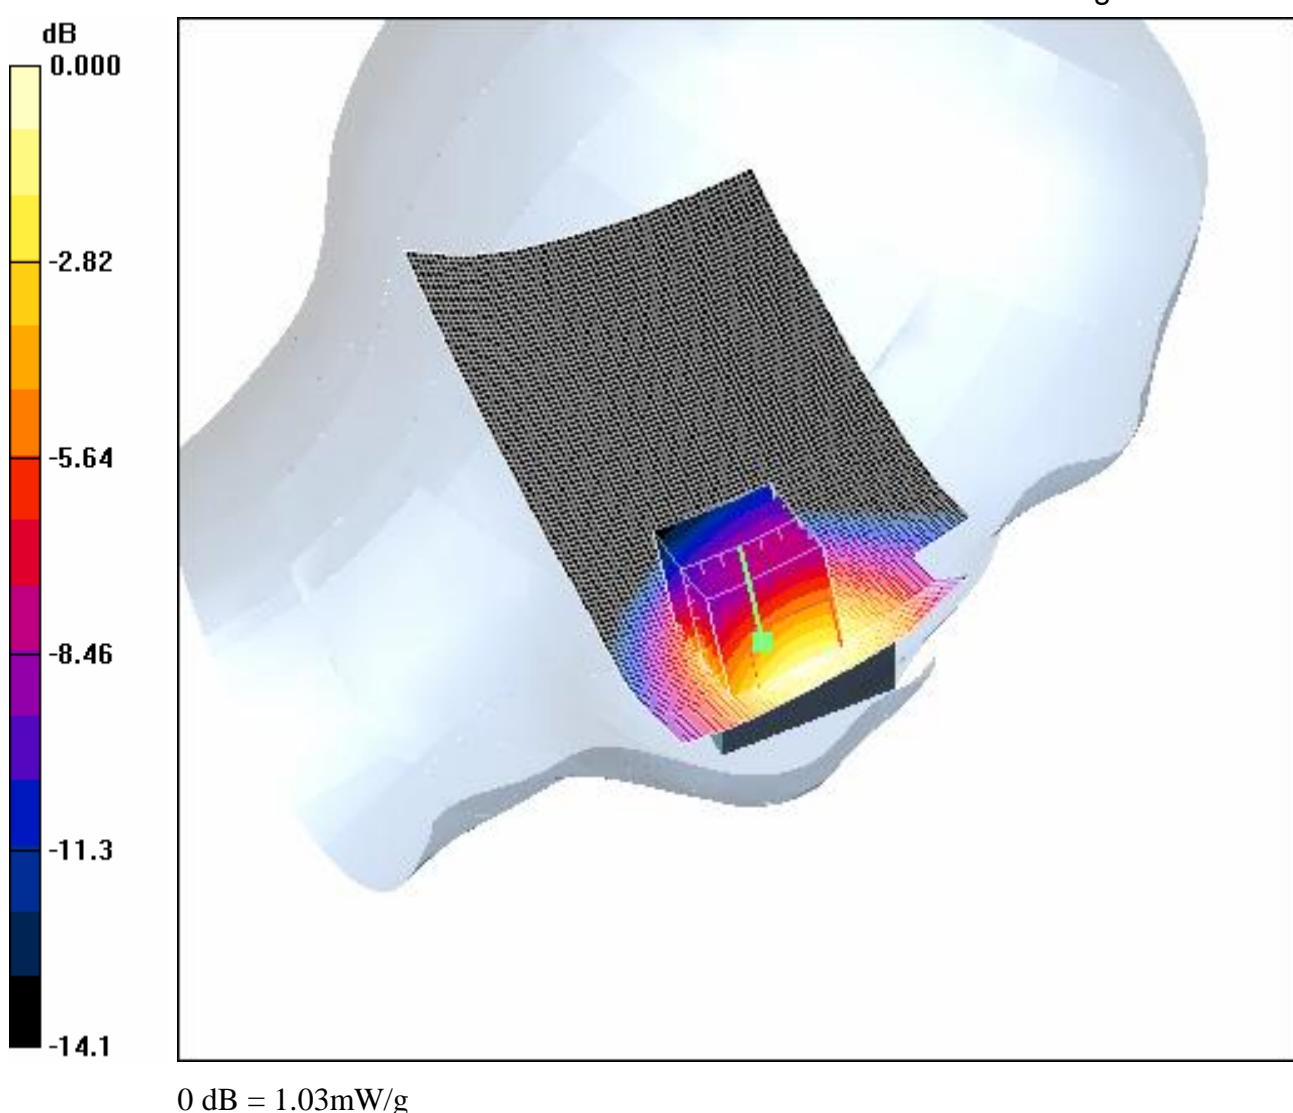

0 dB = 1.03mW/g

4.1.5 GSM850-RightHandSide-Cheek-Middle

Date/Time: 2007-7-16 14:14:43

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-Middle(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 24 of 142

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.918 mW/g


Cheek position - Middle(BYD)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.82 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.602 mW/g

Maximum value of SAR (measured) = 0.896 mW/g

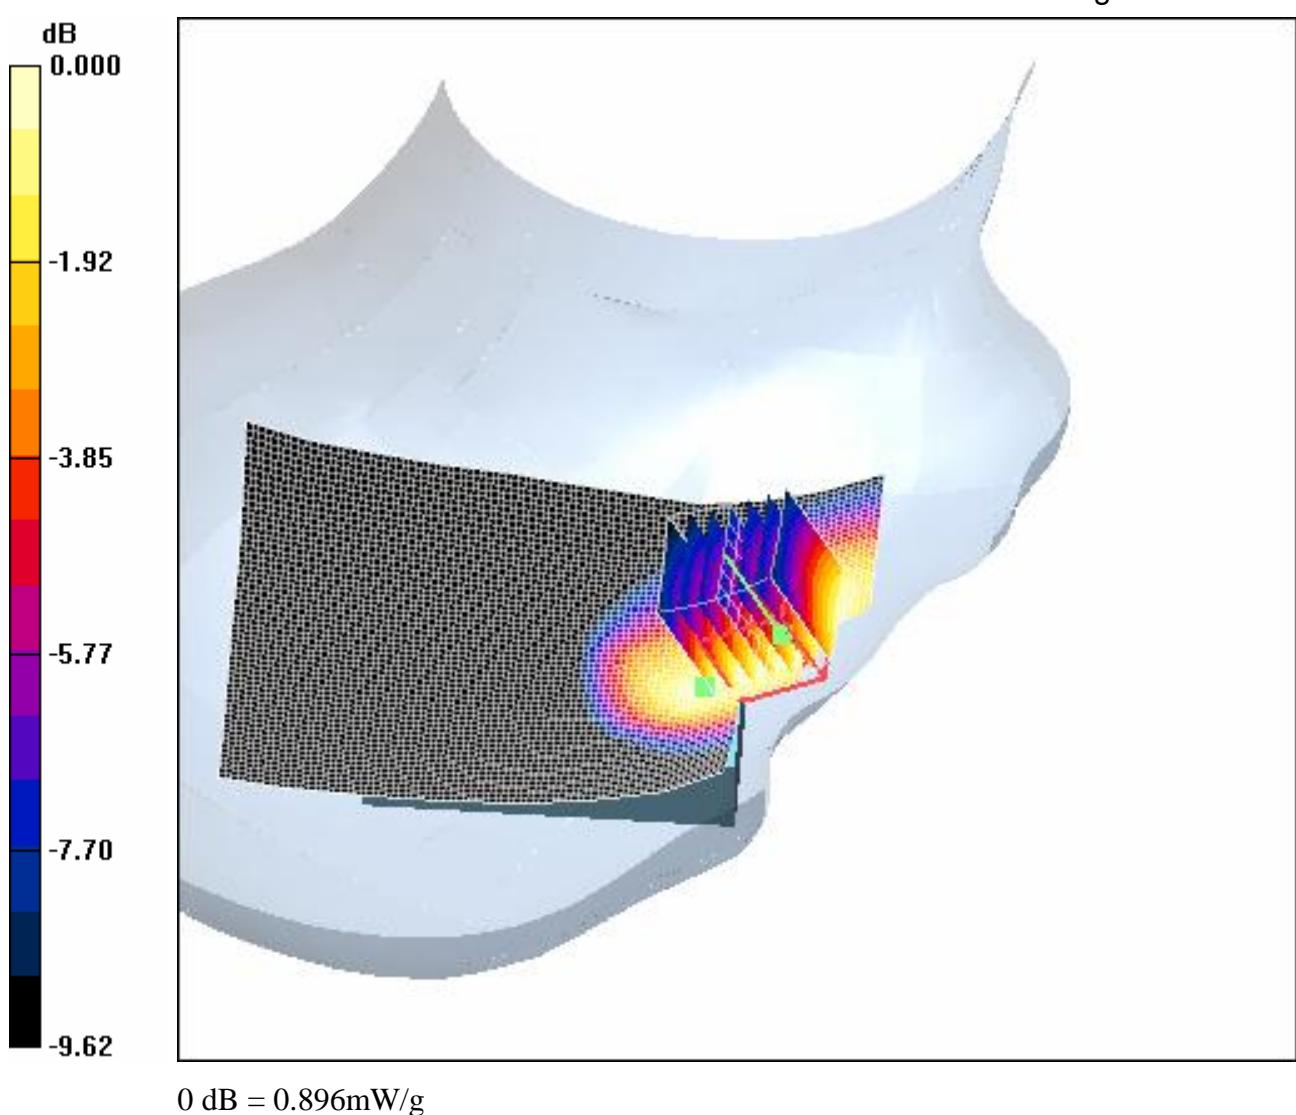

0 dB = 0.896mW/g

4.1.6 GSM850-RightHandSide-Tilt-Middle

Date/Time: 2007-7-16 15:05:50

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Tilt-Middle(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 26 of 142

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.095 mW/g


Tilt position - Middle(BYD)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.69 V/m; Power Drift = 0.106 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.096 mW/g

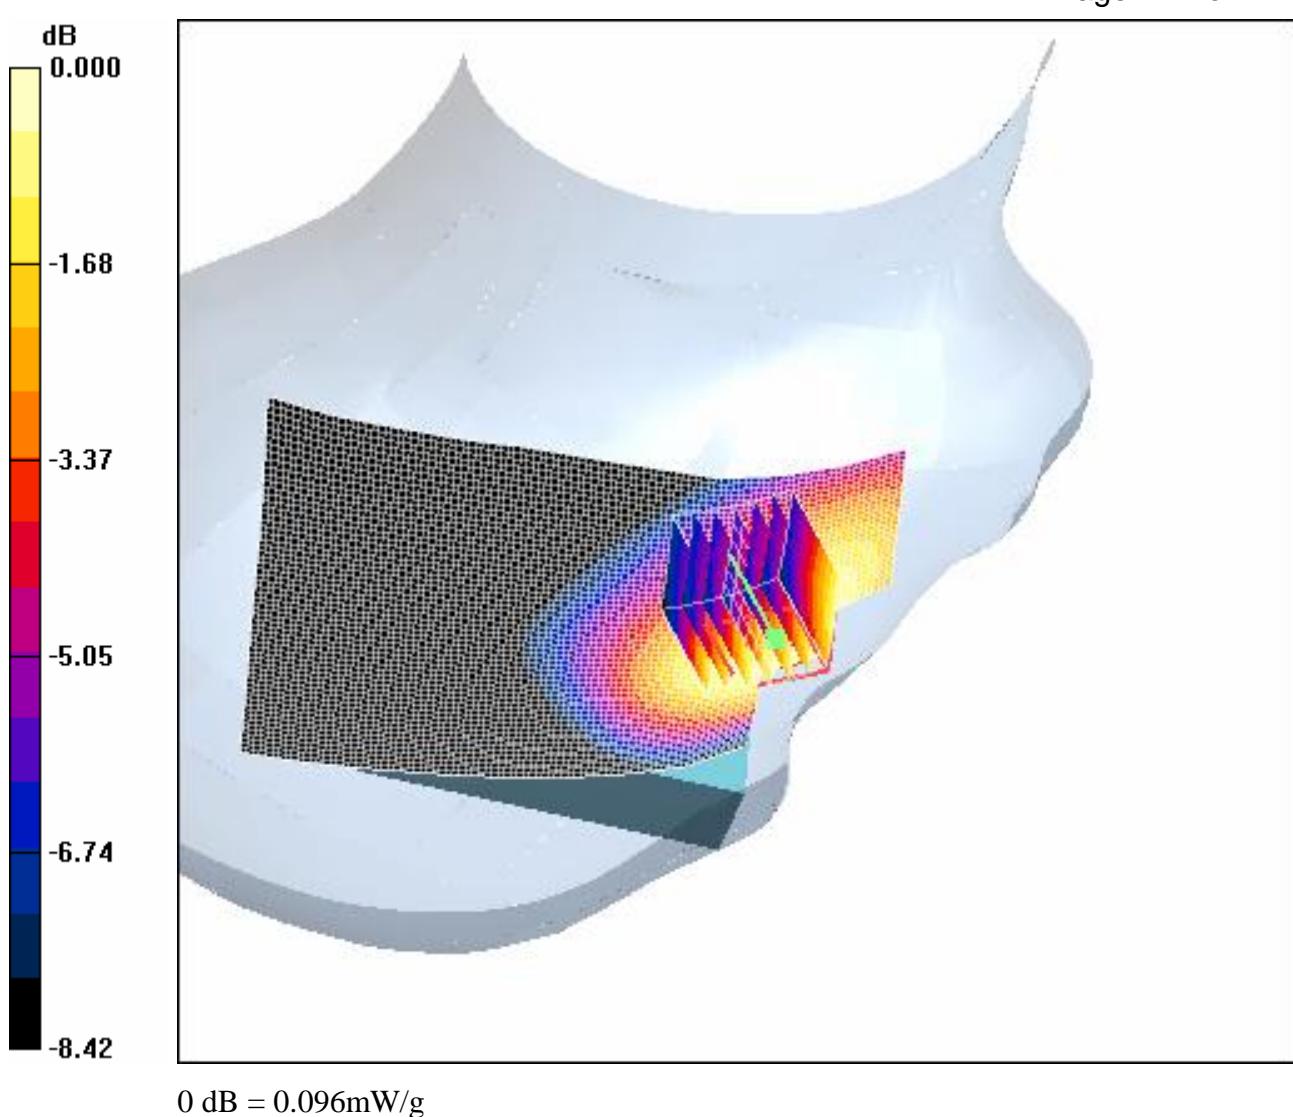

0 dB = 0.096mW/g

4.1.7 GSM850-RightHandSide-WorstCase-Low

Date/Time: 2007-7-16 13:48:31

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-Low(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 28 of 142

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.922 mW/g


Cheek position - Low(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.33 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.839 mW/g; SAR(10 g) = 0.603 mW/g

Maximum value of SAR (measured) = 0.894 mW/g

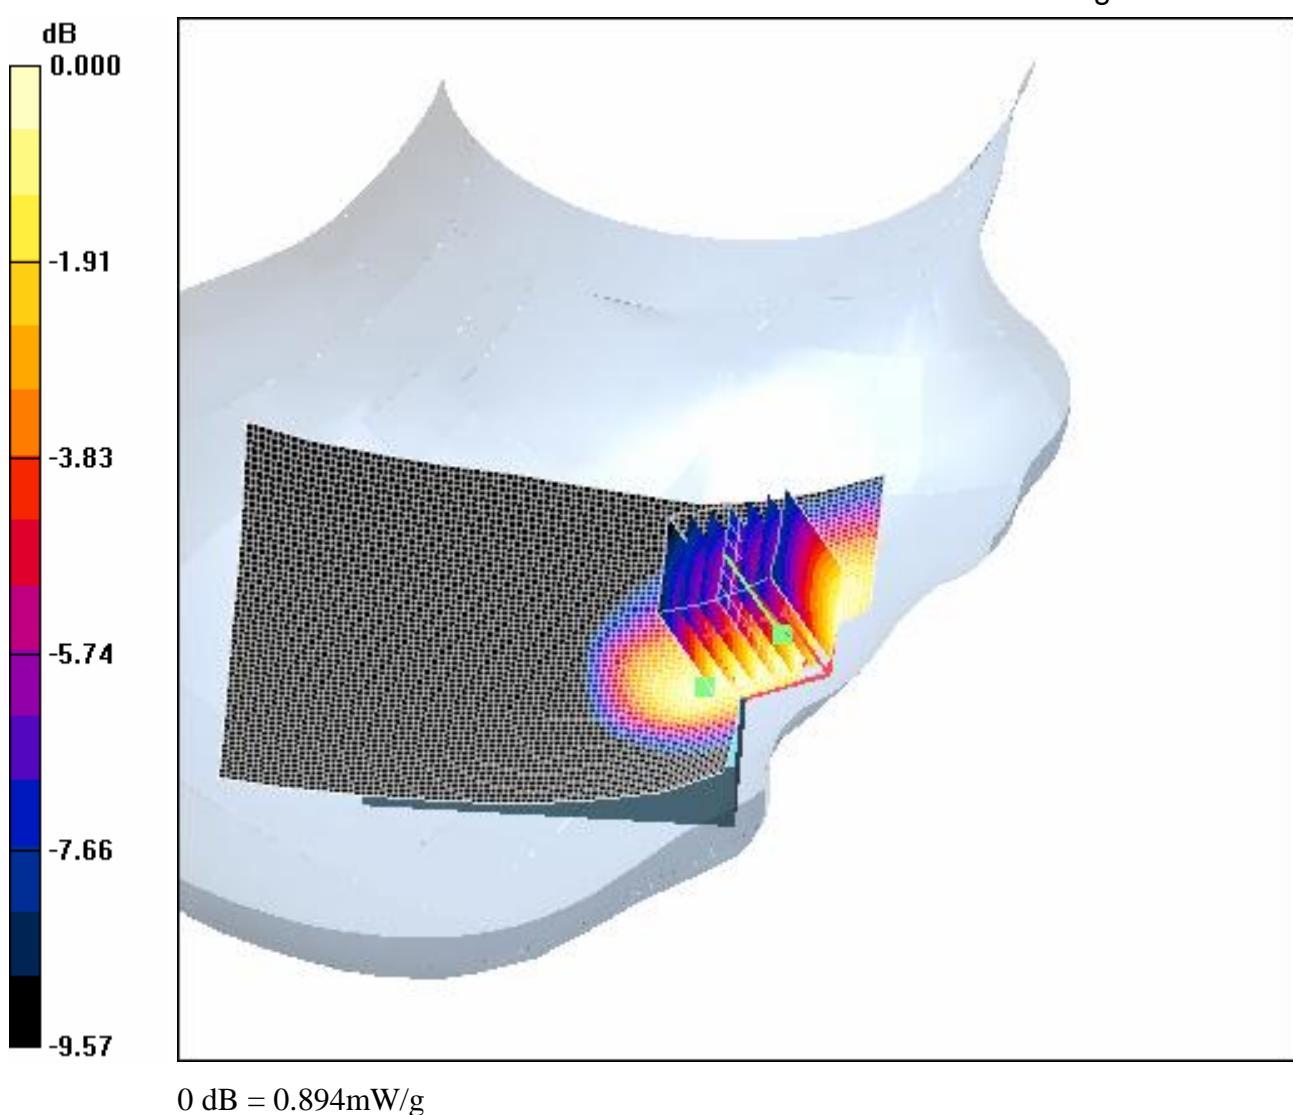

0 dB = 0.894mW/g

4.1.8 GSM850-RightHandSide-WorstCase-High

Date/Time: 2007-7-16 14:40:07

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-High(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 30 of 142

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 43.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.965 mW/g


Cheek position - High(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.22 V/m; Power Drift = 0.273 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.637 mW/g

Maximum value of SAR (measured) = 0.938 mW/g

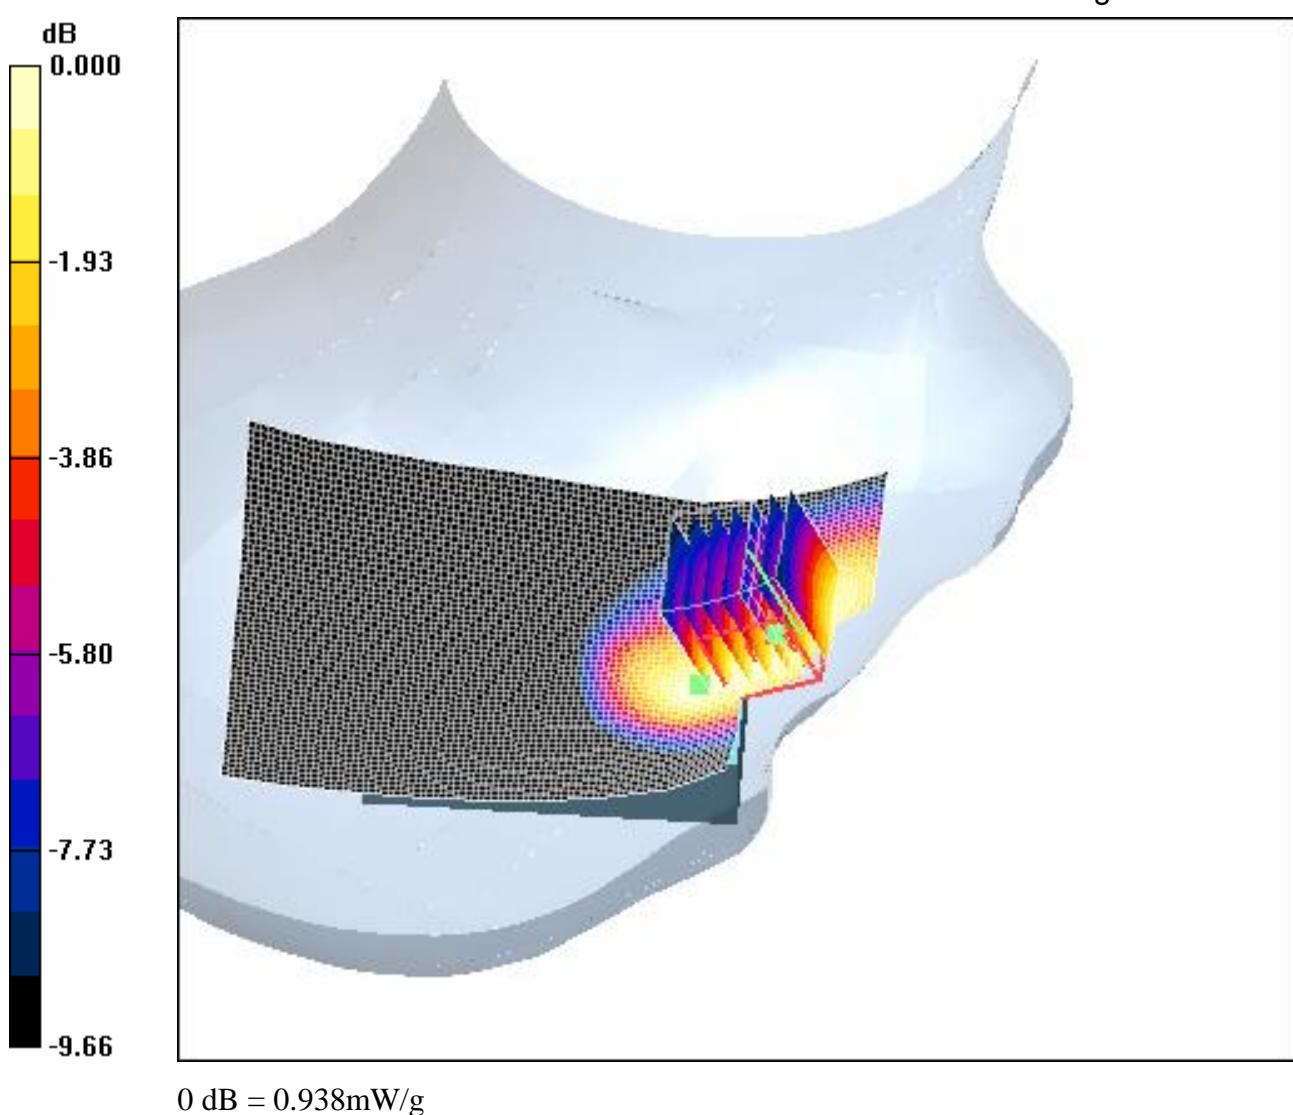

4.1.9 GSM850-Body-Worn -Low

Date/Time: 2007-7-14 12:25:50

Test Laboratory: SGS-GSM

GSM850-Body-Worn-Low-2.0cm(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 32 of 142

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: 850-Body Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.952 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low(BYD) 2.0cm/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.304 mW/g


Body Worn - Low(BYD) 2.0cm/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.303 mW/g

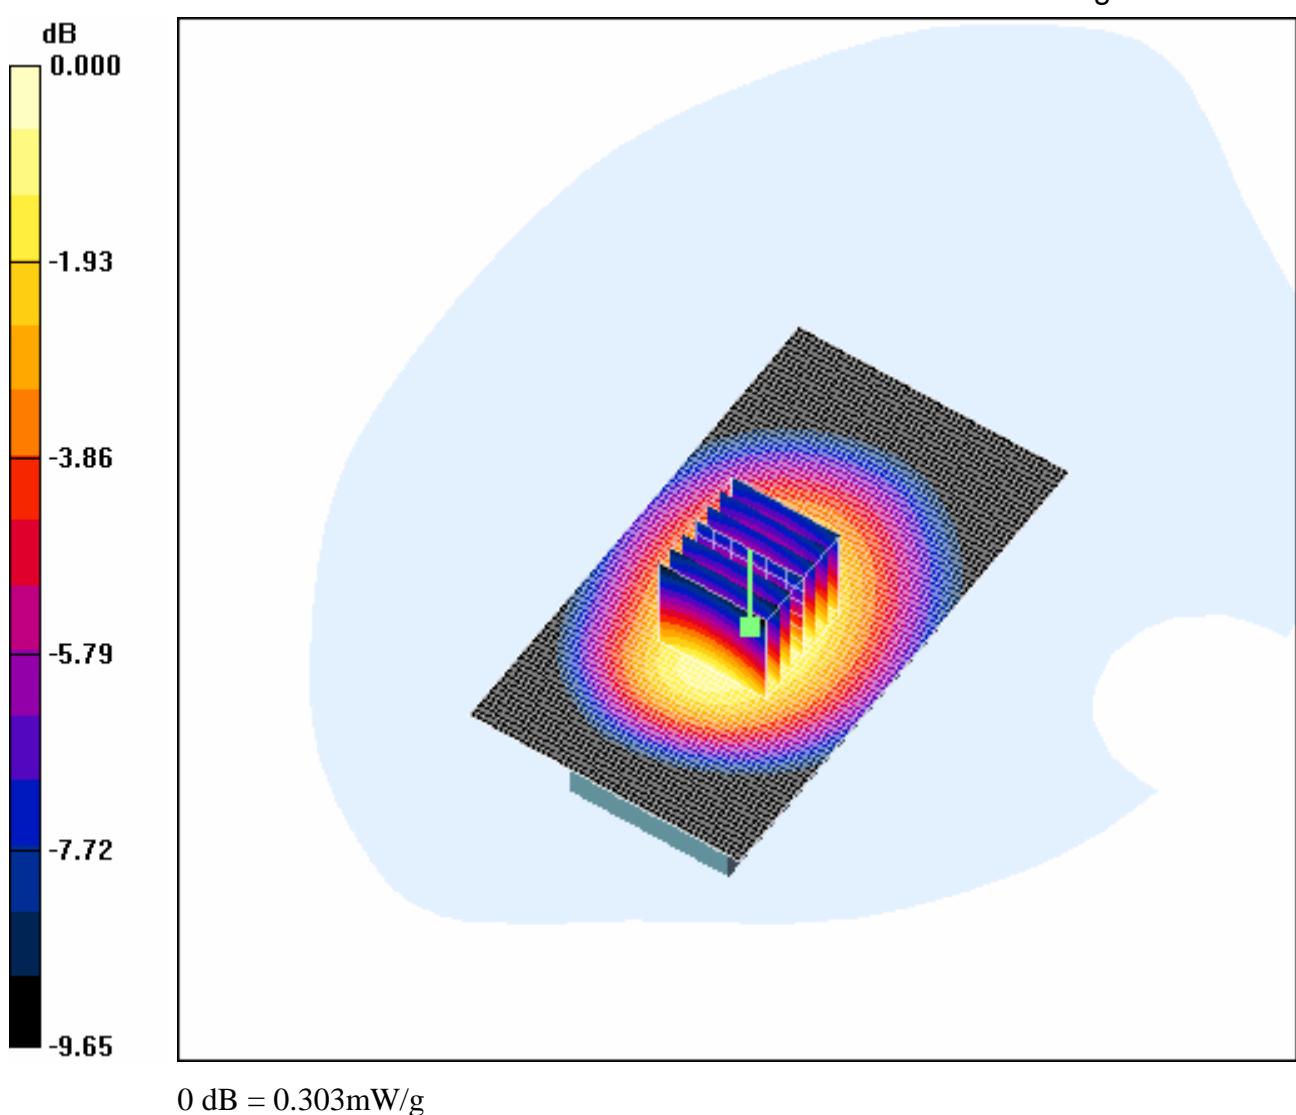

4.1.10 GSM850-Body-Worn -Middle

Date/Time: 2007-7-14 12:49:10

Test Laboratory: SGS-GSM

GSM850-Body-Worn-Middle-2.0cm(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 34 of 142

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: 850-Body Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.964 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle(BYD) 2.0cm/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.323 mW/g


Body Worn - Middle(BYD) 2.0cm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.320 mW/g

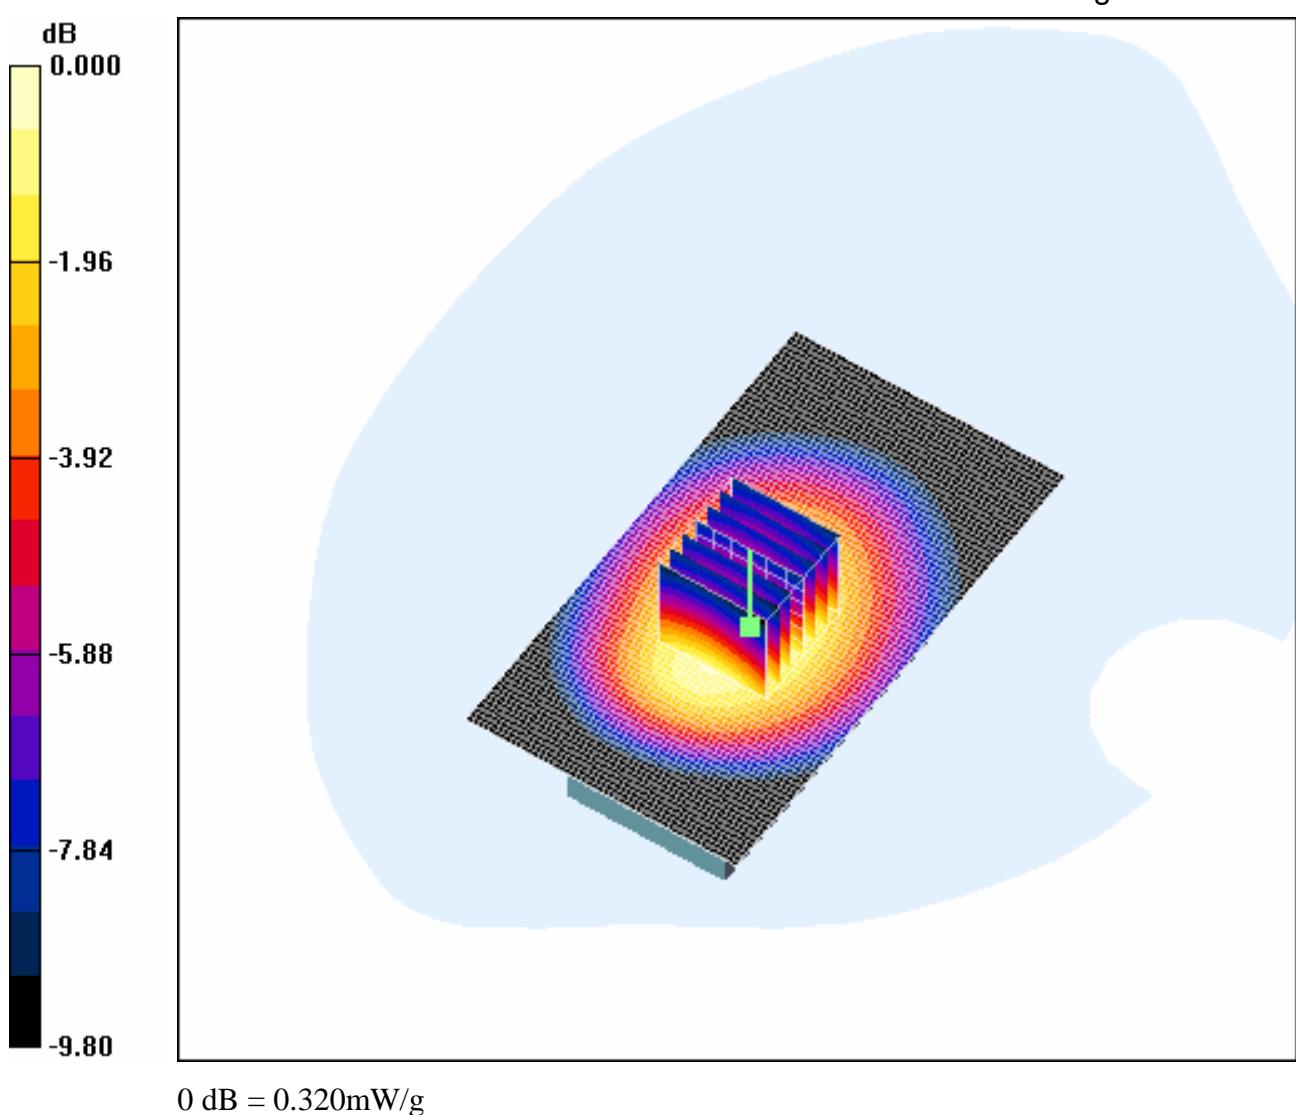

4.1.11 GSM850-Body-Worn -High

Date/Time: 2007-7-14 13:14:53

Test Laboratory: SGS-GSM

GSM850-Body-Worn-High-2.0cm(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 36 of 142

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: 850-Body Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High(BYD) 2.0cm/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.354 mW/g


Body Worn - High(BYD) 2.0cm/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.356 mW/g

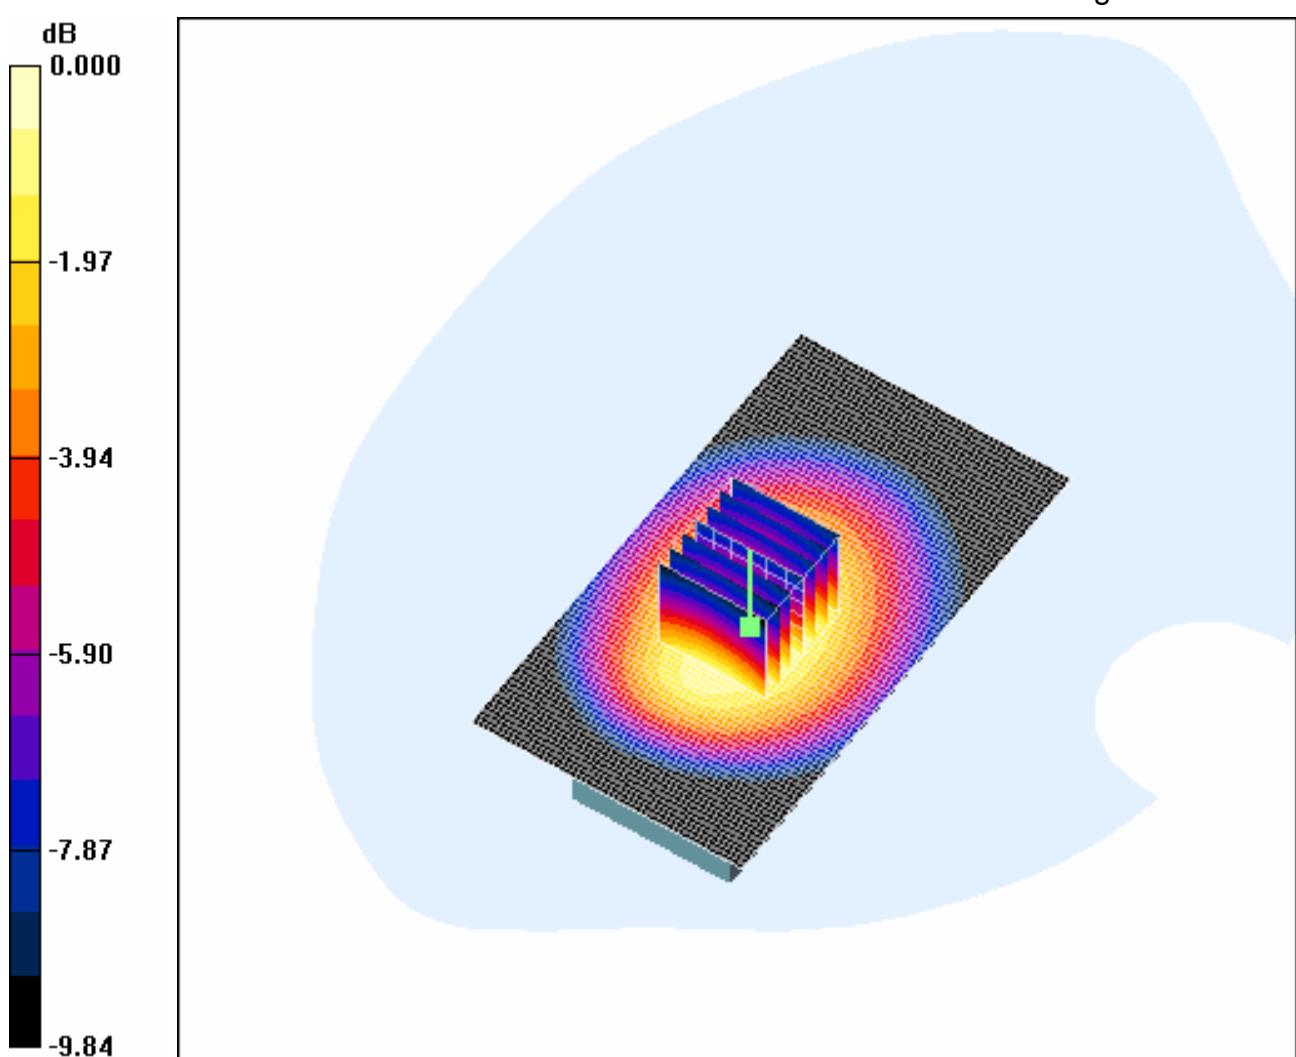

0 dB = 0.356mW/g

4.1.12 PCS1900-LeftHandSide-Cheek-Middle

Date/Time: 2007-7-20 13:59:37

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-Middle(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 38 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle(BYD)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.413 mW/g


Cheek position - Middle(BYD)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.99 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.404 mW/g

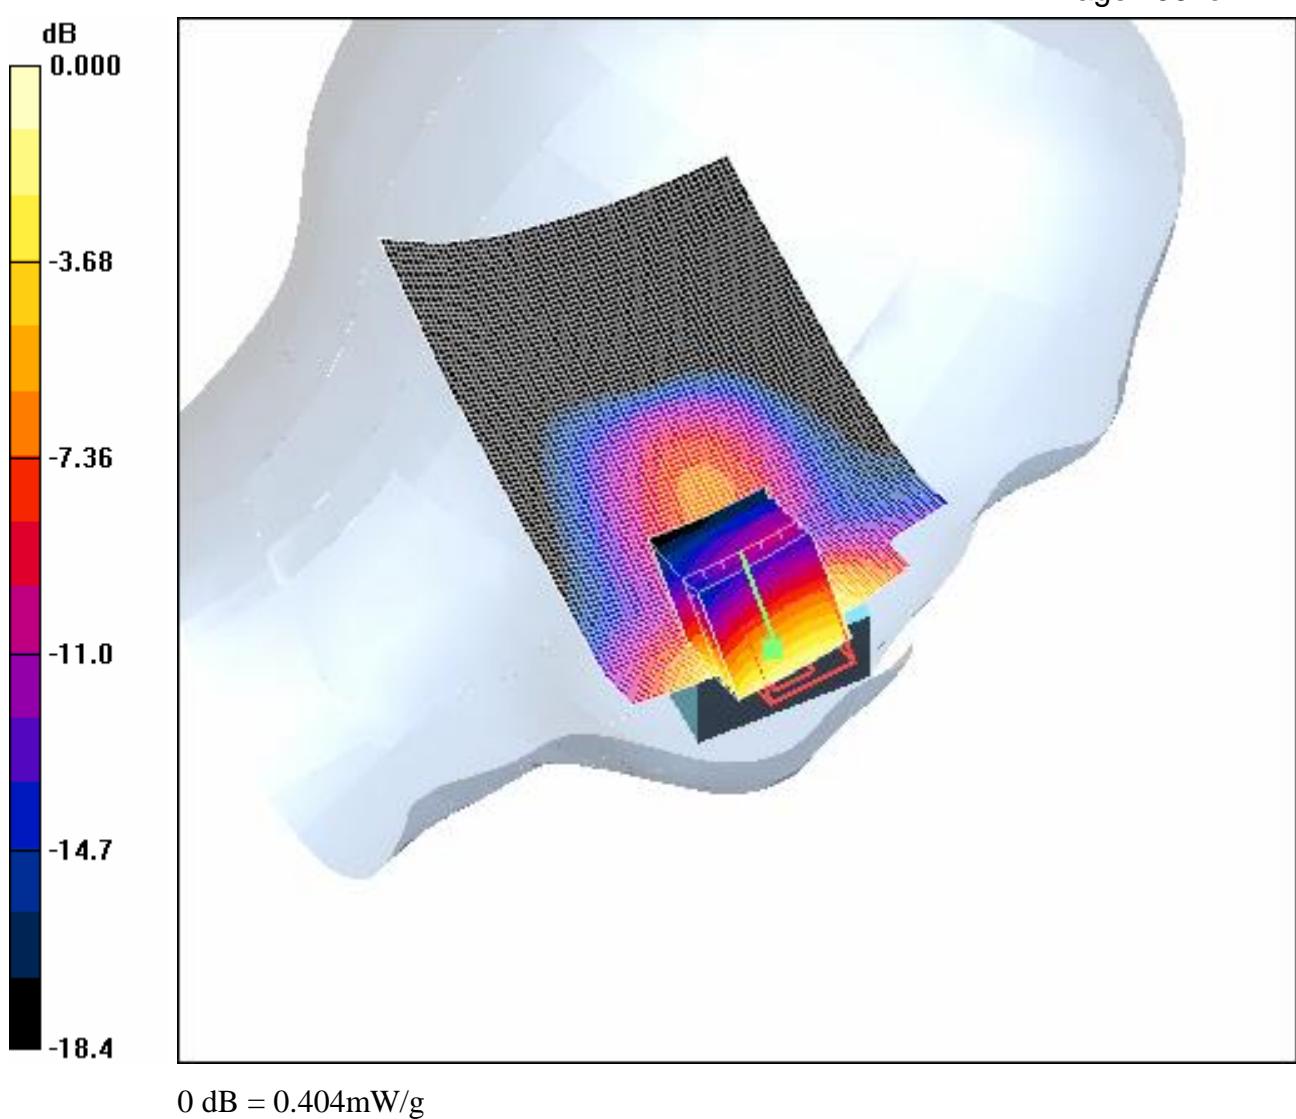

4.1.13 PCS1900-LeftHandSide-Tilt-Middle

Date/Time: 2007-7-20 15:22:47

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-Middle(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 40 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle(BYD)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.050 mW/g


Tilt position - Middle(BYD)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.89 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.048 mW/g

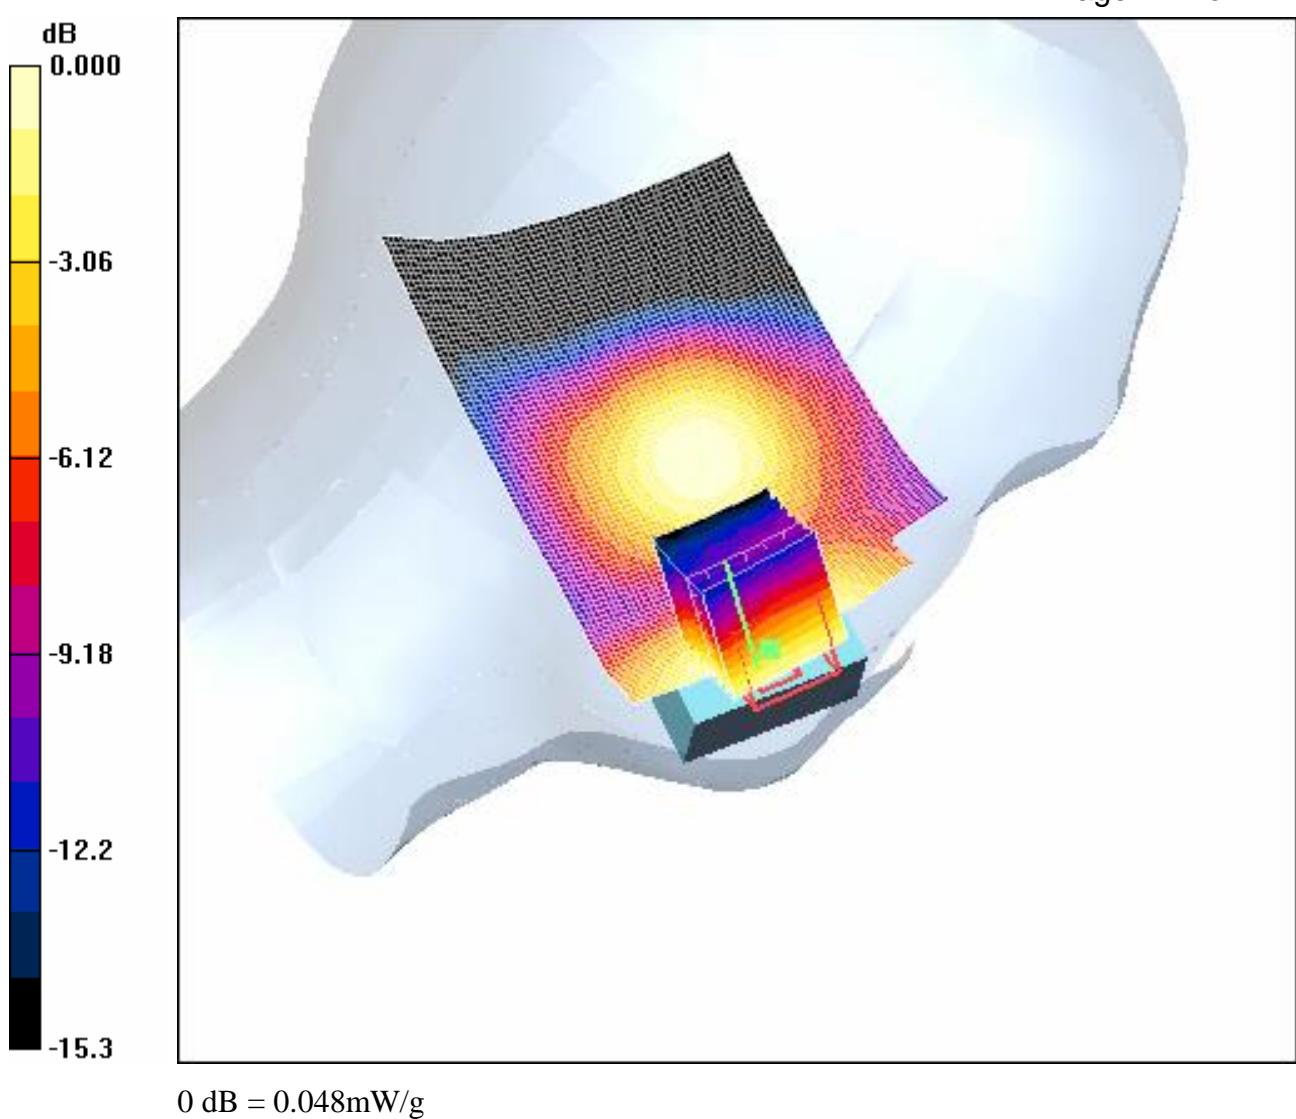

4.1.14 PCS1900-LeftHandSide-WorstCase-Low

Date/Time: 2007-7-20 14:30:29

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-Low(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low(BYD)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.345 mW/g


Cheek position - Low(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.57 V/m; Power Drift = -0.364 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.354 mW/g

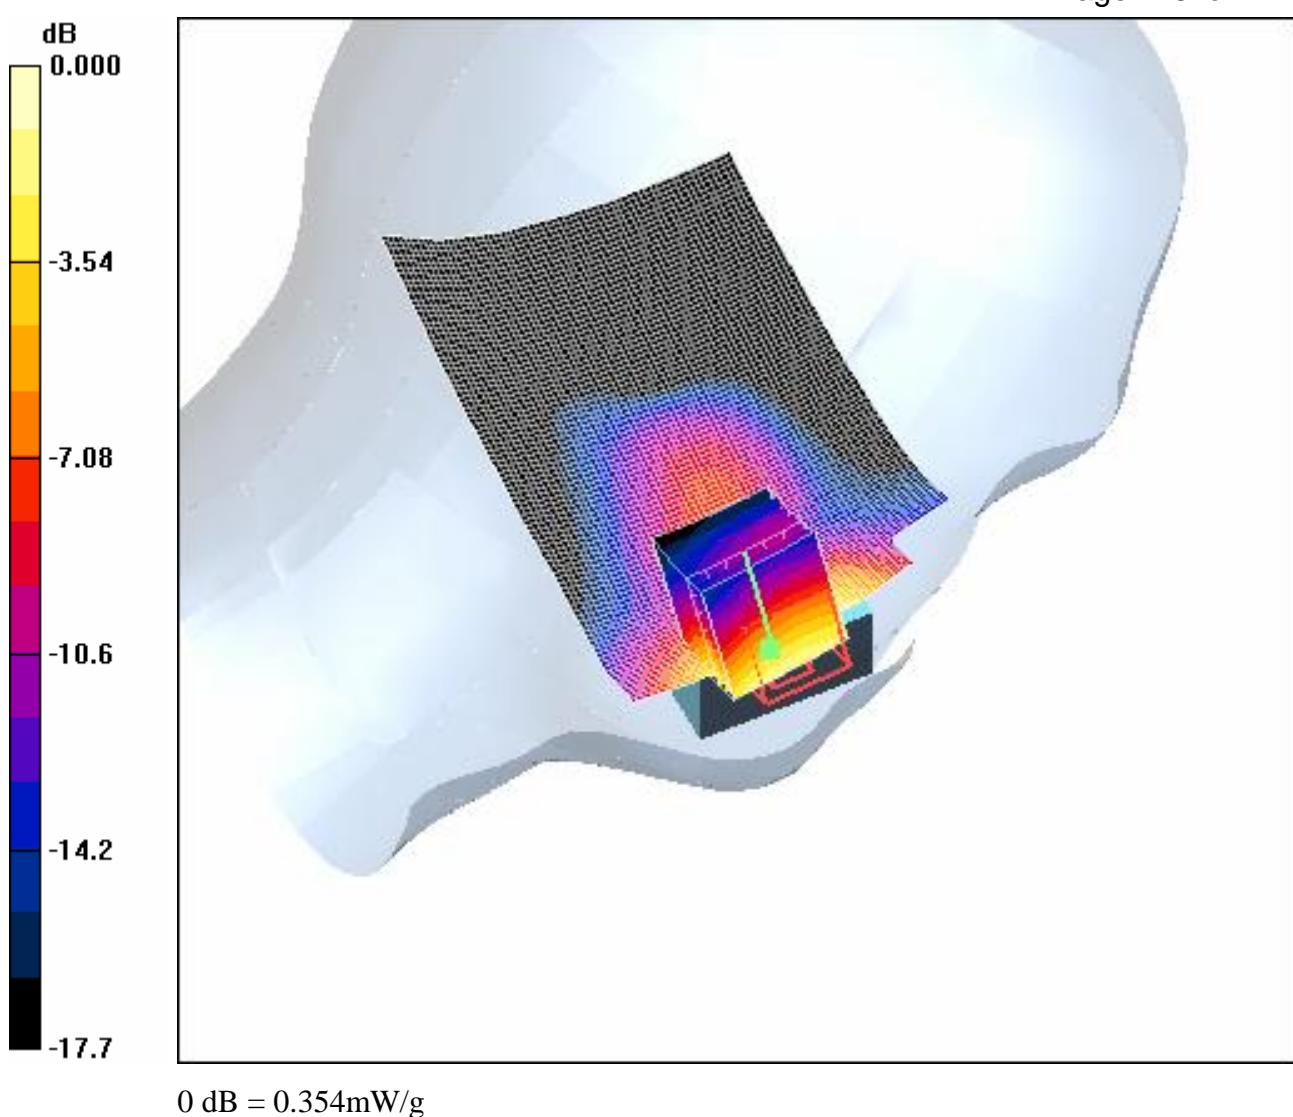

0 dB = 0.354mW/g

4.1.15 PCS1900-LeftHandSide-WorstCase-High

Date/Time: 2007-7-20 14:57:21

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-High(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 44 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High(BYD)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.374 mW/g


Cheek position - High(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.99 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.202 mW/g

Maximum value of SAR (measured) = 0.359 mW/g

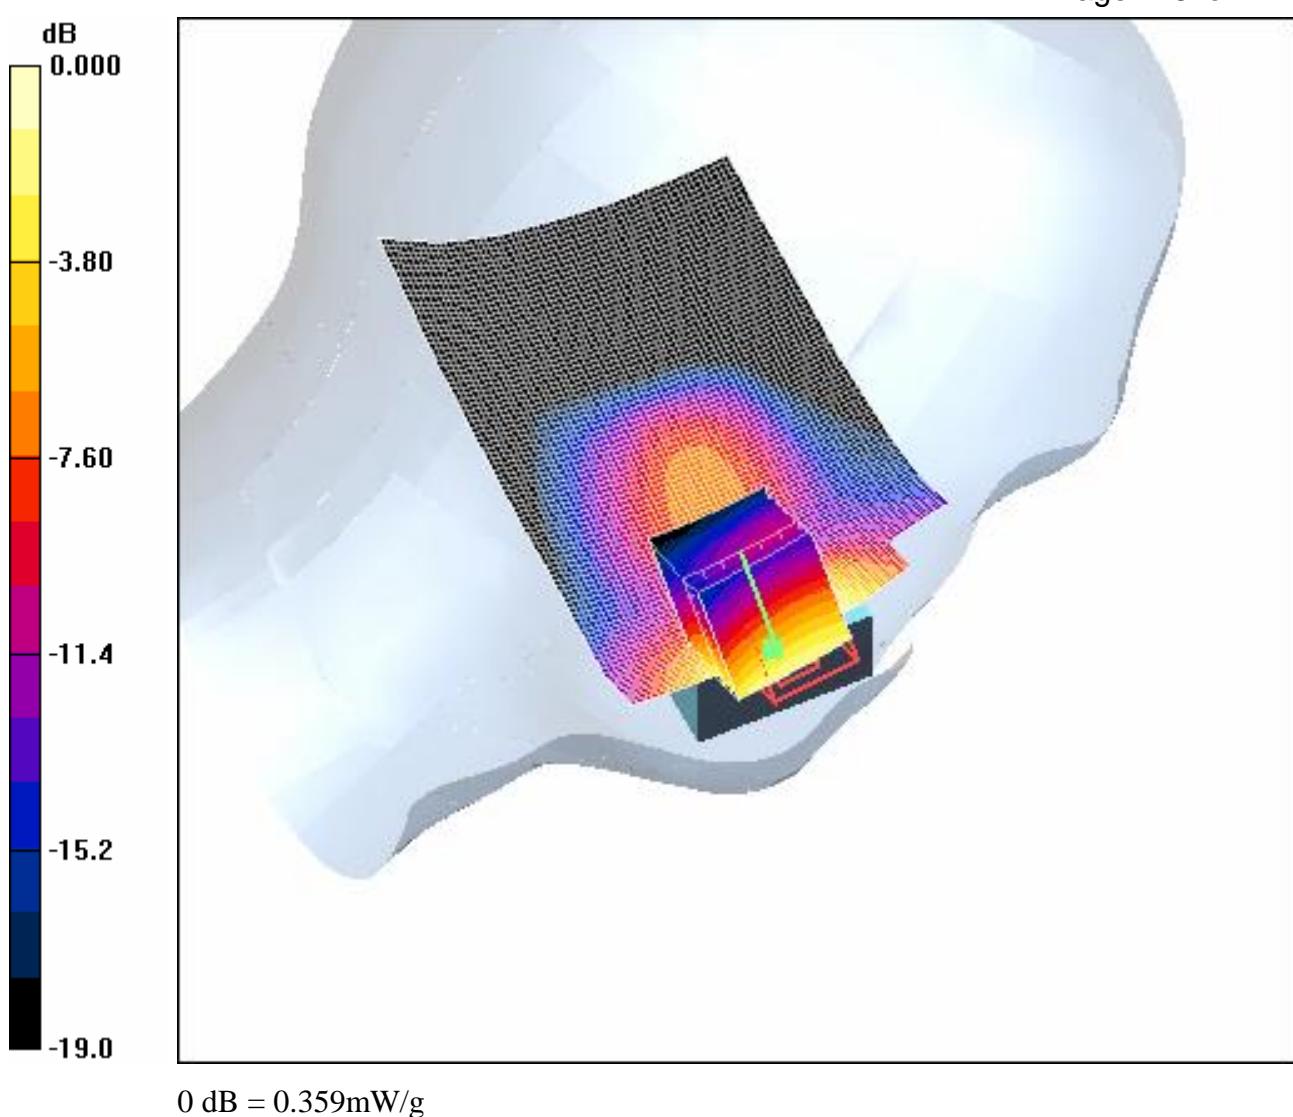

4.1.16 PCS1900-RightHandSide-Cheek-Middle

Date/Time: 2007-7-20 20:40:12

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-Middle(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 46 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle(BYD)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.536 mW/g


Cheek position - Middle(BYD)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.17 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.523 mW/g

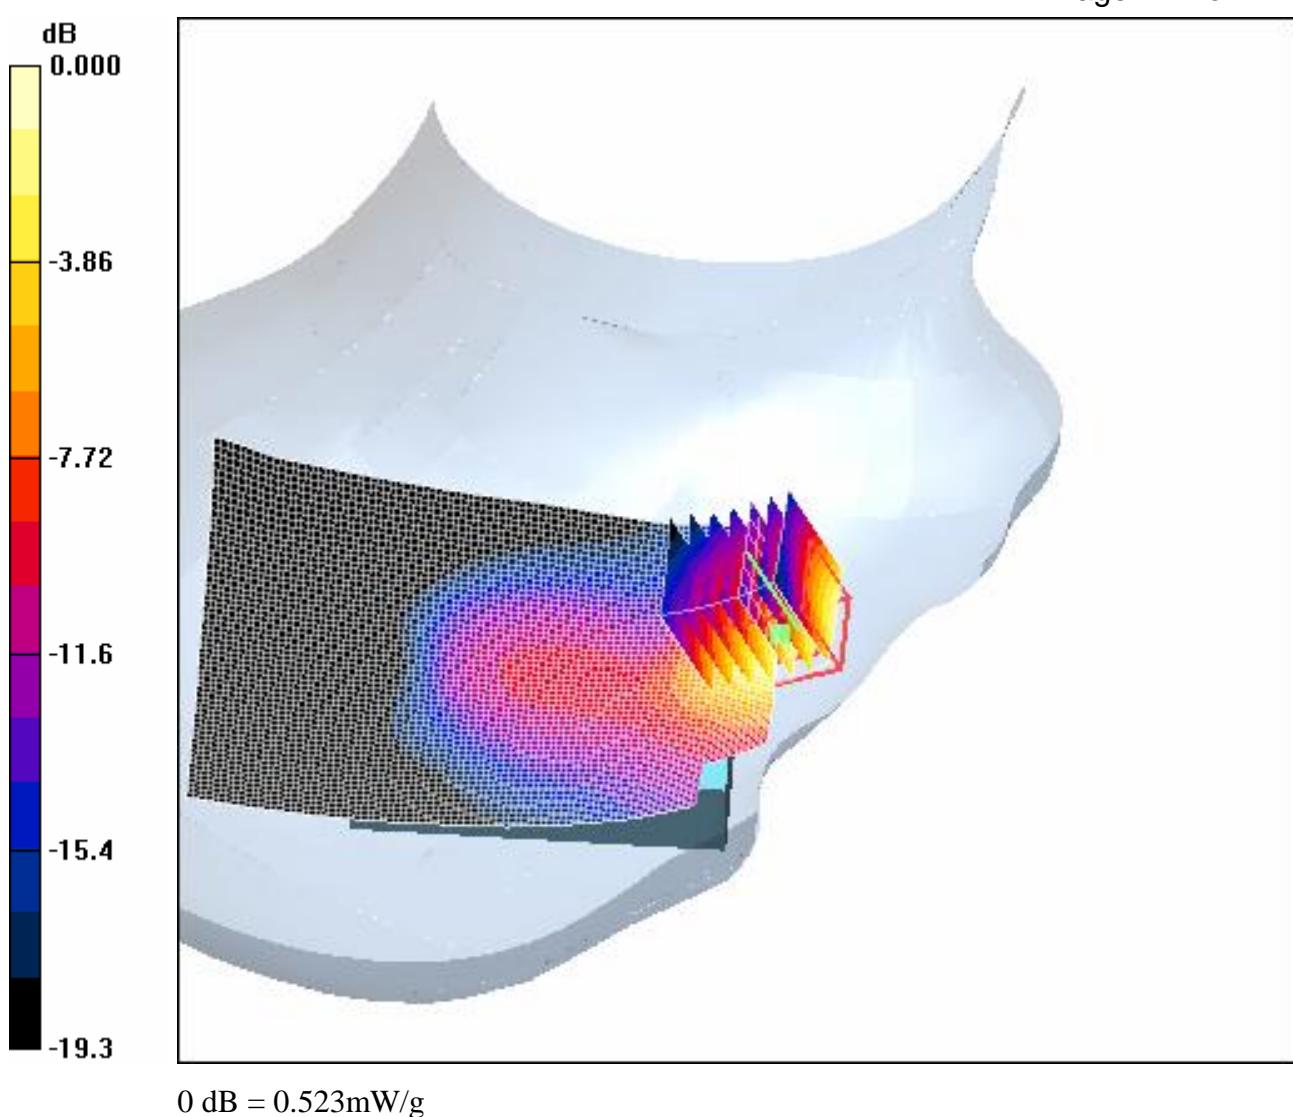

0 dB = 0.523mW/g

4.1.17 PCS1900-RightHandSide-Tilt-Middle

Date/Time: 2007-7-20 19:42:03

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Tilt-Middle(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 48 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.059 mW/g


Tilt position - Middle(BYD)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.63 V/m; Power Drift = -0.279 dB

Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.057 mW/g

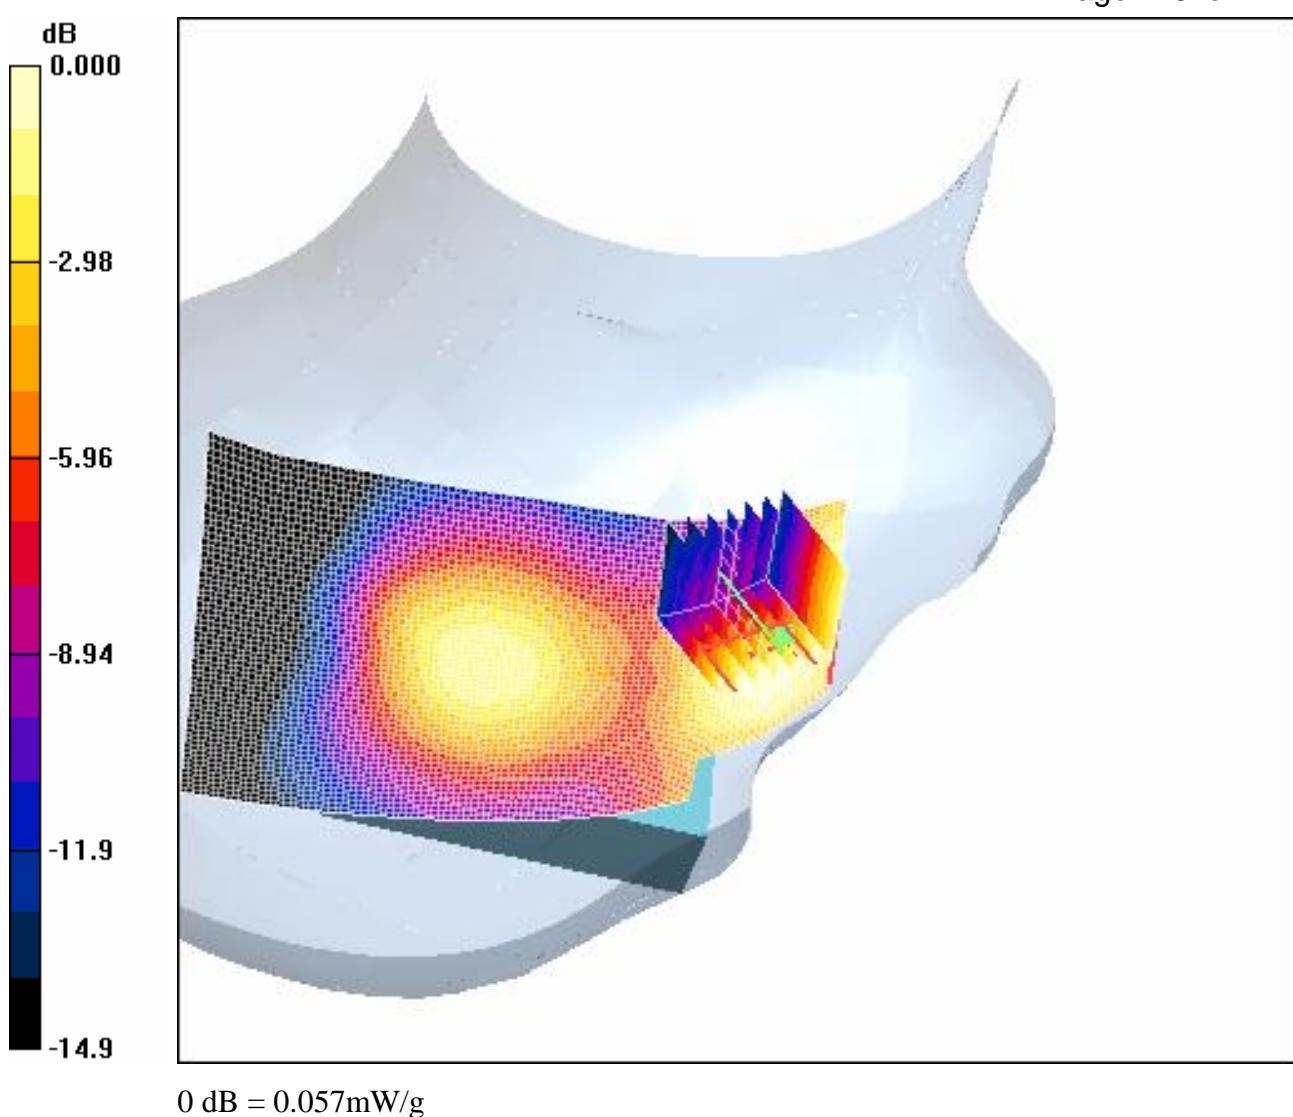

4.1.18 PCS1900-RightHandSide-WorstCase-Low

Date/Time: 2007-7-20 20:13:17

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-Low(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 50 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.437 mW/g


Cheek position - Low(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.85 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.442 mW/g

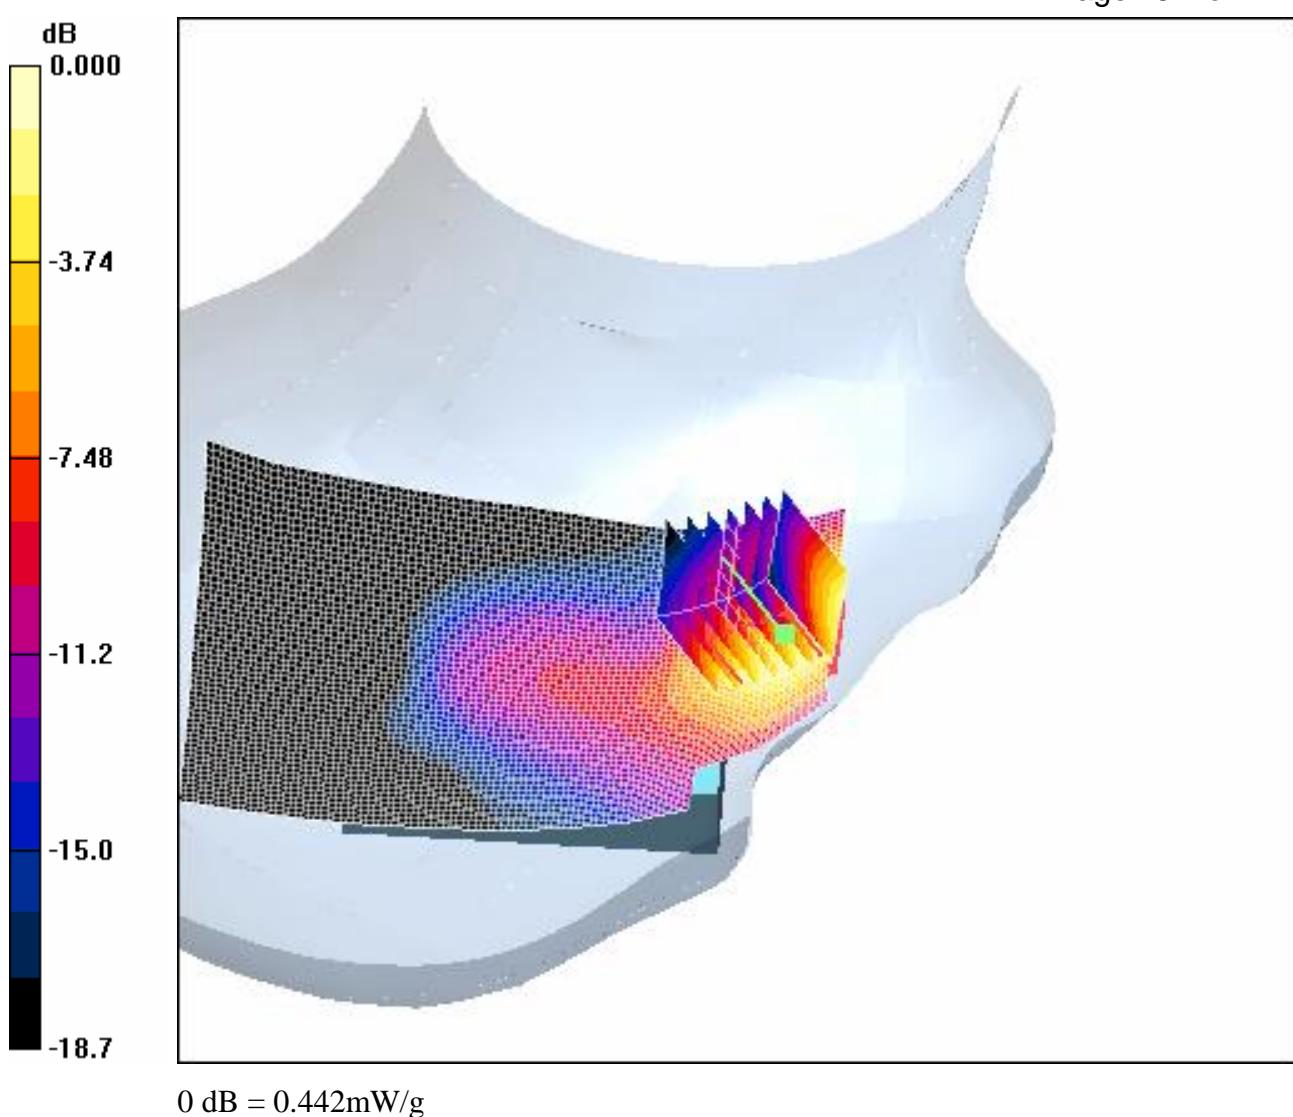

0 dB = 0.442mW/g

4.1.19 PCS1900-RightHandSide-WorstCase-High

Date/Time: 2007-7-20 21:08:50

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 52 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High(BYD)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.536 mW/g


Cheek position - High(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.20 V/m; Power Drift = 0.242 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.264 mW/g

Maximum value of SAR (measured) = 0.526 mW/g

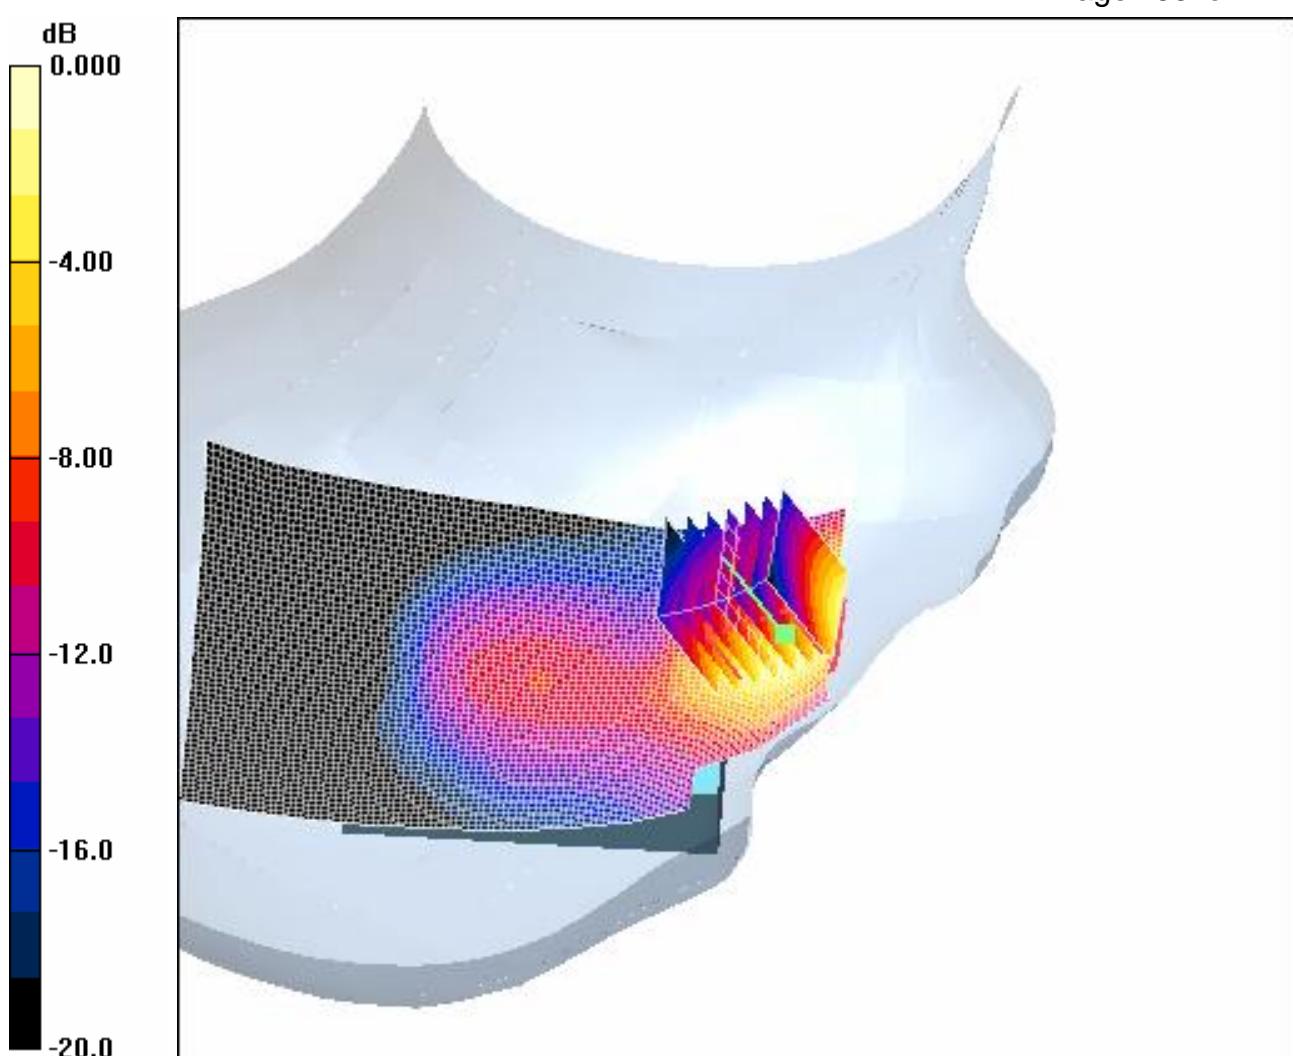

0 dB = 0.526mW/g

4.1.20 PCS1900-Body-Worn -Low

Date/Time: 2007-7-18 9:04:38

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-Low-2.0cm(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 54 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: 1900-Body Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low(BYD)/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.351 mW/g


Body Worn - Low(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.89 V/m; Power Drift = 0.276 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 0.343 mW/g

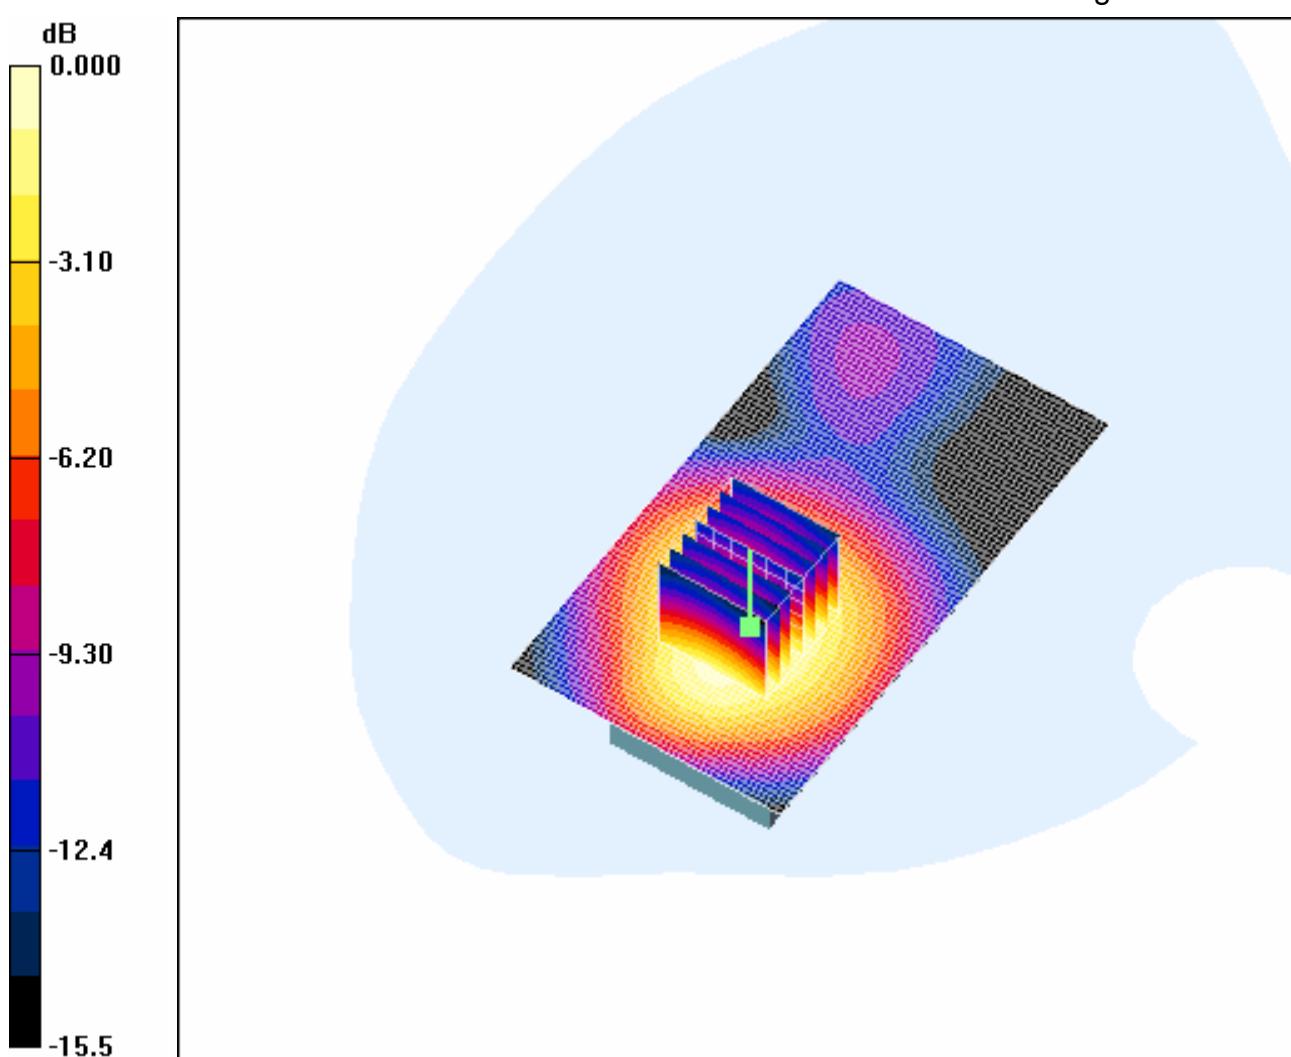

0 dB = 0.343mW/g

4.1.21 PCS1900-Body-Worn -Middle

Date/Time: 2007-7-18 8:42:28

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-Middle-2.0cm(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 56 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900-Body Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle(BYD)/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.413 mW/g


Body Worn - Middle(BYD)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.10 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.403 mW/g

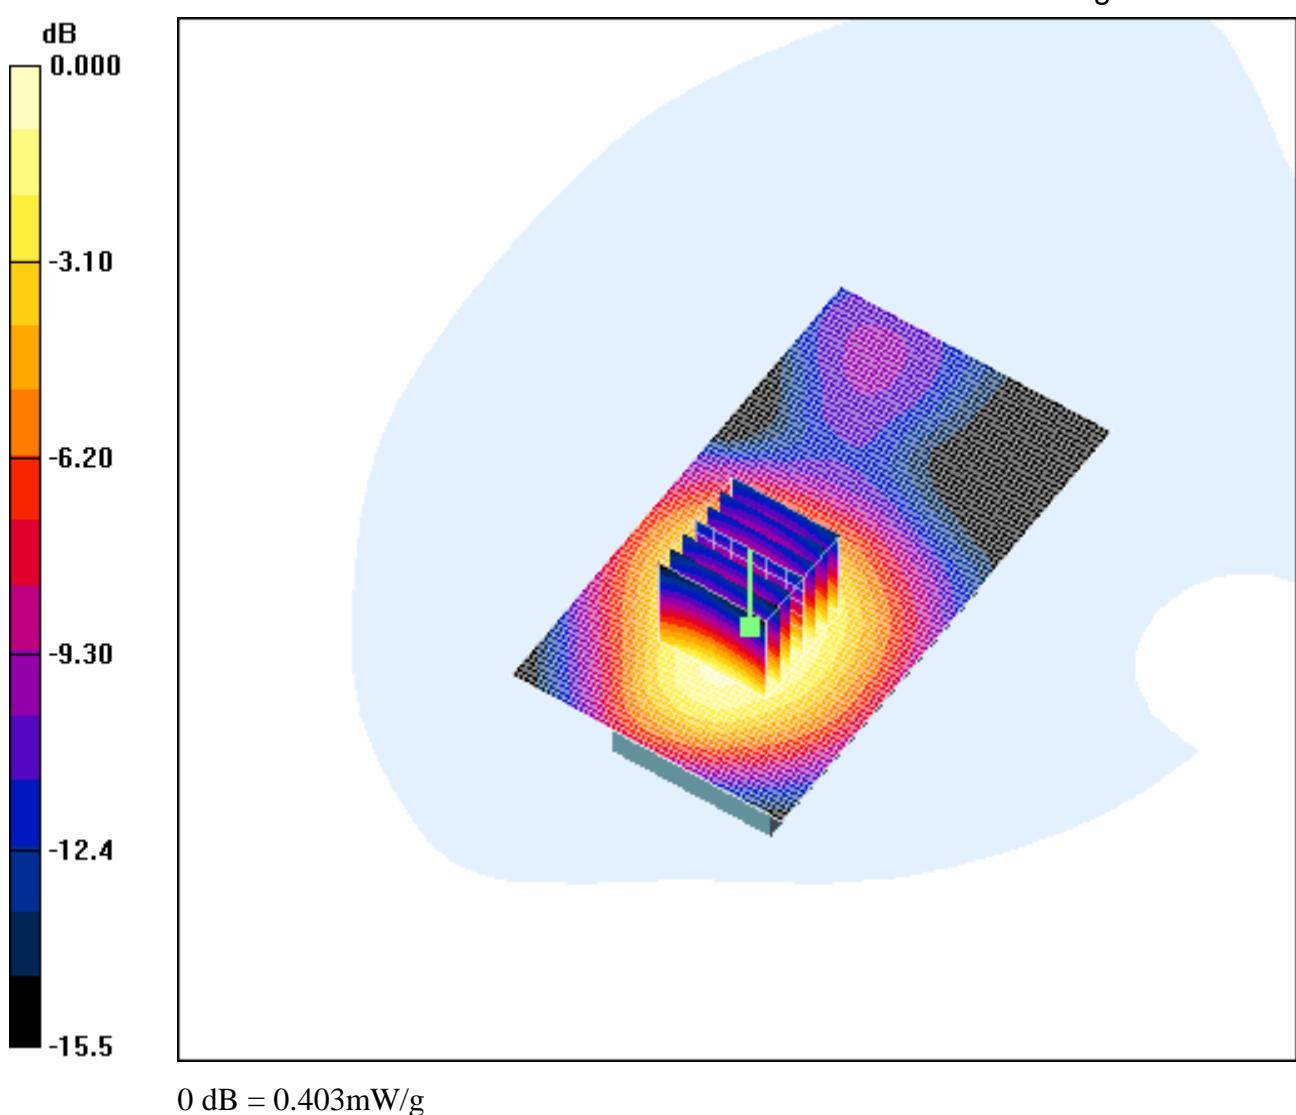

4.1.22 PCS1900-Body-Worn -High

Date/Time: 2007-7-18 9:27:32

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-High-2.0cm(BYD)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 58 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: 1900-Body Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.6 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High(BYD)/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.317 mW/g


Body Worn - High(BYD)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.67 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.313 mW/g

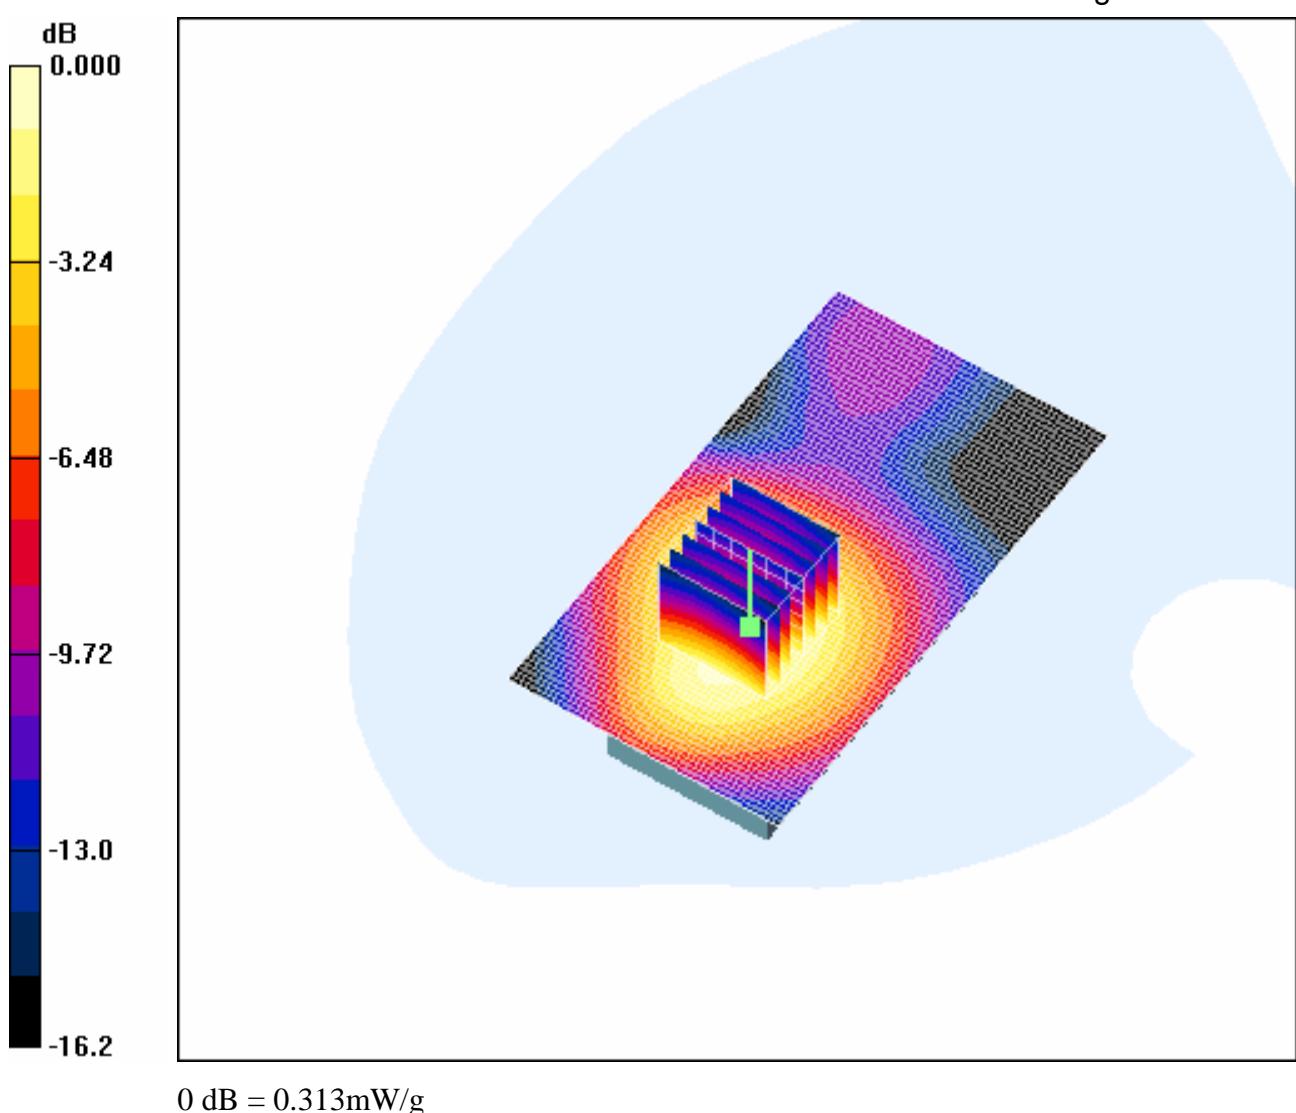

4.2 For JINNENG Battery

4.2.1 GSM850-LeftHandSide-Cheek-Middle

Date/Time: 2007-7-16 16:14:37

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Middle(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 60 of 142

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Mid(JN)/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.05 mW/g


Cheek position - Mid(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.99 V/m; Power Drift = 0.172 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.915 mW/g; SAR(10 g) = 0.599 mW/g

Maximum value of SAR (measured) = 1.00 mW/g

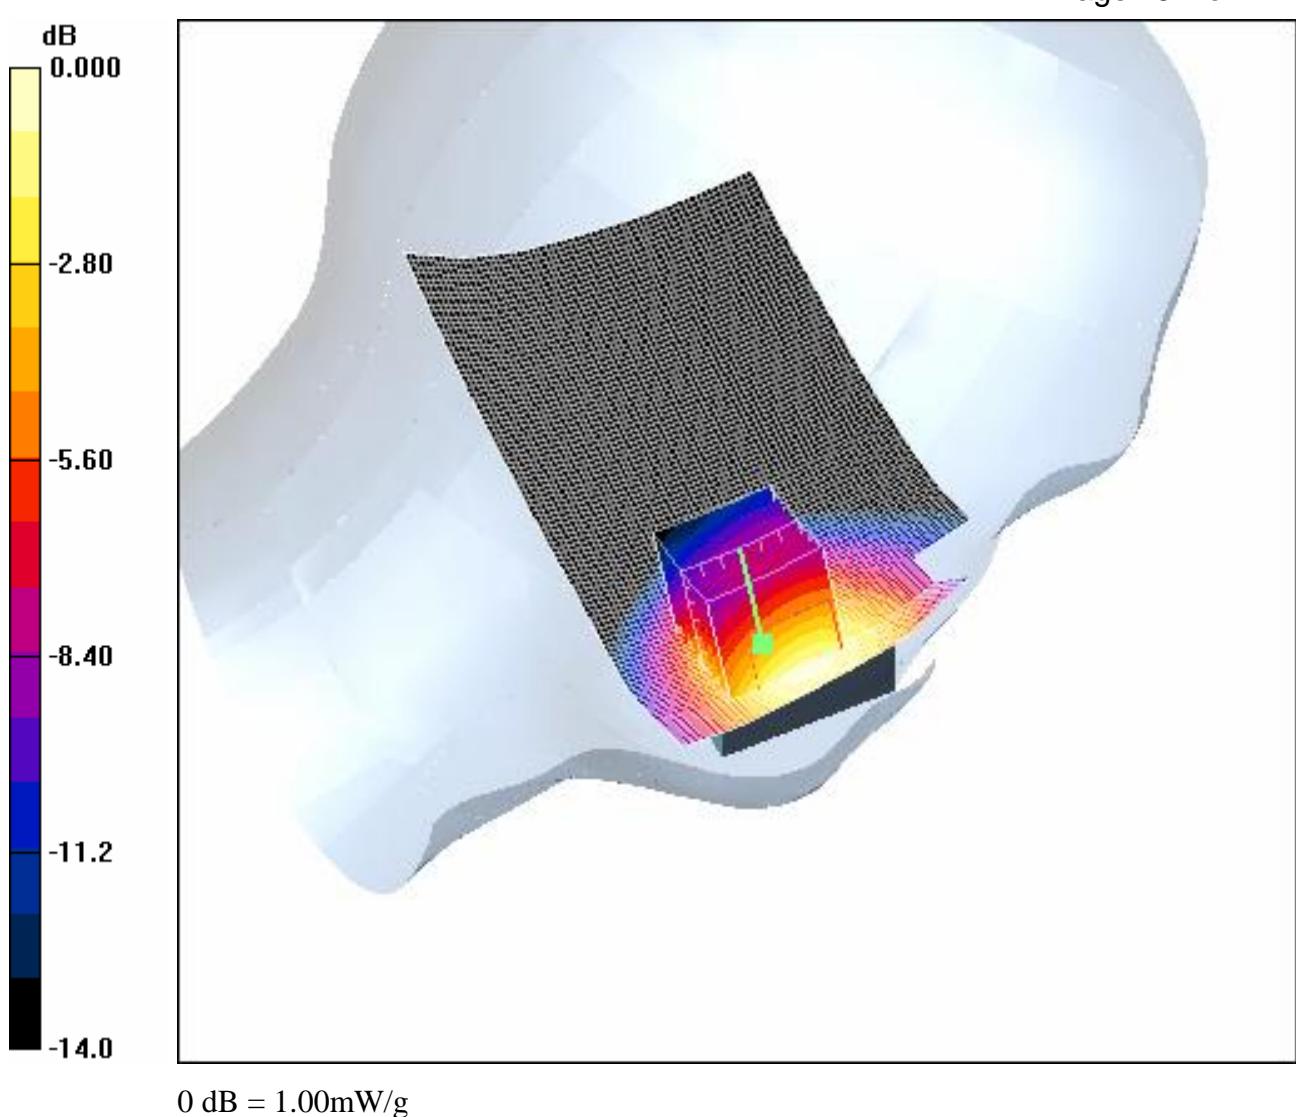

0 dB = 1.00mW/g

4.2.2 GSM850-LeftHandSide-Tilt-Middle

Date/Time: 2007-7-16 17:09:37

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Tilt-Middle(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Mid(JN)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.093 mW/g


Tilt position - Mid(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.54 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

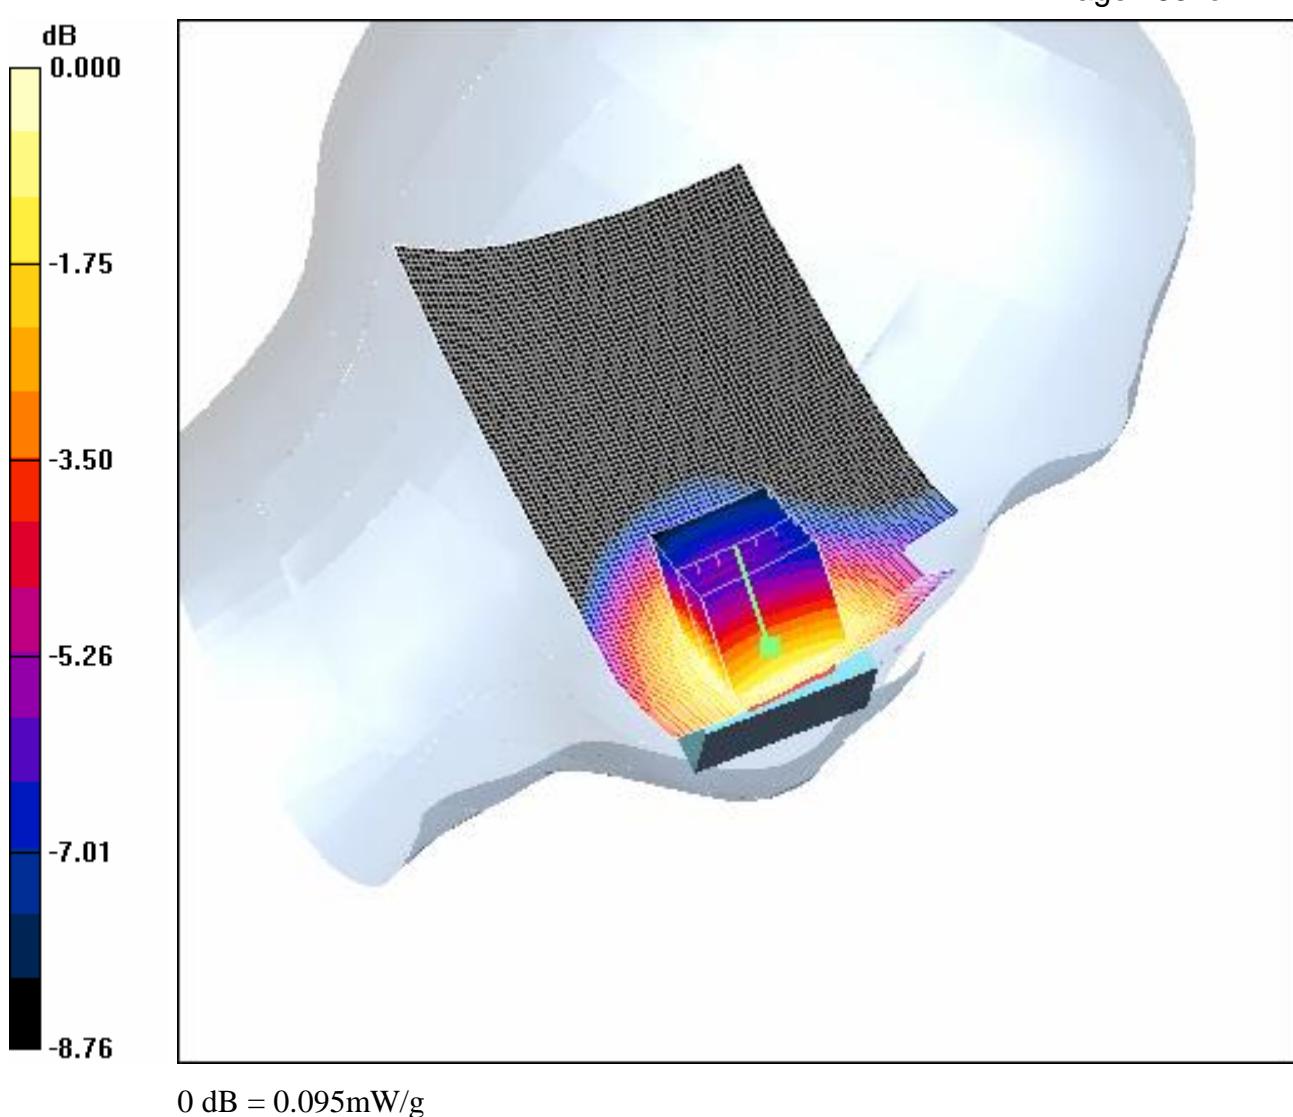

0 dB = 0.095mW/g

4.2.3 GSM850-LeftHandSide-WorstCase-Low

Date/Time: 2007-7-16 15:50:07

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Low(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 64 of 142

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low(JN)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.993 mW/g


Cheek position - Low(JN)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.52 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.561 mW/g

Maximum value of SAR (measured) = 0.967 mW/g

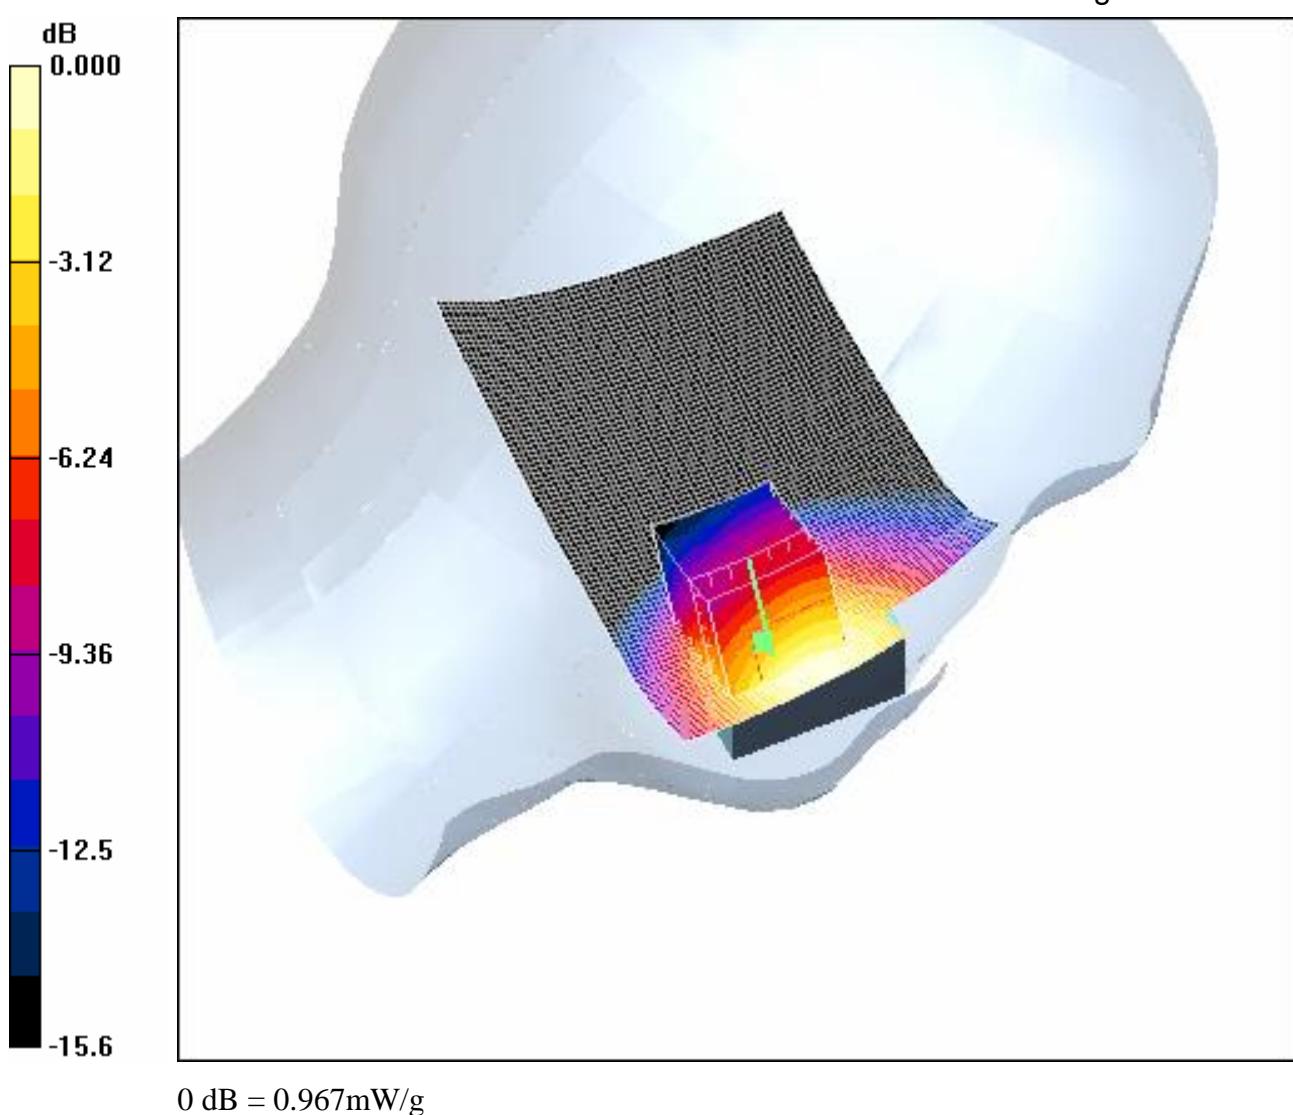

4.2.4 GSM850-LeftHandSide-WorstCase-High

Date/Time: 2007-7-16 16:39:28

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 43.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High(JN)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g


Cheek position - High(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.41 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.969 mW/g; SAR(10 g) = 0.634 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

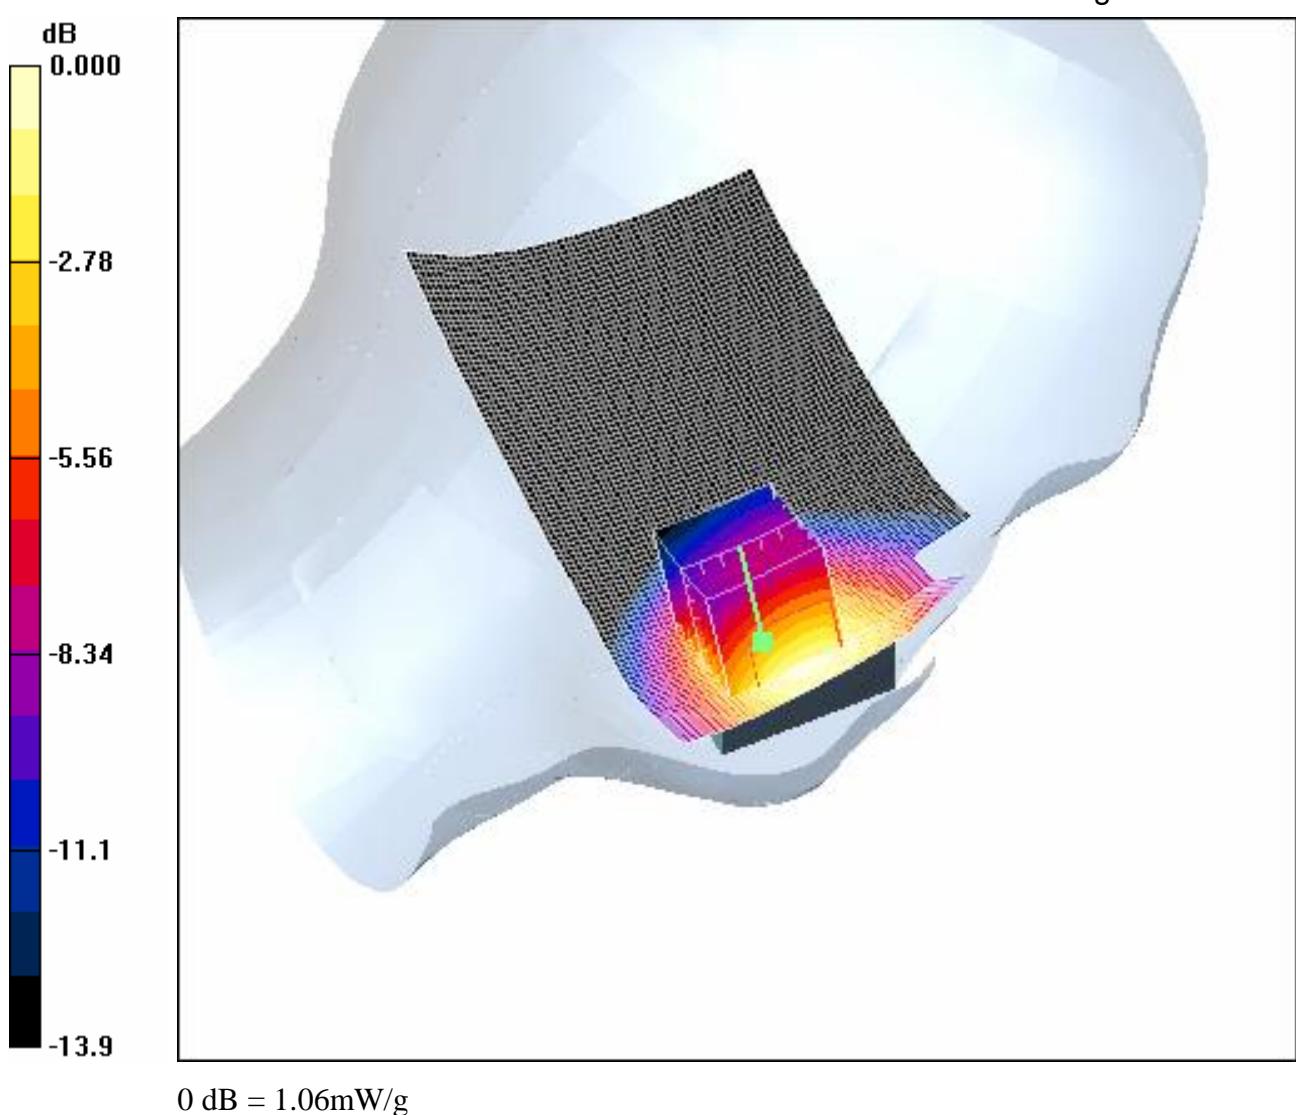

0 dB = 1.06mW/g

4.2.5 GSM850-RightHandSide-Cheek-Middle

Date/Time: 2007-7-16 11:10:15

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-Middle(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle(JN)/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.776 mW/g


Cheek position - Middle(JN)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.17 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.924 W/kg

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.515 mW/g

Maximum value of SAR (measured) = 0.763 mW/g

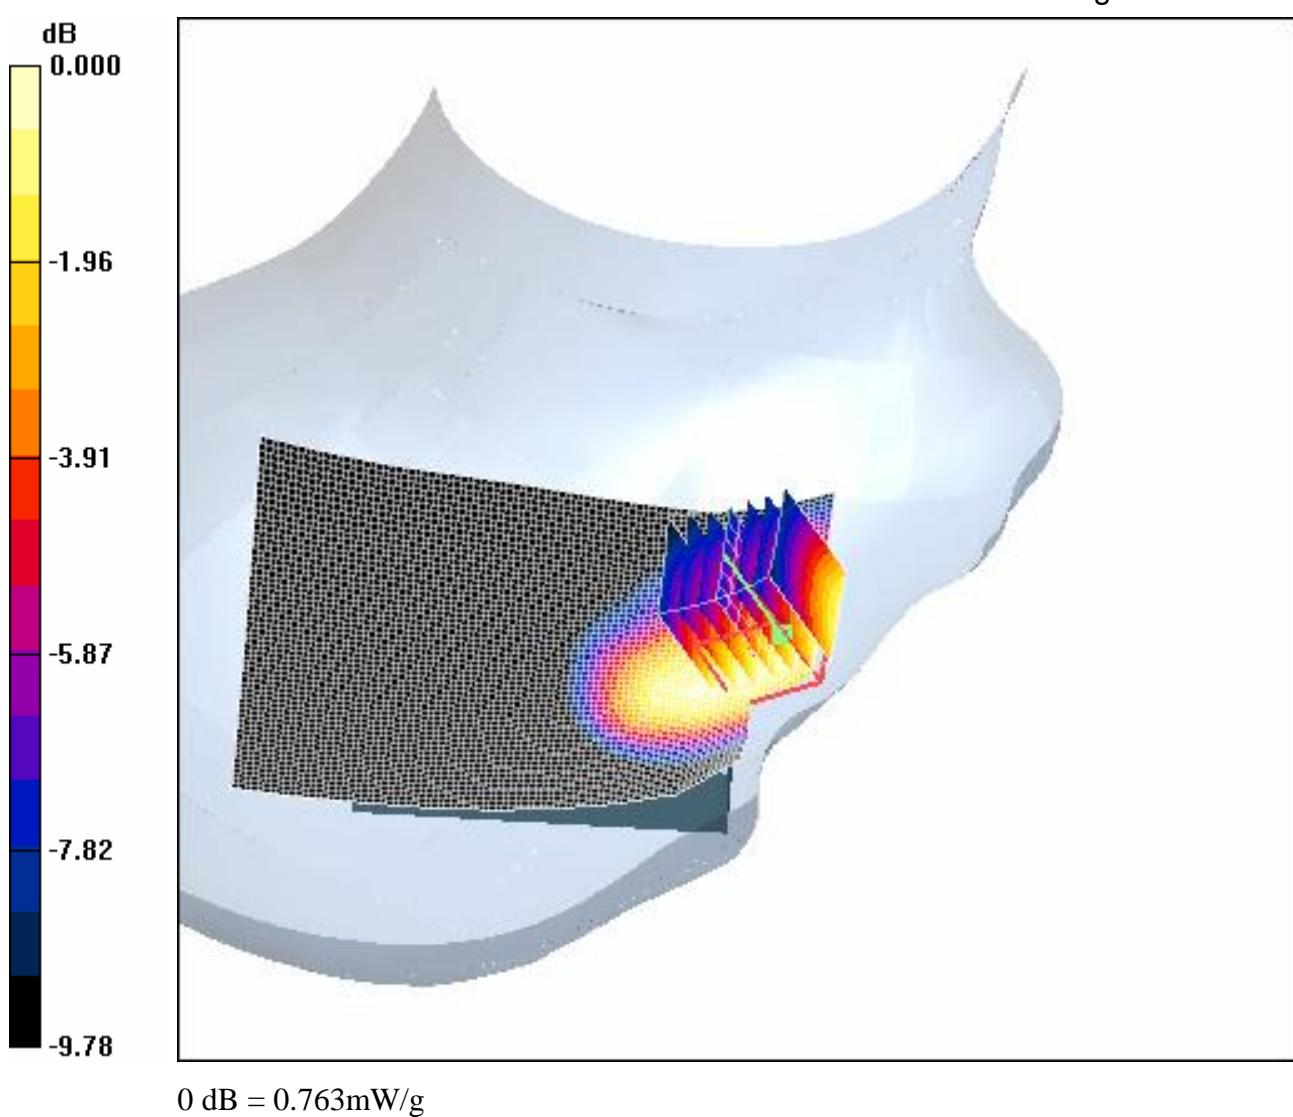

4.2.6 GSM850-RightHandSide-Tilt-Middle

Date/Time: 2007-7-16 13:20:33

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Tilt-Middle(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 70 of 142

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle(JN)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.100 mW/g


Tilt position - Middle(JN)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.71 V/m; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.101 mW/g

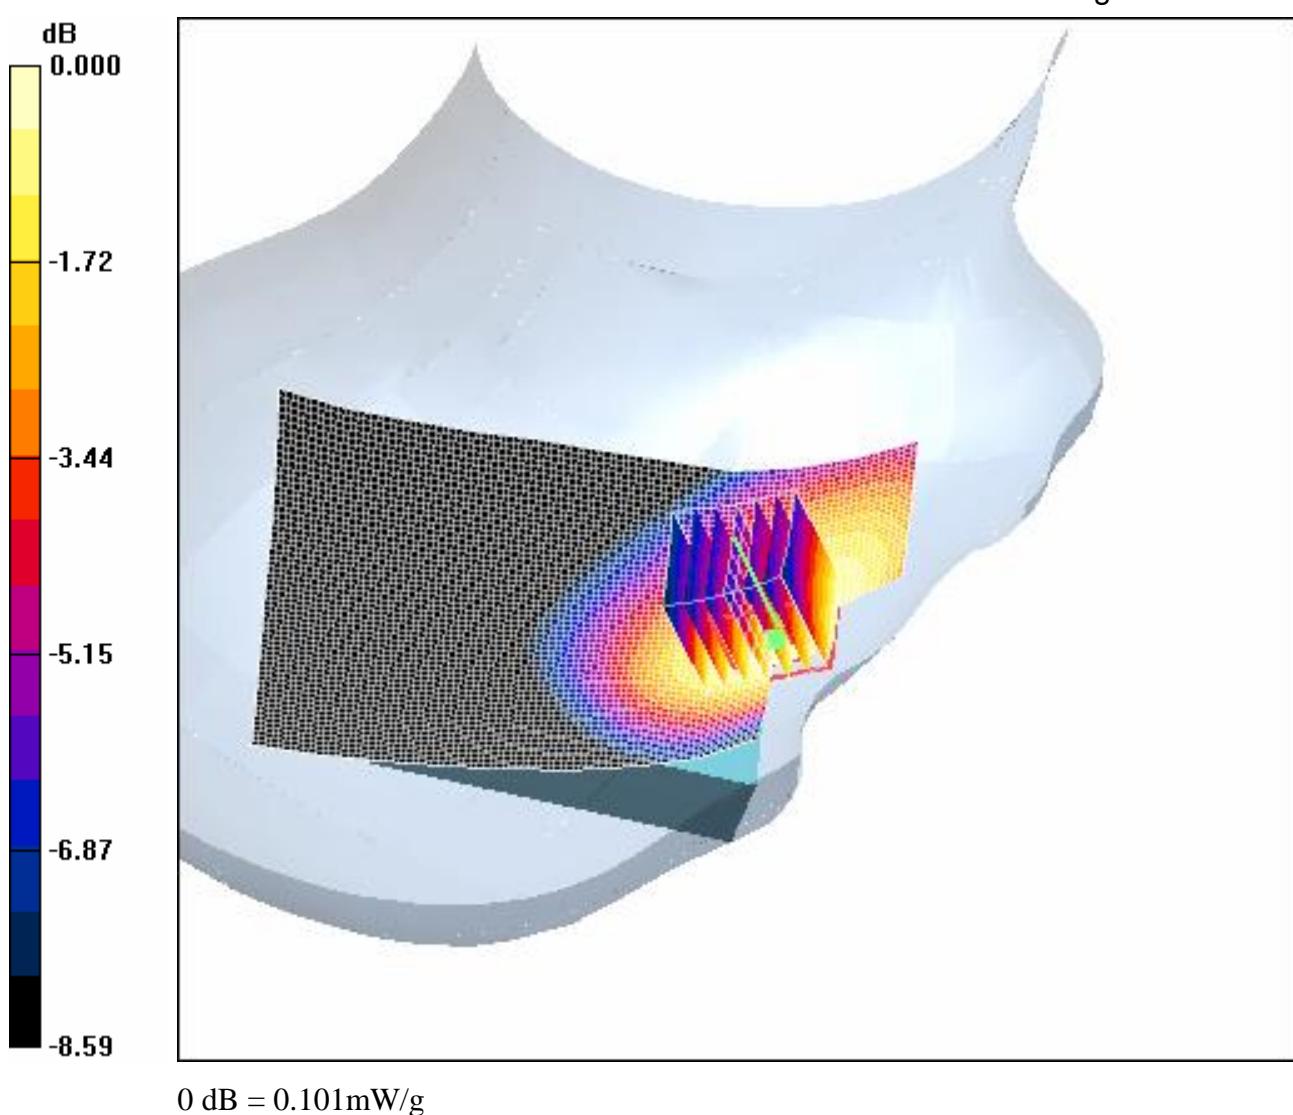

0 dB = 0.101mW/g

4.2.7 GSM850-RightHandSide-WorstCase-Low

Date/Time: 2007-7-16 12:13:08

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-Low(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low(JN)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.759 mW/g


Cheek position - Low(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.11 V/m; Power Drift = 0.249 dB

Peak SAR (extrapolated) = 0.900 W/kg

SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 0.752 mW/g

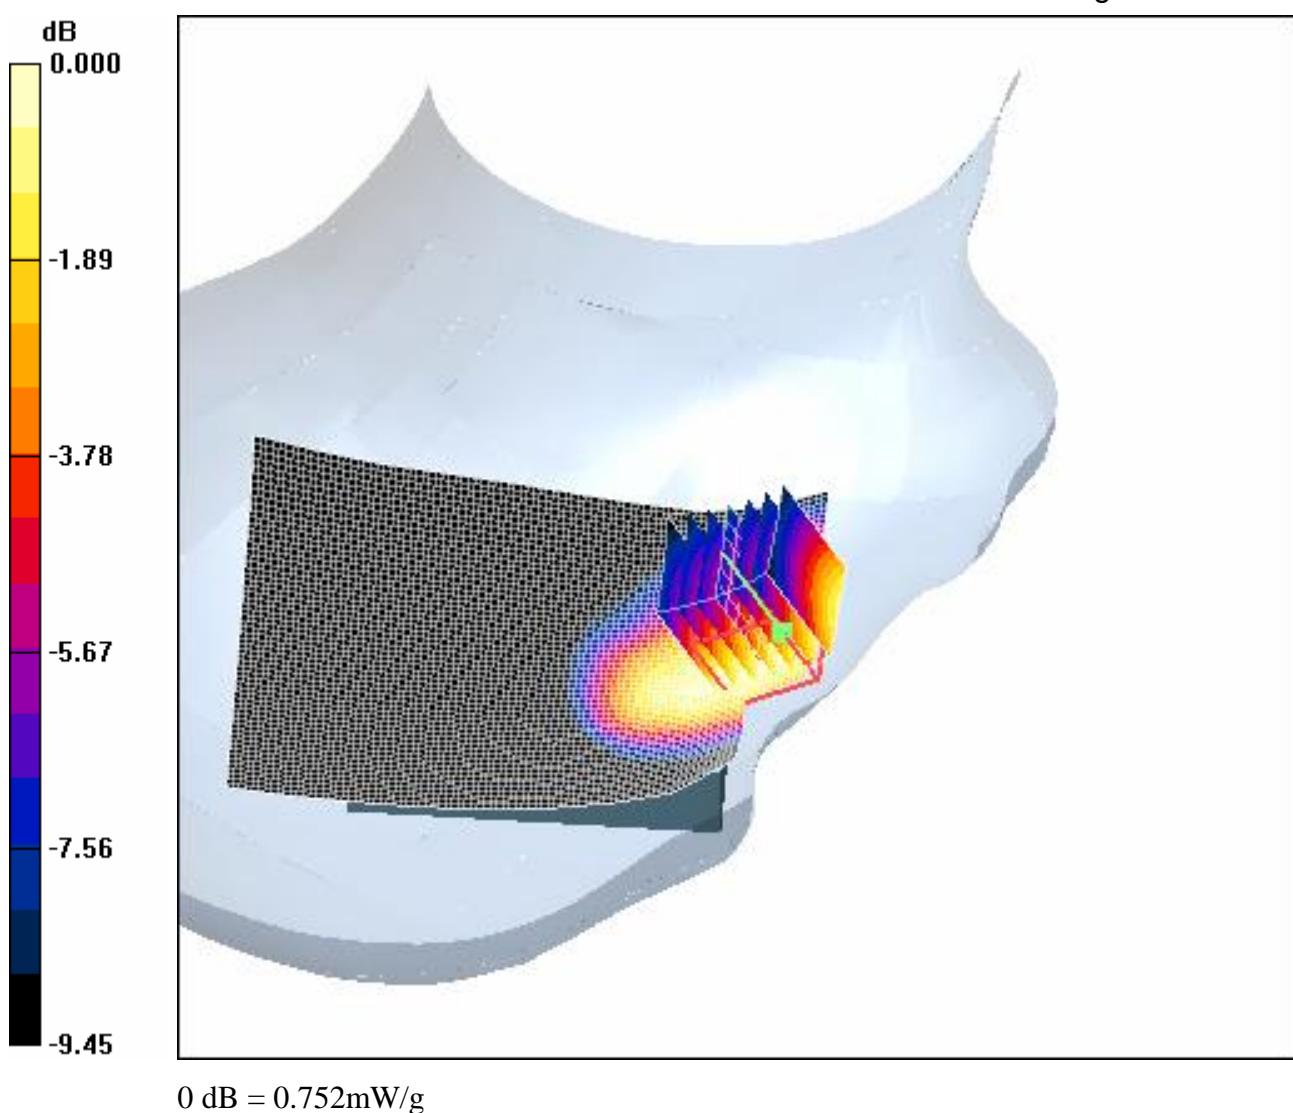

0 dB = 0.752mW/g

4.2.8 GSM850-RightHandSide-WorstCase-High

Date/Time: 2007-7-16 12:42:02

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-High(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 43.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High(JN)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.834 mW/g


Cheek position - High(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.88 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.549 mW/g

Maximum value of SAR (measured) = 0.817 mW/g

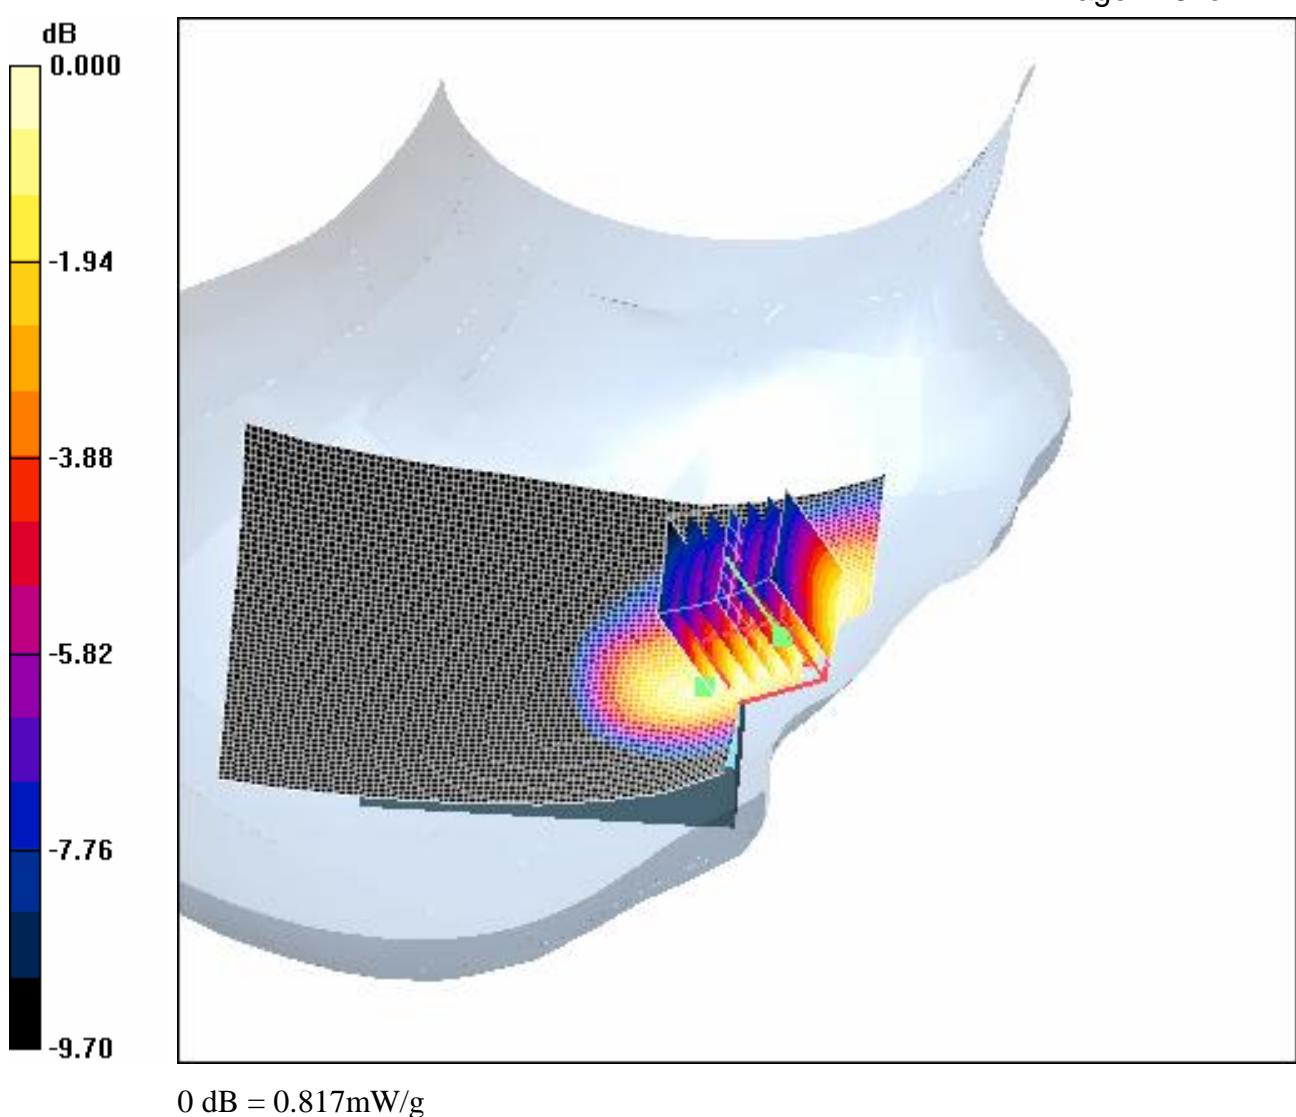

0 dB = 0.817mW/g

4.2.9 GSM850-Body-Worn -Low

Date/Time: 2007-7-13 16:20:59

Test Laboratory: SGS-GSM

GSM850-Body-Worn-Low-2.0cm(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 76 of 142

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: 850-Body Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.952 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low(JN) 2.0cm/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.278 mW/g


Body Worn - Low(JN) 2.0cm/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.72 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.183 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

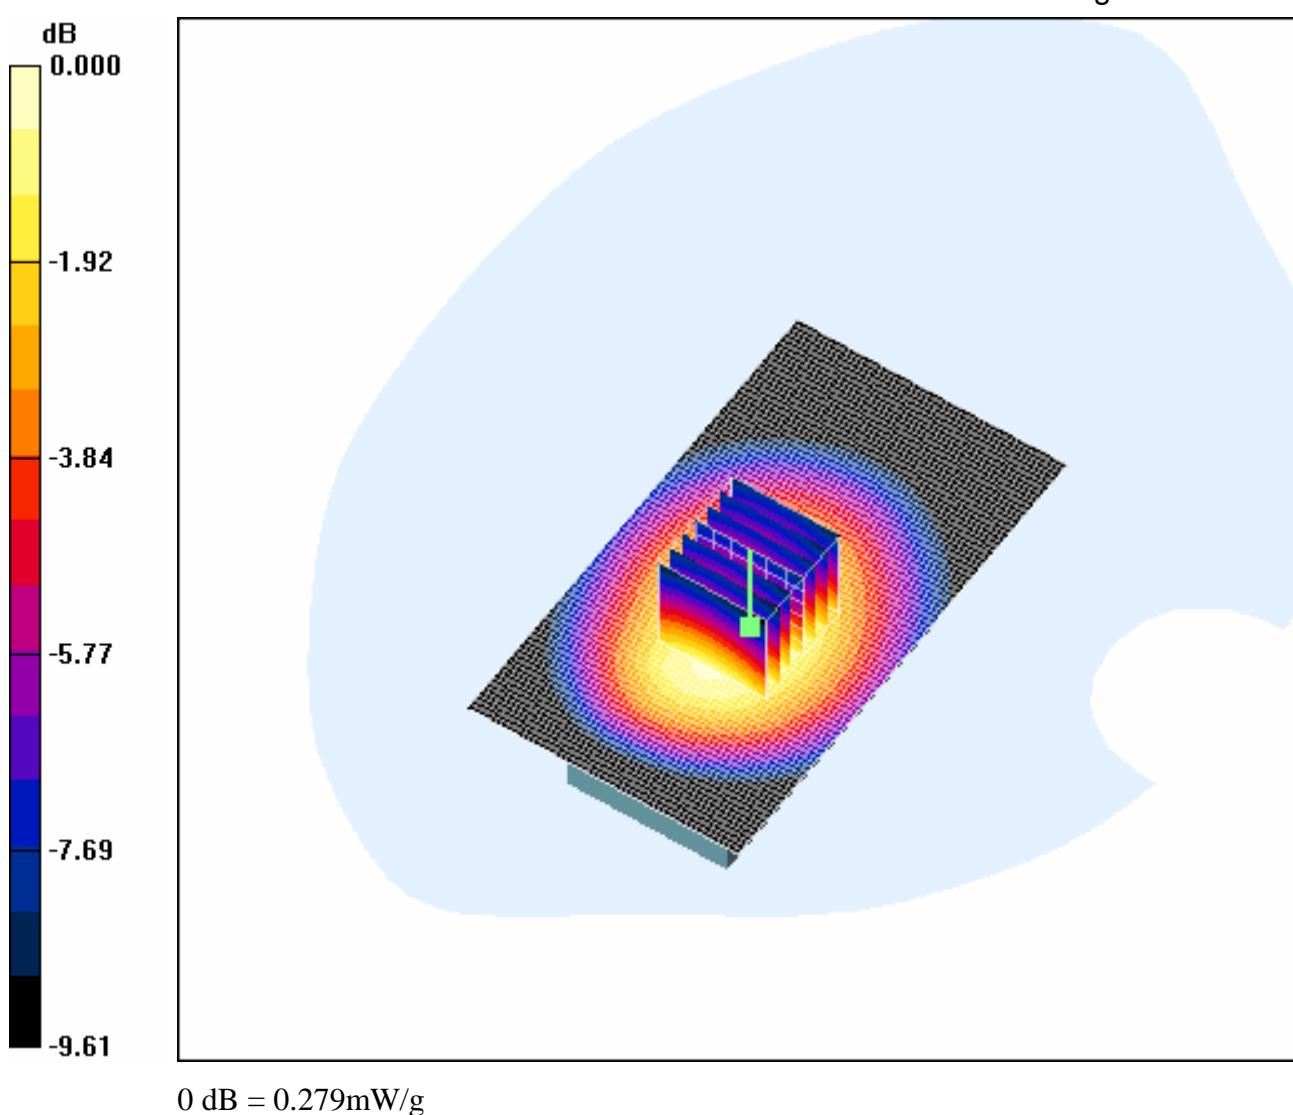

0 dB = 0.279mW/g

4.2.10 GSM850-Body-Worn -Middle

Date/Time: 2007-7-13 15:42:36

Test Laboratory: SGS-GSM

GSM850-Body-Worn-Middle-2.0cm(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 78 of 142

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: 850-Body Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.964 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle(JN) 2.0cm/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.286 mW/g


Body Worn - Middle(JN) 2.0cm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.79 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.284 mW/g

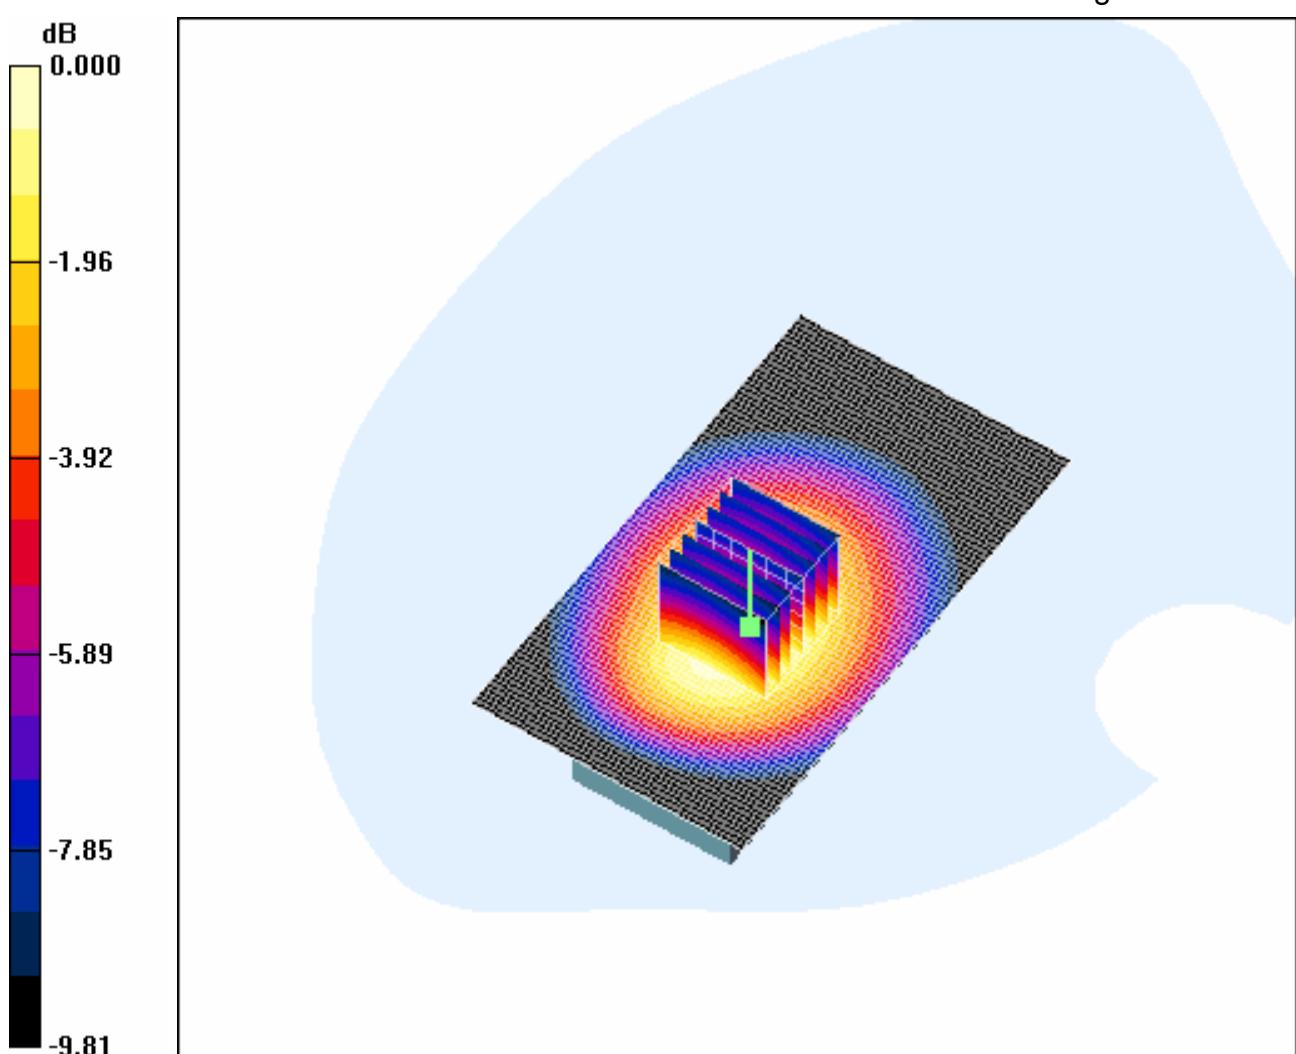

0 dB = 0.284mW/g

4.2.11 GSM850-Body-Worn -High

Date/Time: 2007-7-13 15:12:35

Test Laboratory: SGS-GSM

GSM850-Body-Worn-High-2.0cm(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 80 of 142

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: 850-Body Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High(JN) 2.0cm/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.324 mW/g


Body Worn - High(JN) 2.0cm/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.30 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.304 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

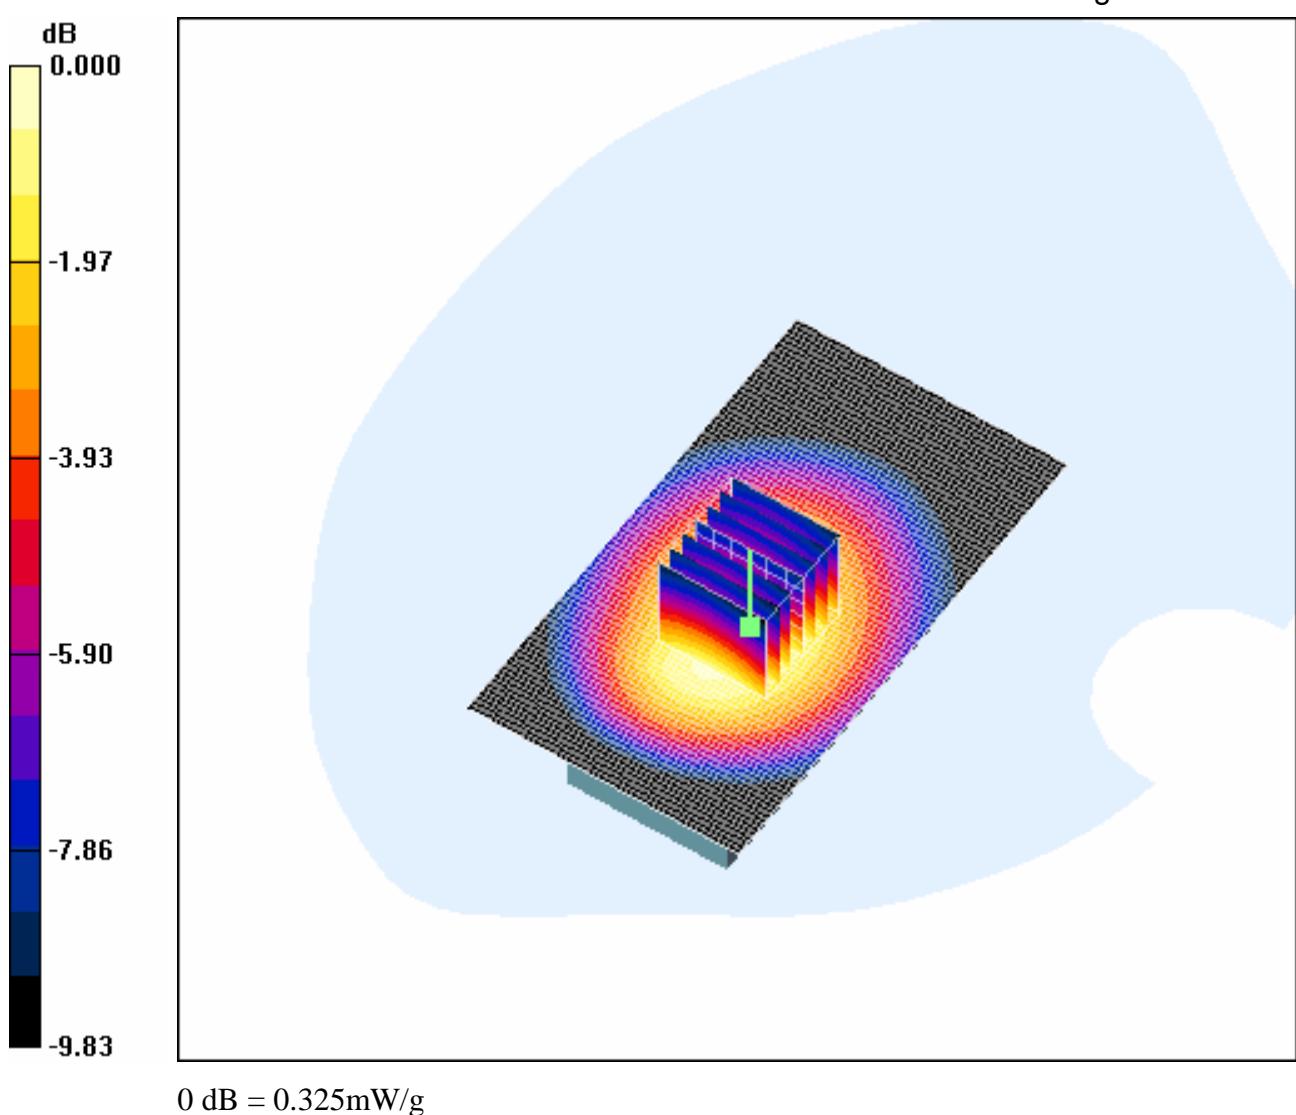

0 dB = 0.325mW/g

4.2.12 PCS1900-LeftHandSide-Cheek-Middle

Date/Time: 2007-7-20 16:22:17

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-Middle(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle(JN)/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.572 mW/g


Cheek position - Middle(JN)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.89 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.297 mW/g

Maximum value of SAR (measured) = 0.542 mW/g

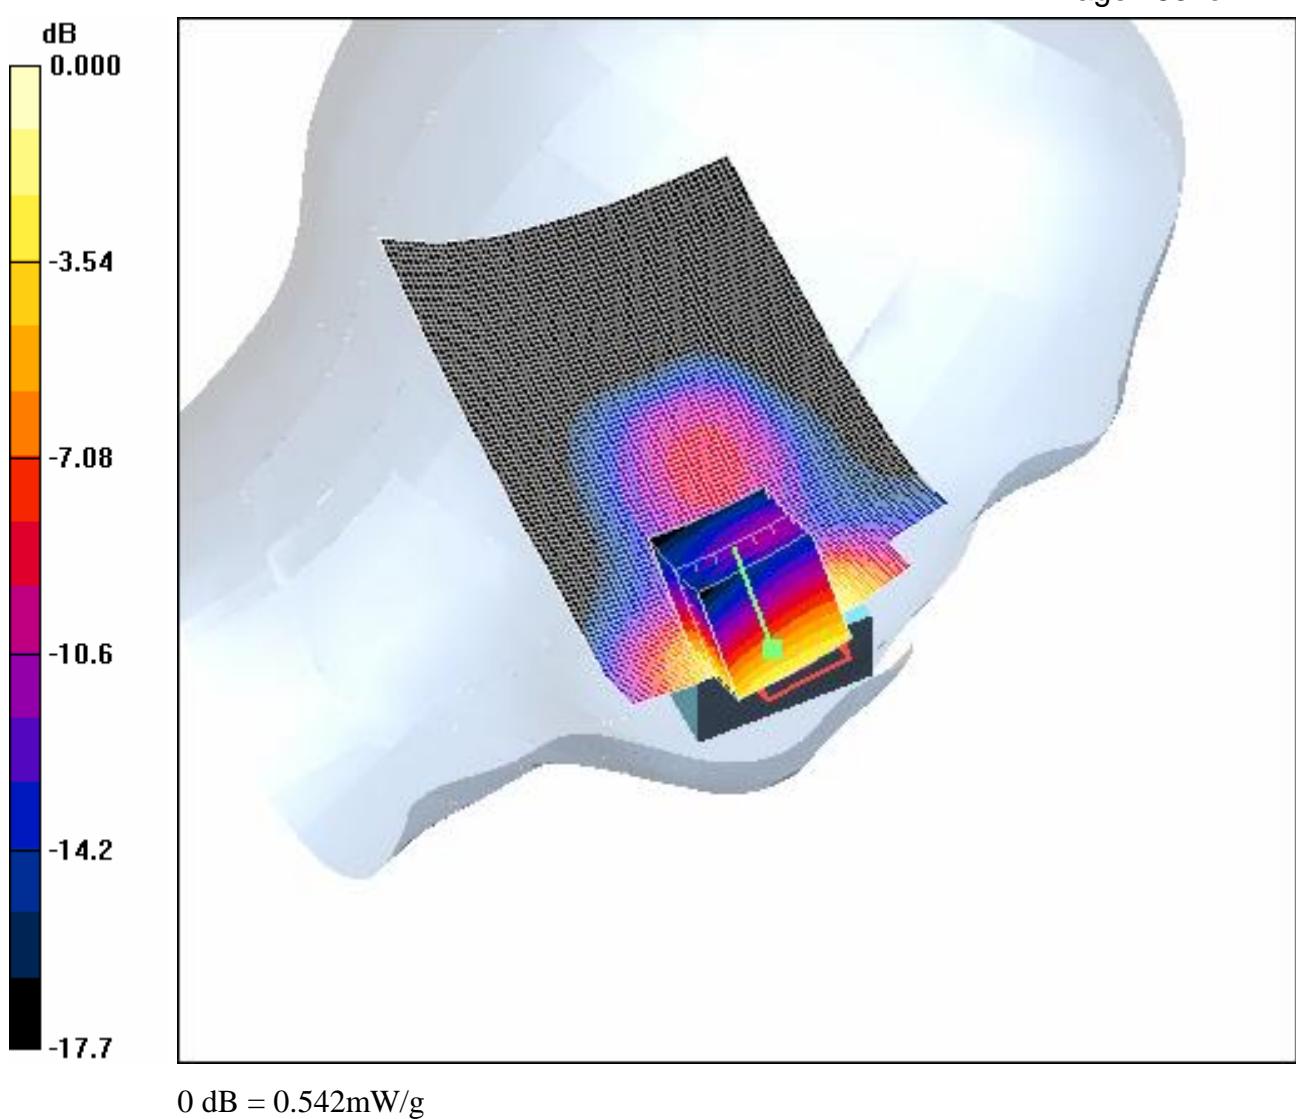

4.2.13 PCS1900-LeftHandSide-Tilt-Middle

Date/Time: 2007-7-20 15:56:34

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-Middle(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 84 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle(JN)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.088 mW/g


Tilt position - Middle(JN)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.93 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

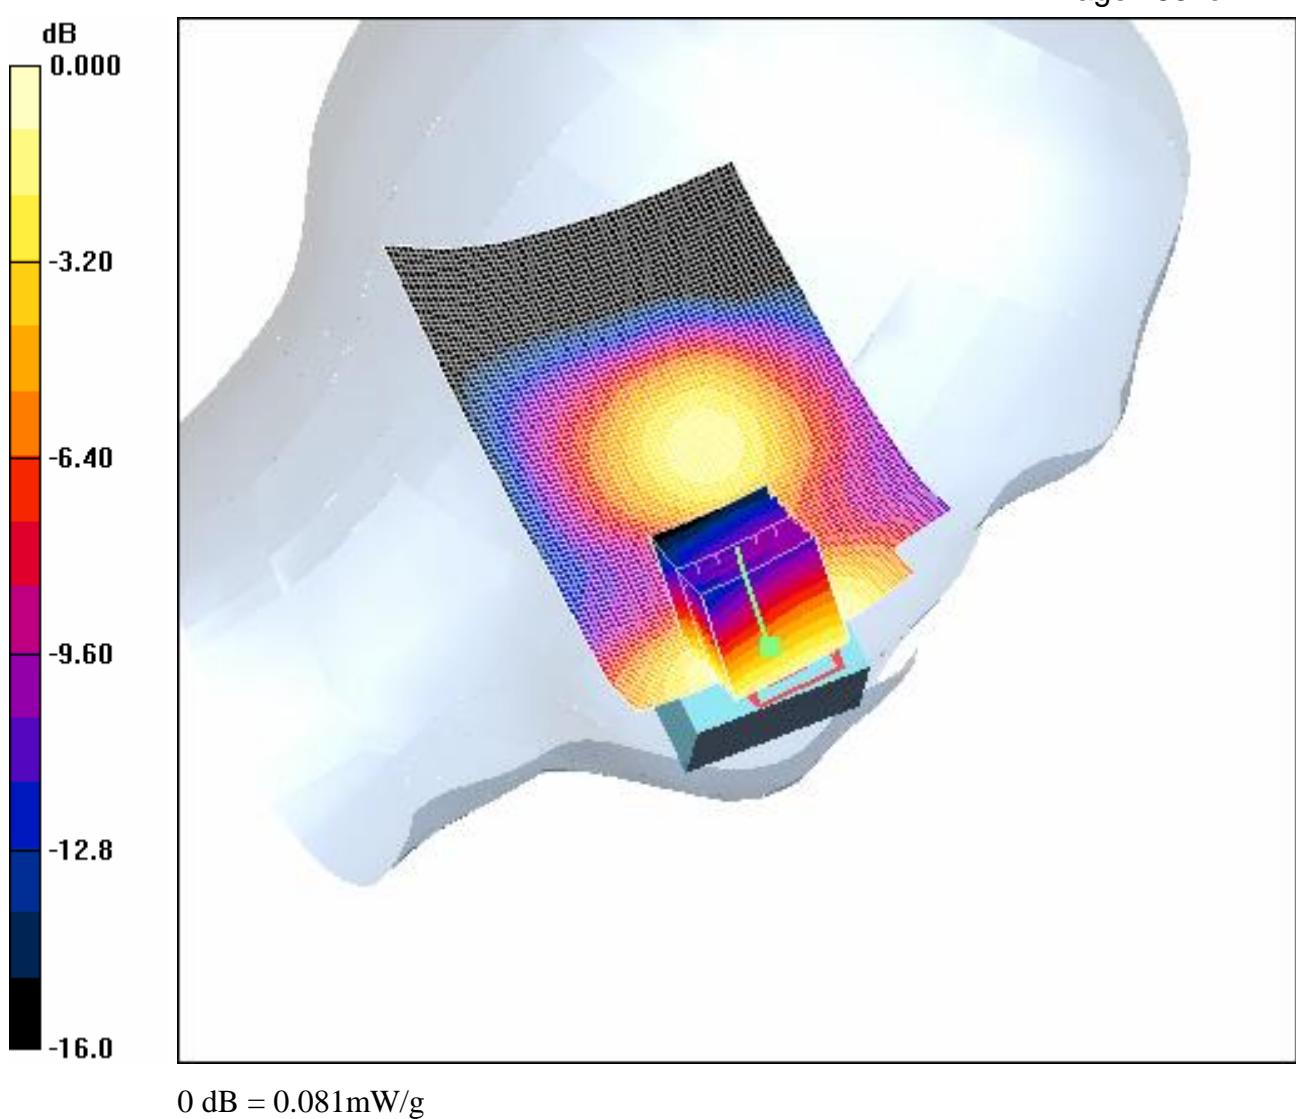

4.2.14 PCS1900-LeftHandSide-WorstCase-Low

Date/Time: 2007-7-20 16:47:40

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-Low(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 86 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low(JN)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.526 mW/g


Cheek position - Low(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.39 V/m; Power Drift = 0.303 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.273 mW/g

Maximum value of SAR (measured) = 0.488 mW/g

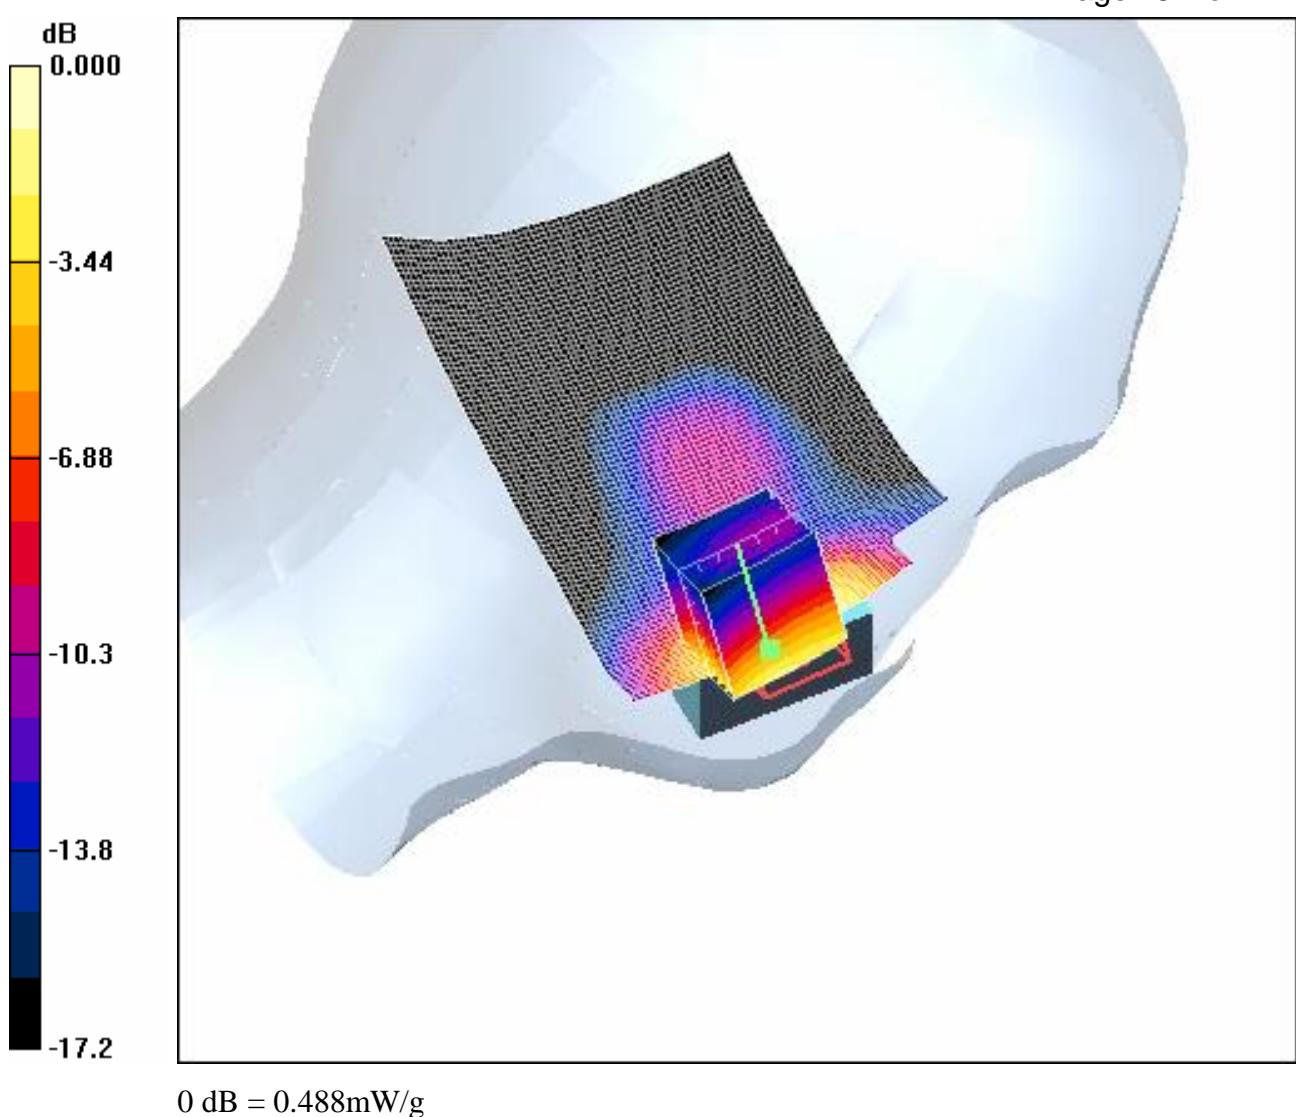

0 dB = 0.488mW/g

4.2.15 PCS1900-LeftHandSide-WorstCase-High

Date/Time: 2007-7-20 17:20:50

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-High(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 88 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High(JN)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.508 mW/g


Cheek position - High(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.10 V/m; Power Drift = -0.204 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.262 mW/g

Maximum value of SAR (measured) = 0.469 mW/g

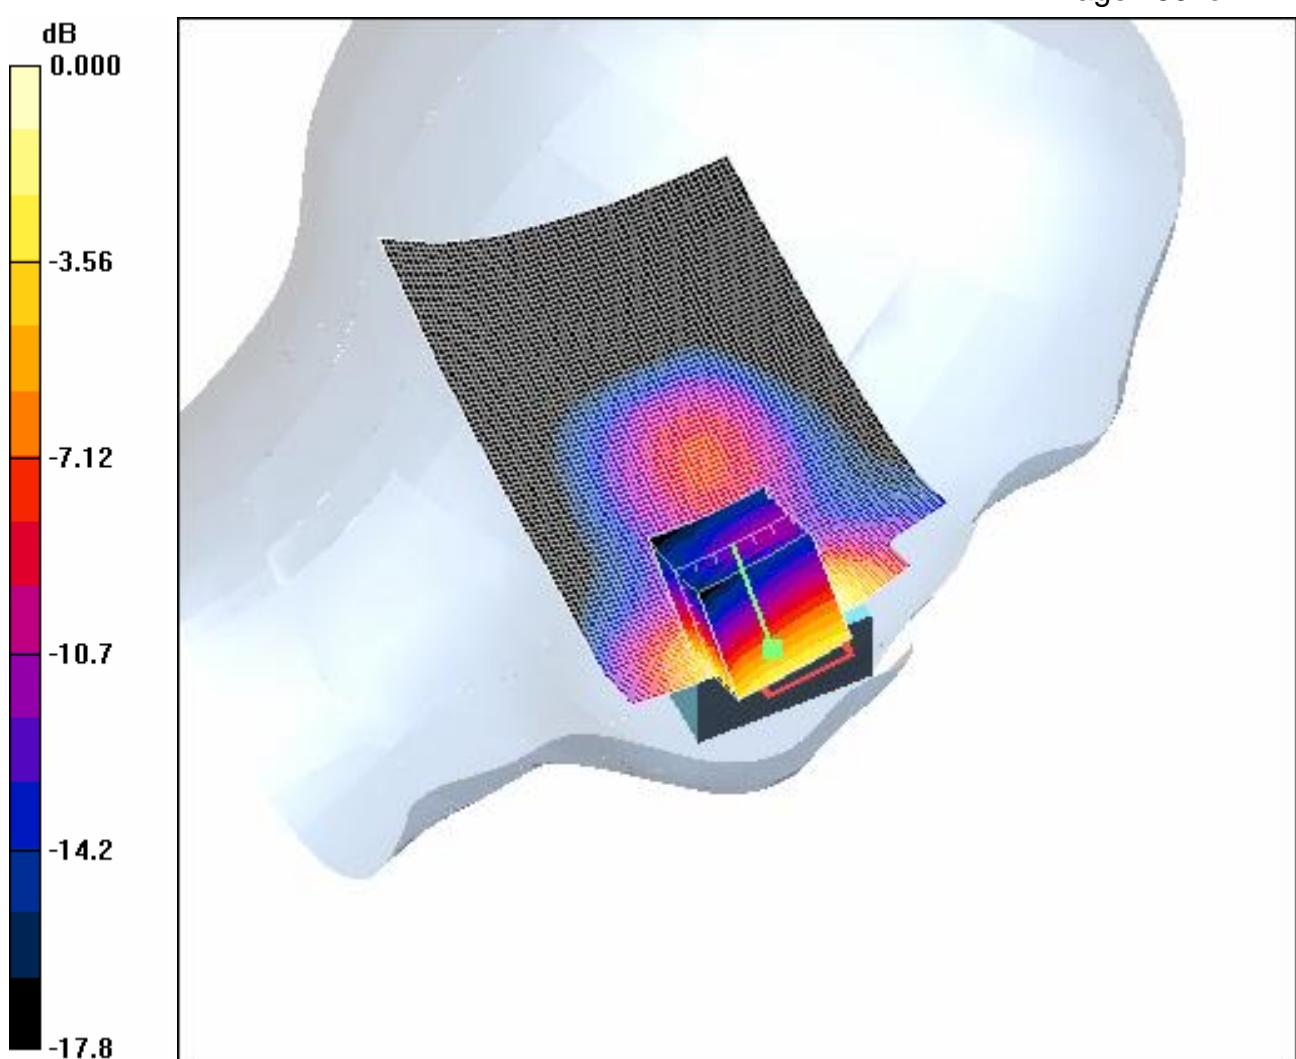

0 dB = 0.469mW/g

4.2.16 PCS1900-RightHandSide-Cheek-Middle

Date/Time: 2007-7-20 9:02:07

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-Middle(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 90 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle(JN)/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.582 mW/g


Cheek position - Middle(JN)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.96 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.595 mW/g

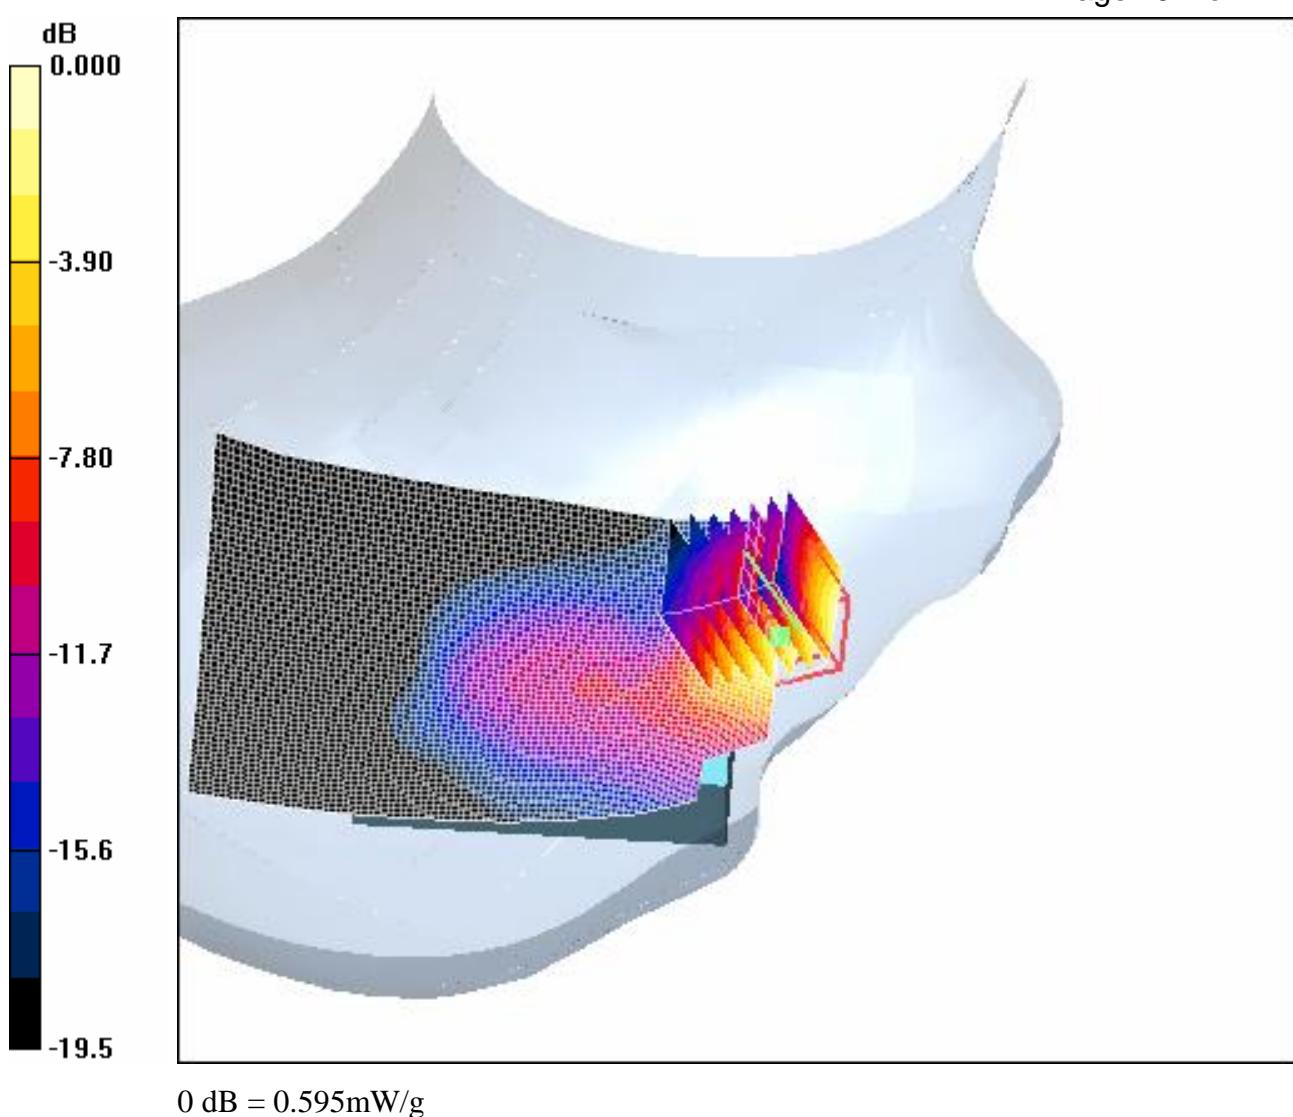

0 dB = 0.595mW/g

4.2.17 PCS1900-RightHandSide-Tilt-Middle

Date/Time: 2007-7-20 19:06:21

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Tilt-Middle(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle(JN)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.067 mW/g


Tilt position - Middle(JN)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.99 V/m; Power Drift = -0.160 dB

Peak SAR (extrapolated) = 0.091 W/kg

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

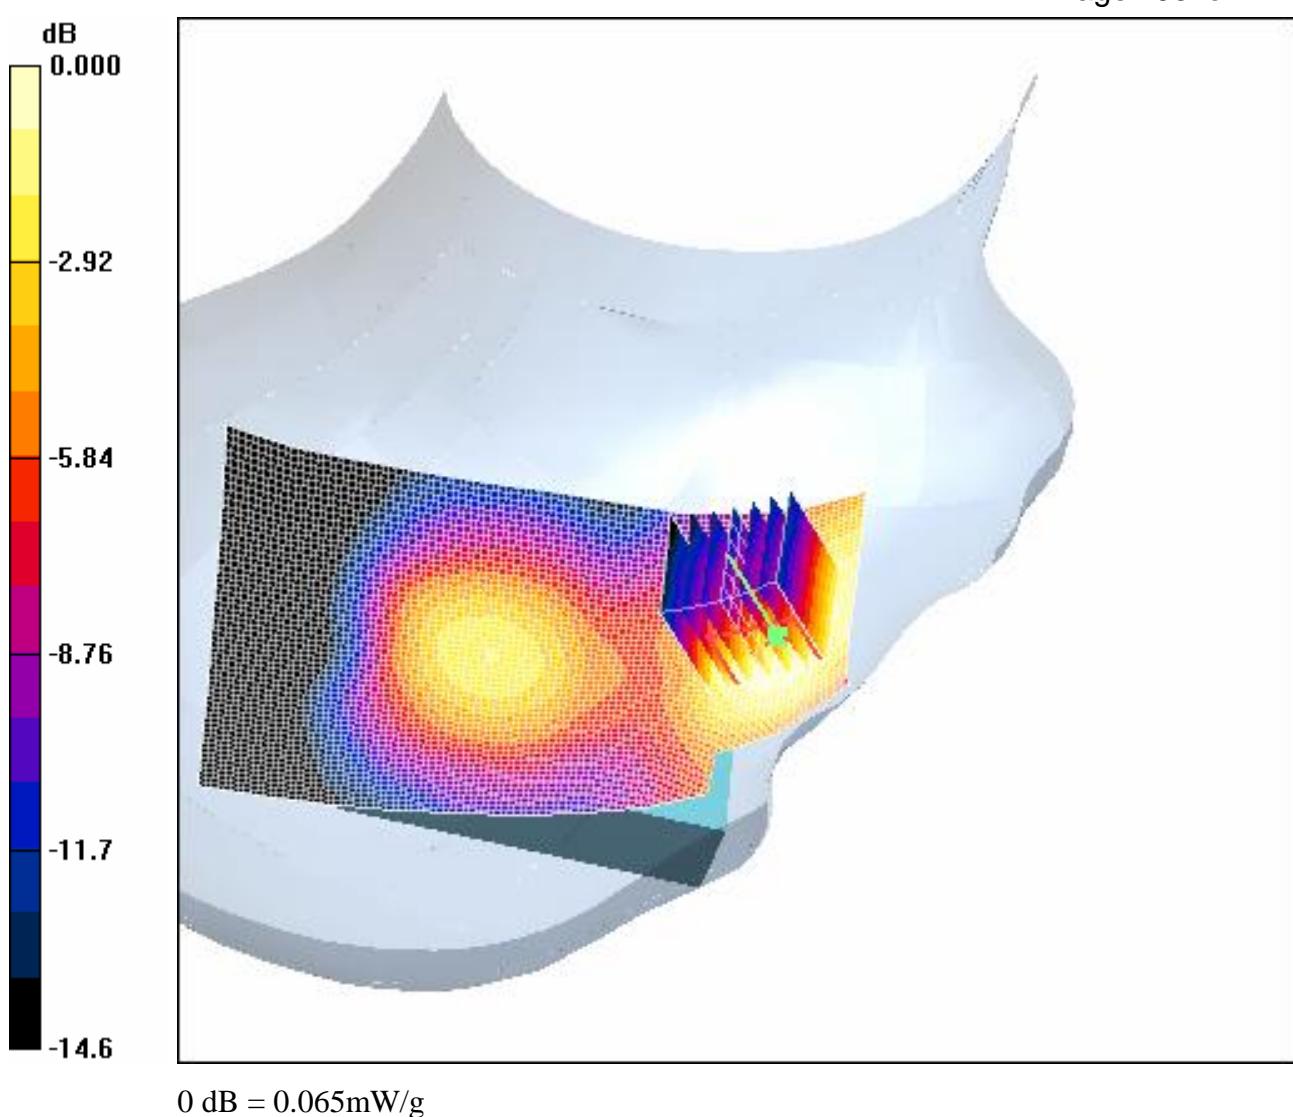

0 dB = 0.065mW/g

4.2.18 PCS1900-RightHandSide-WorstCase-Low

Date/Time: 2007-7-20 17:47:27

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-Low(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 94 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low(JN)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.447 mW/g


Cheek position - Low(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.23 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 0.660 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.456 mW/g

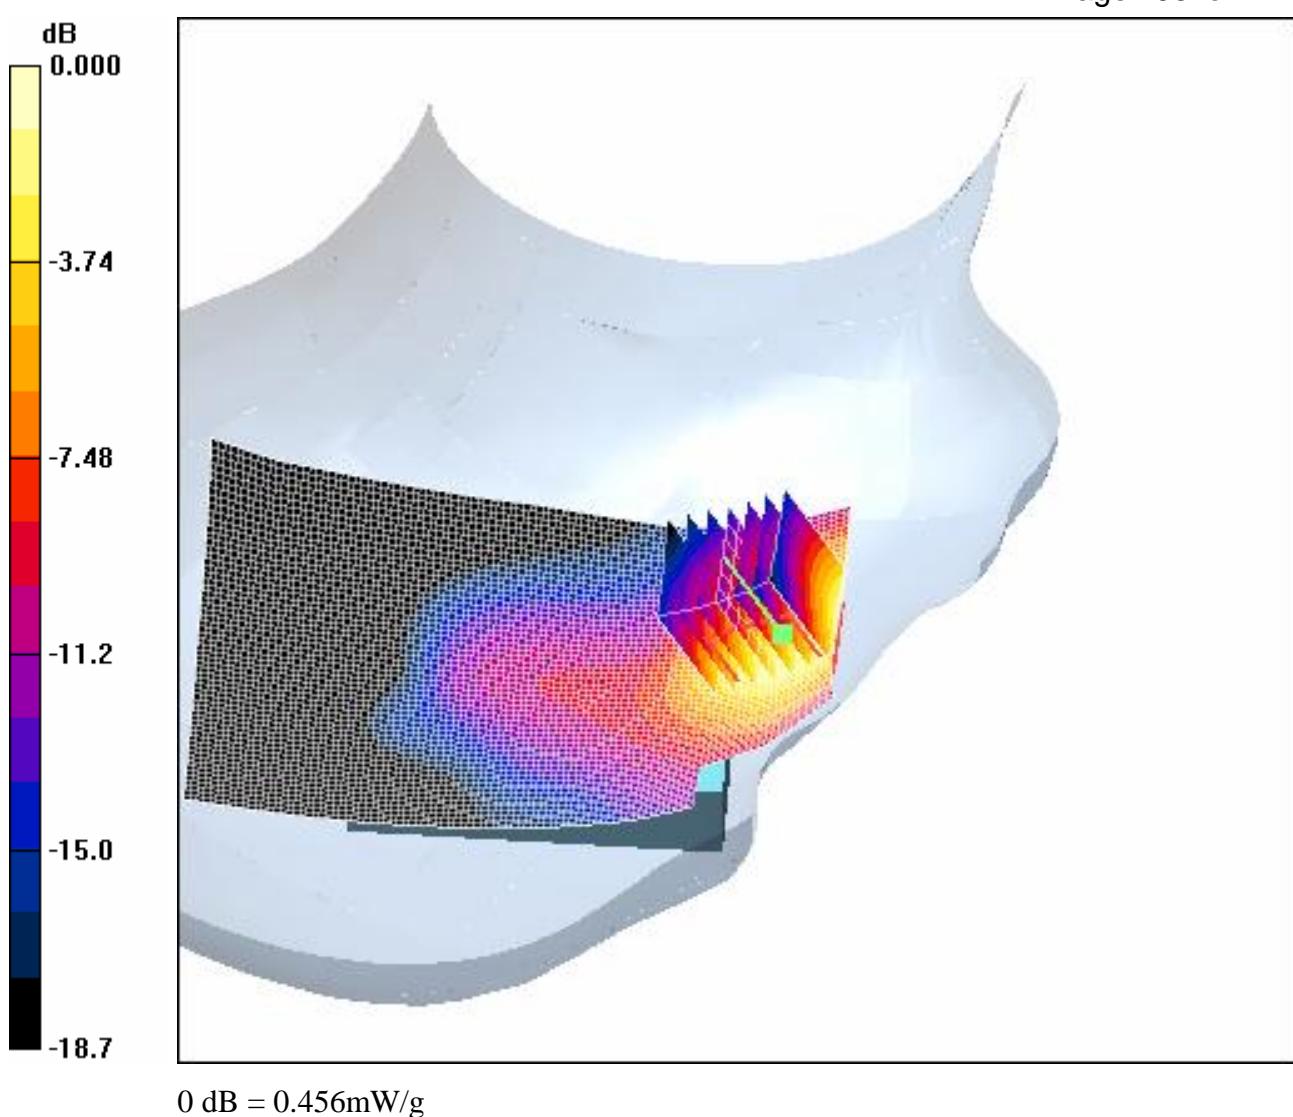

0 dB = 0.456mW/g

4.2.19 PCS1900-RightHandSide-WorstCase-High

Date/Time: 2007-7-20 18:27:06

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 96 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High(JN)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.499 mW/g


Cheek position - High(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.50 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.498 mW/g

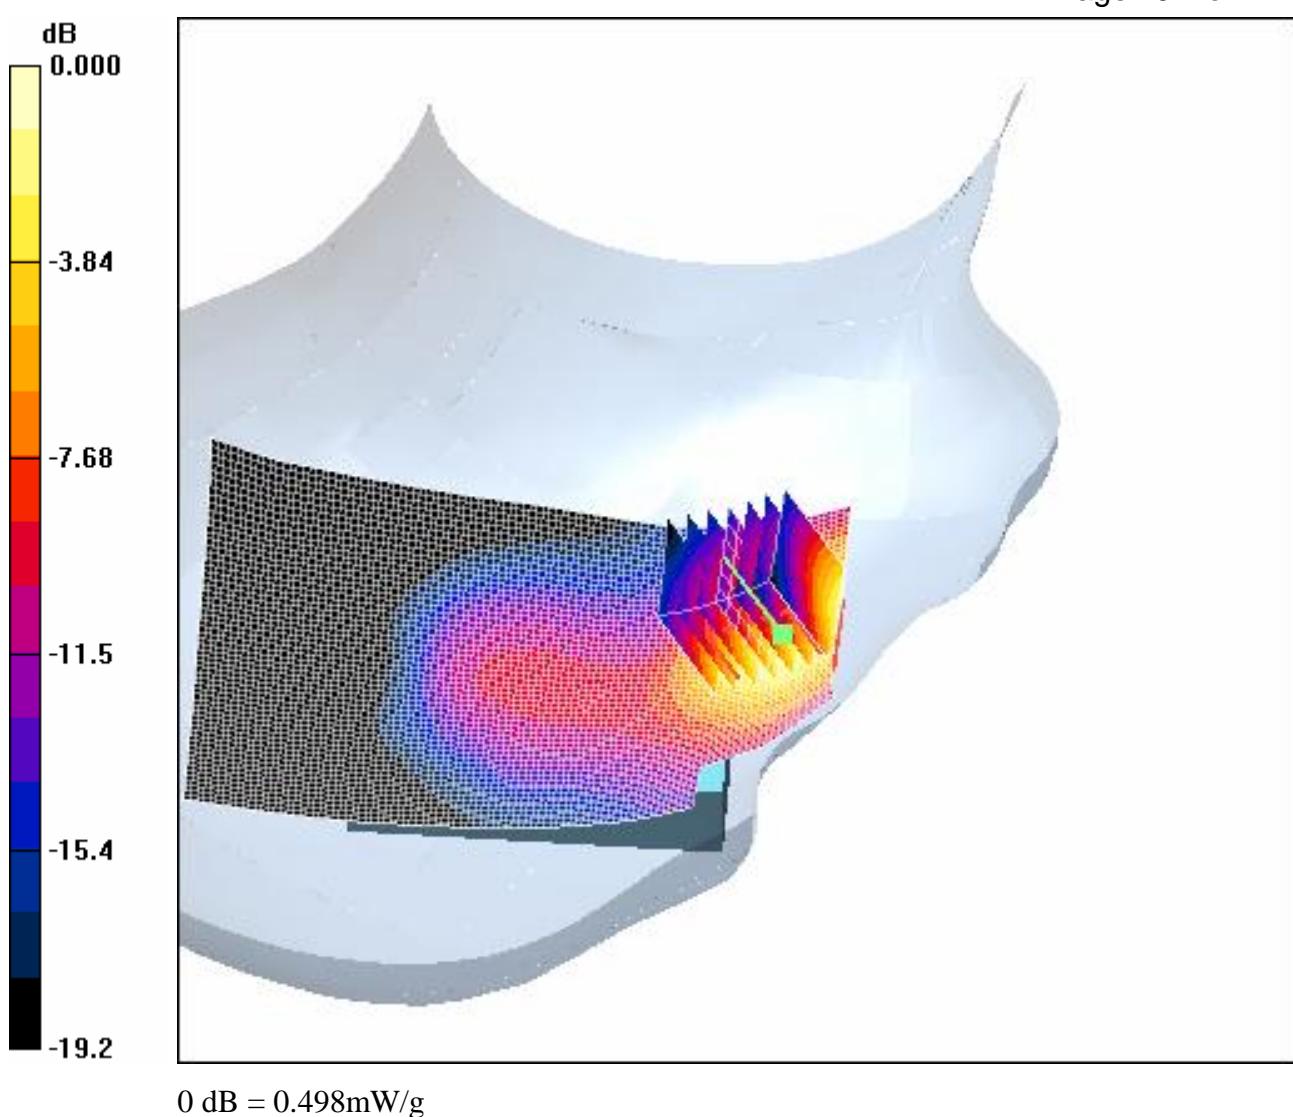

4.2.20 PCS1900-Body-Worn -Low

Date/Time: 2007-7-18 9:54:41

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-Low-2.0cm(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 98 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900-Body Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle(JN)/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.377 mW/g


Body Worn - Middle(JN)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.86 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.344 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.371 mW/g

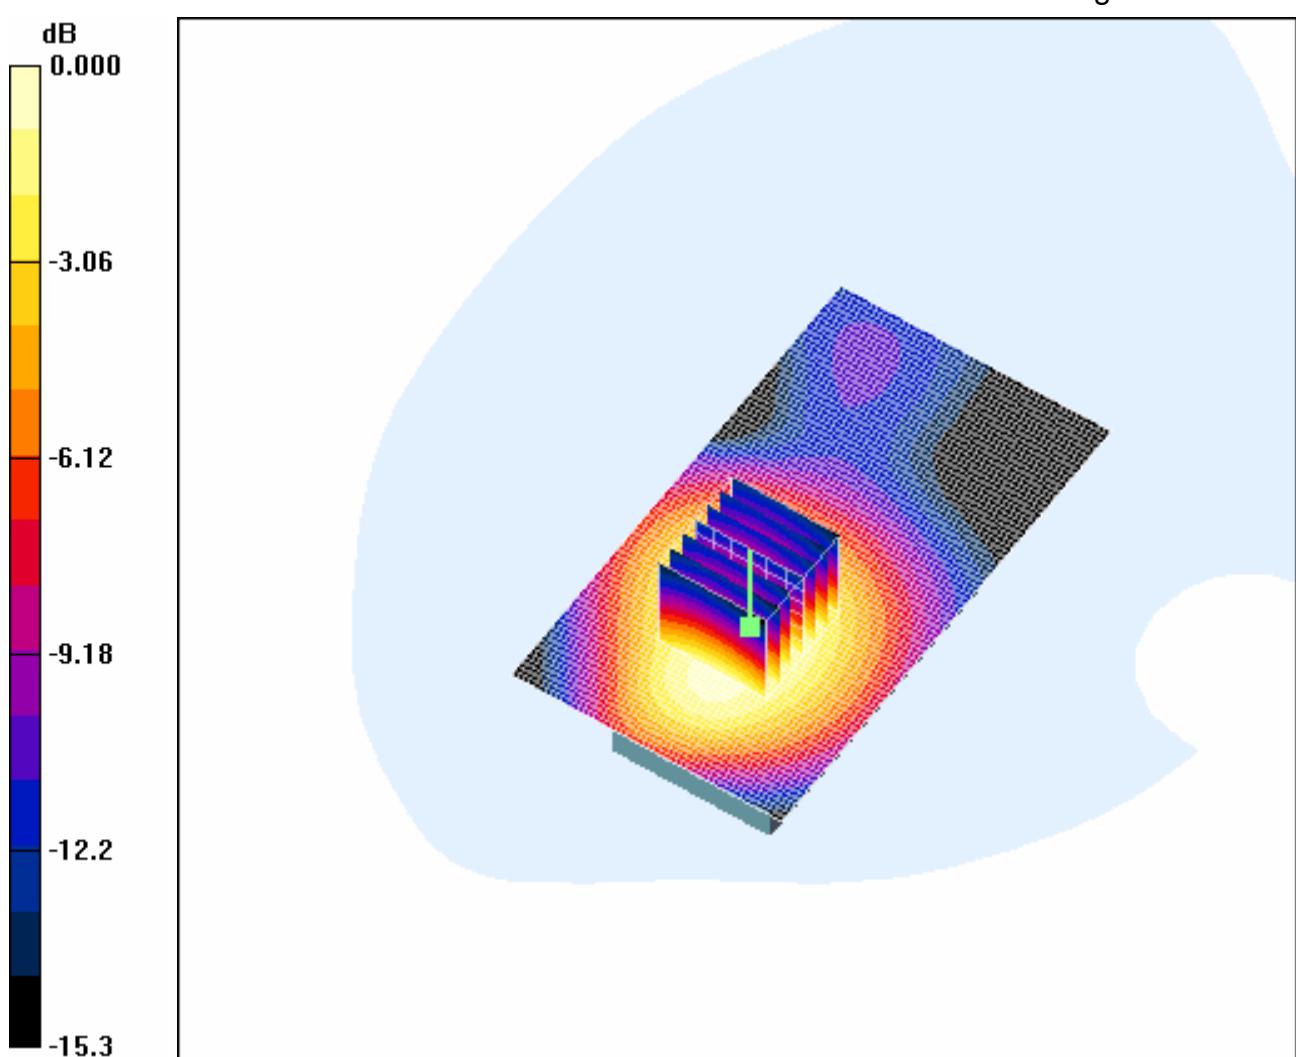

0 dB = 0.371mW/g

4.2.21 PCS1900-Body-Worn -Middle

Date/Time: 2007-7-18 10:25:17

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-Middle-2.0cm(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 100 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: 1900-Body Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low(JN)/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.309 mW/g


Body Worn - Low(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.51 V/m; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.304 mW/g

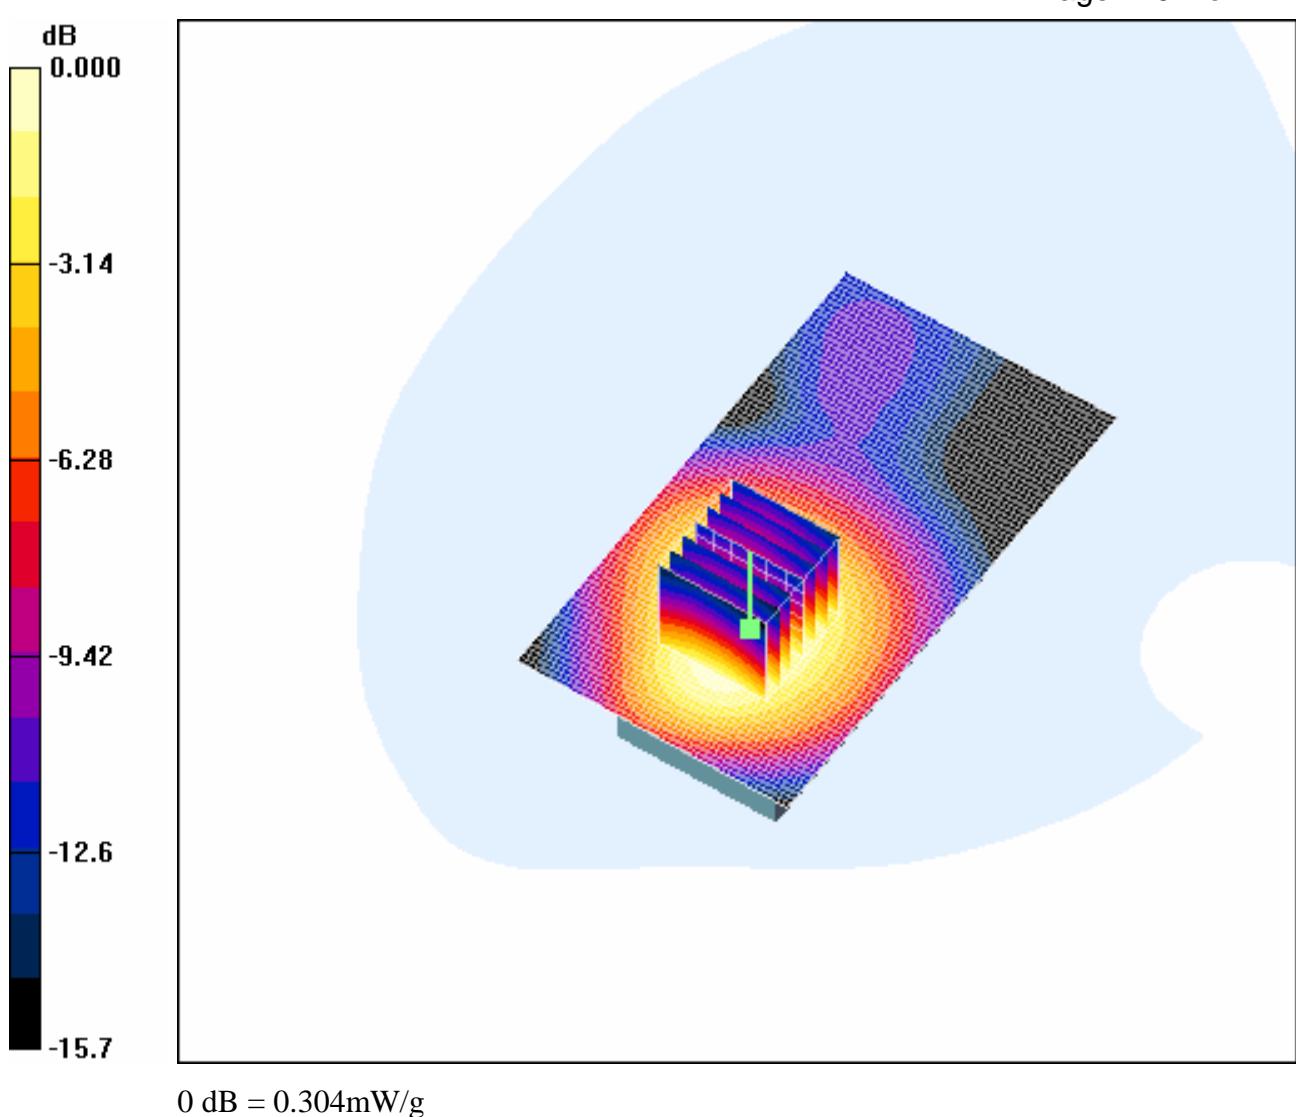

0 dB = 0.304mW/g

4.2.22 PCS1900-Body-Worn -High

Date/Time: 2007-7-18 10:55:49

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-High-2.0cm(JN)

DUT: GSM10459962-Body; Type: Body; Serial: 011163000026156

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 102 of 142

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: 1900-Body Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.6 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High(JN)/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.287 mW/g


Body Worn - High(JN)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.42 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.282 mW/g

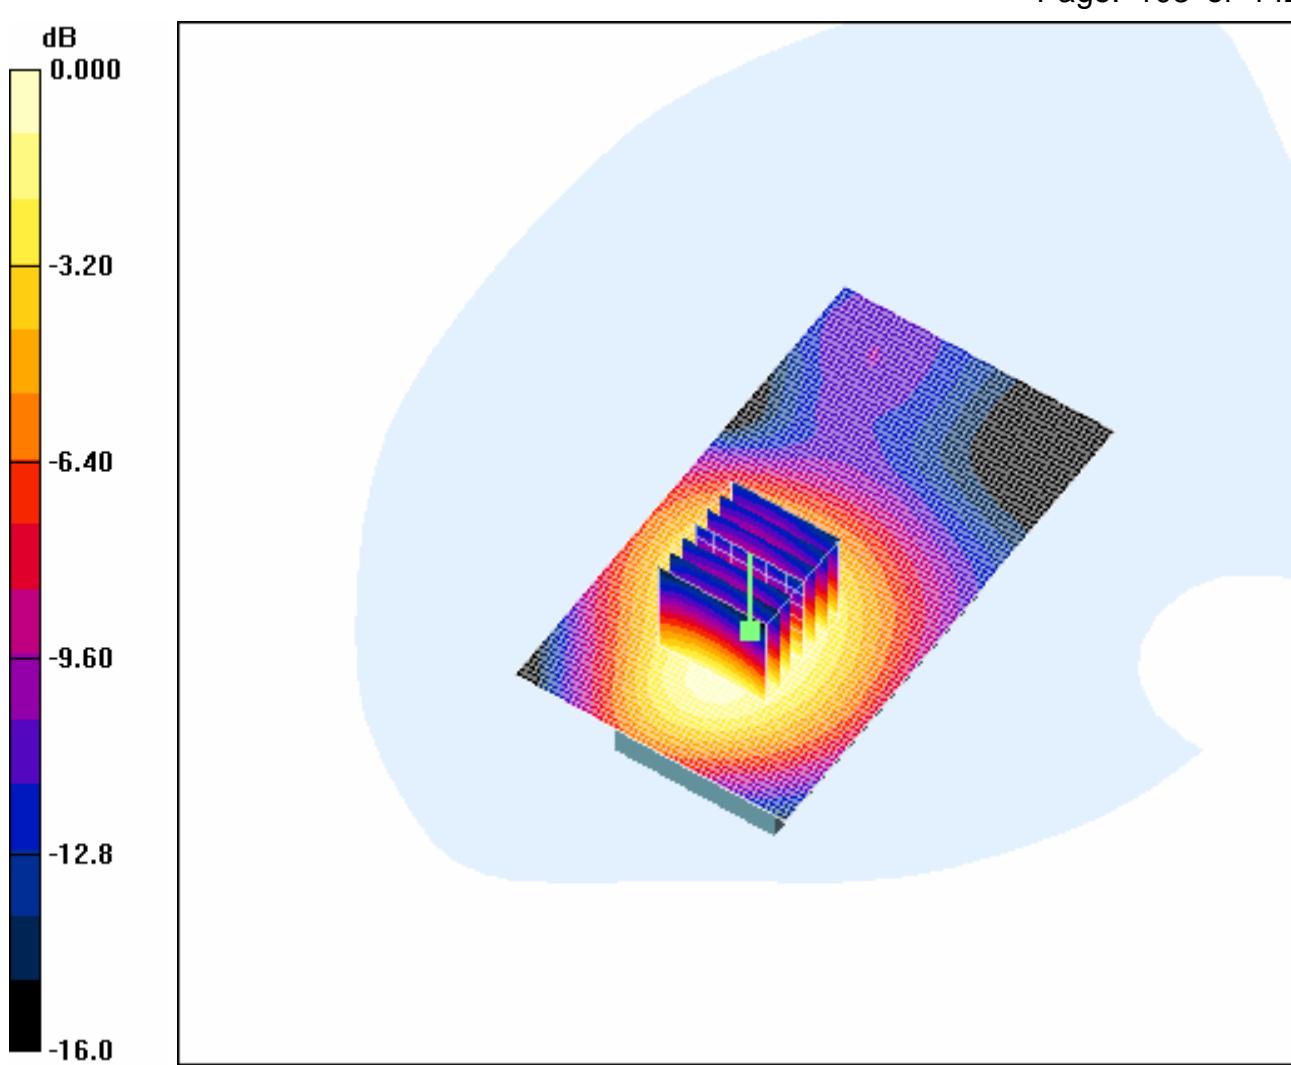

Appendix

1. Photographs of Test Setup

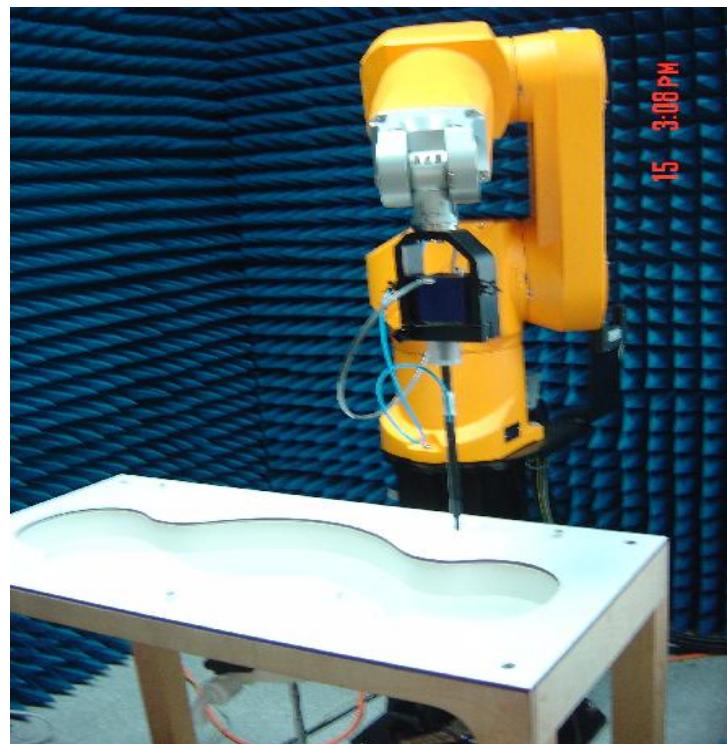


Fig.1 Photograph of the SAR measurement System

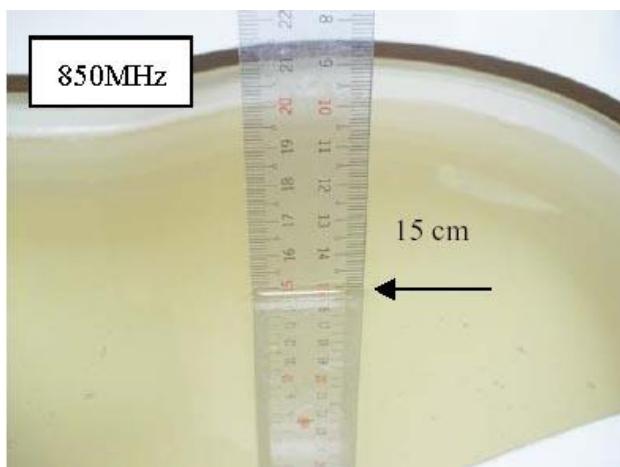


Fig.2 Photograph of the Tissue Simulant
Fluid Liquid depth 15cm for
Left-Head Side

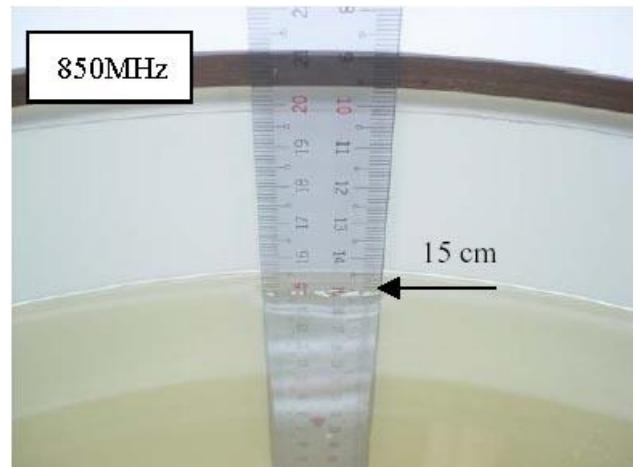


Fig.3 Photograph of the Tissue Simulant
Liquid depth 15cm for Body-Worn

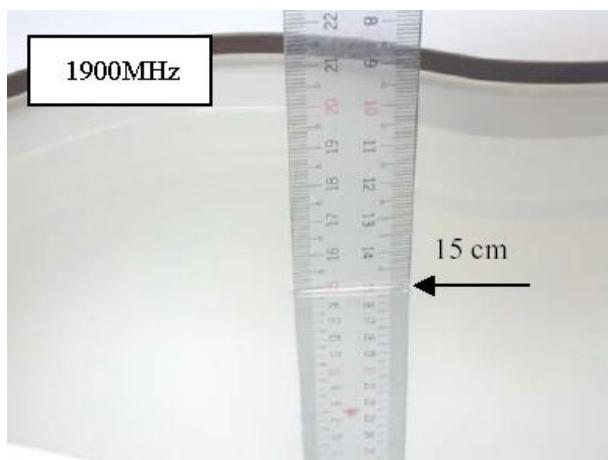


Fig.4 Photograph of the Tissue Simulant Fluid Liquid depth 15cm for Right-Head Side

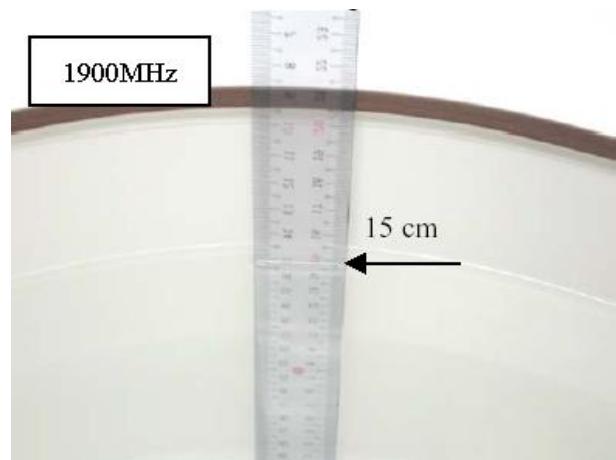


Fig.5 Photograph of the Tissue Simulant Liquid depth 15cm for Body-Worn



Fig.6 Photograph of the Left Hand Side Cheek status

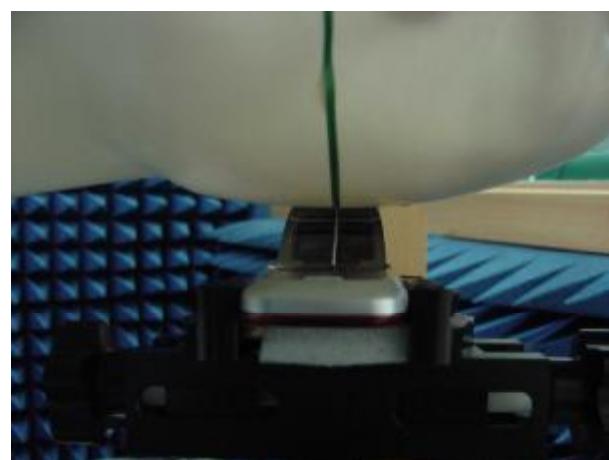


Fig.7 Photograph of the Left Hand Side Tilt status

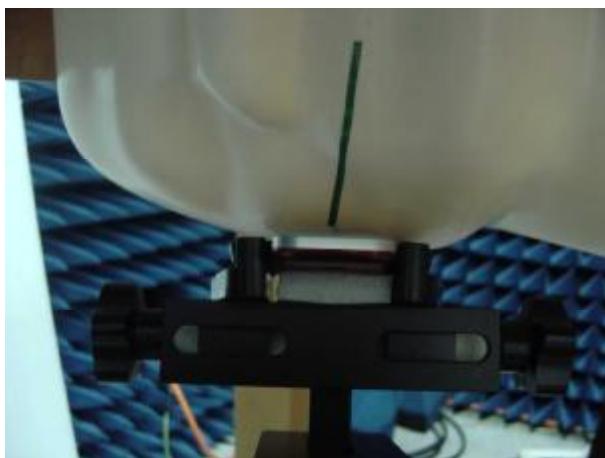


Fig.8 Photograph of the Right Hand Side Cheek status

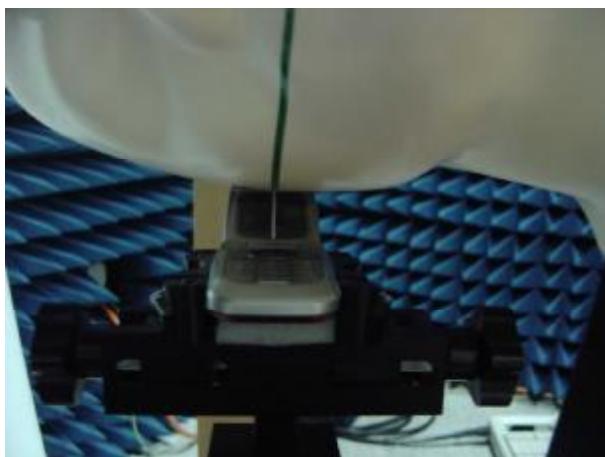


Fig.9 Photograph of the Right Hand Side Tilt status

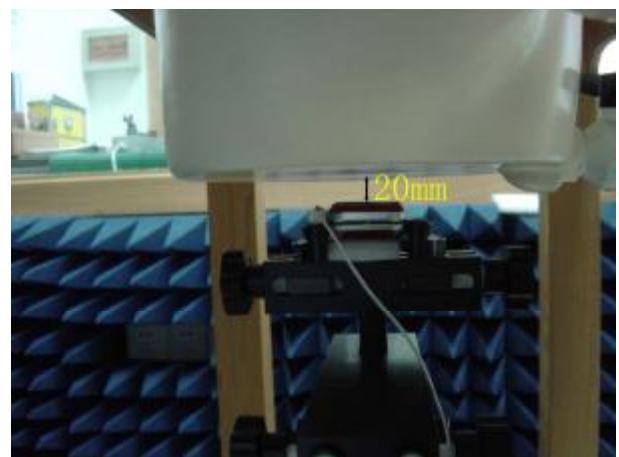
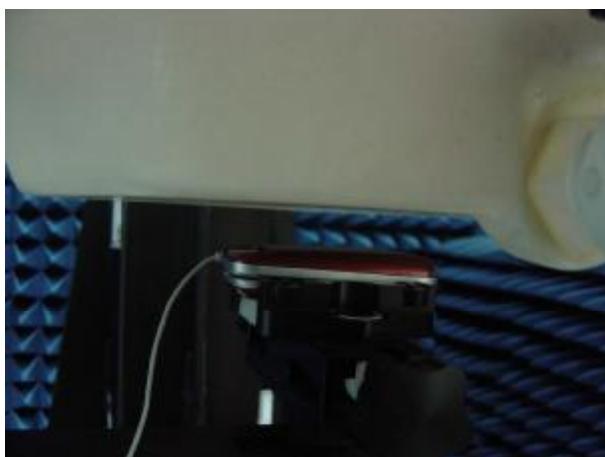


Fig.10 Photograph of the BodyWorn status

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 107 of 142

2. Photographs of the EUT



Fig.11 Front View



Fig.12 Back View

3. Photographs of the battery



Fig. 13 Battery For BYD

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 108 of 142



Fig. 14 Battery For JINNENG

4. Photograph of the charger



Fig.15 Charger

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 109 of 142

5. Probe Calibration certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client SGS-CSTC (MTT)

Certificate No: ES3-3088_Dec06

CALIBRATION CERTIFICATE

Object ES3DV3 - SN:3088

Calibration procedure(s) QA CAL-01.v5
Calibration procedure for dosimetric E-field probes

Calibration date: December 12, 2006

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07

Secondary Standards	ID #	Check Date (In house)	Scheduled Check
RF generator HP 8848C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

Calibrated by:	Name	Function	Signature
	Katja Pokrovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Issued: December 13, 2006

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)x,y,z = NORMx,y,z * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCPx,y,z*: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z} * ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 111 of 142

ES3DV3 SN:3088

December 12, 2006

Probe ES3DV3

SN:3088

Manufactured:

July 20, 2005

Last calibrated:

September 13, 2005

Recalibrated:

December 12, 2006

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3088

December 12, 2006

DASY - Parameters of Probe: ES3DV3 SN:3088**Sensitivity in Free Space^A**

NormX	$1.31 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	$1.23 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	$1.27 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	94 mV
DCP Y	94 mV
DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{be} [%]	Without Correction Algorithm	2.4	0.6
SAR _{be} [%]	With Correction Algorithm	1.0	0.0

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{be} [%]	Without Correction Algorithm	7.6	4.5
SAR _{be} [%]	With Correction Algorithm	0.1	0.2

Sensor OffsetProbe Tip to Sensor Center **2.0 mm**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.


^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3088

December 12, 2006

Frequency Response of E-Field



(TEM-Cell:ifi110 EXX, Waveguide: R22)

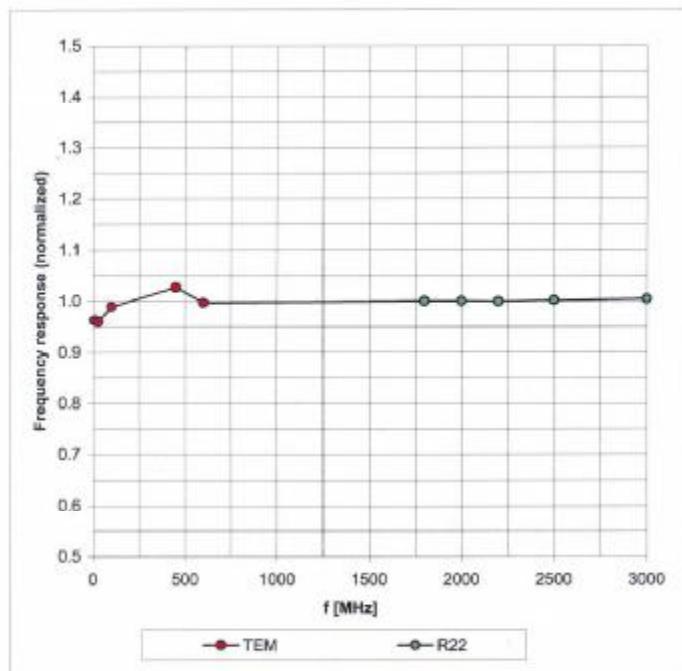

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3 SN:3088

December 12, 2006

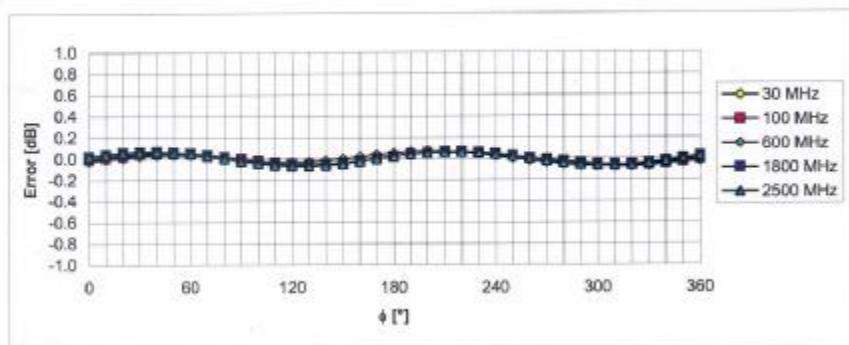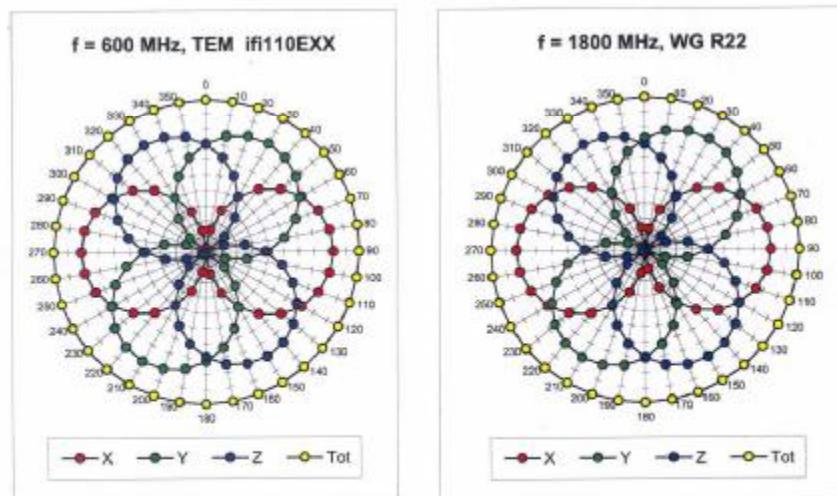
Receiving Pattern (ϕ), $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3 SN:3088

December 12, 2006

Dynamic Range f(SAR_{head})

(Waveguide R22, f = 1800 MHz)

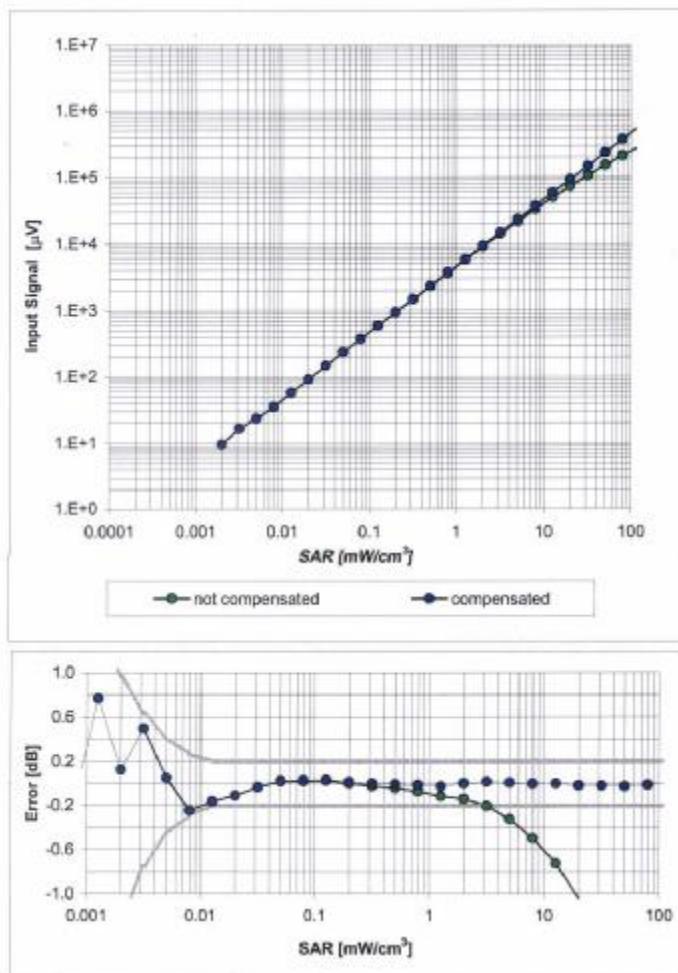


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

ES3DV3 SN:3088

December 12, 2006

Conversion Factor Assessment

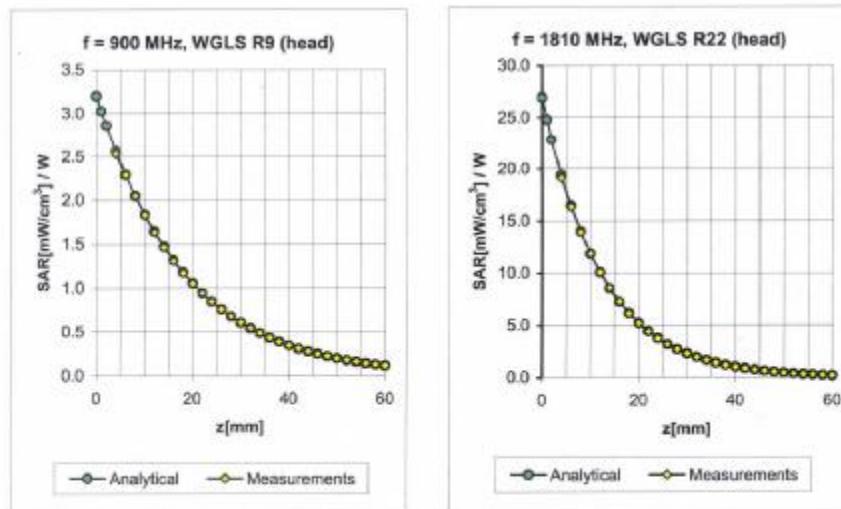


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	$\pm 50 / \pm 100$	Head	$41.5 \pm 5\%$	$0.97 \pm 5\%$	1.00	1.18	$6.00 \pm 11.0\% (k=2)$
1810	$\pm 50 / \pm 100$	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.73	1.39	$5.07 \pm 11.0\% (k=2)$
2000	$\pm 50 / \pm 100$	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.73	1.38	$4.97 \pm 11.0\% (k=2)$
2450	$\pm 50 / \pm 100$	Head	$39.2 \pm 5\%$	$1.80 \pm 5\%$	0.74	1.36	$4.69 \pm 11.8\% (k=2)$

900	$\pm 50 / \pm 100$	Body	$55.0 \pm 5\%$	$1.05 \pm 5\%$	1.00	1.17	$5.92 \pm 11.0\% (k=2)$
1810	$\pm 50 / \pm 100$	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	1.00	1.18	$4.68 \pm 11.0\% (k=2)$
2000	$\pm 50 / \pm 100$	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.89	1.27	$4.51 \pm 11.0\% (k=2)$
2450	$\pm 50 / \pm 100$	Body	$52.7 \pm 5\%$	$1.95 \pm 5\%$	0.80	1.12	$4.33 \pm 11.8\% (k=2)$

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3088

December 12, 2006

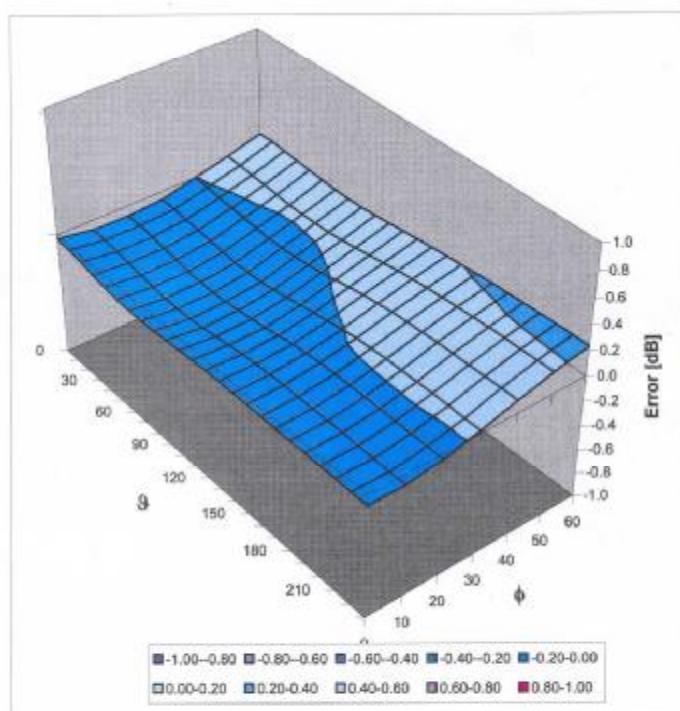Deviation from Isotropy in HSLError (ϕ, θ), f = 900 MHzUncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

6. DAE Calibration certification

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **SGS – CSTC (MTT)**Certificate No: **DAE3-569_Dec06****CALIBRATION CERTIFICATE**Object **DAE3 - SD 000 D03 AA - SN: 569**

Calibration procedure(s) **QA CAL-06.v12**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **December 8, 2006**Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Fluke Process Calibrator Type 702	SN: 6295803	13-Oct-06 (Elcal AG, No: 5492)	Oct-07
Keithley Multimeter Type 2001	SN: 0810278	03-Oct-06 (Elcal AG, No: 5478)	Oct-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS.006 AB 1002	15-Jun-06 (SPEAG, In house check)	In house check Jun-07

Calibrated by: Name **Stefano Giannotta** Function **Technician** Signature

Approved by: Name **Fir. Bornholt** Function **R&D Director** Signature

Issued: December 8, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters contain technical information as a result from the performance test and require no uncertainty.
- *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
- *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
- *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
- *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
- *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
- *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
- *Input resistance*: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
- *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
- *Power consumption*: Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = $6.1\mu V$, full range = $-100...+300 mV$ Low Range: 1LSB = $61nV$, full range = $-1.....+3mV$

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$404.742 \pm 0.1\% (k=2)$	$404.327 \pm 0.1\% (k=2)$	$404.103 \pm 0.1\% (k=2)$
Low Range	$3.93547 \pm 0.7\% (k=2)$	$3.93513 \pm 0.7\% (k=2)$	$3.93385 \pm 0.7\% (k=2)$

Connector Angle

Connector Angle to be used in DASY system	$80^\circ \pm 1^\circ$
---	------------------------

Appendix**1. DC Voltage Linearity**

High Range		Input (μ V)	Reading (μ V)	Error (%)
Channel X	+ Input	200000	199999.9	0.00
Channel X	+ Input	20000	20002.27	0.01
Channel X	- Input	20000	-19998.87	-0.01
Channel Y	+ Input	200000	200000.1	0.00
Channel Y	+ Input	20000	19999.20	0.00
Channel Y	- Input	20000	-20003.47	0.02
Channel Z	+ Input	200000	200000.0	0.00
Channel Z	+ Input	20000	20001.01	0.01
Channel Z	- Input	20000	-20001.46	0.01

Low Range		Input (μ V)	Reading (μ V)	Error (%)
Channel X	+ Input	2000	1999.9	0.00
Channel X	+ Input	200	199.91	-0.05
Channel X	- Input	200	-200.86	0.43
Channel Y	+ Input	2000	1999.9	0.00
Channel Y	+ Input	200	199.35	-0.32
Channel Y	- Input	200	-200.57	0.28
Channel Z	+ Input	2000	2000.1	0.00
Channel Z	+ Input	200	200.37	0.19
Channel Z	- Input	200	-201.04	0.52

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μ V)	Low Range Average Reading (μ V)
Channel X	200	-6.08	-11.00
	-200	8.46	12.92
Channel Y	200	6.85	6.78
	-200	-8.07	-8.07
Channel Z	200	-5.10	-5.59
	-200	4.40	3.64

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μ V)	Channel Y (μ V)	Channel Z (μ V)
Channel X	200	-	0.47	0.37
Channel Y	200	1.04	-	3.88
Channel Z	200	-1.66	0.07	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16395	15608
Channel Y	15744	16385
Channel Z	16312	16061

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	0.16	-0.70	1.24	0.30
Channel Y	-1.80	-2.48	-0.86	0.32
Channel Z	-0.29	-1.19	0.92	0.39

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance

	Zeroing (MOhm)	Measuring (MOhm)
Channel X	200.2	0.2001
Channel Y	204.0	0.2001
Channel Z	205.8	0.2000

8. Low Battery Alarm Voltage (verified during pre test)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (verified during pre test)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.0	+6	+14
Supply (- Vcc)	-0.01	-8	-9

7. Dipole Calibration certification

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **SGS-CSTC (MTT)**Certificate No: **D900V2-184_Dec06**

CALIBRATION CERTIFICATE

Object **D900V2 - SN: 184**Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kitsCalibration date: **December 6, 2006**Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Power sensor HP 8481A	US37292783	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Reference 20 dB Attenuator	SN: 5066 (20g)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference Probe ET3DV6 (HF)	SN 1507	19-Oct-06 (SPEAG, No. ET3-1507_Oct06)	Oct-07
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A,	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

Calibrated by:	Name	Function	Signature
	Claudio Leubler	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: December 8, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation.
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency and Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	$dx, dy, dz = 5 \text{ mm}$	
Frequency	$900 \text{ MHz} \pm 1 \text{ MHz}$	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	$22.0 \text{ }^{\circ}\text{C}$	41.5	0.97 mho/m
Measured Head TSL parameters	$(22.0 \pm 0.2) \text{ }^{\circ}\text{C}$	$40.8 \pm 6 \%$	$0.97 \text{ mho/m} \pm 6 \%$
Head TSL temperature during test	$(21.7 \pm 0.2) \text{ }^{\circ}\text{C}$	—	—

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.72 mW / g
SAR normalized	normalized to 1W	10.9 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	$10.8 \text{ mW / g} \pm 17.0 \% \text{ (k=2)}$
SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.75 mW / g
SAR normalized	normalized to 1W	7.00 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	$6.95 \text{ mW / g} \pm 16.5 \% \text{ (k=2)}$

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.4 ± 6 %	1.05 mho/m ± 6 %
Body TSL temperature during test	(21.6 ± 0.2) °C	—	—

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	250 mW input power	2.75 mW / g
SAR normalized	normalized to 1W	11.0 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	10.8 mW/g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.79 mW / g
SAR normalized	normalized to 1W	7.16 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	7.05 mW/g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	50.8 Ω - 6.2 jΩ
Return Loss	- 24.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 8.3 jΩ
Return Loss	- 20.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.411 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 01, 2003

DASY4 Validation Report for Head TSL

Date/Time: 05.12.2006 17:14:04

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:184

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(6.01, 6.01, 6.01); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA;
- Measurement SW: DASY4, V4.7 Build 46; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.4 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 4.01 W/kg

SAR(1 g) = 2.72 mW/g; SAR(10 g) = 1.75 mW/g

Maximum value of SAR (measured) = 2.96 mW/g

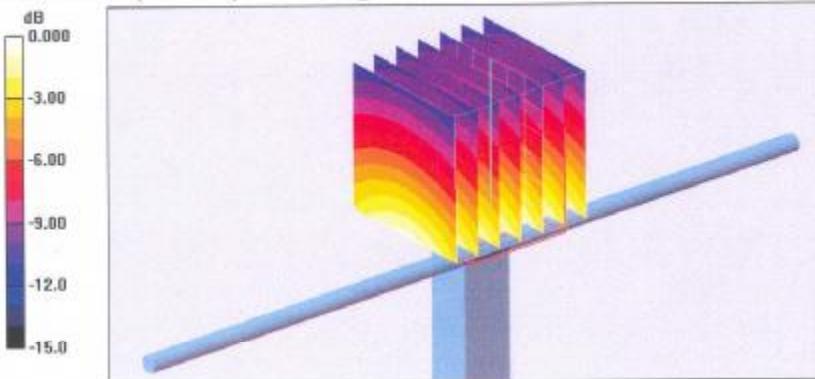


0 dB = 2.96mW/g

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 129 of 142

Impedance Measurement Plot for Head TSL

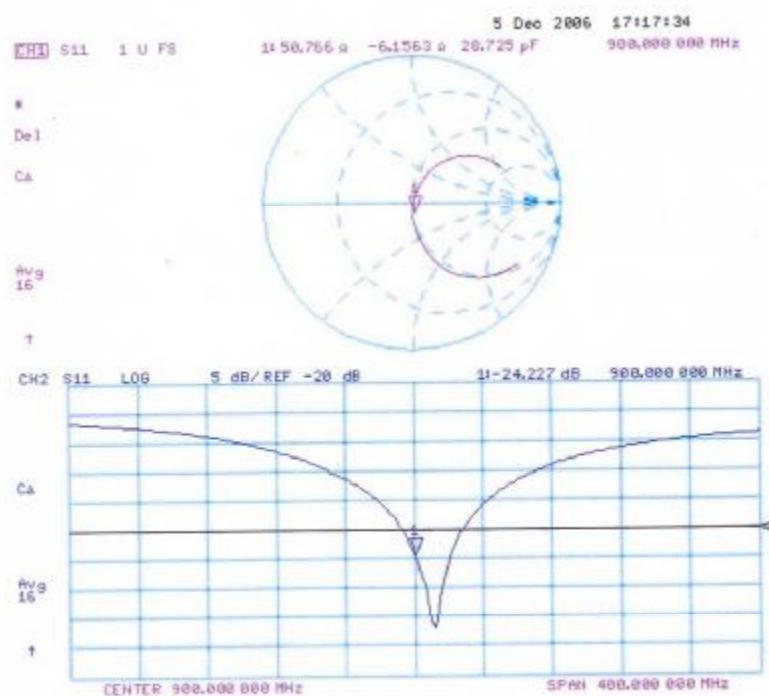

DASY4 Validation Report for Body TSL

Date/Time: 06.12.2006 15:53:38

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:184

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: MSL900;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.05 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(5.8, 5.8, 5.8); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA;
- Measurement SW: DASY4, V4.7 Build 46; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.1 V/m; Power Drift = 0.006 dB


Peak SAR (extrapolated) = 3.89 W/kg

SAR(1 g) = 2.75 mW/g; SAR(10 g) = 1.79 mW/g

Maximum value of SAR (measured) = 3.00 mW/g

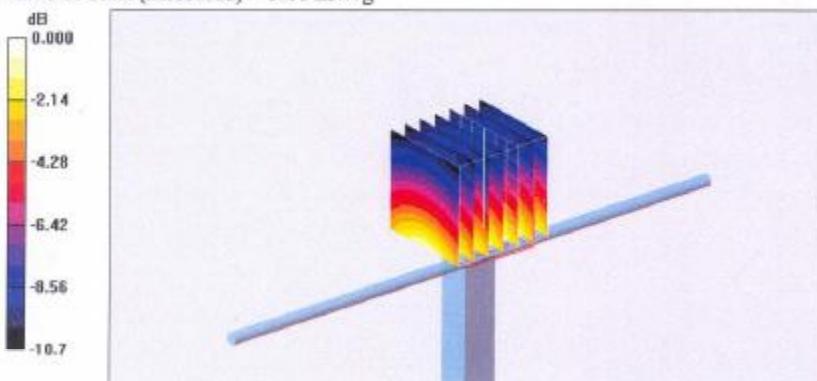

0 dB = 3.00mW/g

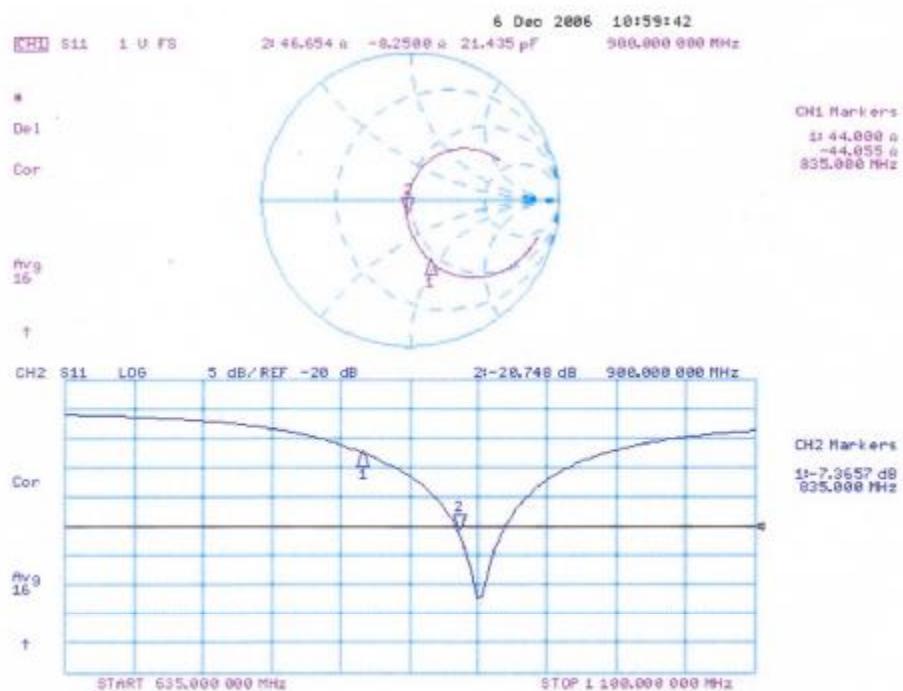Impedance Measurement Plot for Body TSL

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 132 of 142

Calibration Laboratory of

Schmid & Partner
Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS-CSTC (MTT)**

Certificate No: **D1900V2-5d028_Dec06**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d028**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **December 12, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Power sensor HP 8481A	US37292783	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Reference 20 dB Attenuator	SN: 5066 (20g)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference Probe ET3DV6	SN: 1507	19-Oct-06 (SPEAG, No. ET3-1507_Oct06)	Oct-07
Reference Probe ES3DV3	SN: 3025	19-Oct-06 (SPEAG, No. ES3-3025_Oct06)	Oct-07
DAE4	SN: 601	15-Dec-06 (SPEAG, No. DAE4-601_Dec06)	Dec-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, In house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, In house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, In house check Oct-06)	In house check: Oct-07

Calibrated by:	Name	Function	Signature
	Mike Meili	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: December 14, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.4 ± 6 %	1.40 mho/m ± 6 %
Head TSL temperature during test	(21.2 ± 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	9.36 mW / g
SAR normalized	normalized to 1W	37.4 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	36.6 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	4.96 mW / g
SAR normalized	normalized to 1W	19.8 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	19.5 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.8 ± 6 %	1.54 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.50 mW / g
SAR normalized	normalized to 1W	38.0 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	37.0 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.05 mW / g
SAR normalized	normalized to 1W	20.2 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	19.8 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	$54.8 \Omega + 4.5 j\Omega$
Return Loss	- 24.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$51.2 \Omega + 6.6 j\Omega$
Return Loss	- 23.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.197 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2002

DASY4 Validation Report for Head TSL

Date/Time: 11.12.2006 18:50:48

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvP(4.97, 4.97, 4.97); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn60I; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 10 mm/Area Scan (101x101x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 10.6 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.6 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 9.36 mW/g; SAR(10 g) = 4.96 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

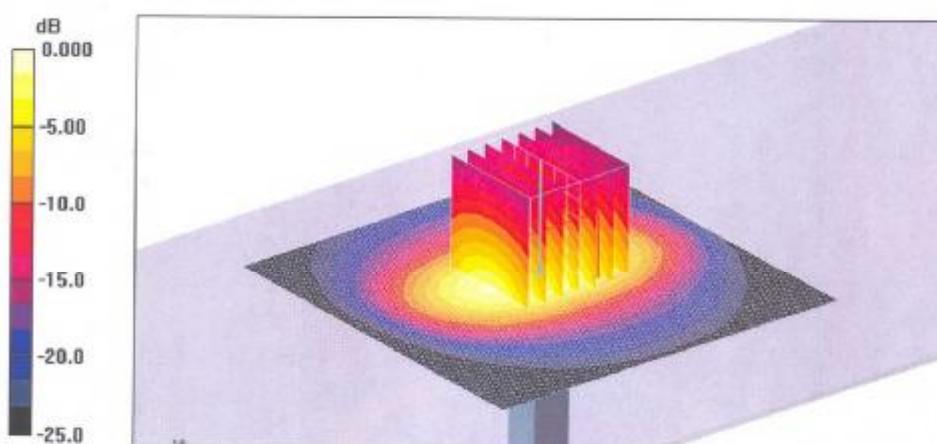


0 dB = 10.6mW/g

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 138 of 142

Impedance Measurement Plot for Head TSL

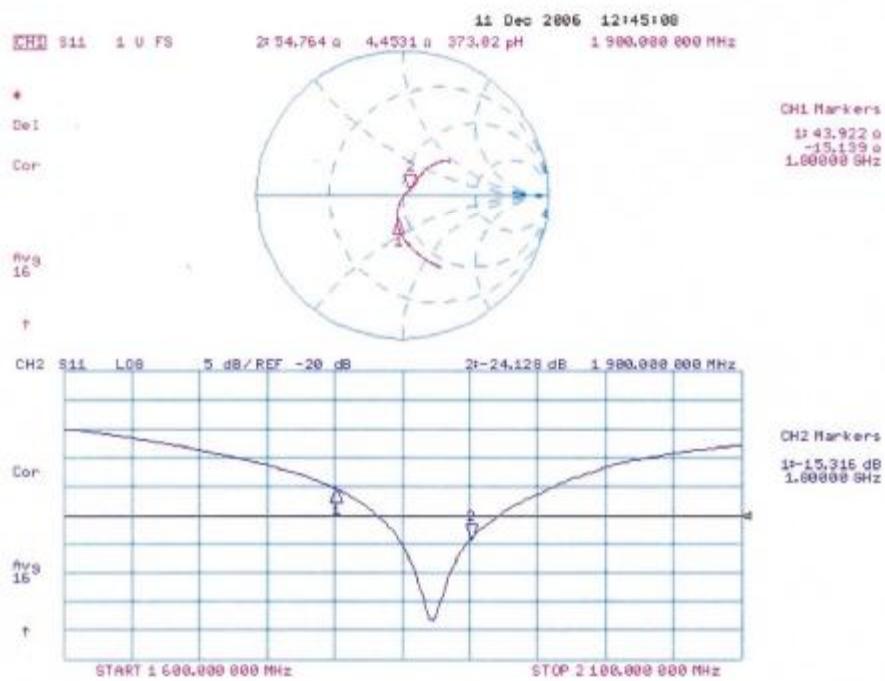

DASY4 Validation Report for Body TSL

Date/Time: 12.12.2006 16:43:40

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.43, 4.43, 4.43); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.1 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.5 mW/g; SAR(10 g) = 5.05 mW/g

Maximum value of SAR (measured) = 10.4 mW/g

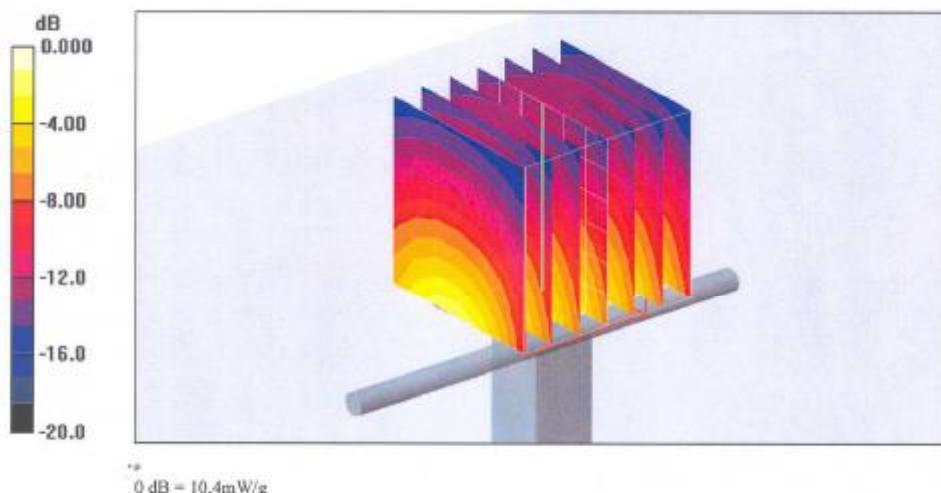


* 0 dB = 10.4mW/g

Order No: GSM10459962-1

Date: Jul. 23, 2007

Page: 140 of 142

Impedance Measurement Plot for Body TSL

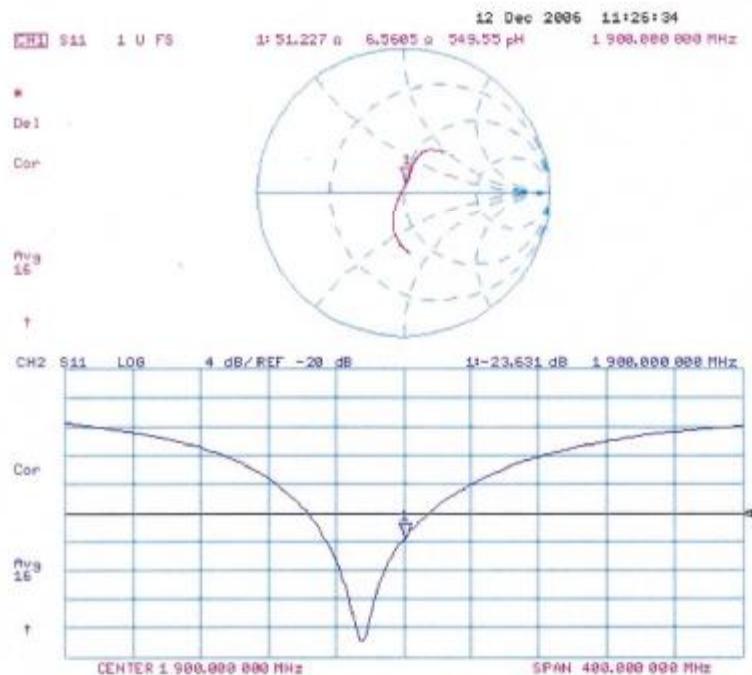

8. Uncertainty analysis

Error Description	Tol. (± %)	Prob. dist.	Div.	(c_i) (1g)	(c_i) (10g)	Std. unc. (± %) (1g)	(v_i)
Measurement System							
Probe Calibration	4.8	N	1	1	1	4.8	4.8
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	0	R	$\sqrt{3}$	1	1	0	0
Boundary Effects	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
System Detection Limit	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	N	1	1	1	1.0	1.0
Response Time	0	R	$\sqrt{3}$	1	1	0	0
Integration Time	0	R	$\sqrt{3}$	1	1	0	0
RF Ambient Conditions	3.0	R	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner	0.4	R	$\sqrt{3}$	1	1	0.2	0.2
Probe Positioning	2.9	R	$\sqrt{3}$	1	1	1.7	1.7
Algorithms for Max. SAR Eval.	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Dipole							
Dipole Axis to Liquid Distance	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Input power and SAR drift meas.	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Phantom and Tissue Param.							
Phantom Uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid Conductivity (target)	5.0	R.	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid Permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined Stdandard Uncertainty						8.4	8.1
Coverage Factor for 95%	kp=2						
Expanded Uncertainty						16.8	16.2

Dasy4 Uncertainty Budget

9. Phantom description

Schmid & Partner Engineering AG

Zooghausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT1S CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard	Pre-series, First article

Standards

- [1] CENELEC EN 60361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT1S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

28.02.2002

Signature / Stamp

Schmid & Partner
Engineering AG

Zooghausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

Page 10

End of Report