



TEST REPORT

No. 2008TAR033

for

TCT Mobile Suzhou Limited

GSM/GPRS 850/1900 dual-band mobile phone

Type: OT-S521A

with

Hardware Version: PIO2

Software Version: V929

Issued Date: Jul 23th, 2008



No. DAT-P-114/01-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Information Industry

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0)10-62303288-2105, Fax:+86(0)10-62304793 Email:welcme@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	5
4. REFERENCE DOCUMENTS.....	5
4.1. REFERENCE DOCUMENTS FOR TESTING.....	5
5. LABORATORY ENVIRONMENT.....	6
6. SUMMARY OF TEST RESULTS.....	7
7. TEST EQUIPMENTS UTILIZED.....	7
ANNEX A: EUT PHOTOGRAPH.....	8
ANNEX B: MEASUREMENT RESULTS.....	14
ANNEX C: TEST LAYOUT.....	18

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MII
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100083
Telephone: 00861062303288
Fax: 00861062304793

1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: May 5th, 2008
Testing End Date: May 5th, 2008

1.4. Signature




Zi Xiaogang

(Prepared this test report)



Sun Xiangqian

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Suzhou Limited
Address /Post: 4F, South Building, No.2966, JinKe Road, Zhangjiang High-Tech Park
Shanghai 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460884
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Suzhou Limited
Address /Post: 4F, South Building, No.2966, JinKe Road, Zhangjiang High-Tech Park
Shanghai 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460884
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/GPRS 850/1900 dual-band mobile phone
Model	OT-S521A
FCC ID	RAD071
Hardware status	PIO2
Software status	V929
Power supply	Battery or Charger (AC Adaptor)

The GSM850/PCS1900 mobile phone, OT-S521A, supporting GSM850/GSM1900, manufactured by TCT Mobile Suzhou Limited is a variant of OT-S520A for the test. Only the T-Flash Card should be supported on the variant model. So the test result is coming from the OT-S520A.

Note: Photographs of EUT are shown in ANNEX A of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	011438000064260	PIO2	V929

*EUT ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	V 10.1.07
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURER	CAL DUE DATE
1	Test Receiver	ESS	847151/015	R&S	2008-10-30
2	Test Receiver	ESI40	831564/002	R&S	2009-2-11
3	BiLog Antenna	3142B	9908-1403	EMCO	2009-1-16
4	BiLog Antenna	VUL9163	9163 175	Schwarzbeck	2009-9-19
5	Signal Generator	SMT06	831285/005	R&S	2008-12-26
6	Signal Generator	SMP04	100070	R&S	2009-4-20
7	LISN	ESH2-Z5	829991/012	R&S	2008-8-13
8	Spectrum Analyzer	FSU26	200030	R&S	2009-6-18
9	Universal Radio Communication Tester	CMU200	100680	R&S	2008-8-23
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2009-3
11	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2009-3
12	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2009-3
13	Climatic chamber	SH-241	92003546	ESPEC	2009-5-15

ANNEX A: EUT photograph

External Photo



Mobile Phone



Mobile Phone



Charger (AC/DC Adapter)



Label of Charger (AC/DC Adapter)




Battery AE1



Battery AE1



Battery AE2

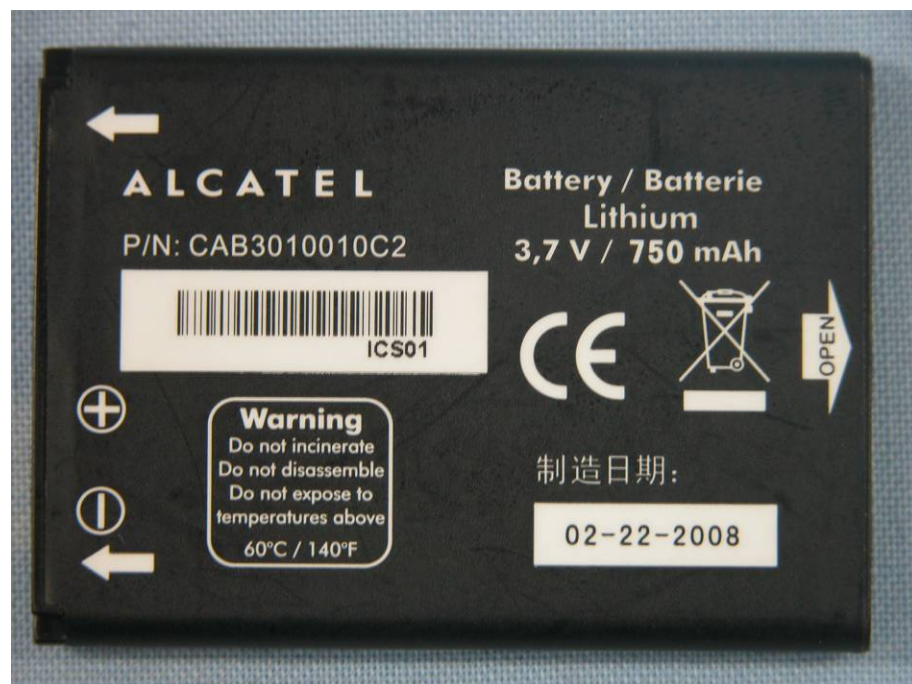

Battery AE2

Internal Photo




Mobile phone Disassembly



Mobile phone Disassembly



Mobile phone Disassembly

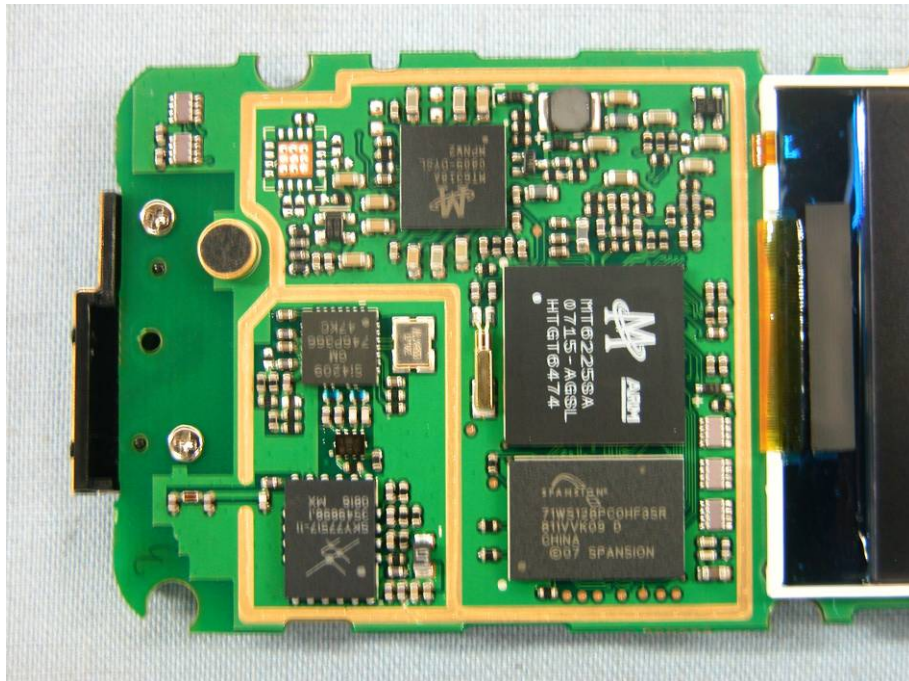

Mobile phone Disassembly

ANNEX B: MEASUREMENT RESULTS

B.1 Radiated Emission (§15.109(a))

B.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS) at a distance of 3 meters is tested. The test set-up please refers to Annex C.1.

B.1.2 EUT Operating Mode:

The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.

B.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

B.1.4 Measurement Results

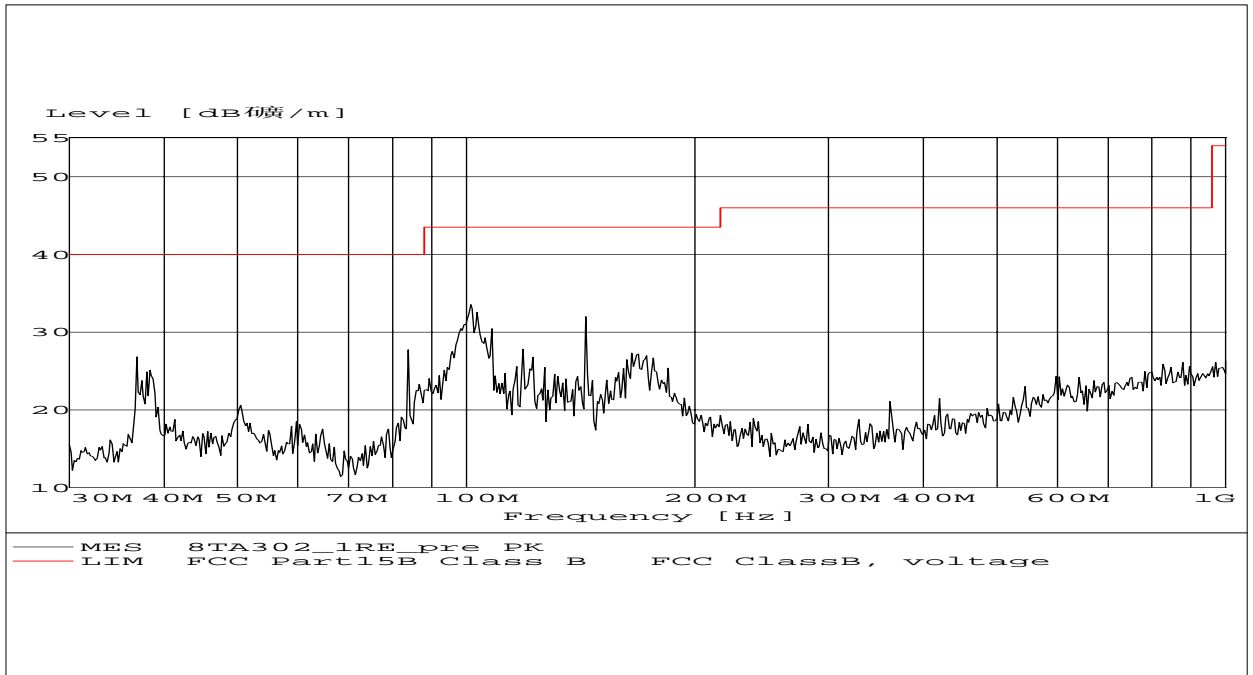


Figure B.1 Radiated Emission from 30MHz to 1GHz

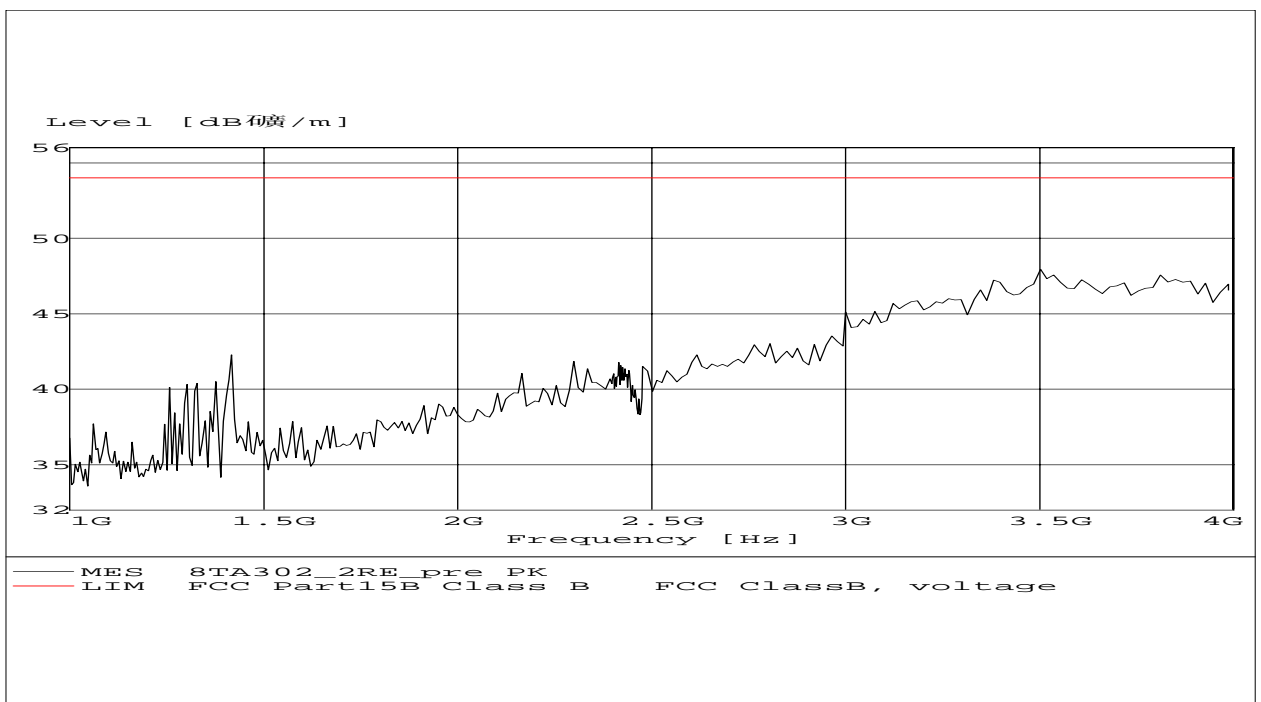


Figure B.2 Radiated Emission from 1GHz to 4GHz

B.2 Conducted Emission (§15.107(a))

B.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. The test set-up please refers to Annex C.2.

B.2.2 EUT Operating Mode:

The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.

B.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

B.2.4 Measurement Results

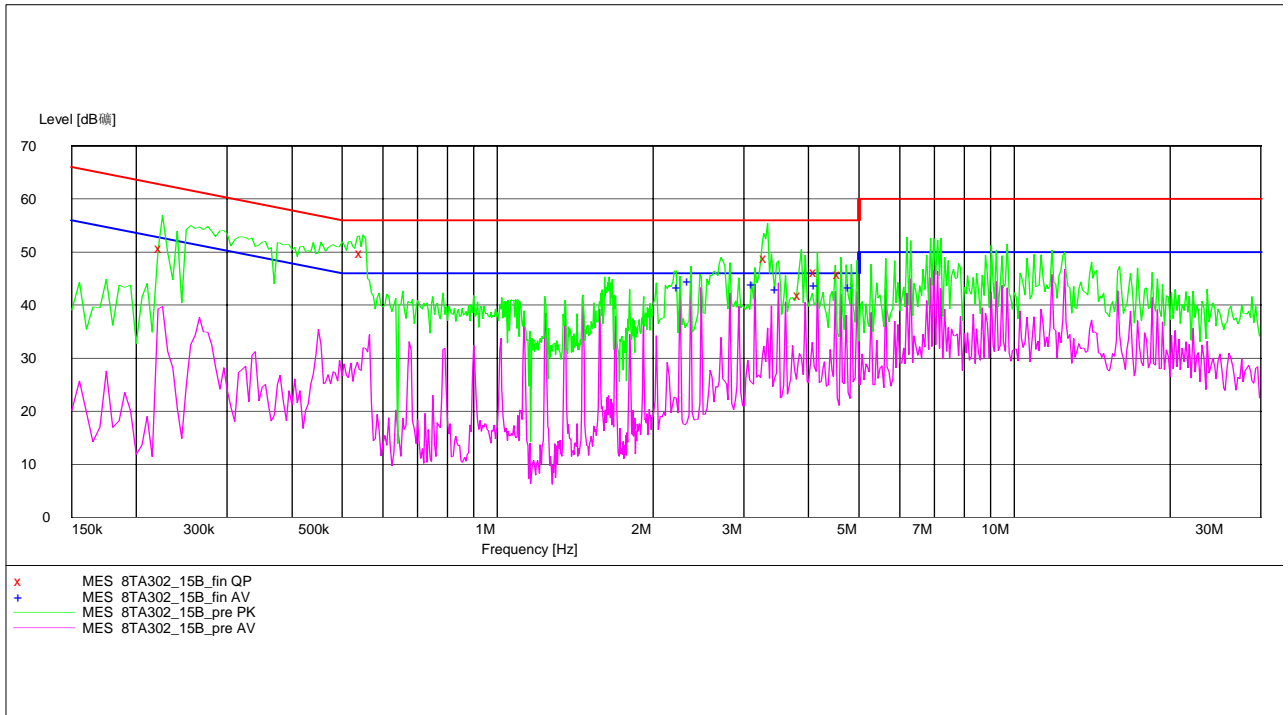



Figure B.3 Conducted Emission

MEASUREMENT RESULT: "8TA302_15B_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.225000	50.80	10.1	63	11.8	L1	FLO
0.550000	49.90	10.1	56	6.1	N	GND
3.330459	48.90	10.1	56	7.1	L1	GND
3.874843	41.90	10.1	56	14.1	L1	GND
4.162928	46.20	10.1	56	9.8	N	GND
4.617276	45.90	10.2	56	10.1	N	GND

MEASUREMENT RESULT: "8TA302_15B_fin AV"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
2.253917	43.30	10.1	46	2.8	L1	GND
2.364292	44.60	10.1	46	1.4	L1	GND
3.149781	43.90	10.1	46	2.1	L1	GND
3.493552	43.00	10.1	46	3.0	L1	GND
4.162928	43.80	10.1	46	2.2	N	GND
4.843386	43.50	10.2	46	2.5	N	GND

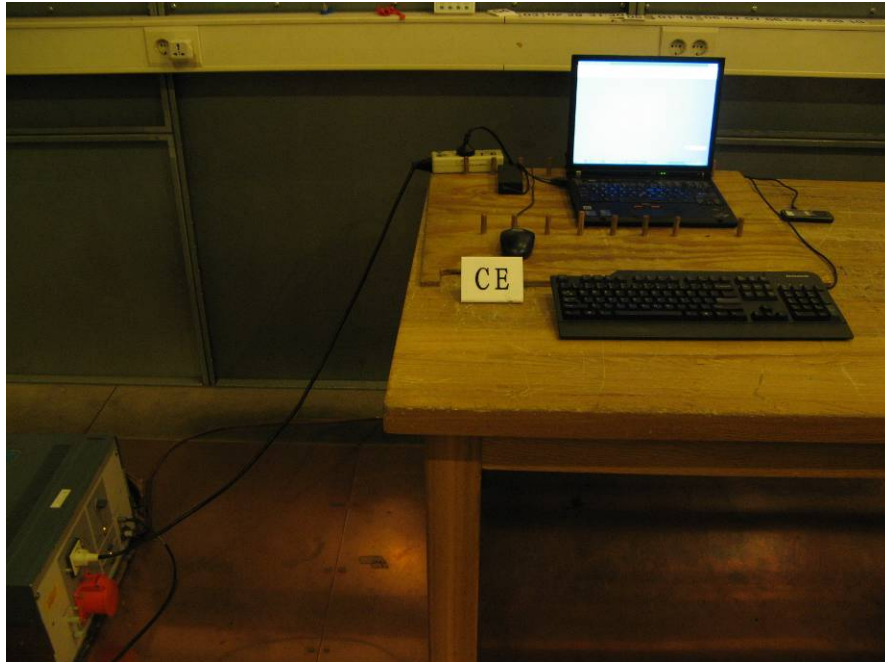ANNEX C: TEST LAYOUT

Pic C-1 Conducted Emission



Pic C-2 Radiated Spurious Emission

*****END OF REPORT*****