



TEST REPORT

No. 2011TAR281

for

TCT Mobile Limited

HSDPA/UMTS dual band / GSM four bands mobile phone

Model Name: one touch 908S

FCC ID: RAD170

IC ID: 9238A-0002

with

Hardware Version: PIO

Software Version: V61S

Issued Date: Jun 20, 2011

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DAT-P-114/01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191

Tel:+86(0)10-62304633-2678, Fax:+86(0)10-62304793 Email:welcom@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
7. TEST EQUIPMENTS UTILIZED	10
ANNEX A: MEASUREMENT RESULTS.....	11
A.1 OUTPUT POWER (§27.50(D)(2)).....	11
A.2 EMISSION LIMIT (§2.1051/§22.917§24.238).....	15
A.3 CONDUCTED EMISSION (§15.107§15.207)	20
A.4 FREQUENCY STABILITY (§2.1055/§24.235)	25
A.5 OCCUPIED BANDWIDTH (§2.1049(H)(I)).....	27
A.6 EMISSION BANDWIDTH (§22.917(B)/§24.238(B)).....	32
A.7 BAND EDGE COMPLIANCE (§22.917(B)/§24.238(B))	37
A.8 CONDUCTED SPURIOUS EMISSION (§2.1057/§22.917/§24.238).....	38
A.9 RECEIVER RADIATION EMISSION.....	51

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: Shouxiang Science Building, No 51, Xueyuan Road, Haidian District,
Beijing, P.R.China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: May 13, 2011
Testing End Date: Jun 20, 2011


1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSDPA/UMTS dual band / GSM four bands mobile phone
Model Name	one touch 908S
FCC ID	RAD170
IC ID	9238A-0002
Frequency	GSM 850MHz; PCS 1900MHz; WCDMA BAND IV;
Antenna	Internal
Power supply	Battery or Charger (AC Adaptor)
Output power	28.35dBm maximum EIRP measured for WCDMA BAND IV
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N01	012636000020781	PIO	V61S
N02	012636000020187	PIO	V61S

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Charger	/
AE3	Charger	/

AE1

Model	CAB31P0000C1
Manufacturer	BYD
Capacitance	1300mAh
Nominal Voltage	3.7V

AE2

Model	CBA3001AG0C2
Manufacturer	Tenpao
Length of DC line	120cm

AE3

Model	CBA3001AG0C1
Manufacturer	BYD
Length of DC line	120cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of HSDPA/UMTS dual band / GSM four bands mobile phone with integrated antenna. It consists of normal options: lithium battery, charger Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	V 10.1.07
RSS-Gen	RSS-Gen — General Requirements and Information for the Certification of Radiocommunication Equipment	Issue 3, Dec 2010
RSS139	Advanced Wireless Services Equipment Operating in the Bands 1710-1755 MHz and 2110-2155 MHz	Issue 2, February 2009
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

WCDMA Band IV

Items	Test Name	Clause in FCC rules	Clause in IC rules RSS-Gen and RSS- 133	Section in this report	Verdict
1	Output Power	27.50(d)(2)	5.4	A.1	P
2	Emission Limit	2.1051/27.53(g)	5.5	A.2	P
3	CONDUCTED EMISSION	15.107/15.207			
3	Frequency Stability	2.1055/27.54	5.3	A.4	P
4	Occupied Bandwidth	2.1049(h)(i)	4.6.1	A.5	P
5	Emission Bandwidth	27.53(b)	4.6.1	A.6	P
6	Band Edge Compliance	27.53(b)	5.5	A.7	P
7	Conducted Spurious Emission	2.1057/ 27.53(g)	5.5	A.8	P

Receiver Radiated Emission

Items	Test Name	Clause in FCC rules	Clause in IC rules		Section in this report	Verdict
			RSS-132	RSS-133		
1	Receiver Radiated Emissions	15.109 2.1053	4.6	6.6	A.9	P

7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL DUE DATE
1	Test Receiver	ESCI	100766	R&S	2011-12-06
2	Test Receiver	ESI40	831564/002	R&S	2011-07-12
3	BiLog Antenna	VULB9163	9163-175	Schwarzbeck	2011-07-05
4	BiLog Antenna	VULB9163	9163-302	Schwarzbeck	2011-07-10
5	Signal Generator	SMB100A	102063	R&S	2011-07-05
7	LISN	ESH2-Z5	829991/012	R&S	2011-07-20
8	Spectrum Analyzer	FSU26	200030	R&S	2011-12-18
9	Spectrum Analyzer	FSU46	100054	R&S	2011-10-14
10	Universal Radio Communication Tester	CMU200	100680	R&S	2011-12-23
11	Universal Radio Communication Tester	CMU200	109914	R&S	2011-07-21
12	Dual-Ridge Waveguide Horn Antenna	3117	00119024	ETS	2012-08-31
13	Dual-Ridge Waveguide Horn Antenna	3117	00119021	ETS	2013-07-09
14	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2011-07-01
15	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2011-07-01
16	Climatic chamber	PL-2G	343074	ESPEC	2011-12-15

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER (§27.50(d)(2))

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (RMS) These measurements were done at 3 frequencies, 1712.4MHz, 1740MHz, and 1752.6MHz for WCDMA Band IV. (bottom, middle and top of operational frequency range).

Limit

According to FCC§2.1046.

A.1.2.2 Test Condition

RBW	VBW	Sweep Time	Span
10MHz	10MHz	800ms	50MHz

WCDMA Band IV

Measurement result

WCDMA (Band IV)	CH	Frequency(MHz)	output power(dBm)	Target (dB)
	1312	1712.4	22.07	23±1
	1450	1740	22.09	23±1
	1513	1752.6	22.04	23±1

ANALYZER SETTINGS: VBW=RBW=10MHz; SPAN=50MHz;SWT=800ms

A.1.3 Radiated

A.1.3.1 Description


This is the test for the maximum radiated power from the EUT.

Rule Part 27.50(d)(2) specifies, " Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to a peak EIRP of 1 watt."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

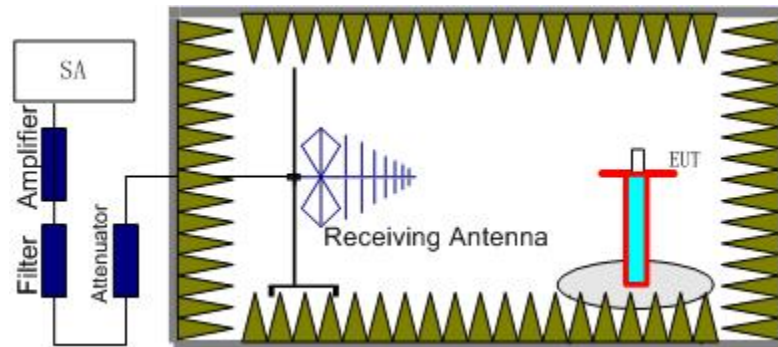

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

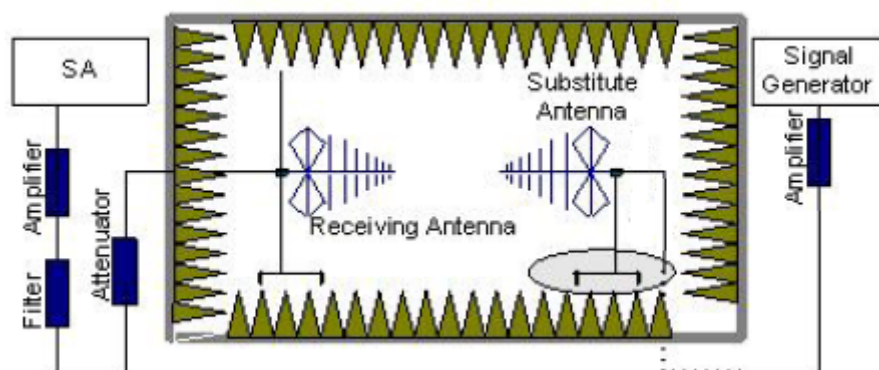

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The

test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} + P_{\text{Ag}} + P_{\text{cl}} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

WCDMA Band IV-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	30dBm (2W)

Measurement result

Frequency(MHz)	Peak EIRP(dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	P _{Mea} (dBm)	Polarization
1712.4	28.30	-4.02	50	5.18	-22.86	H
1740	24.59	-4.09	50	5.04	-26.36	H
1752.6	28.35	-4.16	50	5.00	-22.49	H

Frequency: 1752.6MHz

Peak EIRP(dBm)= P_{Mea}(-22.49dBm)+ P_{cl}(-4.16dB)+ P_{Ag}(50dB)+G_a (5.00dB) =28.35dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

A.2 EMISSION LIMIT (§2.1051/§22.917§24.238)


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the WCDMA Band IV.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

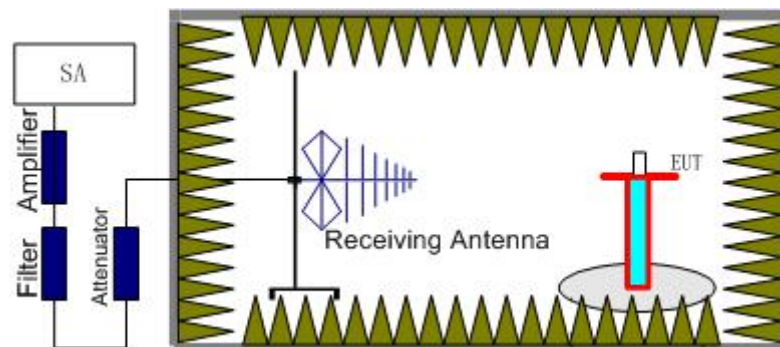

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

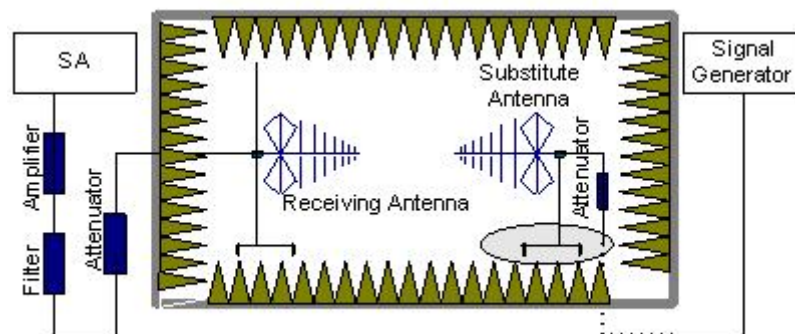

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band IV(1712.4MHz, 1740MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band IV	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass
Received GSM 1700MHz	Idle Mode	9KHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band IV	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

WCDMA BAND IV Mode Channel 1312/1712.4MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3426.18	-56.73	5.77	-7.72	-54.78	-13	41.78
4487.2	-67.9	6.68	-8.79	-65.79	-13	52.79
6890.99	-61.82	8.16	-10.99	-58.99	-13	45.99
8873.61	-64.44	8.68	-12.5	-60.62	-13	47.62
12673.07	-62.63	9.81	-12.91	-59.53	-13	46.53
14912.66	-59.68	10.49	-13.52	-56.65	-13	43.65

WCDMA BAND IV Mode Channel 1450/1740MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3481.39	-52.37	5.64	-7.86	-50.15	-13	37.15
5075.53	-64.71	7.2	-9.75	-62.16	-13	49.16
6862.91	-63.53	7.95	-10.96	-60.52	-13	47.52
8258.38	-64.66	8.44	-12.06	-61.04	-13	48.04
10634.36	-62.76	9.4	-12.47	-59.69	-13	46.69
13371.36	-59	9.85	-13.67	-55.18	-13	42.18

WCDMA BAND IV Mode Channel 1513/1752.6MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3503.04	-55.42	5.78	-7.9	-53.3	-13	40.3
5026.29	-62.99	7.11	-9.72	-60.38	-13	47.38
7006.98	-62.12	8.43	-11.1	-59.45	-13	46.45
10206.01	-63	8.87	-12.44	-59.43	-13	46.43
12339.37	-62.5	9.57	-12.64	-59.43	-13	46.43
16161.4	-55.33	10.94	-12.81	-53.46	-13	40.46

A.3 CONDUCTED EMISSION (§15.107§15.207)

The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.


A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

A.3.2 Measurement result

WCDMA Band IV-AE2

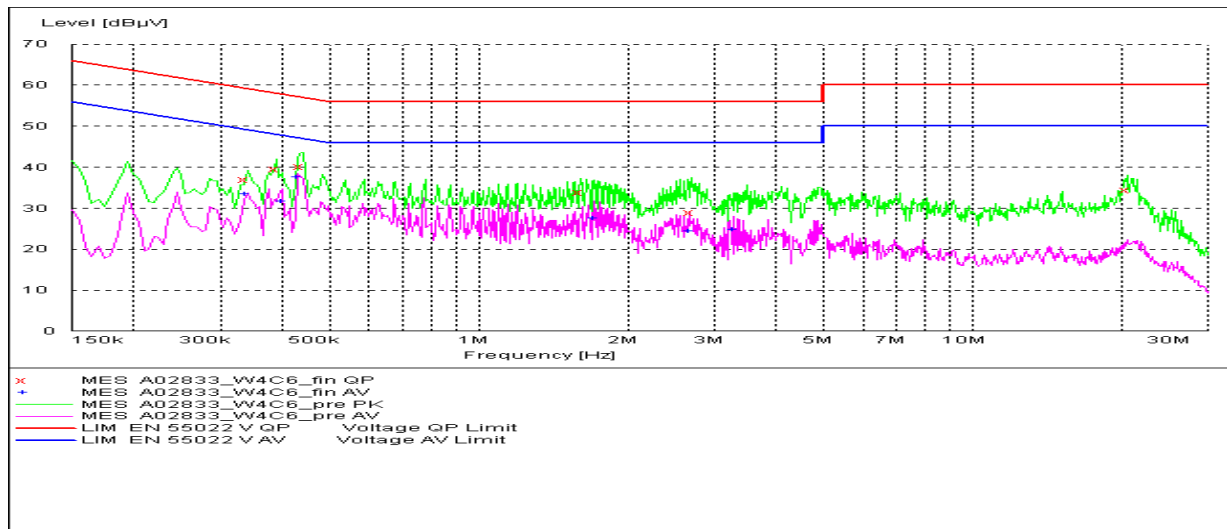


MEASUREMENT RESULT: "A02833_W4C6_fin QP"

Frequency MHz	Level dBµV	Transd	Limit dB	Margin dBµV	Line dB	PE
0.340000	36.90	10.1	59	22.3	L1	GND
0.390000	39.50	10.1	58	18.6	L1	GND
0.440000	40.20	10.1	57	16.9	L1	GND
1.605000	33.90	10.1	56	22.1	N	GND
2.697700	28.90	10.1	56	27.1	L1	GND
20.539073	34.30	10.2	60	25.7	L1	GND

MEASUREMENT RESULT: "A02833_W4C6_fin AV"

Frequency MHz	Level dBμV	Transd	Limit dB	Margin dBμV	Line	PE
0.340000	33.50	10.1	49	15.7	L1	GND
0.400000	31.60	10.1	48	16.2	L1	GND
0.430000	37.60	10.1	47	9.6	N	GND
1.715000	27.60	10.1	46	18.4	N	GND
2.670924	24.40	10.1	46	21.6	L1	GND
3.276952	24.90	10.1	46	21.1	N	GND

WCDMA Band IV-AE3

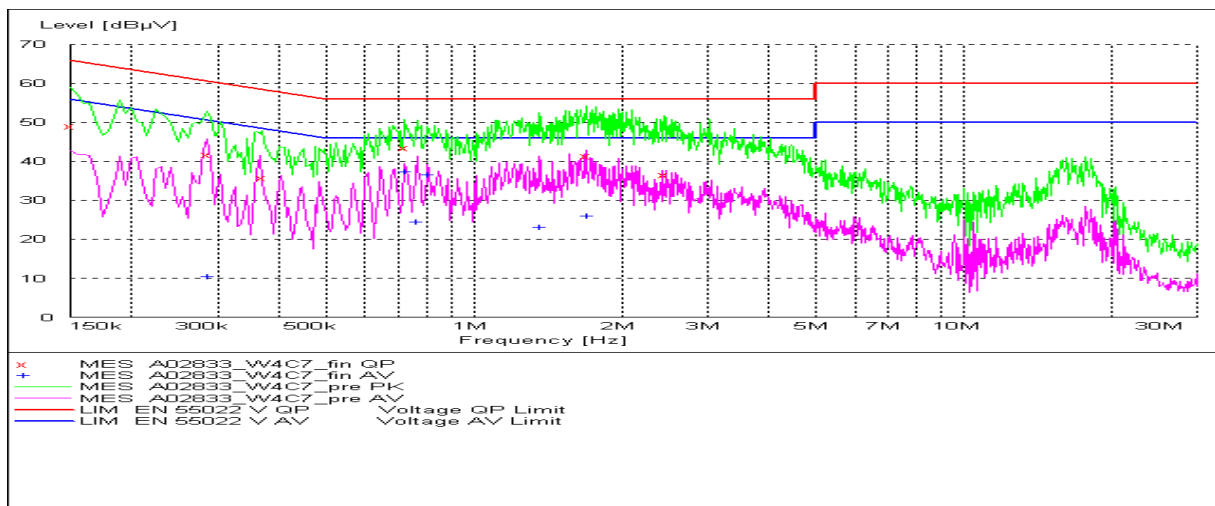


MEASUREMENT RESULT: "A02833_W4C7_fin QP"

Frequency MHz	Level dBμV	Transd	Limit dB	Margin dBμV	Line	PE
0.150000	49.10	10.1	66	16.9	L1	GND
0.285000	41.70	10.1	61	19.0	L1	GND
0.370000	35.90	10.1	59	22.6	L1	GND
0.725000	43.60	10.1	56	12.4	L1	GND
1.690000	41.40	10.1	56	14.6	L1	GND
2.441588	36.70	10.1	56	19.3	L1	GND

MEASUREMENT RESULT: "A02833_W4C7_fin AV"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.285000	10.40	10.1	51	40.2	N	GND
0.725000	37.40	10.1	46	8.6	L1	GND
0.765000	24.50	10.1	46	21.5	L1	GND
0.805000	36.60	10.1	46	9.4	L1	GND
1.360000	23.10	10.1	46	22.9	L1	GND
1.690000	26.10	10.1	46	19.9	L1	GND

MP3

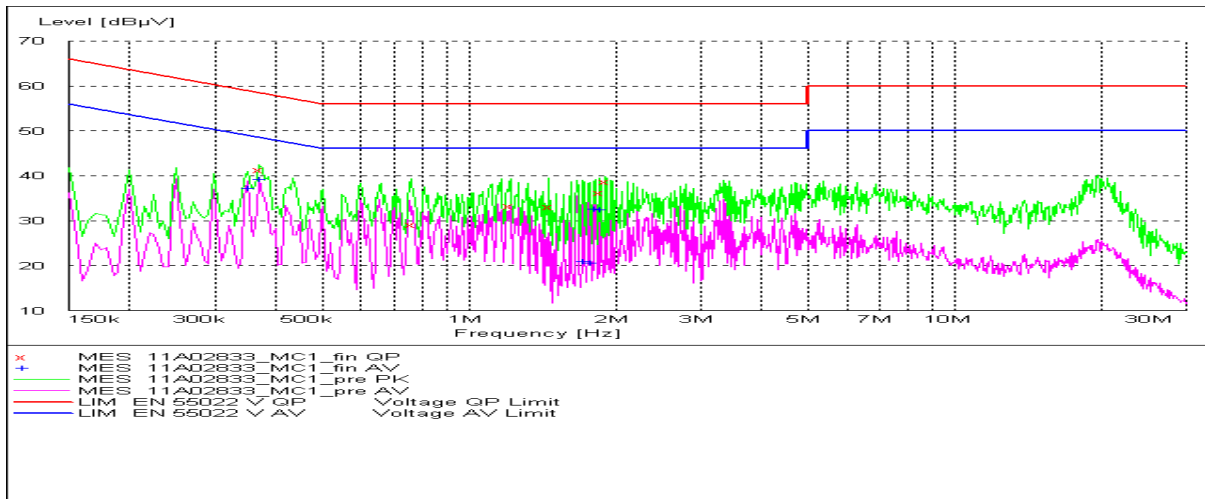


MEASUREMENT RESULT: "11A02833_MC1_fin QP"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.370000	41.40	10.1	59	17.1	L1	GND
0.760000	29.10	10.1	56	26.9	L1	GND
1.215000	33.40	10.1	56	22.6	L1	GND
1.460000	33.20	10.1	56	22.8	L1	GND
1.865000	36.30	10.1	56	19.7	L1	GND
1.910000	38.80	10.1	56	17.2	L1	GND

MEASUREMENT RESULT: "11A02833_MCI_fin AV"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.350000	37.20	10.1	49	11.7	L1	GND
0.370000	39.20	10.1	49	9.3	N	GND
1.720000	21.00	10.1	46	25.0	N	GND
1.770000	20.60	10.1	46	25.4	N	GND
1.815000	32.70	10.1	46	13.3	N	GND
1.865000	32.50	10.1	46	13.5	L1	GND

CAMERA

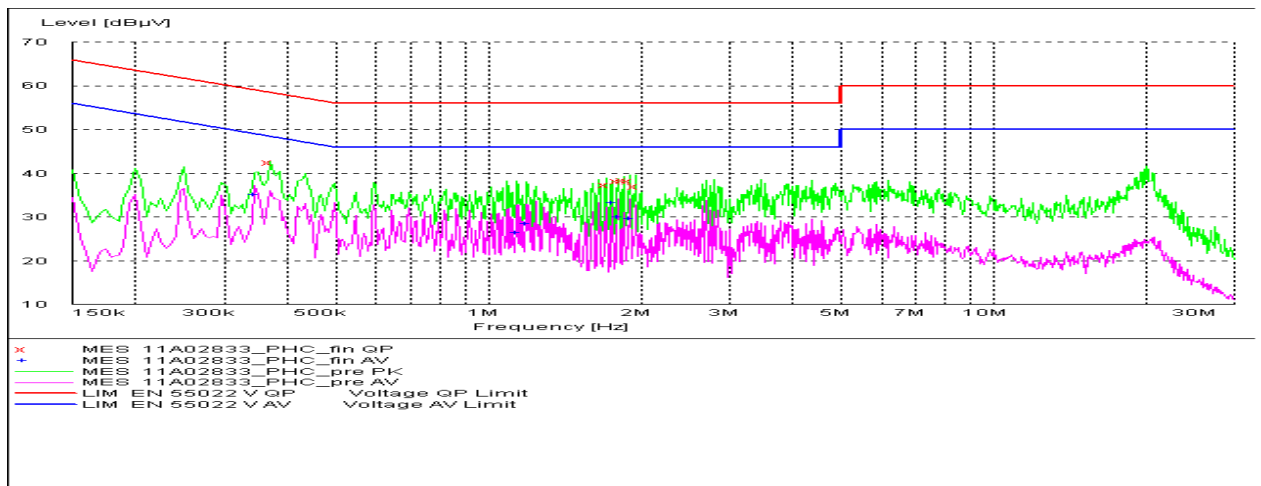

MEASUREMENT RESULT: "11A02833_PHC_fin QP"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.370000	42.40	10.1	59	16.1	L1	GND
1.710000	37.40	10.1	56	18.6	N	GND
1.805000	38.10	10.1	56	17.9	L1	GND
1.855000	38.30	10.1	56	17.7	L1	GND
1.905000	38.10	10.1	56	17.9	L1	GND
1.955000	37.00	10.1	56	19.0	L1	GND

MEASUREMENT RESULT: "11A02833_PHC_fin AV"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line dB	PE
0.345000	35.10	10.1	49	14.0	L1	GND
1.140000	26.40	10.1	46	19.6	N	GND
1.190000	28.40	10.1	46	17.6	N	GND
1.760000	33.20	10.1	46	12.8	N	GND
1.805000	30.00	10.1	46	16.0	L1	GND
1.905000	29.70	10.1	46	16.3	L1	GND

A.4 FREQUENCY STABILITY (§2.1055/§24.235)

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 9400 for WCDMA Band II and channel 4183 for WCDMA Band V, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.4.3 Measurement results

WCDMA Band IV

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	20	0.019
3.8	20	0.019
4.2	21	0.020

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	22	0.021
-20	22	0.021
-10	21	0.020
0	21	0.020
10	20	0.019
20	20	0.019
30	20	0.019
40	21	0.020
50	22	0.021

A.5 OCCUPIED BANDWIDTH (§2.1049(h)(i))

A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA IV. The table below lists the measured -20dBc BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band IV(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
1712.4	4.567
1740	4.583
1752.6	4.567


WCDMA Band IV

Channel 1312-Occupied Bandwidth (-20dBc BW)

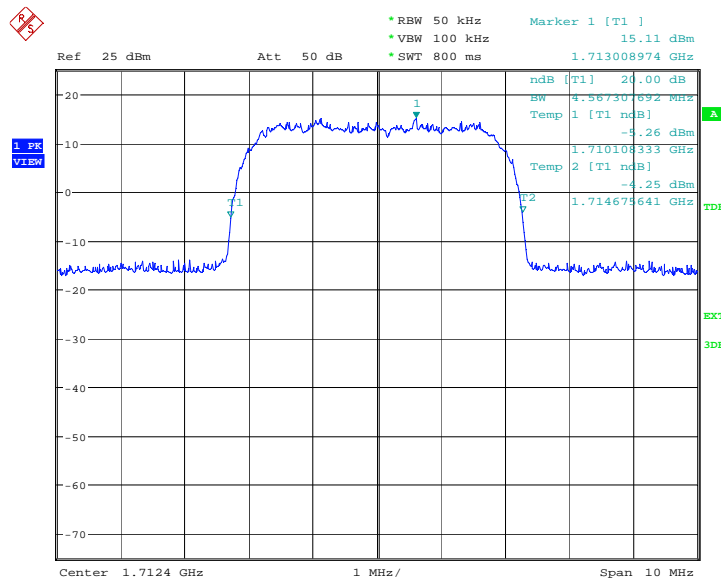


Date: 31.MAY.2011 06:23:09

Channel 1450-Occupied Bandwidth (-20dBc BW)

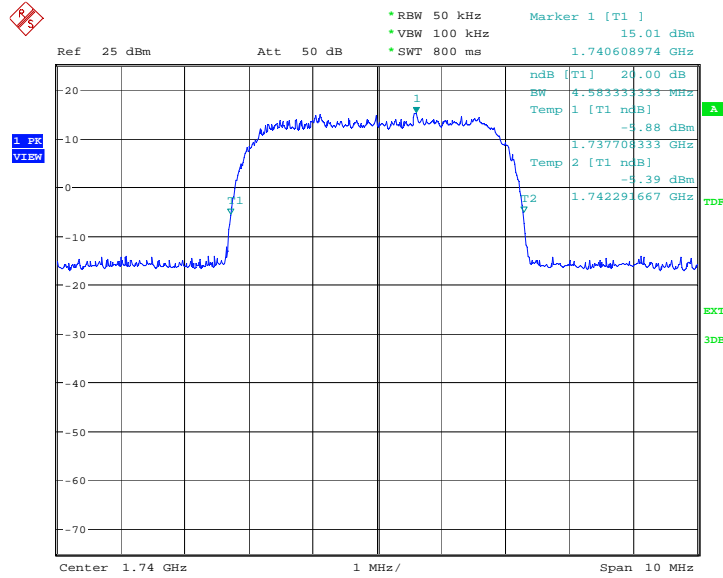

Date: 31.MAY.2011 06:24:09

Channel 1513-Occupied Bandwidth (99%)

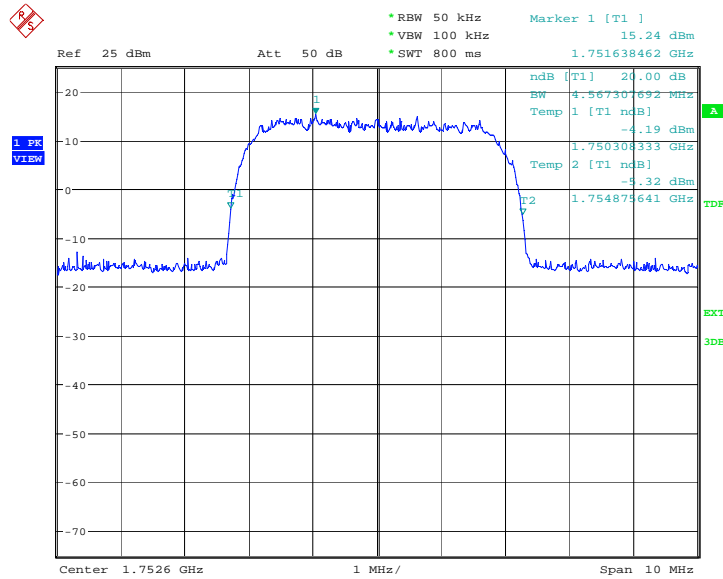


Date: 31.MAY.2011 06:25:09

WCDMA Band IV(-20dBc)-IC


Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
1712.4	3.750
1740	3.686
1752.6	3.822

Channel 1312-Occupied Bandwidth Reference Level

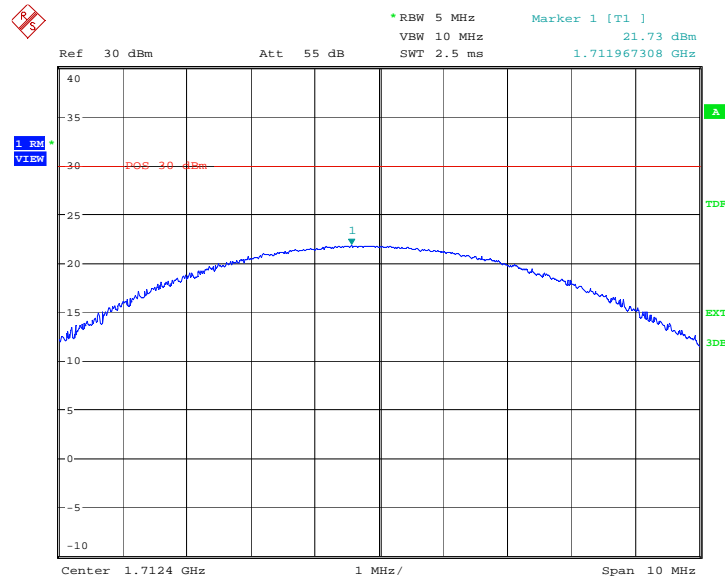


Date: 20.JUN.2011 03:49:04

Channel 1312-Occupied Bandwidth (-20dBc BW)

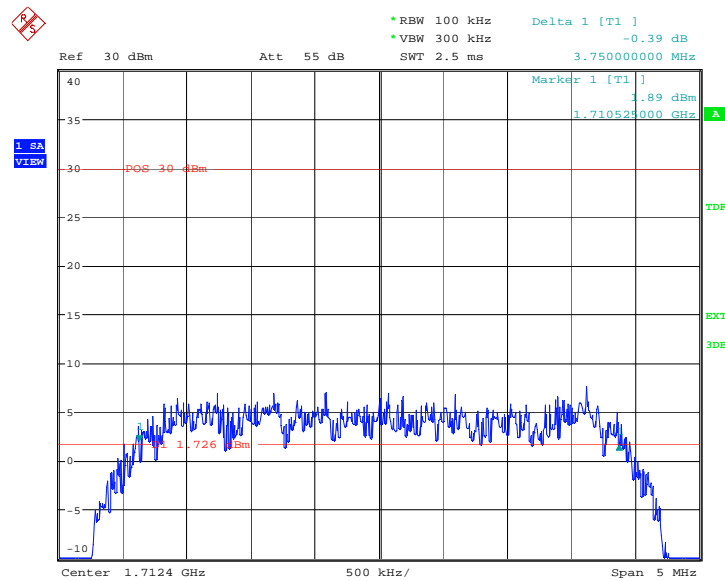


Date: 20.JUN.2011 03:49:44

Channel 1450-Occupied Bandwidth Reference Level

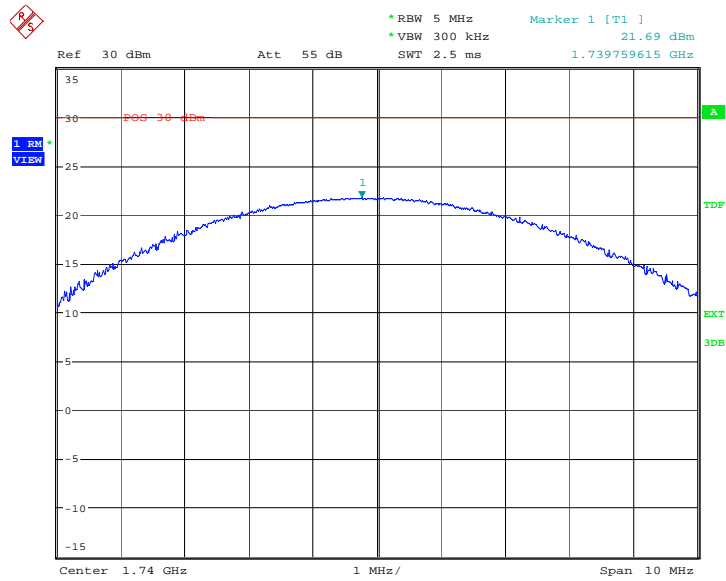


Date: 31.MAY.2011 06:50:39

Channel 1450-Occupied Bandwidth (-20dBc BW)

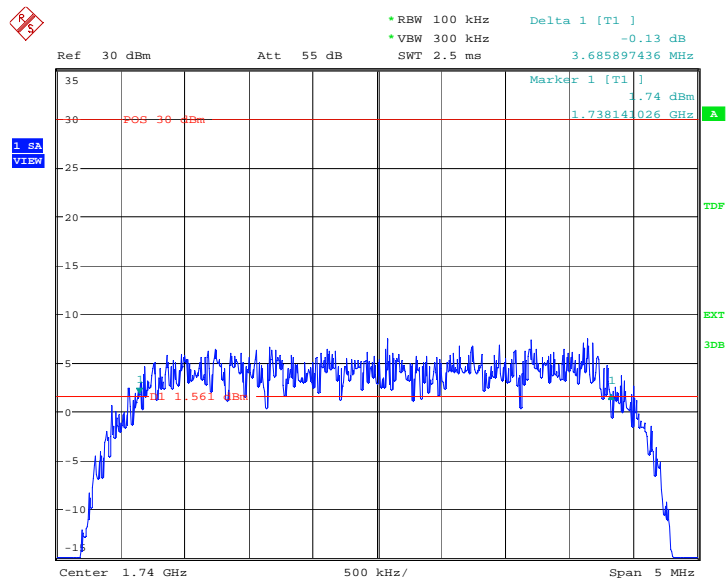


Date: 20.JUN.2011 03:51:25

Channel 1513-Occupied Reference Level (-20dBc BW)

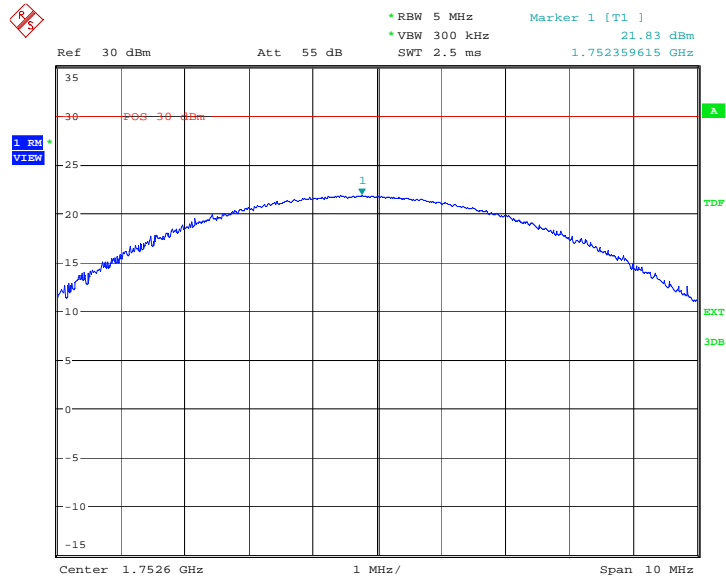

Date: 20.JUN.2011 03:52:22

Channel 1513-Occupied Bandwidth (-20dBc BW)

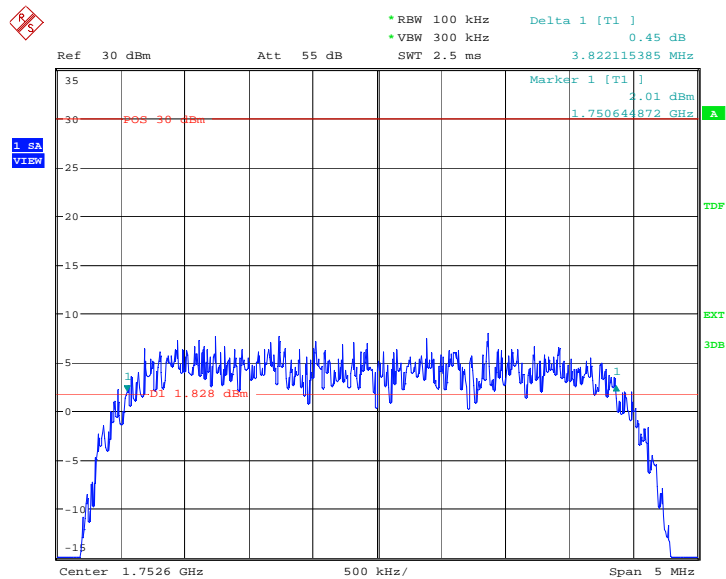

Date: 20.JUN.2011 03:53:16

A.6 EMISSION BANDWIDTH (§22.917(b)/§24.238(b))

A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band IV. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band IV(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
1712.4	4.663
1740	4.647
1752.6	4.663


WCDMA Band IV

Channel 1312-Occupied Bandwidth (-26dBc BW)

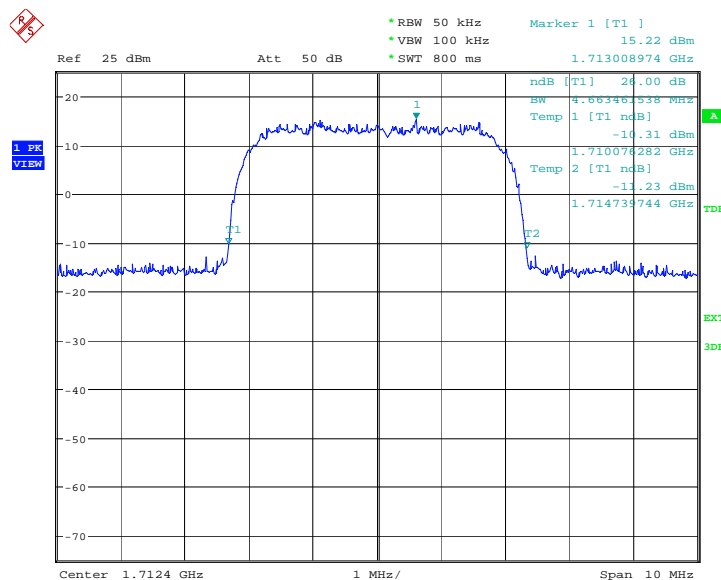


Date: 31.MAY.2011 06:26:11

Channel 1450-Occupied Bandwidth (-26dBc BW)

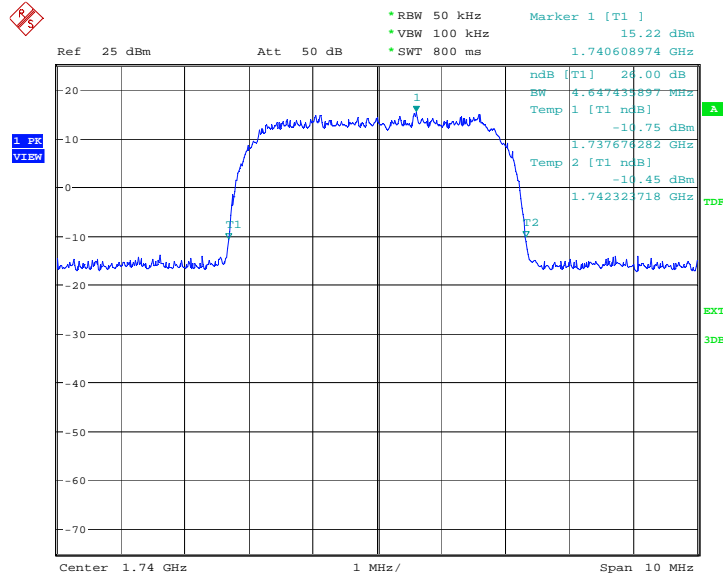

Date: 31.MAY.2011 06:27:11

Channel 1513-Occupied Bandwidth (-26dBc BW)

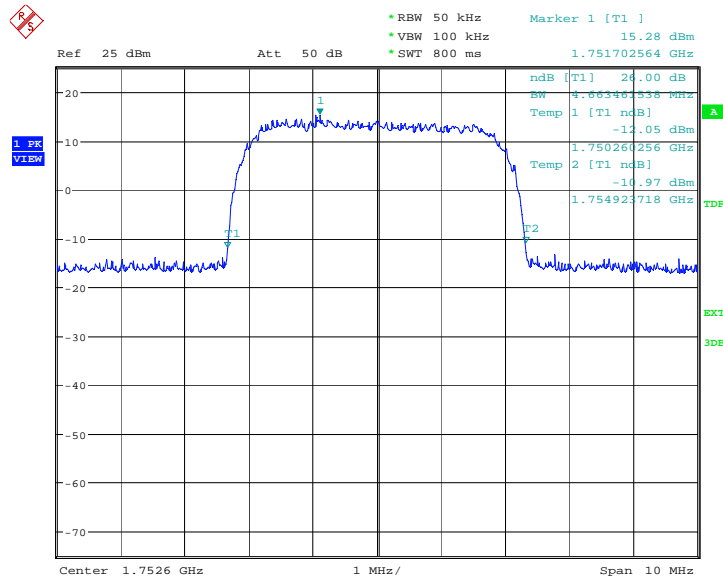


Date: 31.MAY.2011 06:28:11

WCDMA Band IV(-26dBc)-IC


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
1712.4	4.311
1740	4.263
1752.6	4.255

Channel 1312-Occupied Bandwidth Reference Level

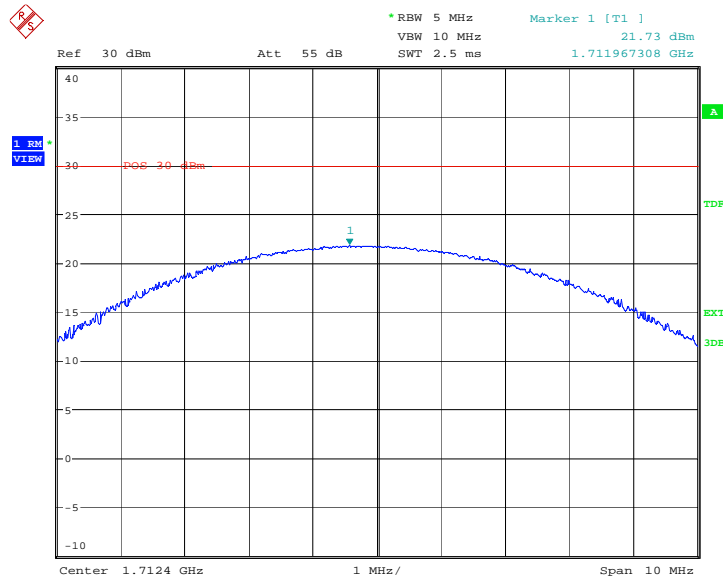


Date: 20.JUN.2011 03:49:04

Channel 1312-Occupied Bandwidth (-26dBc BW)

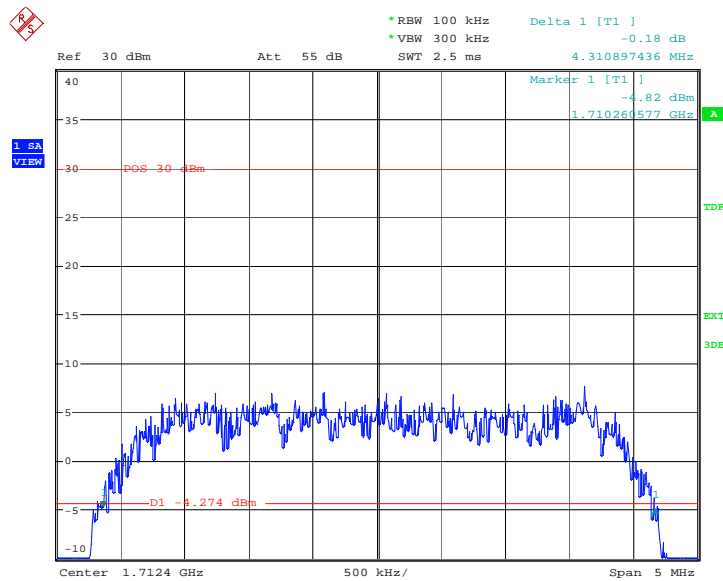


Date: 20.JUN.2011 03:50:36

Channel 1450-Occupied Bandwidth Reference Level

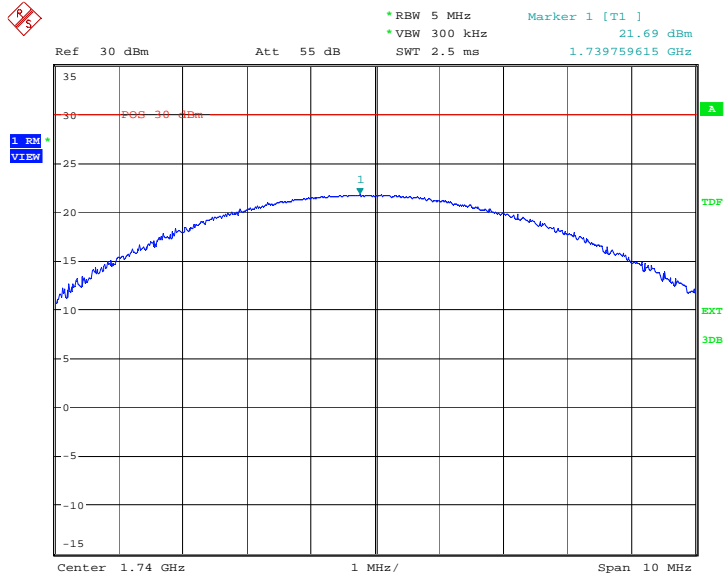


Date: 31.MAY.2011 06:50:39

Channel 1450-Occupied Bandwidth (-26dBc BW)

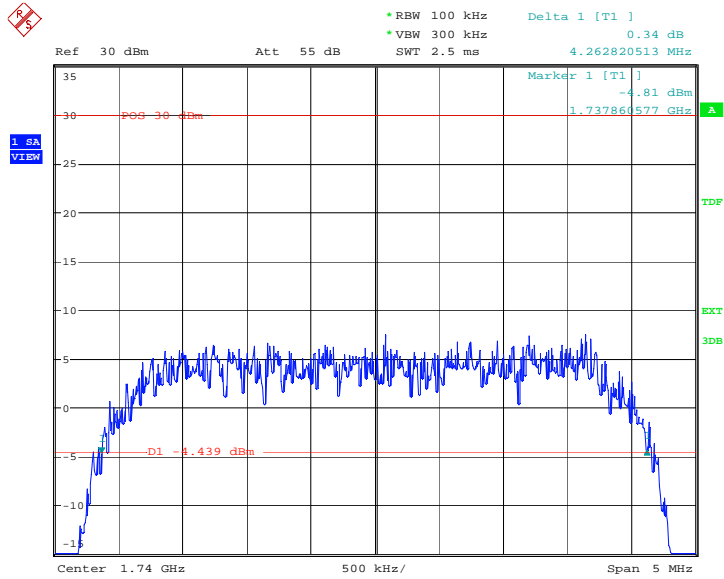


Date: 20.JUN.2011 03:52:07

Channel 1513-Occupied Reference Level

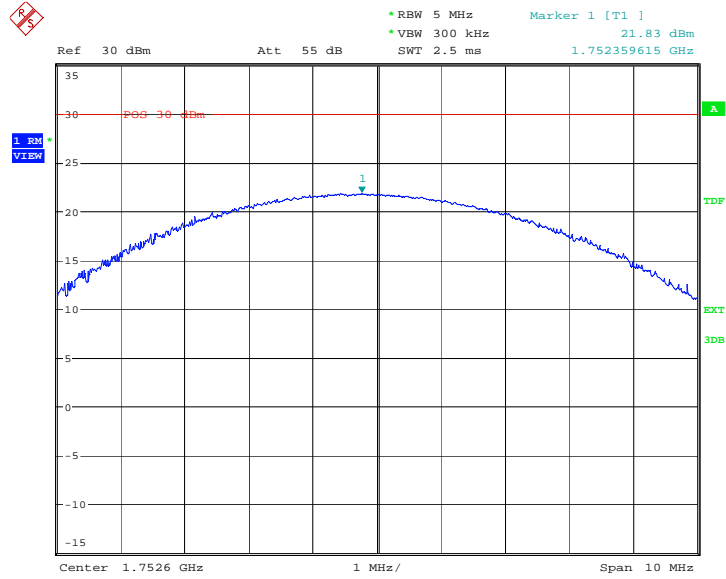

Date: 20.JUN.2011 03:52:22

Channel 1513-Occupied Bandwidth (-26dBc BW)

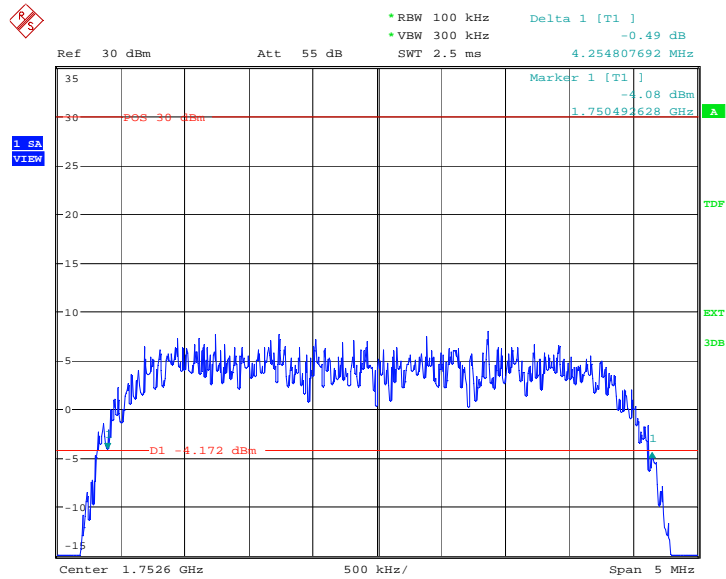


Date: 20.JUN.2011 03:53:59

A.7 BAND EDGE COMPLIANCE (§22.917(b)/§24.238(b))


WCDMA Band IV

LOW BAND EDGE BLOCK-A (WCDMA Band IV)-Channel 1312

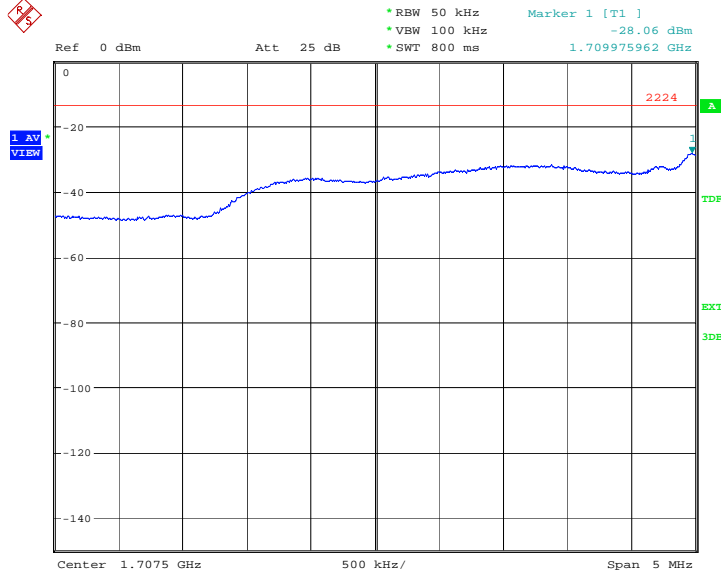

Date: 31.MAY.2011 06:28:42

HIGH BAND EDGE BLOCK-C (WCDMA Band IV) –Channel 1513

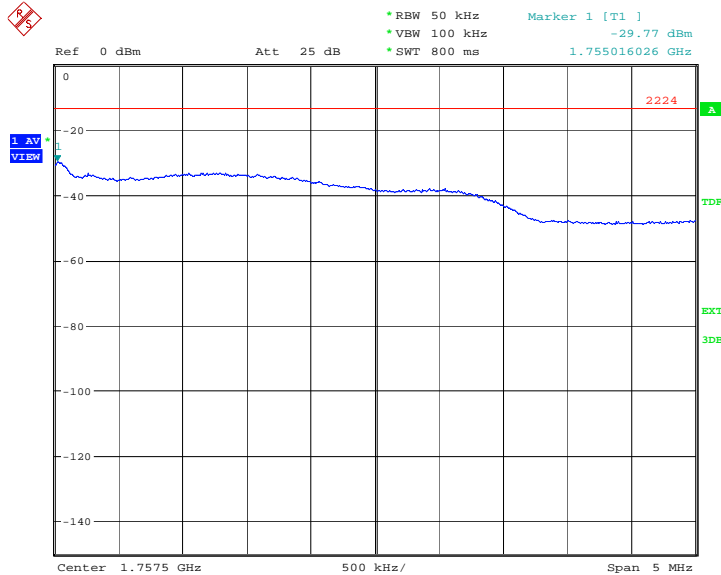

Date: 31.MAY.2011 06:29:14

A.8 CONDUCTED SPURIOUS EMISSION (§2.1057/§22.917/§24.238)

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band IV, this equates to a frequency range of 30 MHz to 17.55 GHz, data taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band IV Transmitter

Channel	Frequency (MHz)
1312	1712.40
1450	1740.00
1513	1752.60

A. 8.2 Measurement Limit

Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


A.8.3 Measurement result

WCDMA Band IV

A. 8.3.1 Channel 1312: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

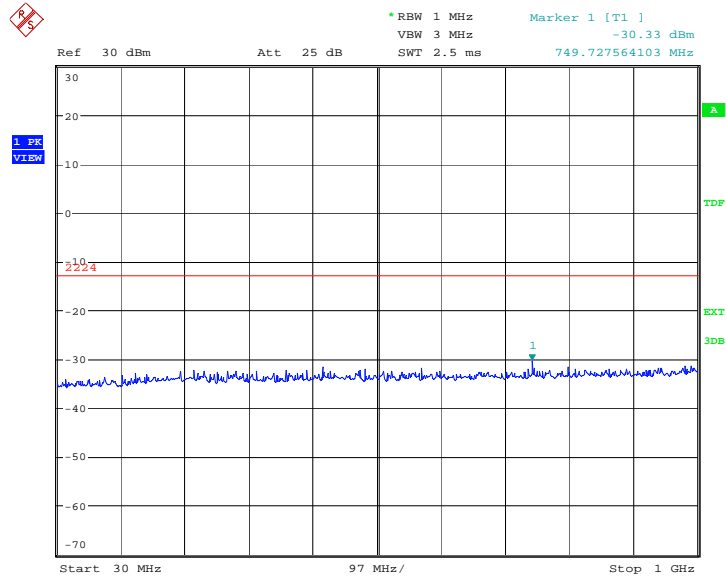

Date: 31.MAY.2011 06:29:45

A. 8.3.2 Channel 1312: 1GHz –2.5GHz

Spurious emission limit –13dBm.

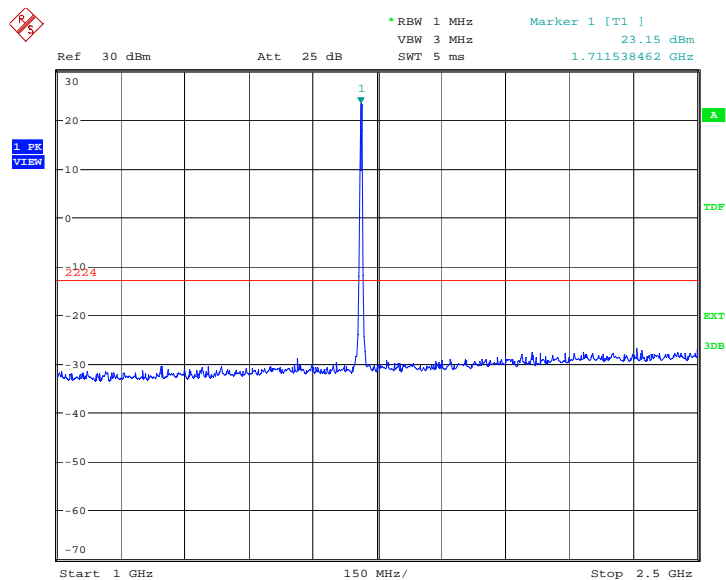


Date: 31.MAY.2011 06:30:13

A. 8.3.3 Channel 1312: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

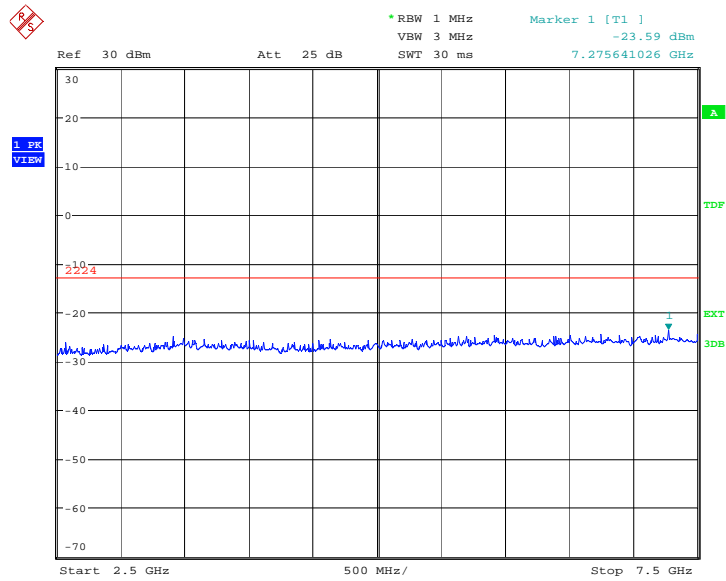

Date: 31.MAY.2011 06:30:42

A. 8.3.4 Channel 1312: 7.5GHz –10GHz

Spurious emission limit –13dBm.

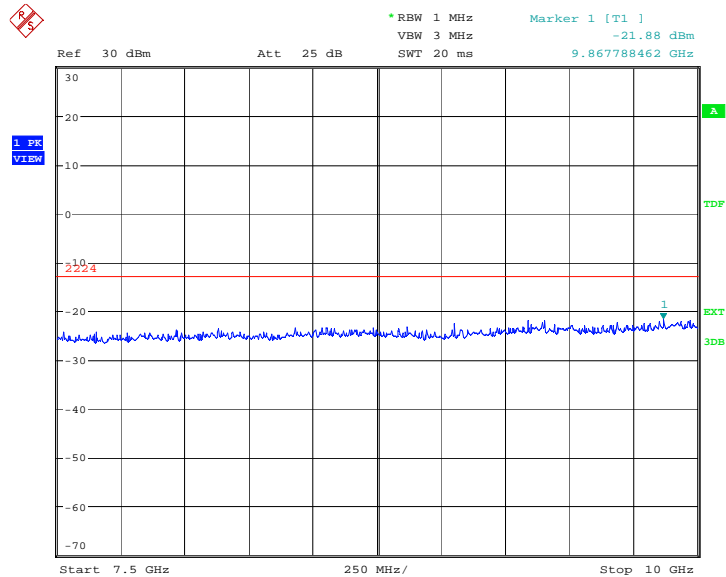


Date: 31.MAY.2011 06:31:10

A. 8.3.5 Channel 1312: 10GHz –15GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

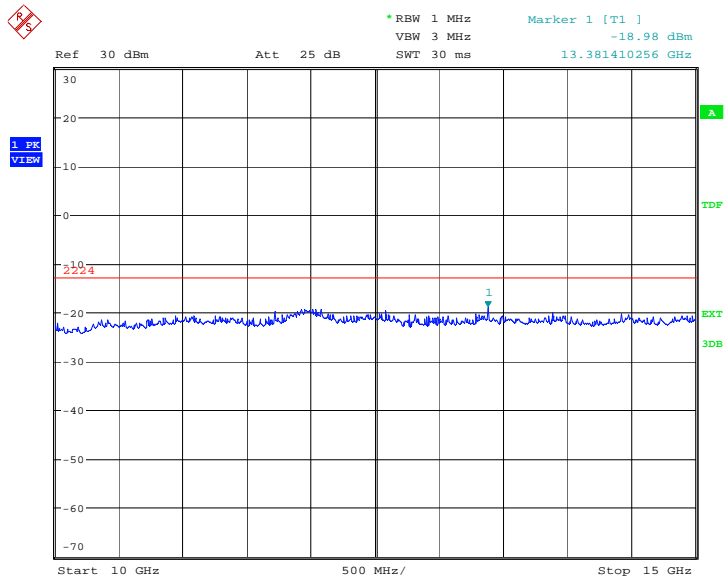

Date: 31.MAY.2011 06:31:38

A. 8.3.6 Channel 1312: 15GHz –20GHz

Spurious emission limit –13dBm.

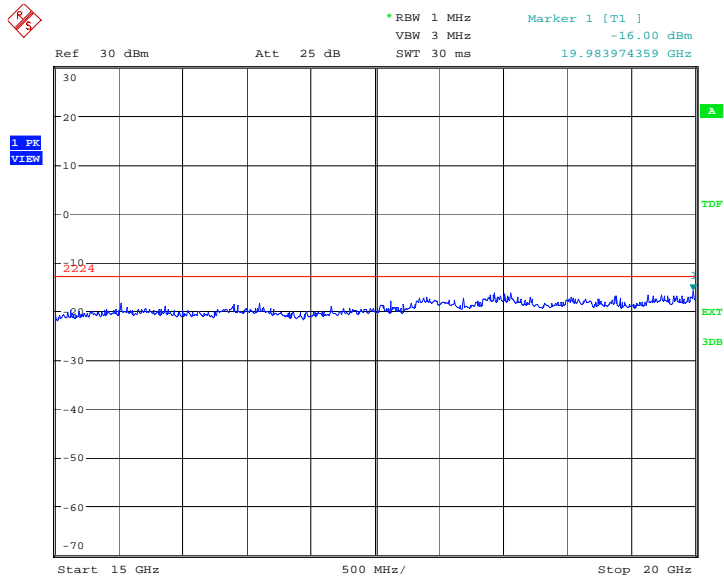


Date: 31.MAY.2011 06:32:07

A. 8.3.7 Channel 1450: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

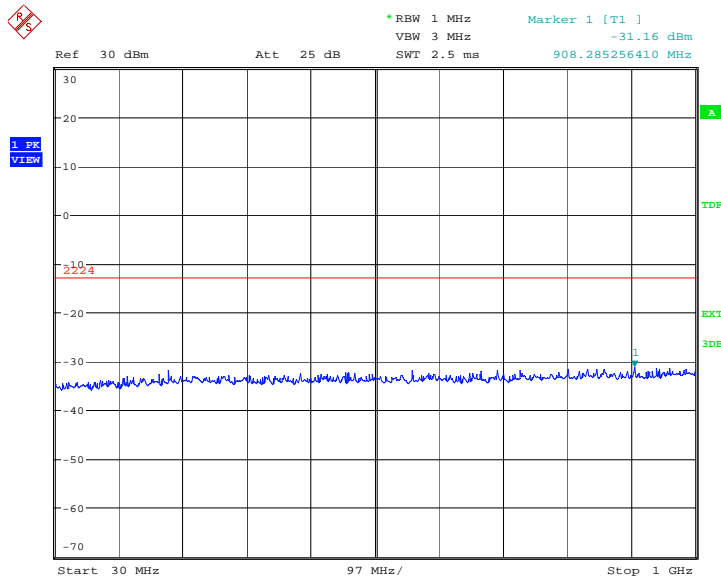

Date: 31.MAY.2011 06:32:38

A. 8.3.8 Channel 1450: 1GHz –2.5GHz

Spurious emission limit –13dBm.

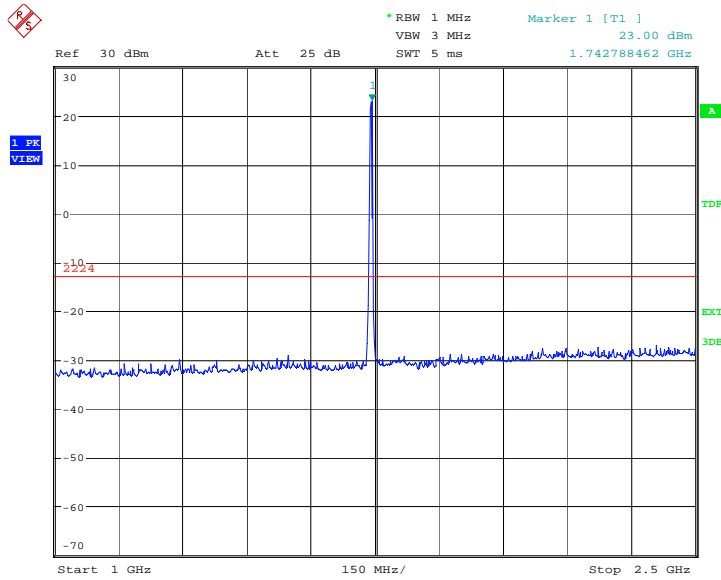


Date: 31.MAY.2011 06:33:06

A. 8.3.9 Channel 1450: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

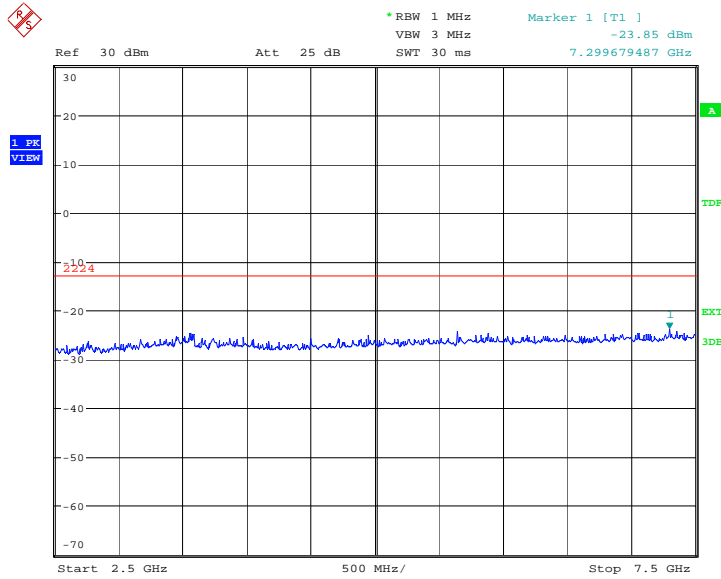

Date: 31.MAY.2011 06:33:35

A. 8.3.10 Channel 1450: 7.5GHz –10GHz

Spurious emission limit –13dBm.

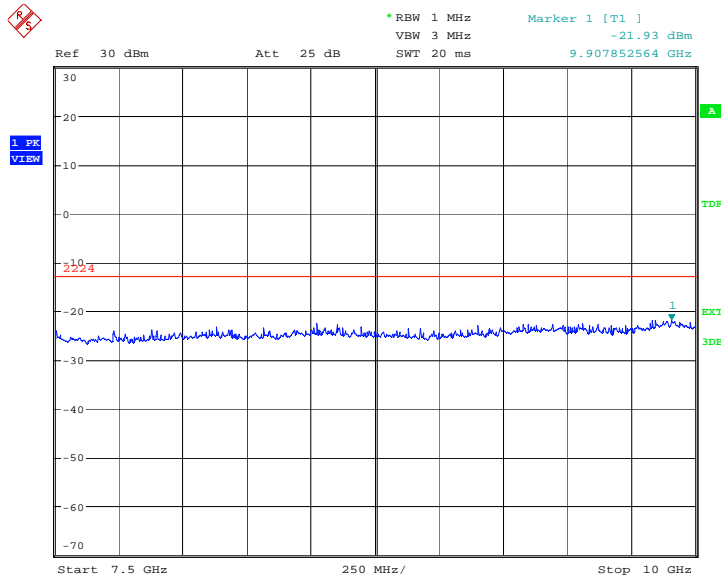


Date: 31.MAY.2011 06:34:03

A. 8.3.11 Channel 1450: 10GHz –15GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

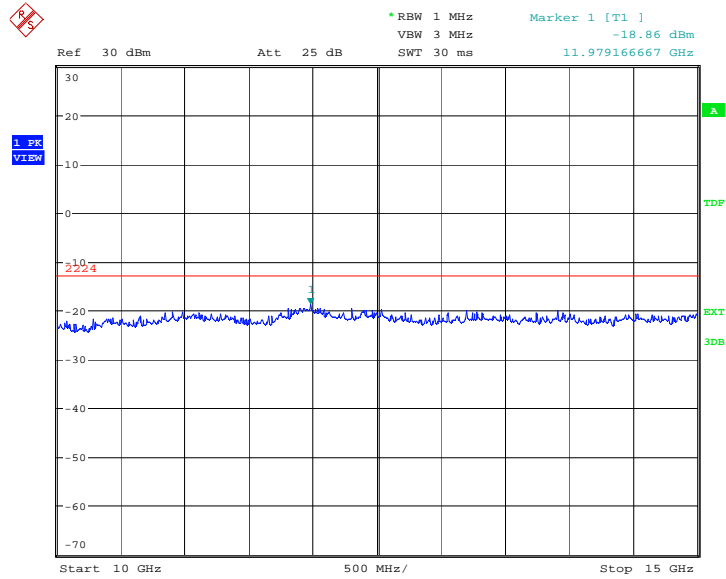

Date: 31.MAY.2011 06:34:32

A. 8.3.12 Channel 1450: 15GHz –20GHz

Spurious emission limit –13dBm.

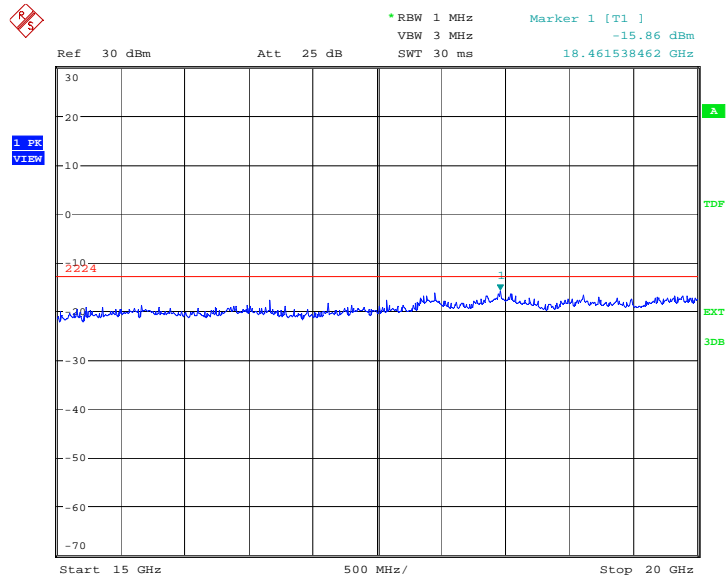


Date: 31.MAY.2011 06:35:00

A. 8.3.13 Channel 1513: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

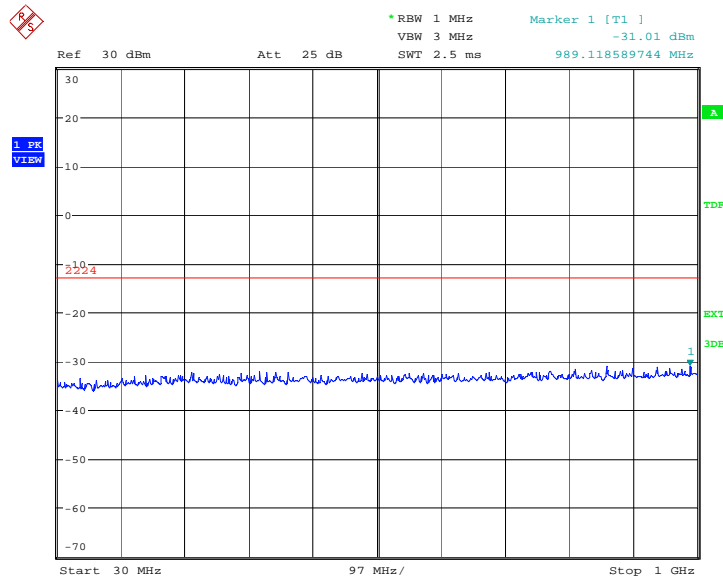

Date: 31.MAY.2011 06:35:32

A. 8.3.14 Channel 1513: 1GHz –2.5GHz

Spurious emission limit –13dBm.

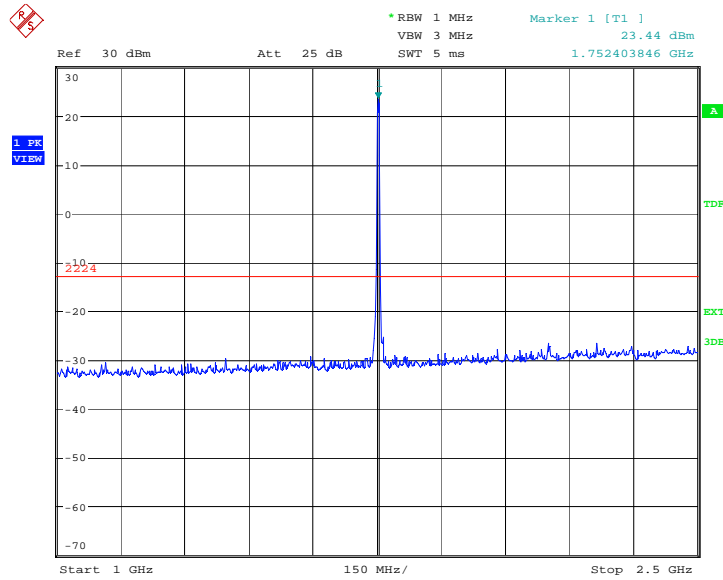


Date: 31.MAY.2011 06:36:00

A. 8.3.15 Channel 1513: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

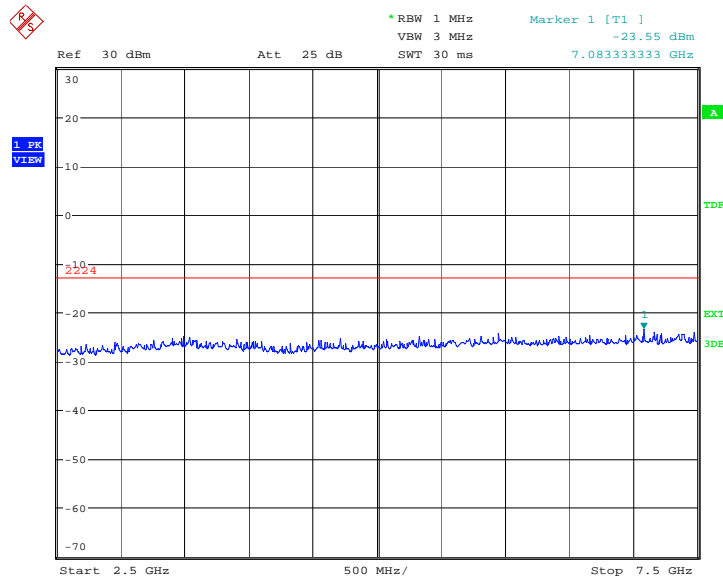

Date: 31.MAY.2011 06:36:28

A. 8.3.16 Channel 1513: 7.5GHz –10GHz

Spurious emission limit –13dBm.

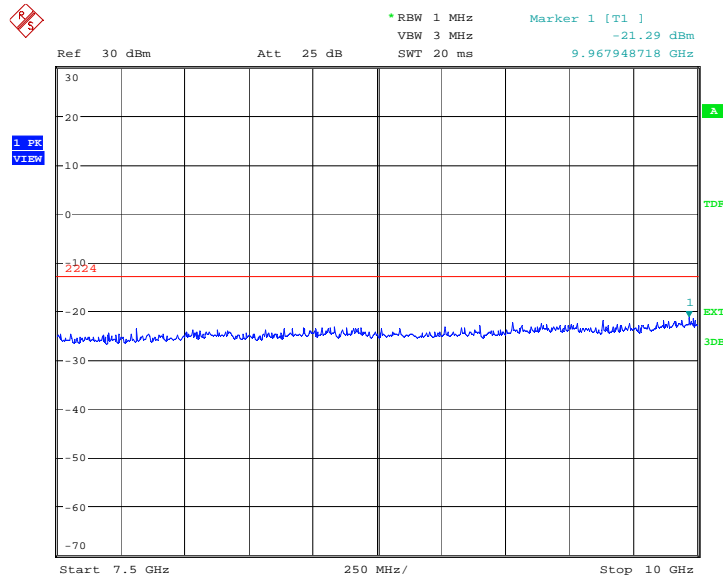


Date: 31.MAY.2011 06:36:56

A. 8.3.17 Channel 1513: 10GHz –15GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

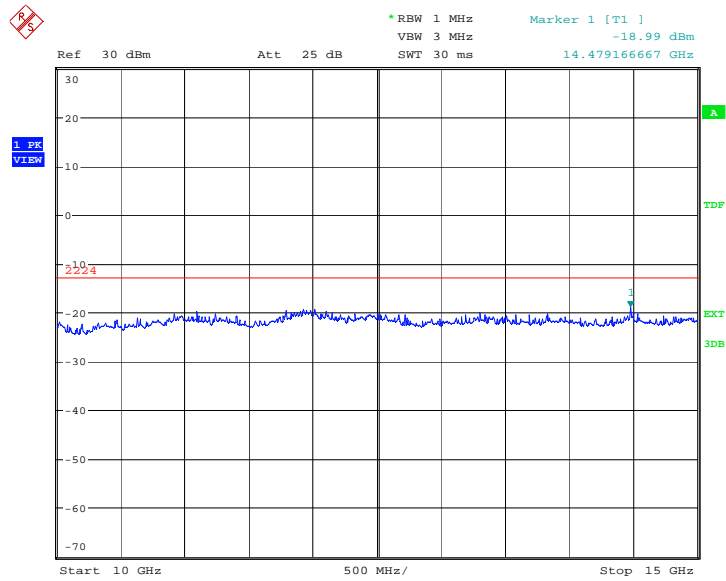

Date: 31.MAY.2011 06:37:25

A. 8.3.18 Channel 1513: 15GHz –20GHz

Spurious emission limit –13dBm.

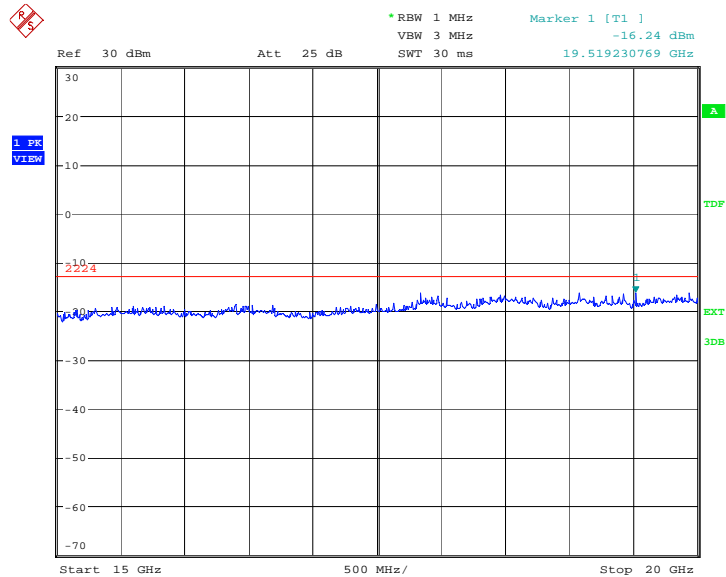


Date: 31.MAY.2011 06:37:53

A. 8.3.19 Idle mode: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

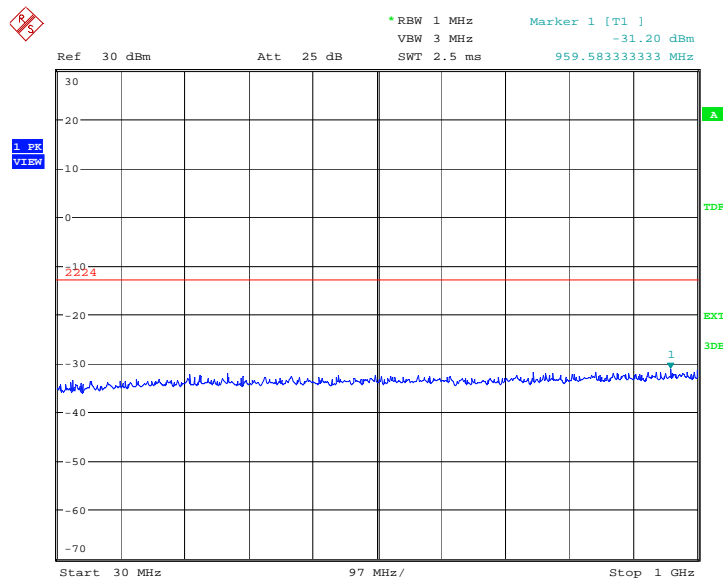

Date: 31.MAY.2011 06:38:23


A.8.3.20 Idle mode: 1GHz –2.5GHz

Spurious emission limit –13dBm.

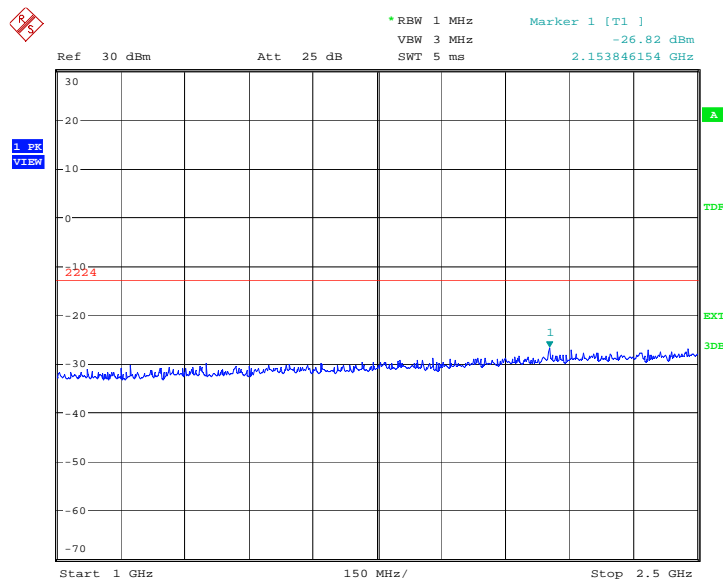


Date: 31.MAY.2011 06:38:51

A.8.3.21 Idle mode: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

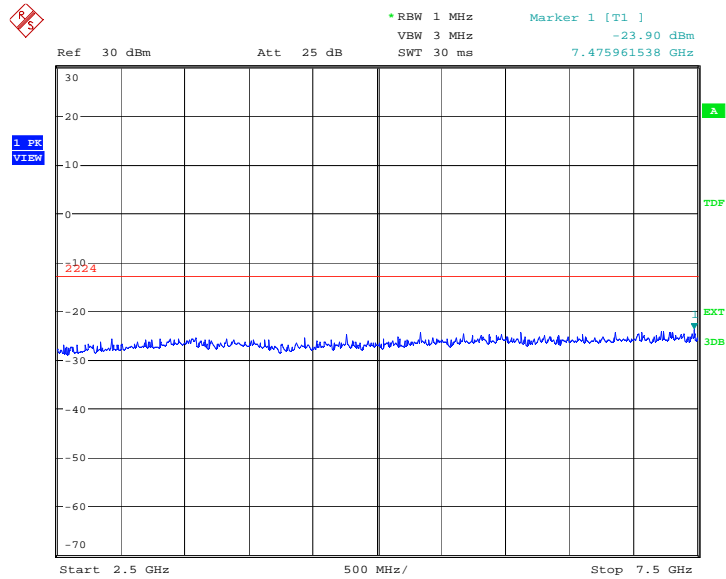


Date: 31.MAY.2011 06:39:19

A.8.3.22 Idle mode: 7.5GHz –10GHz
Spurious emission limit –13dBm.

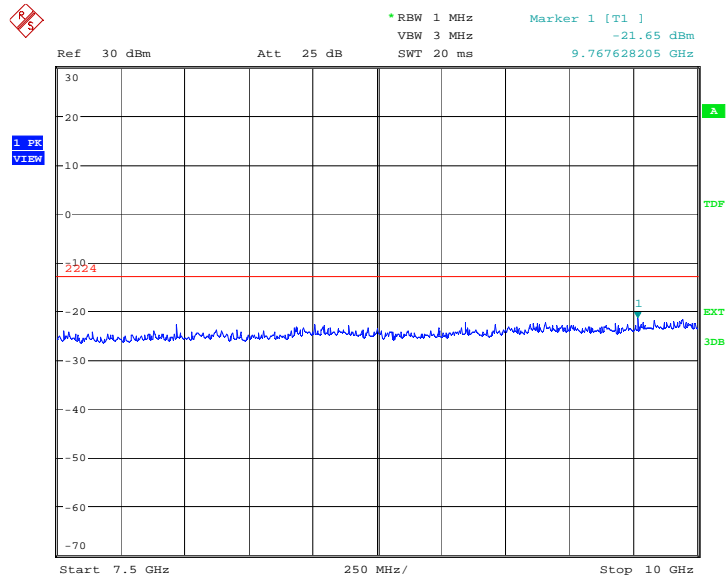


Date: 31.MAY.2011 06:39:47

A.8.3.23 Idle mode: 10GHz –15GHz
Spurious emission limit –13dBm.

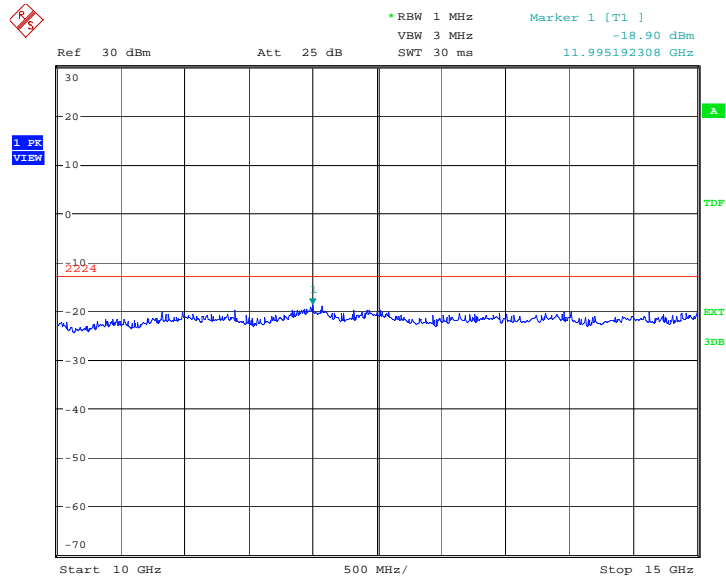

Date: 31.MAY.2011 06:40:16

A.8.3.24 Idle mode: 15GHz –20GHz
Spurious emission limit –13dBm.

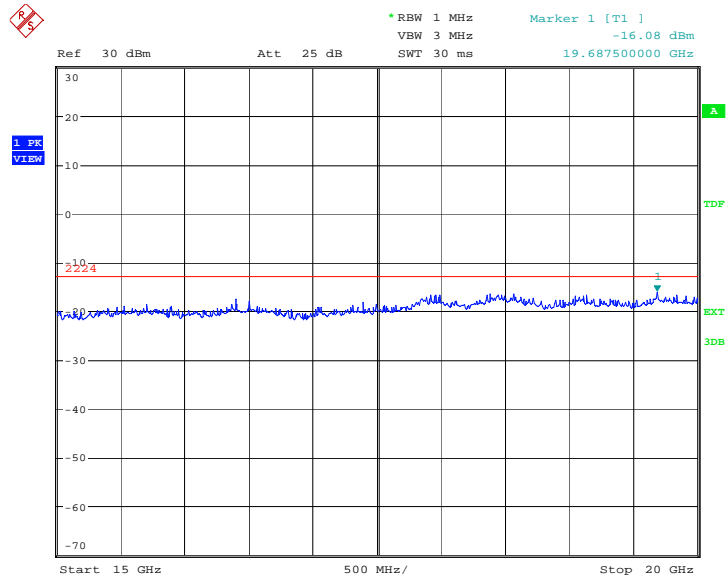

Date: 31.MAY.2011 06:40:44

A.9 RECEIVER RADIATION EMISSION

Reference

FCC: CFR Part 15.109, 2.1053

IC: RSS 132, Issue 2, Section 4.6. RSS 133, Issue 5, Section 6.6

A.9.1 Method of Measurement

The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. The measurement distance is 3m.

The EUT is measured in idle mode without CMU200's signaling.

A.9.2 Limit of Measurement

Frequency of Emission (MHz)	Limit (dB μ V/m)	Measurement Distance (m)
30-88	40	3
88-216	43.5	3
216-960	46	3
>960	54	3

A.9.3 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
>1000	1MHz/1MHz	15

A.9.4 Result of Measurement

850MHz Receive Mode

Frequency (MHz)	Result (dB μ V/m)	Path Loss (dB/m)	Antenna Factor (dB/m)	Pmea(dBuV/m)	Polarity
3885.772	51.05	-19.7	33.4	37.35	HORIZONTAL
3434.870	50.99	-19.6	31.2	39.39	HORIZONTAL
3511.022	50.99	-19.6	33.4	37.19	VERTICAL
3601.202	50.99	-19.6	33.4	37.19	VERTICAL
3432.866	50.90	-19.6	31.2	39.30	VERTICAL
3460.922	50.78	-19.6	31.2	39.18	VERTICAL

END OF REPORT