



FCC PART 15C TEST REPORT No.2011WLN0289

for

TCT Mobile Limited

HSDPA/UMTS dual band / GSM quad bands mobile phone

Type: Tequila US1

Market Name: one touch 909A

With

FCC ID: RAD184

Hardware Version: PIO

Software Version: V940

Issued Date: 2011-09-02



No. DGA-PL-114/01-02

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

Note: The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China, 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

CONTENTS	2
1. TEST LABORATORY.....	5
1.1. TESTING LOCATION	5
1.2. TESTING ENVIRONMENT	5
1.3. PROJECT DATA	5
1.4. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE).....	7
3.1. ABOUT EUT.....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT	9
6. SUMMARY OF TEST RESULTS.....	10
6.1. SUMMARY OF TEST RESULTS.....	10
6.2. STATEMENTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12
A.1. MEASUREMENT METHOD	12
A.2. MAXIMUM PEAK OUTPUT POWER	13
A.2.1. MAXIMUM PEAK OUTPUT POWER	13
A.3. PEAK POWER SPECTRAL DENSITY	15
FIG. 1 POWER SPECTRAL DENSITY (802.11B, CH 1)	16
FIG. 2 POWER SPECTRAL DENSITY (802.11B, CH 6)	16
FIG. 3 POWER SPECTRAL DENSITY (802.11B, CH 11)	17
FIG. 4 POWER SPECTRAL DENSITY (802.11G, CH 1)	17
FIG. 5 POWER SPECTRAL DENSITY (802.11G, CH 6)	18
FIG. 6 POWER SPECTRAL DENSITY (802.11G, CH 11)	18
FIG. 7 POWER SPECTRAL DENSITY (802.11N-20MHz, CH 1)	19
FIG. 8 POWER SPECTRAL DENSITY (802.11N-20MHz, CH 6)	19

FIG. 9 POWER SPECTRAL DENSITY (802.11N-20MHz, CH 11)	20
A.4. OCCUPIED 6dB BANDWIDTH	21
FIG. 10 OCCUPIED 6dB BANDWIDTH (802.11B, CH 1)	22
FIG. 11 OCCUPIED 6dB BANDWIDTH (802.11B, CH 6)	22
FIG. 12 OCCUPIED 6dB BANDWIDTH (802.11B, CH 11)	23
FIG. 13 OCCUPIED 6dB BANDWIDTH (802.11G, CH 1)	23
FIG. 14 OCCUPIED 6dB BANDWIDTH (802.11G, CH 6)	24
FIG. 15 OCCUPIED 6dB BANDWIDTH (802.11G, CH 11)	24
FIG. 16 OCCUPIED 6dB BANDWIDTH (802.11 N-20MHz,, CH 1).....	25
FIG. 17 OCCUPIED 6dB BANDWIDTH (802.11 N-20MHz,, CH 6).....	25
FIG. 18 OCCUPIED 6dB BANDWIDTH (802.11N-20MHz, CH 11)	26
A.5. BAND EDGES COMPLIANCE	27
FIG. 19 BAND EDGES (802.11B, CH 1)	28
FIG. 20 BAND EDGES (802.11B, CH 11)	28
FIG. 21 BAND EDGES (802.11G, CH 1)	29
FIG. 22 BAND EDGES (802.11G, CH 11)	29
FIG. 23 BAND EDGES (802.11 N-20MHz, CH 1)	30
FIG. 24 BAND EDGES (802.11 N-20MHz, CH 11)	30
A.6. TRANSMITTER SPURIOUS EMISSION	31
A.6.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	31
FIG. 25 CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)	32
FIG. 26 CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHz-26 GHz).....	33
FIG. 27 CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)	33
FIG. 28 CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-26 GHz).....	34
FIG. 29 CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)	34
FIG. 30 CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-26 GHz).....	35
FIG. 31 CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY)	35
FIG. 32 CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-26 GHz).....	36
FIG. 33 CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY)	36
FIG. 34 CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-26 GHz).....	37
FIG. 35 CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY)	37
FIG. 36 CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-26 GHz)	38
FIG. 37 CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, CENTER FREQUENCY)	38
FIG. 38 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH1, 30 MHz-26 GHz)	39
FIG. 39 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH6, CENTER FREQUENCY)	39
FIG. 40 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH6, 30 MHz-26 GHz)	40
FIG. 41 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH11, CENTER FREQUENCY).....	40
FIG. 42 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH11, 30 MHz-26 GHz)	41
A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED	42
FIG. 43 RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH1, 2.38 GHz - 245GHz	48
FIG. 44 RADIATED SPURIOUS EMISSION (802.11B, CH1, 30 MHz-1 GHz).....	48
FIG. 45 RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-4 GHz)	49
FIG. 46 RADIATED SPURIOUS EMISSION (802.11B, CH1, 4 GHz-18 GHz)	49
FIG. 47 RADIATED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-1 GHz).....	50

FIG. 48	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-4 GHz)	50
FIG. 49	RADIATED SPURIOUS EMISSION (802.11B, CH6, 4 GHz-18 GHz)	51
FIG. 50	RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH11, 2.45 GHz - 2.50GHz	51
FIG. 51	RADIATED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-1 GHz)	52
FIG. 52	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-4 GHz)	52
FIG. 53	RADIATED SPURIOUS EMISSION (802.11B, CH11, 4 GHz-18 GHz)	53
FIG. 54	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH1, 2.38 GHz - 2.45GHz	53
FIG. 55	RADIATED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-1 GHz)	54
FIG. 56	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-4 GHz)	54
FIG. 57	RADIATED SPURIOUS EMISSION (802.11G, CH1, 4 GHz-18 GHz)	55
FIG. 58	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-1 GHz)	55
FIG. 59	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-4 GHz)	56
FIG. 60	RADIATED SPURIOUS EMISSION (802.11G, CH6, 4 GHz-18 GHz)	56
FIG. 61	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH11, 2.45 GHz - 2.50GHz	57
FIG. 62	RADIATED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-1 GHz)	57
FIG. 63	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-4 GHz)	58
FIG. 64	RADIATED SPURIOUS EMISSION (802.11G, CH11, 4 GHz-18 GHz)	58
FIG. 65	RADIATED SPURIOUS EMISSION (POWER): 802.11N-20MHz, CH1, 2.38 GHz - 2.45GHz	59
FIG. 66	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH1, 30 MHz-1 GHz)	59
FIG. 67	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH1, 1 GHz-4 GHz)	60
FIG. 68	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH1, 4 GHz-18 GHz)	60
FIG. 69	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 30 MHz-1 GHz)	61
FIG. 70	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 1 GHz-4 GHz)	61
FIG. 71	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 4 GHz-18 GHz)	62
FIG. 72	RADIATED SPURIOUS EMISSION (POWER): 802.11N-20MHz, CH11, 2.45 GHz - 2.50GHz	62
FIG. 73	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH11, 30 MHz-1 GHz)	63
FIG. 74	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH11, 1 GHz-4 GHz)	63
FIG. 75	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH11, 4 GHz-18 GHz)	64
FIG. 76	RADIATED EMISSION: 18 GHz - 26.5 GHz	64
A.7.	AC POWERLINE CONDUCTED EMISSION	65
FIG. 77	AC POWERLINE CONDUCTED EMISSION-802.11B.....	66
FIG. 78	AC POWERLINE CONDUCTED EMISSION-802.11G	67
FIG. 79	AC POWERLINE CONDUCTED EMISSION-802.11N-20MHz.....	68

1. TEST LABORATORY

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793

1.2. Testing Environment

Normal Temperature: 15-30°C
Extreme Temperature: -20/+55°C
Relative Humidity: 30-60%
Air Pressure 990hPa-1040hPa

Note: The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data

Testing End Date: 2011-09-01

1.4. Signature

Sun Zhenyu
(Prepared this test report)

Gao Hong
(Reviewed this test report)

Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 518057
Country: China
Contact: Gong Zhizhou
Email: zhizhou.gong @jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 518057
Country: China
Contact: Gong Zhizhou
Email: zhizhou.gong @jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

Description	HSDPA/UMTS dual band / GSM quad bands mobile phone
Type	Tequila US1
FCC ID	RAD184
IC ID	/
With WLAN Function	Yes
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	22.68dBm(OFDM)
Power Supply	3.8V DC by Battery

Note: Photographs of EUT are shown in ANNEX C of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	012717000004676	PIO	V940
EUT2	012717000004254	PIO	V940

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Battery	CAB31P0000C1	/
AE2	Travel Adapter	CBA3001AG0C1	/
AE3	Travel Adapter	CBA3002AG0C1	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of HSDPA/UMTS dual band / GSM quad bands mobile phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct, 2009 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	March 23, 2005

5. LABORATORY ENVIRONMENT

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing::

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Shielding Room2 (7.30 meters×4.00 meters×3.80 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (a)	/	P
Peak Power Spectral Density	15.247 (d)	/	P
Occupied 6dB Bandwidth	15.247 (d)	/	P
Band Edges Compliance	15.247 (b)	/	P
Transmitter Spurious Emission - Conducted	15.247	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.209, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

The measurement is made according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by TMC
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

TMC has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	26°C
Voltage	V nom	3.6V(By battery)
Humidity	H nom	44%
Air Pressure	A nom	1010hPa

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2012-07-19
2	Spectrum Analyzer	MS2687B	6200819812	Anritsu	2011-09-22
3	Test Receiver	ESS	847151/015	Rohde & Schwarz	2011-10-30
4	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2012-08-12

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESI40	831564/002	Rohde & Schwarz	2012-08-11
2	BiLog Antenna	3142B	9908-1403	EMCO	2012-03-15
3	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2011-12-25

Anechoic chamber


Anechoic chamber by Frankonia German.

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

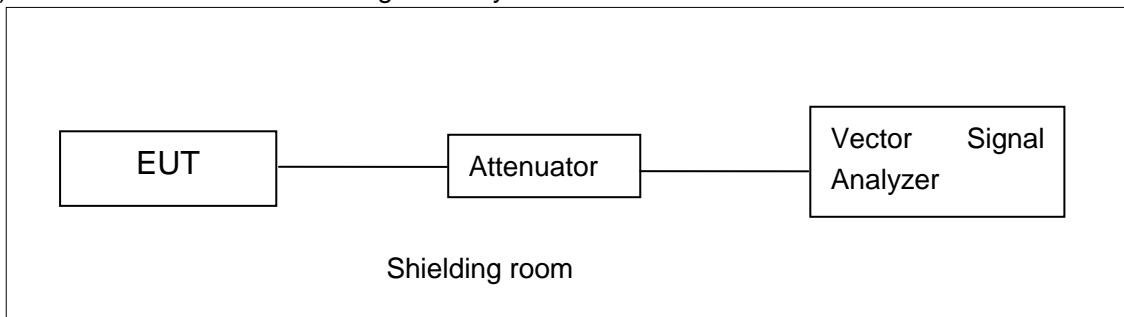


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

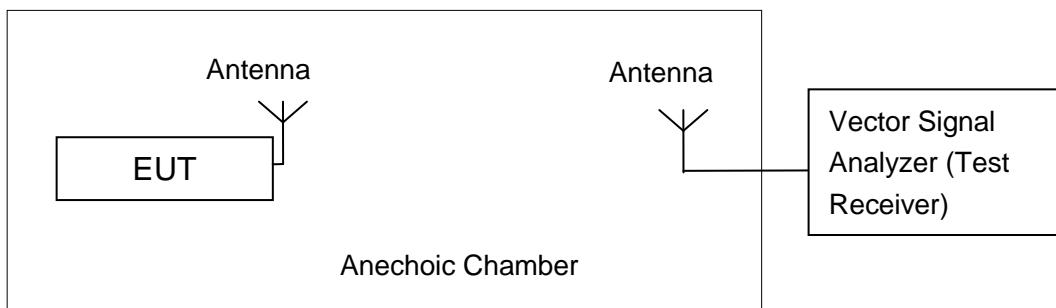

The measurement is made according to ANSI C63.4 and KDB558074

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

The measurement is made according to ANSI C63.4 and KDB558074, and power output option 1 (RBW=20MHz) in KDB558074 is used for the test. EUT is operating in continuous transmitting mode

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

A.2.1. Maximum Peak Output Power

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	18.36	/	/
	2	18.66	/	/
	5.5	20.02	/	/
	11	21.27	21.90	20.77
802.11g	6	21.68	/	/
	9	21.92	/	/
	12	21.12	/	/
	18	21.28	/	/
	24	21.66	/	/
	36	21.73	/	/
	48	21.77	/	/
	54	22.15	22.68	21.81

The data rate 11Mbps and 54Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n mode

Mode	Data Rate (MCS Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz BW)	MCS0	21.60	/	/
	MCS1	21.21	/	/
	MCS2	21.10	/	/
	MCS3	21.60	/	/
	MCS4	21.64	/	/
	MCS5	21.62	/	/

802.11n (40MHz)	MCS6	21.88	22.57	21.51
	MCS7	21.81	/	/
	MCS0	/	/	/
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate index of MCS6 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

A.3. Peak Power Spectral Density**Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:**802.11b/g mode**

Mode	Channel	Power Spectral Density (8 dBm/3 kHz)		Conclusion
802.11b	1	Fig.1	7.85	P
	6	Fig.2	7.48	P
	11	Fig.3	7.60	P
802.11g	1	Fig.4	-10.86	P
	6	Fig.5	-11.25	P
	11	Fig.6	-11.48	P

802.11n mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11n (20MHz)	1	Fig.7	-11.38	P
	6	Fig.8	-11.41	P
	11	Fig.9	-11.25	P
802.11n (40MHz)	/	/	/	/
	/	/	/	/
	/	/	/	/

Conclusion: PASS

Test graphs as below:

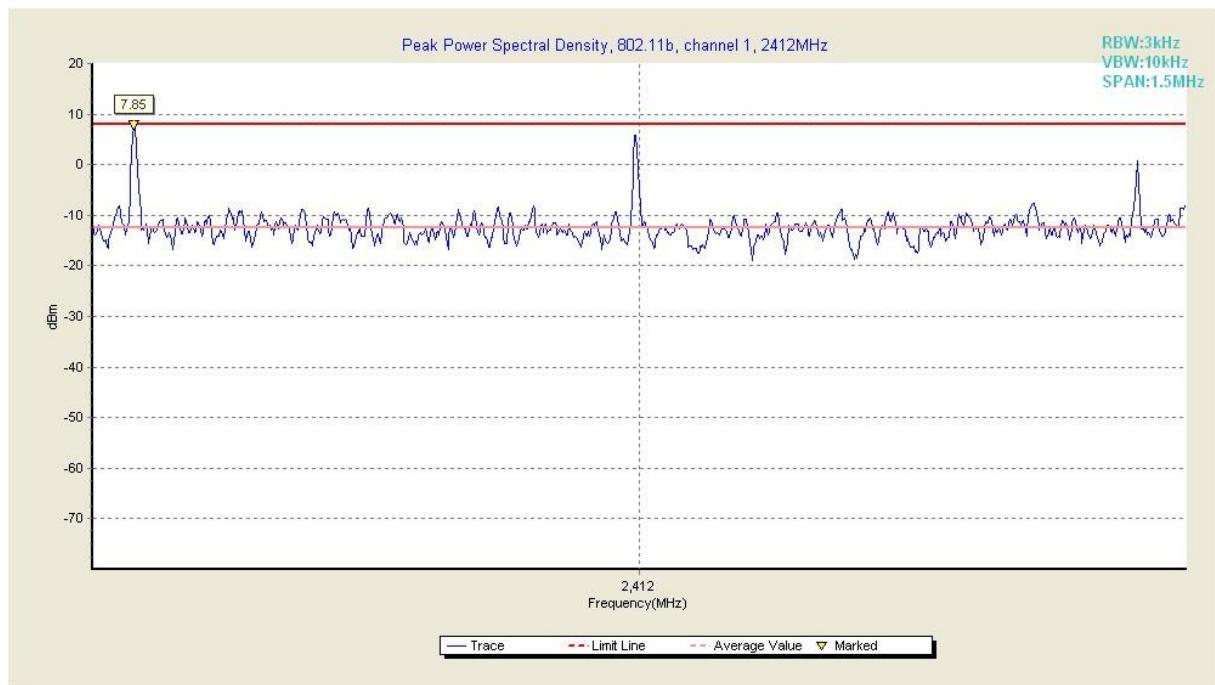


Fig. 1 Power Spectral Density (802.11b, Ch 1)

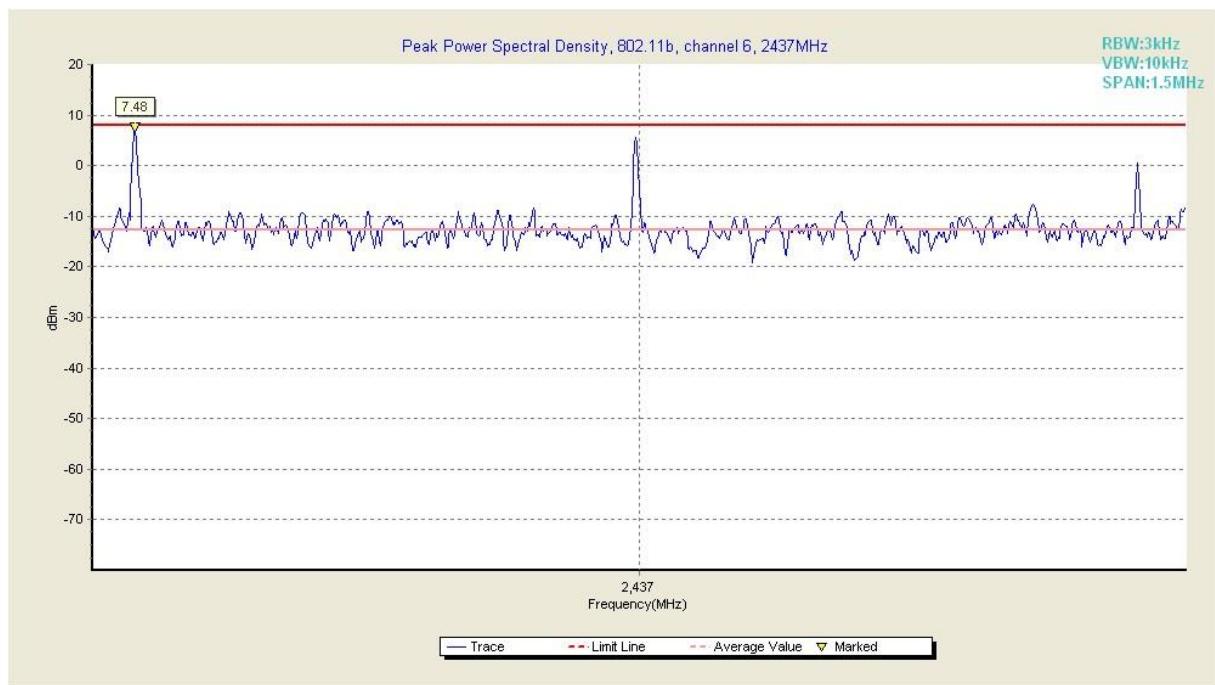
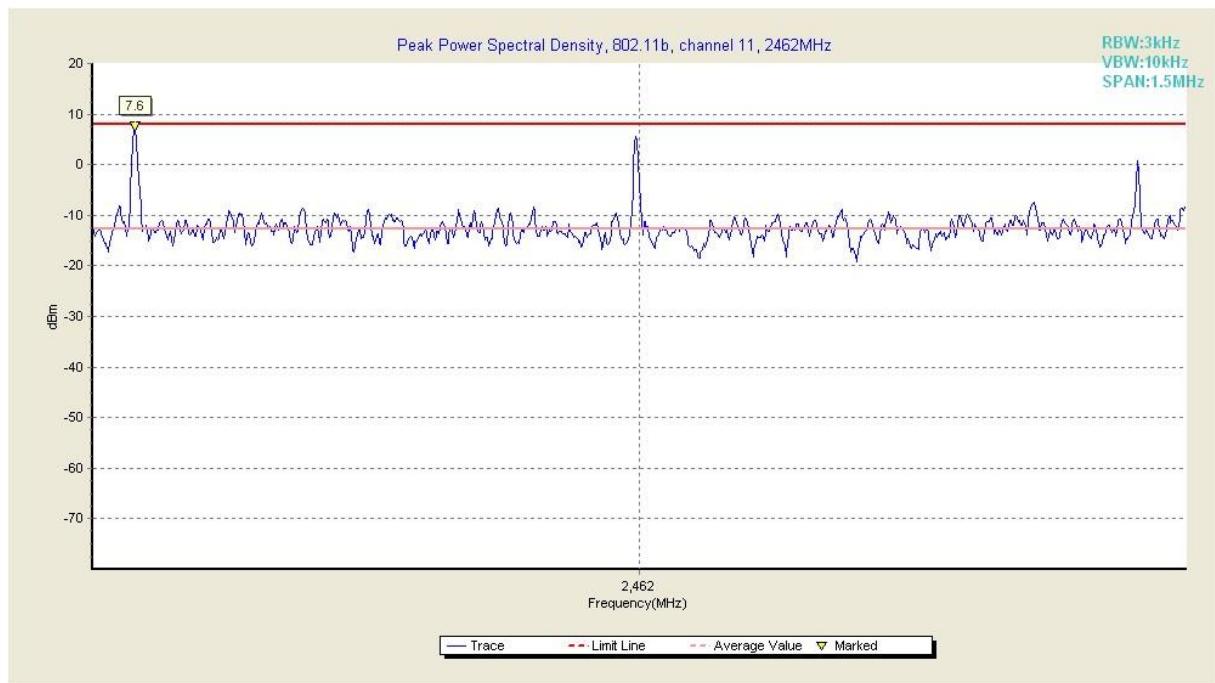
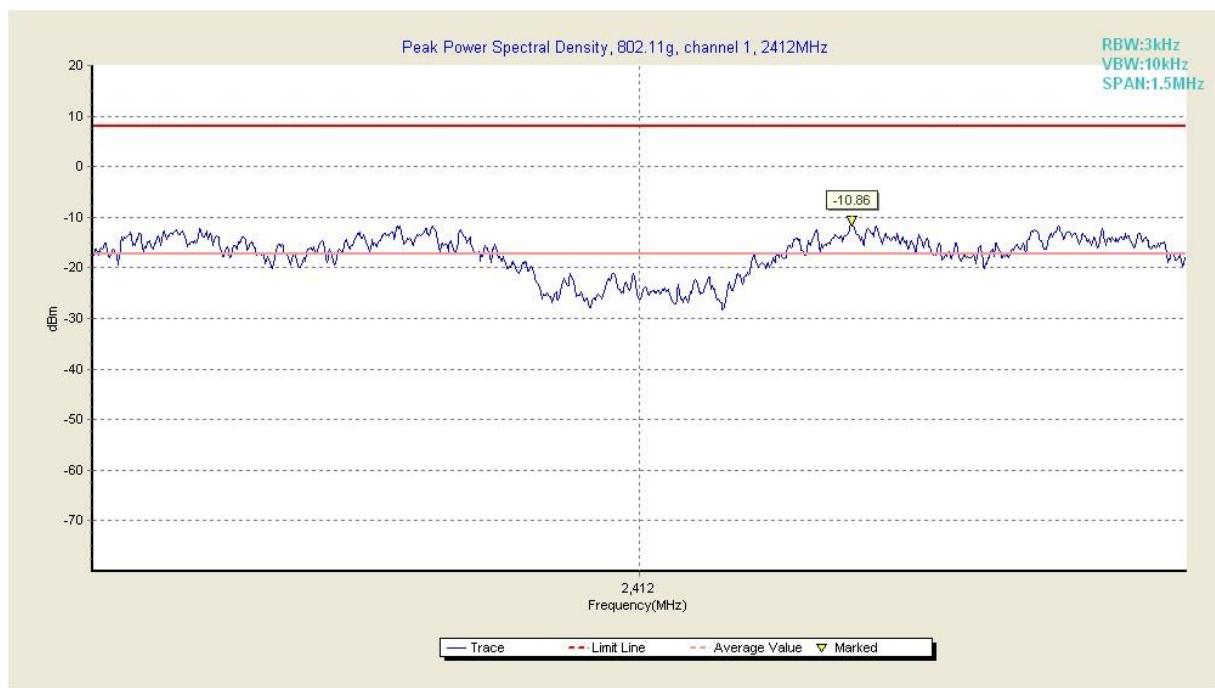
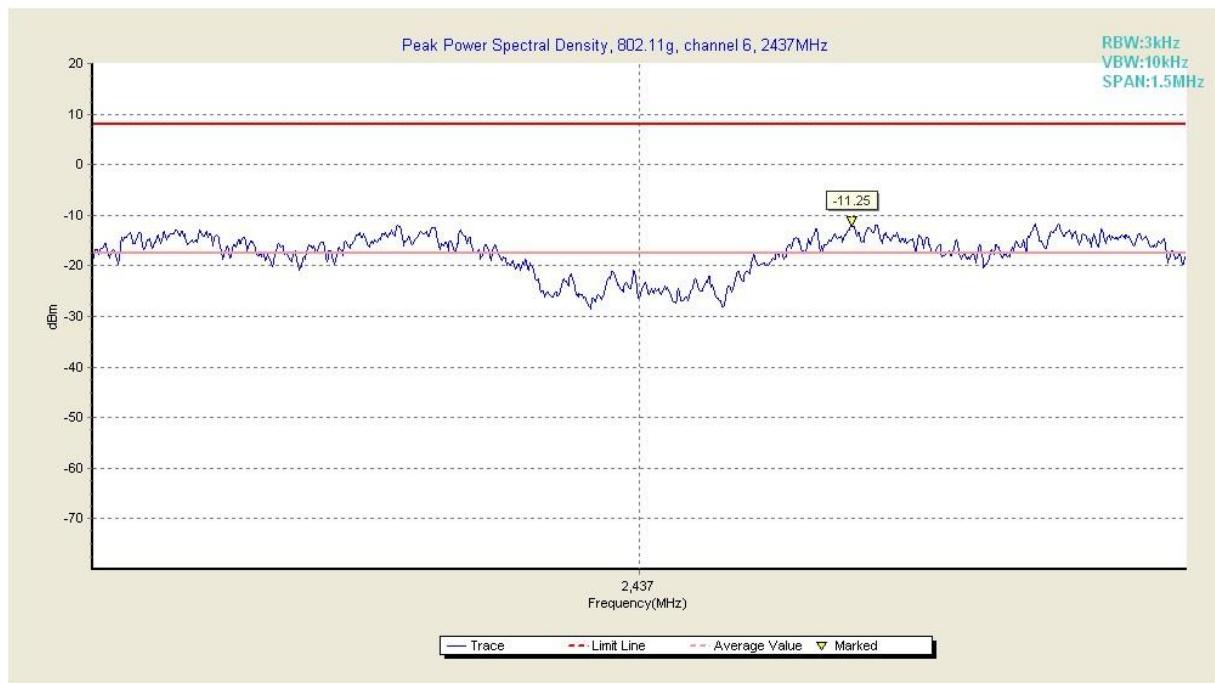


Fig. 2 Power Spectral Density (802.11b, Ch 6)

**Fig. 3 Power Spectral Density (802.11b, Ch 11)****Fig. 4 Power Spectral Density (802.11g, Ch 1)**

**Fig. 5 Power Spectral Density (802.11g, Ch 6)****Fig. 6 Power Spectral Density (802.11g, Ch 11)**

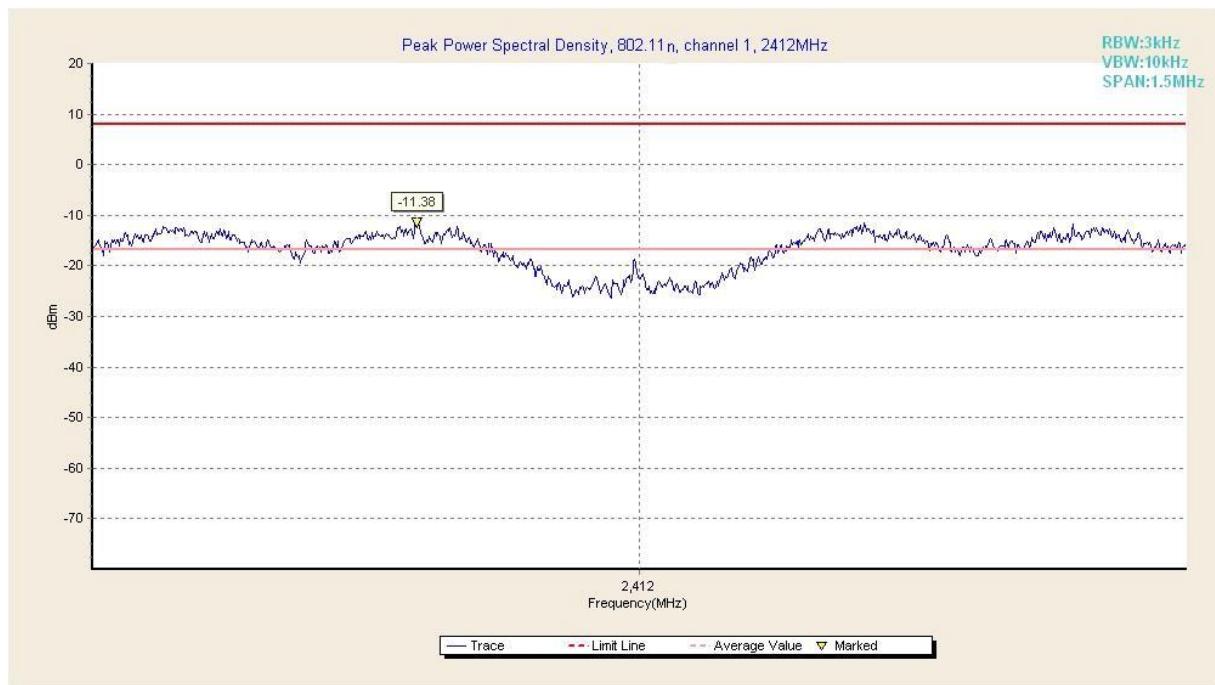


Fig. 7 Power Spectral Density (802.11n-20MHz, Ch 1)

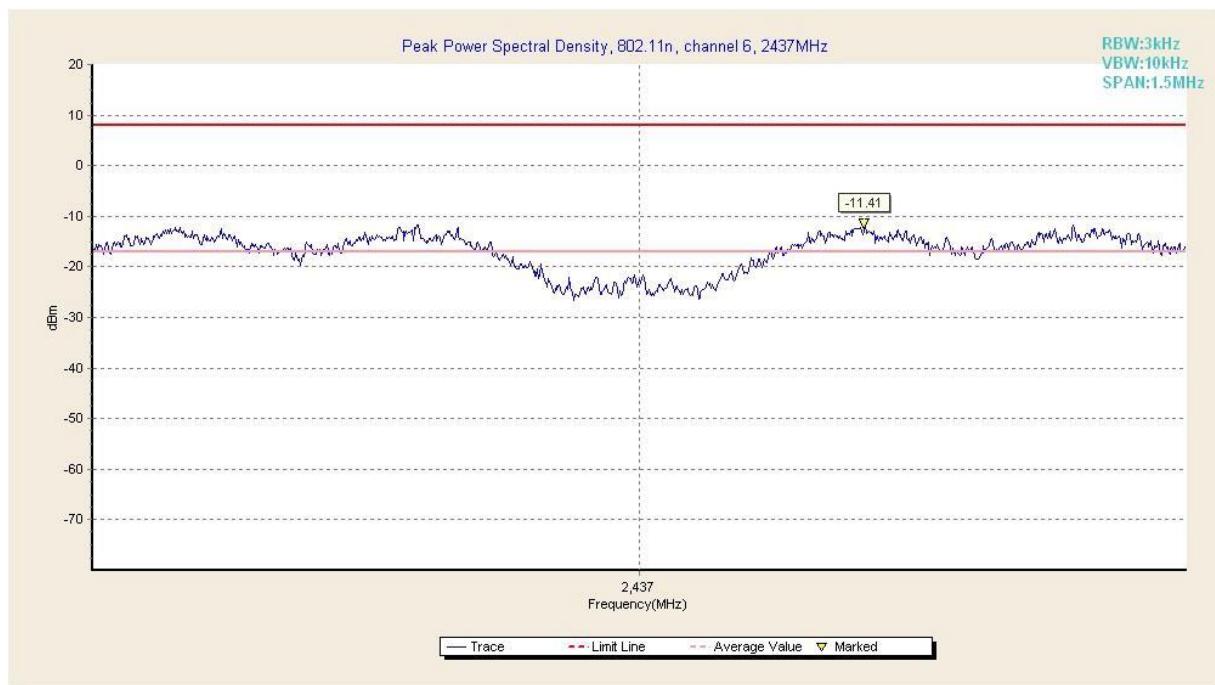


Fig. 8 Power Spectral Density (802.11n-20MHz, Ch 6)

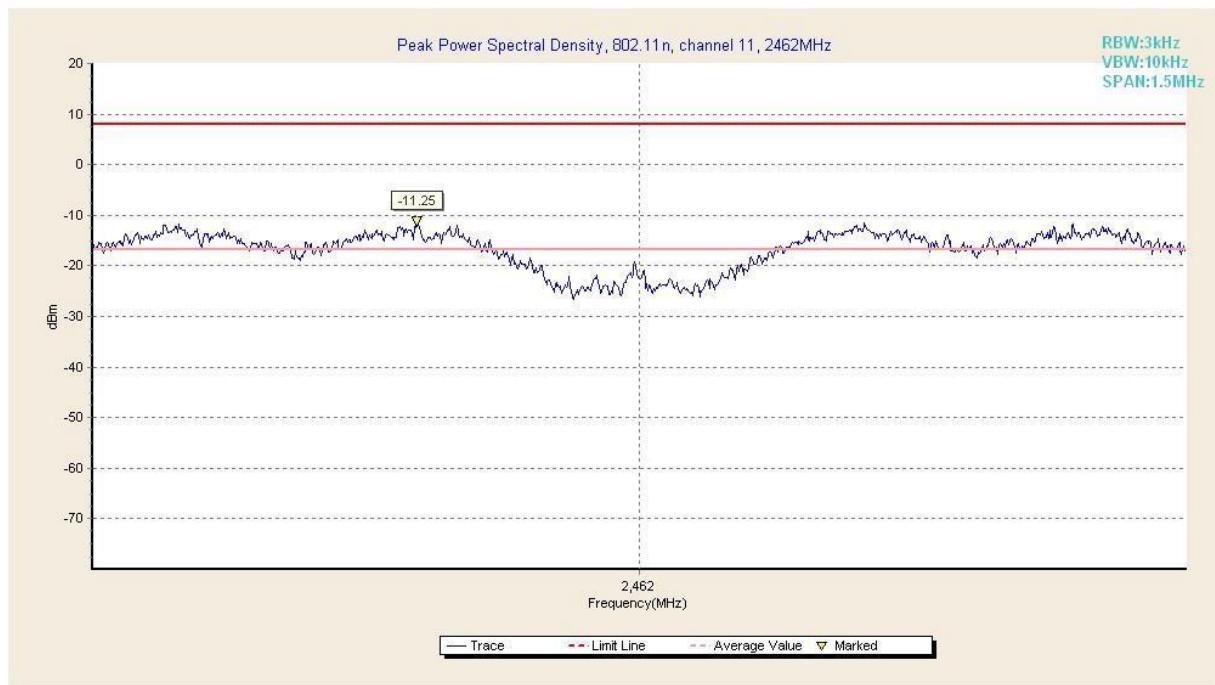


Fig. 9 Power Spectral Density (802.11n-20MHz, Ch 11)

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:**802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11b	1	Fig.10	9300	P
	6	Fig.11	8500	P
	11	Fig.12	7150	P
802.11g	1	Fig.13	16350	P
	6	Fig.14	15800	P
	11	Fig.15	16350	P

802.11n mode

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11n (20MHz)	1	Fig.16	15950	P
	6	Fig.17	16050	P
	11	Fig.18	16150	P
802.11n (40MHz)	/	/	/	/
	/	/	/	/
	/	/	/	/

Conclusion: PASS

Test graphs as below:



Fig. 10 Occupied 6dB Bandwidth (802.11b, Ch 1)

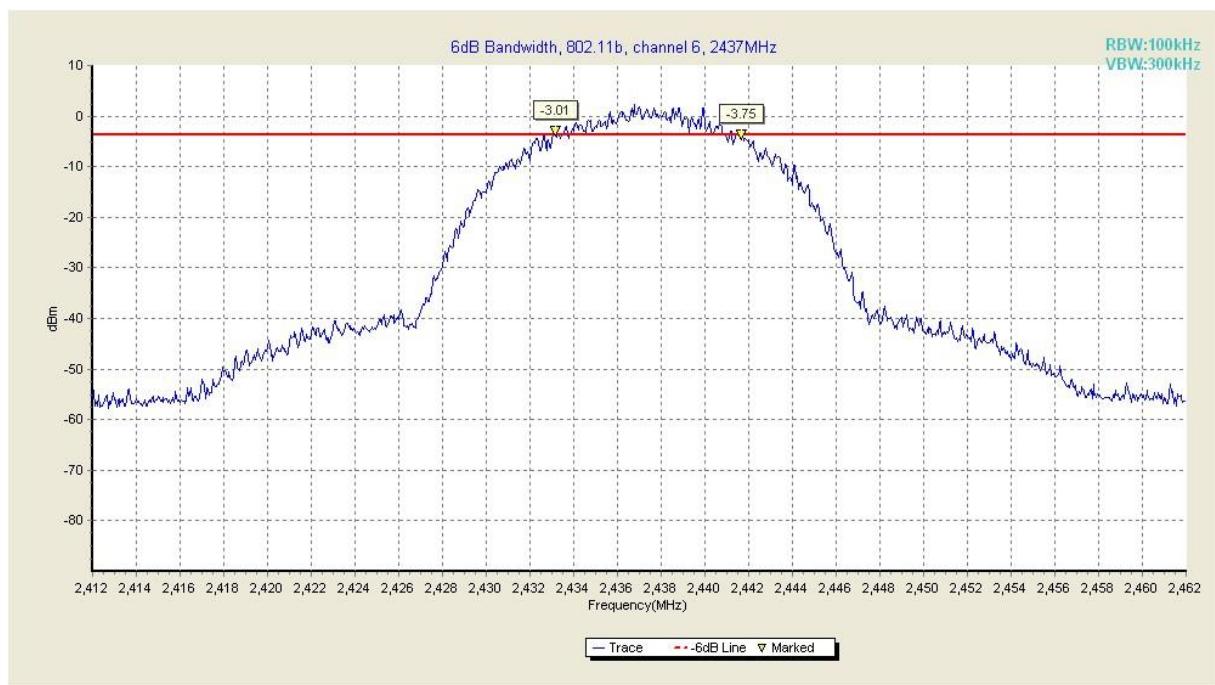


Fig. 11 Occupied 6dB Bandwidth (802.11b, Ch 6)

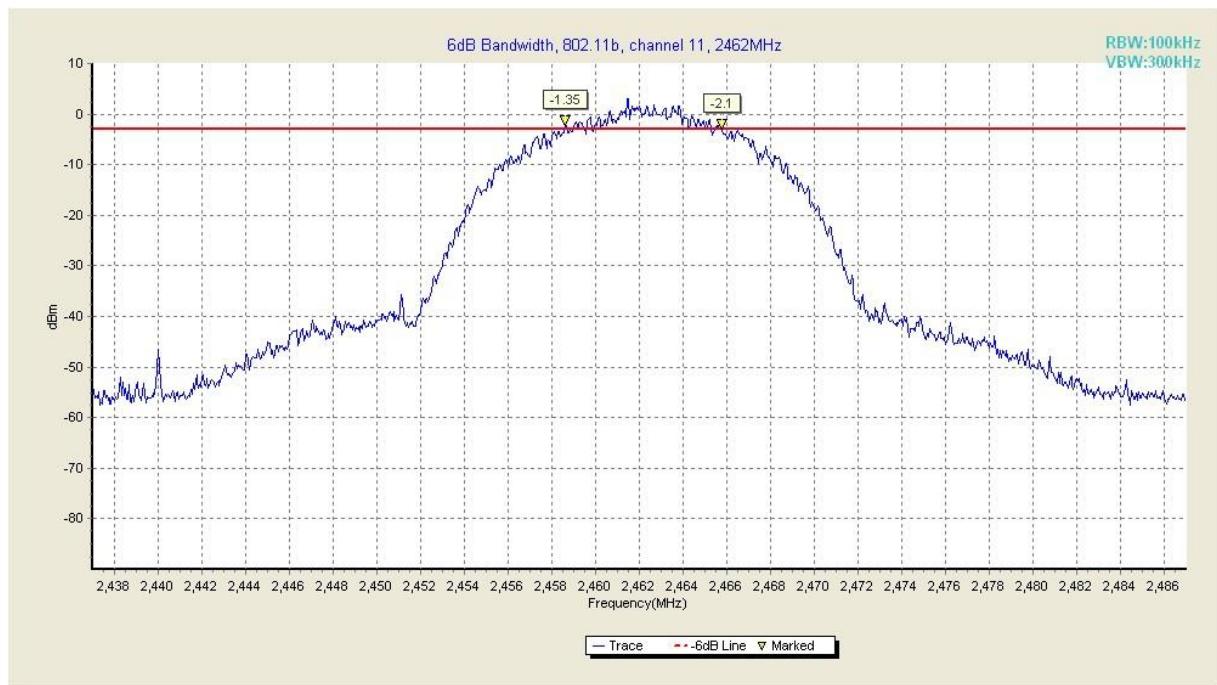


Fig. 12 Occupied 6dB Bandwidth (802.11b, Ch 11)



Fig. 13 Occupied 6dB Bandwidth (802.11g, Ch 1)

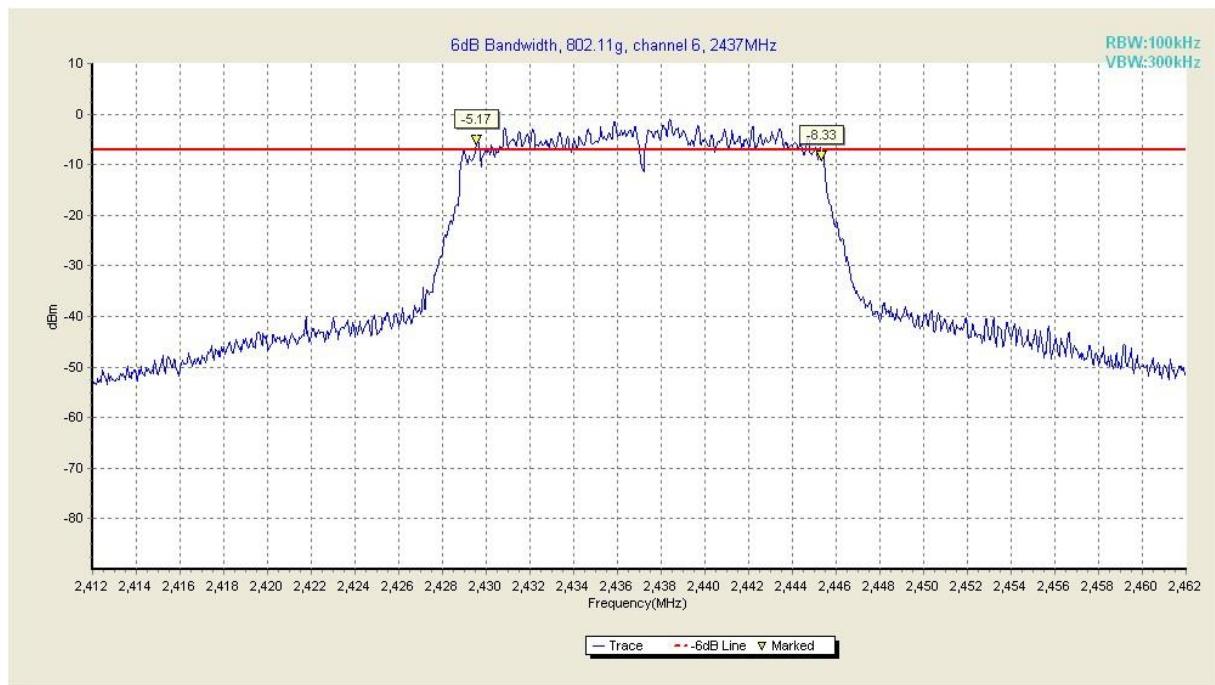


Fig. 14 Occupied 6dB Bandwidth (802.11g, Ch 6)

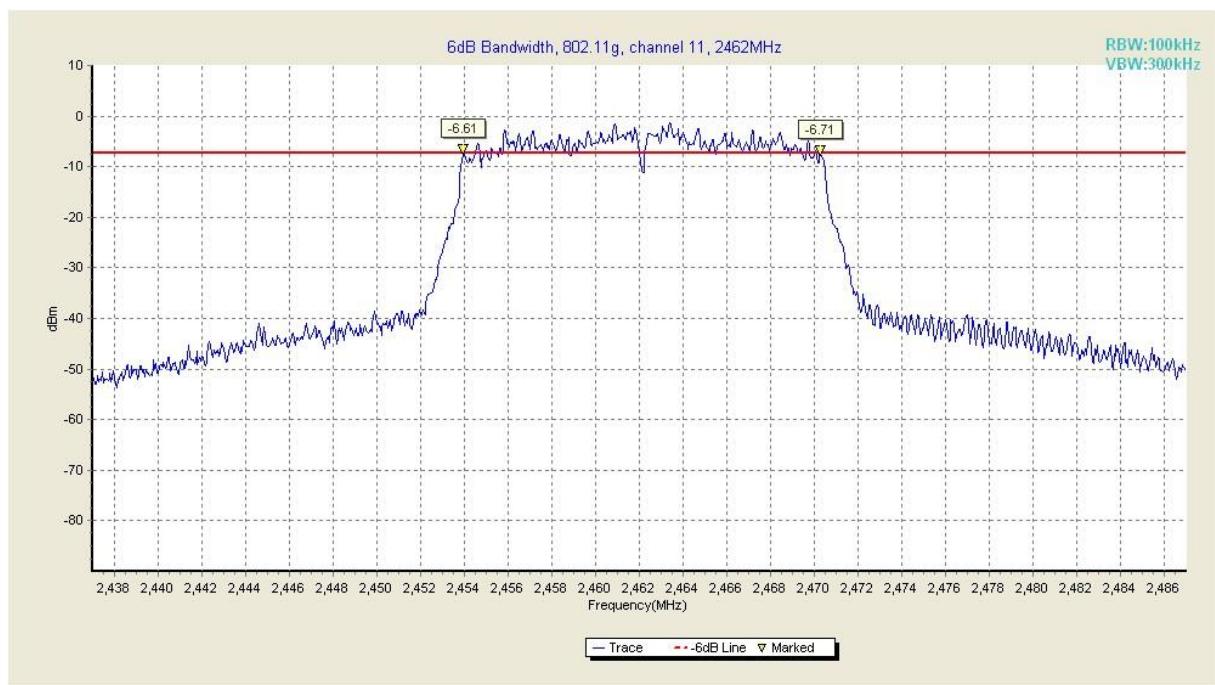


Fig. 15 Occupied 6dB Bandwidth (802.11g, Ch 11)

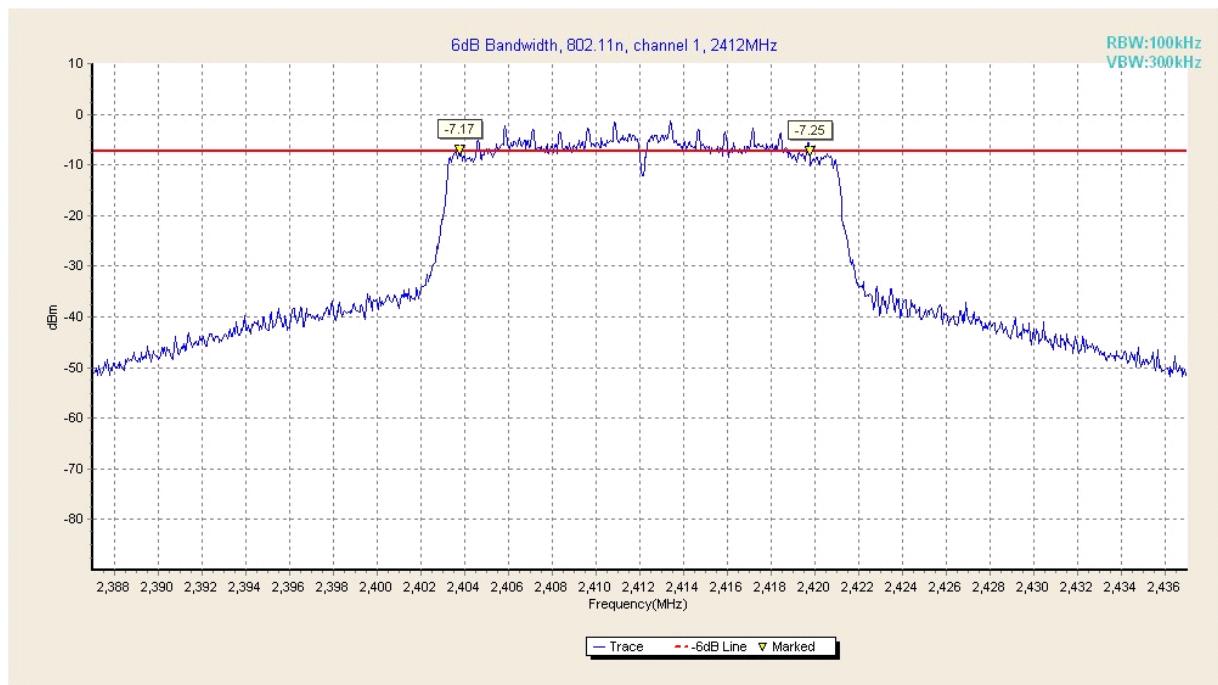


Fig. 16 Occupied 6dB Bandwidth (802.11 n-20MHz,, Ch 1)

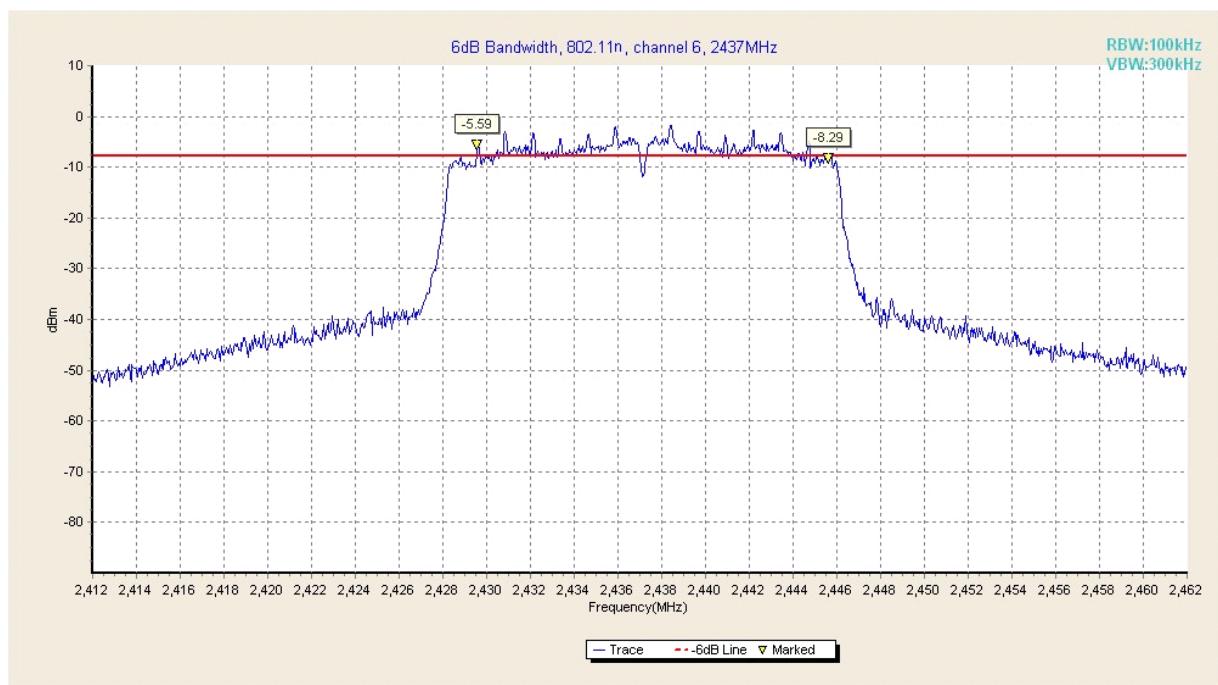


Fig. 17 Occupied 6dB Bandwidth (802.11 n-20MHz,, Ch 6)

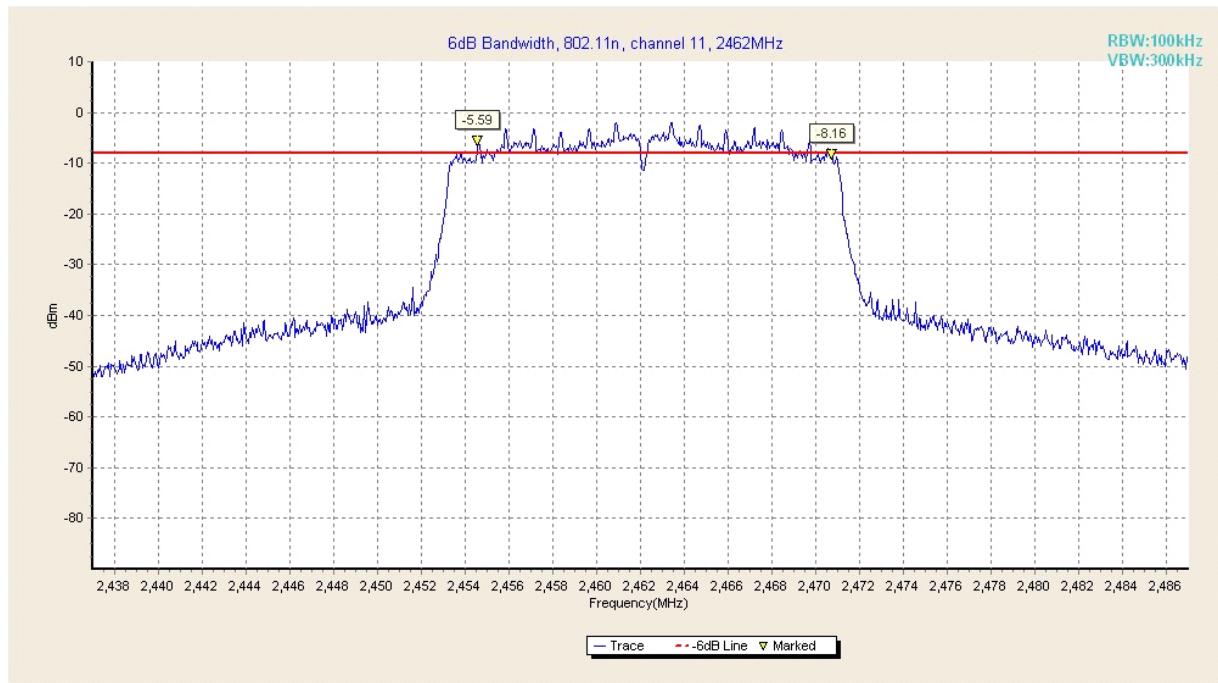


Fig. 18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 11)

A.5. Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

802.11b/g mode



Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.19	P
	11	Fig.20	P
802.11g	1	Fig.21	P
	11	Fig.22	P


802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.23	P
	11	Fig.24	P
802.11n (40MHz)	/	/	/
	/	/	/

Conclusion: PASS

Test graphs as below:

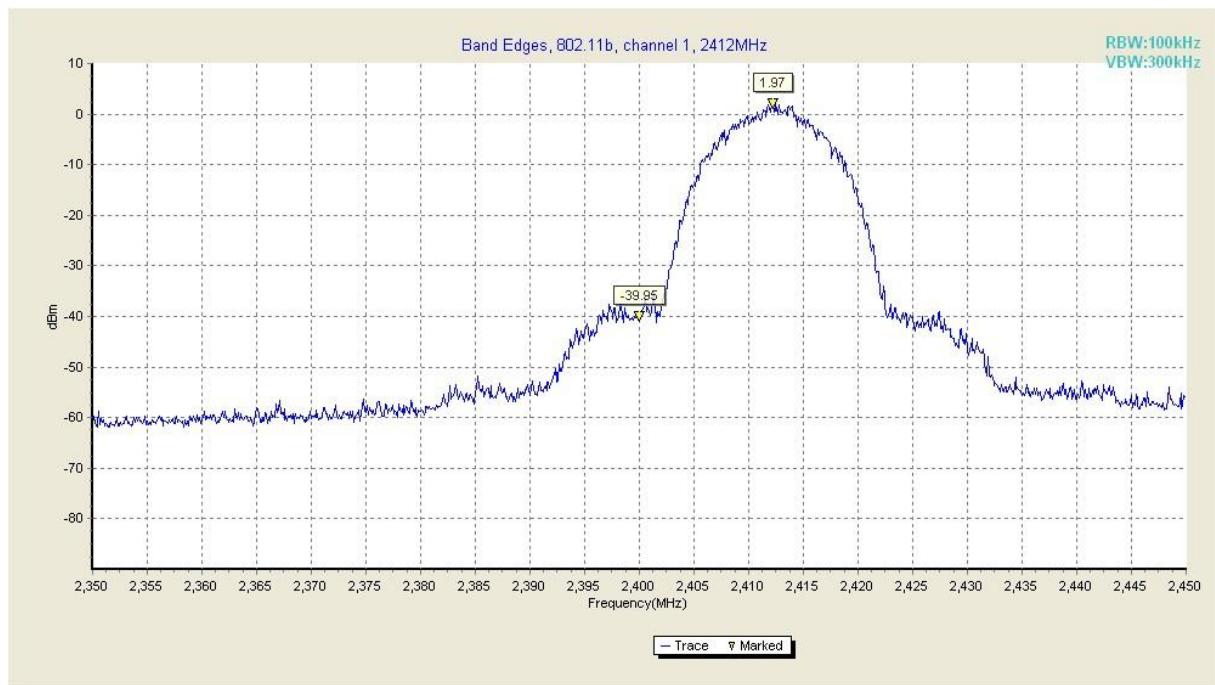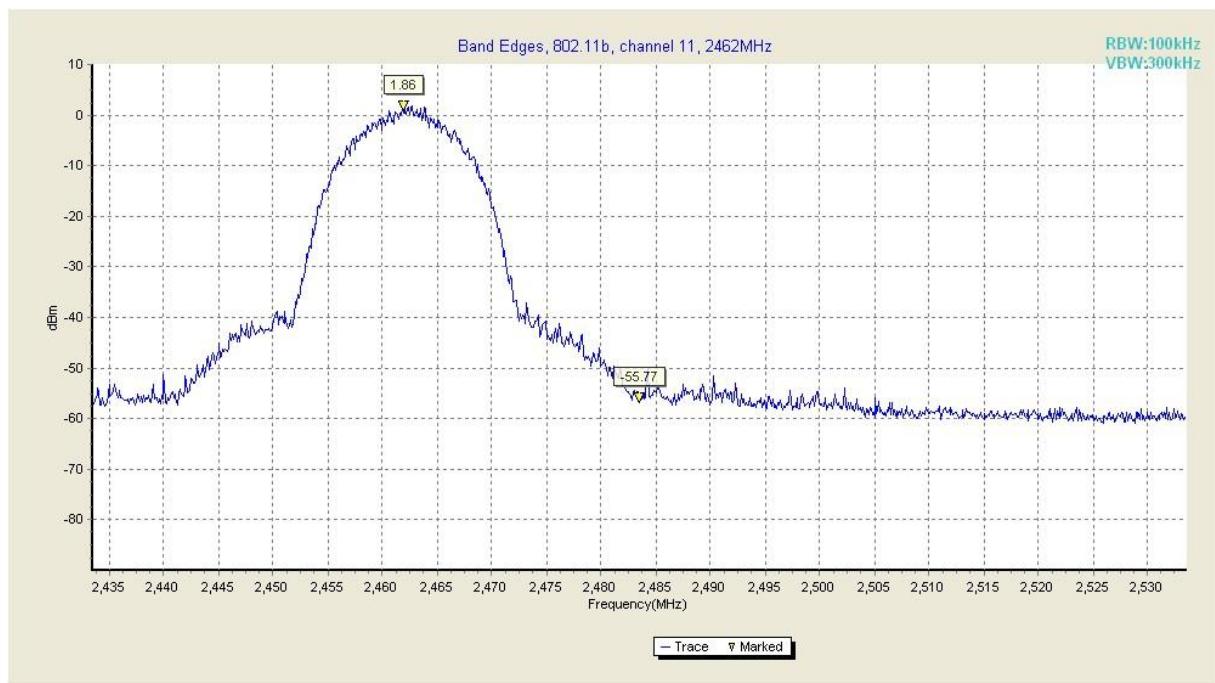**Fig. 19 Band Edges (802.11b, Ch 1)****Fig. 20 Band Edges (802.11b, Ch 11)**

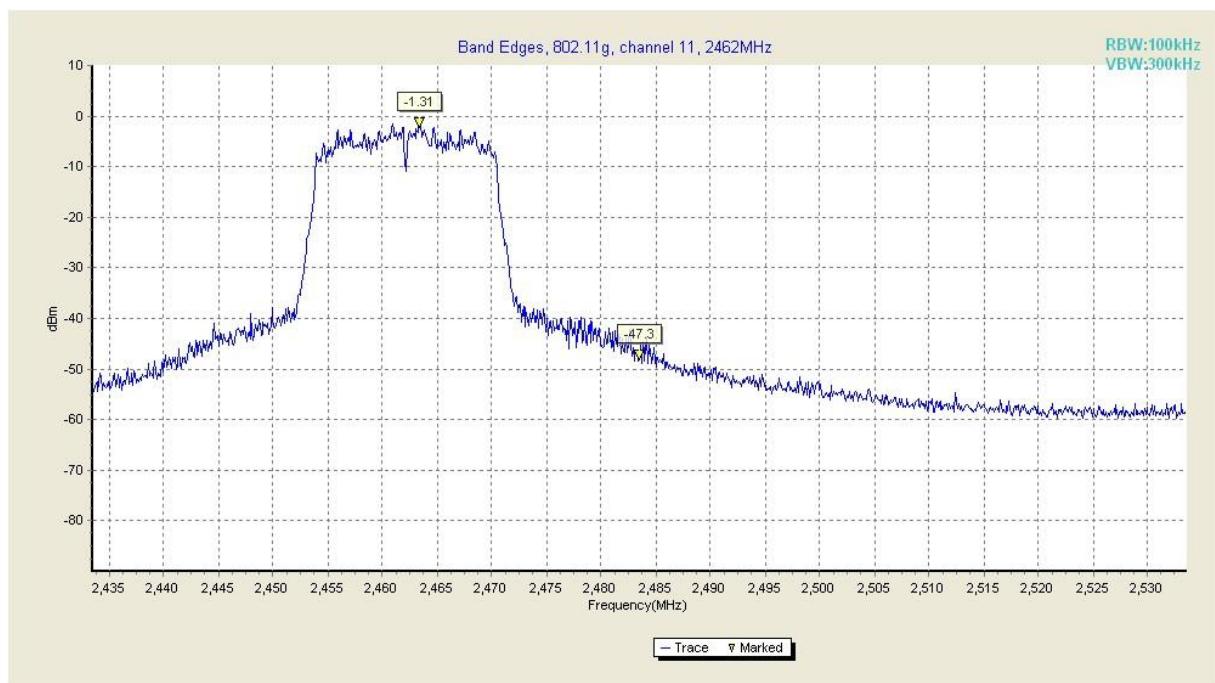**Fig. 21 Band Edges (802.11g, Ch 1)****Fig. 22 Band Edges (802.11g, Ch 11)**

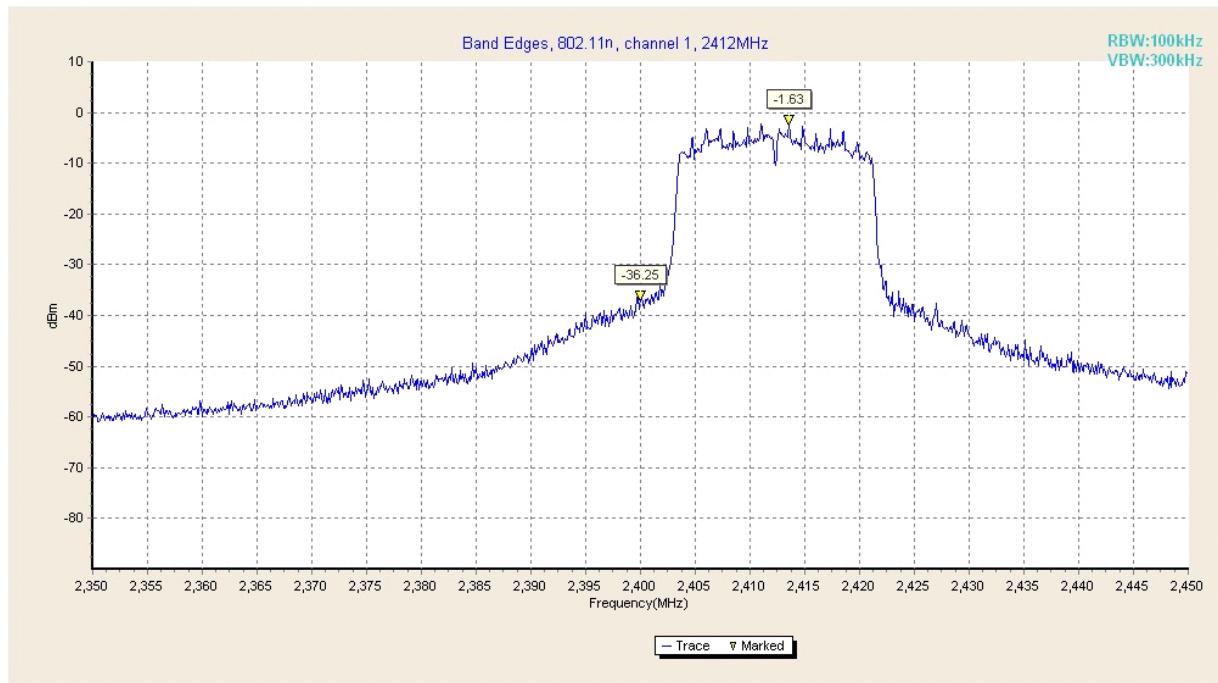


Fig. 23 Band Edges (802.11 n-20MHz, Ch 1)

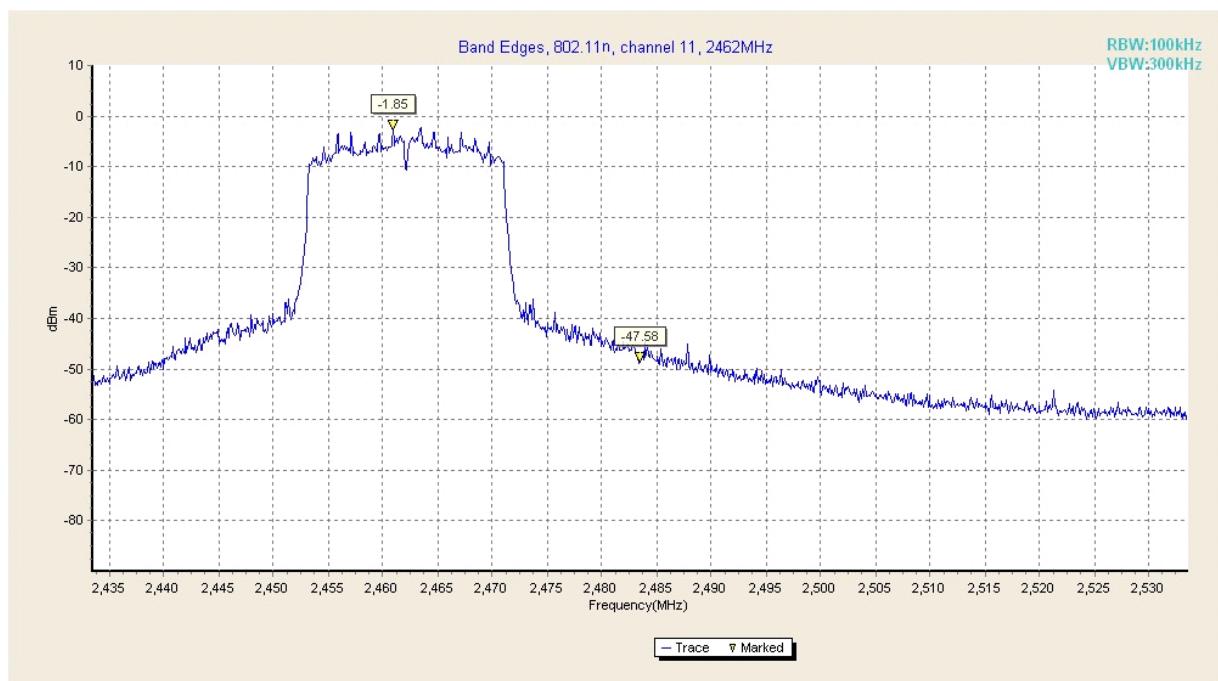


Fig. 24 Band Edges (802.11 n-20MHz, Ch 11)

A.6. Transmitter Spurious Emission

A.6.1 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Frequency Range	Uncertainty
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

Measurement Results:

802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.25	P
		30 MHz-26 GHz	Fig.26	P
	6	2.437 GHz	Fig.27	P
		30 MHz-26 GHz	Fig.28	P
	11	2.462 GHz	Fig.29	P
		30 MHz-26 GHz	Fig.30	P
802.11g	1	2.412 GHz	Fig.31	P
		30 MHz-26 GHz	Fig.32	P
	6	2.437 GHz	Fig.33	P
		30 MHz-26 GHz	Fig.34	P
	11	2.462 GHz	Fig.35	P
		30 MHz-26 GHz	Fig.36	P

802.11n mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (20MHz)	1	2.412 GHz	Fig.37	P
		30 MHz-26 GHz	Fig.38	P
	6	2.437 GHz	Fig.39	P
		30 MHz-26 GHz	Fig.40	P
	11	2.462 GHz	Fig.41	P

		30 MHz-26 GHz	Fig.42	P
802.11n (40MHz)	/	/	/	/
		/	/	/
	/	/	/	/
		/	/	/
	/	/	/	/
		/	/	/

Conclusion: PASS

Test graphs as below:

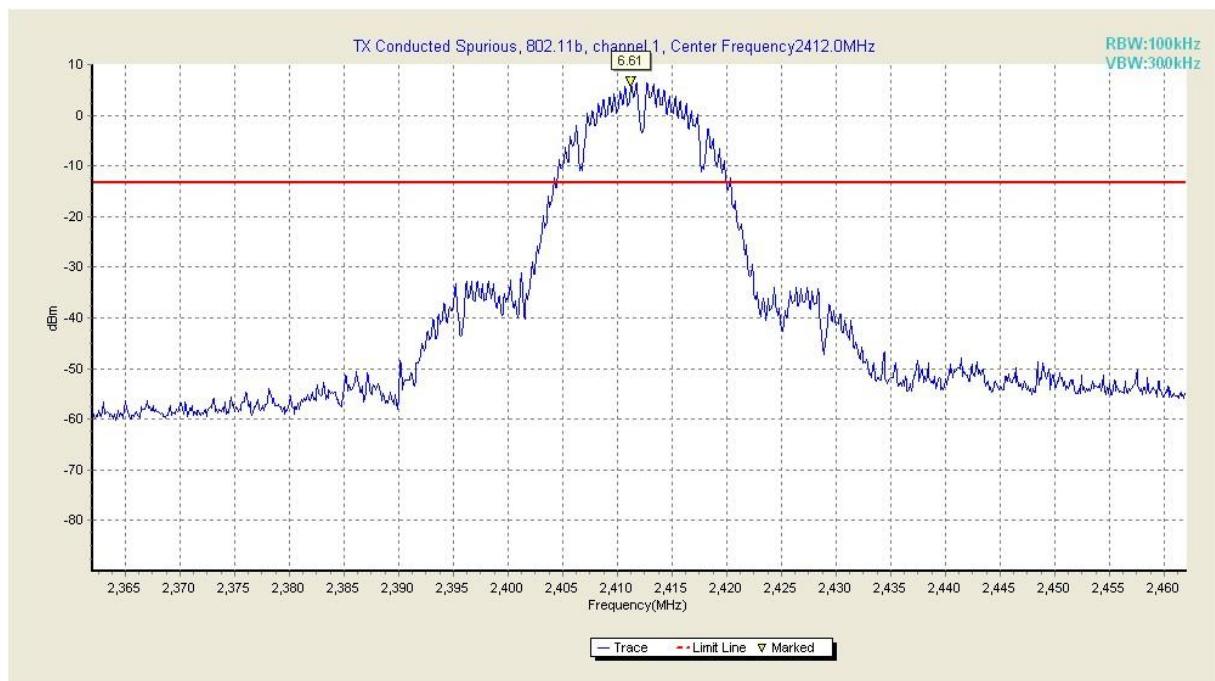


Fig. 25 Conducted Spurious Emission (802.11b, Ch1, Center Frequency)

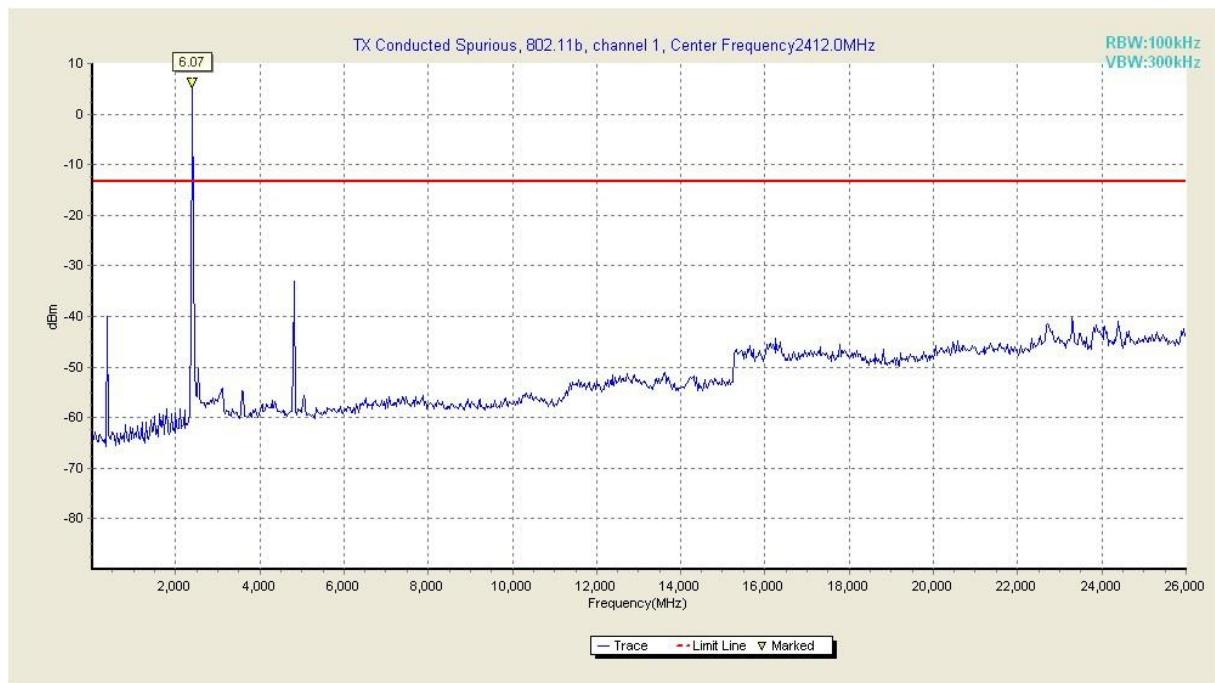


Fig. 26 Conducted Spurious Emission (802.11b, Ch1, 30 MHz-26 GHz)

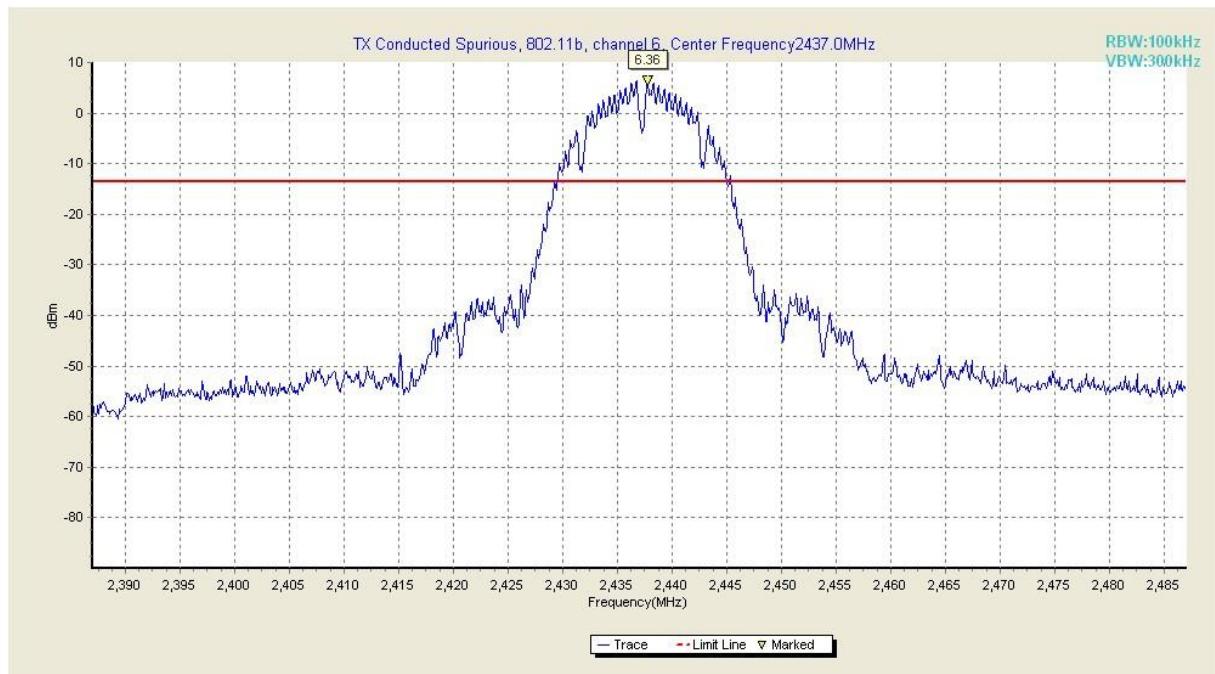


Fig. 27 Conducted Spurious Emission (802.11b, Ch6, Center Frequency)

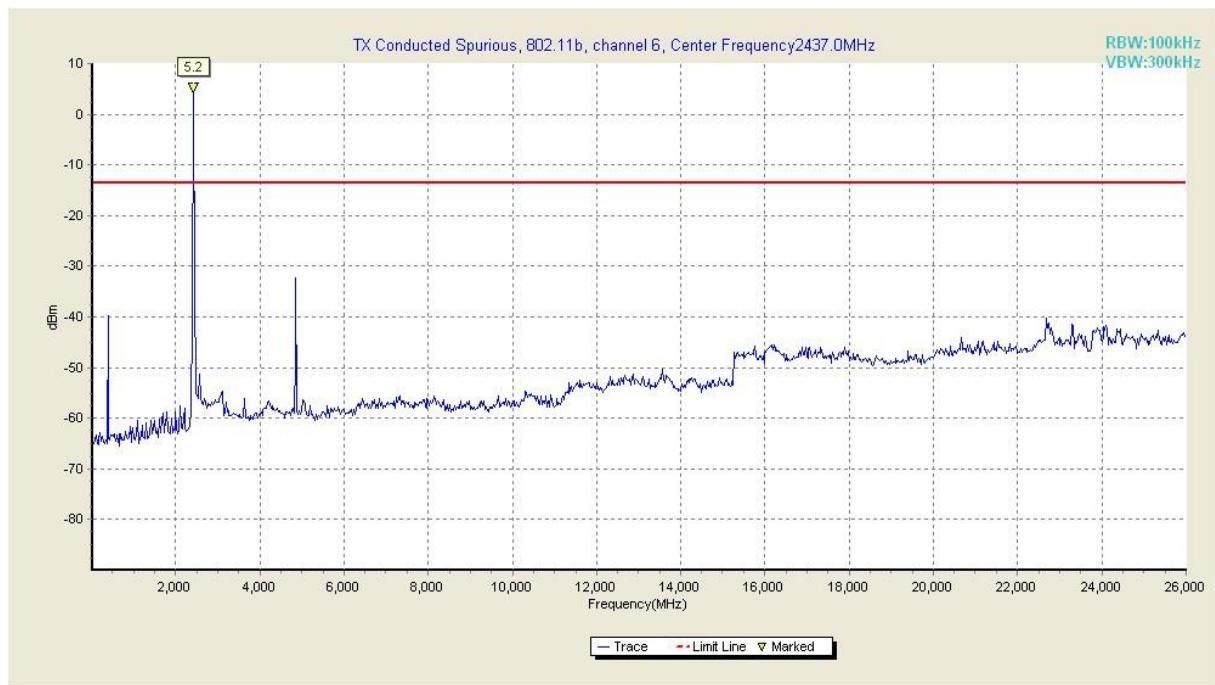


Fig. 28 Conducted Spurious Emission (802.11b, Ch6, 30 MHz-26 GHz)

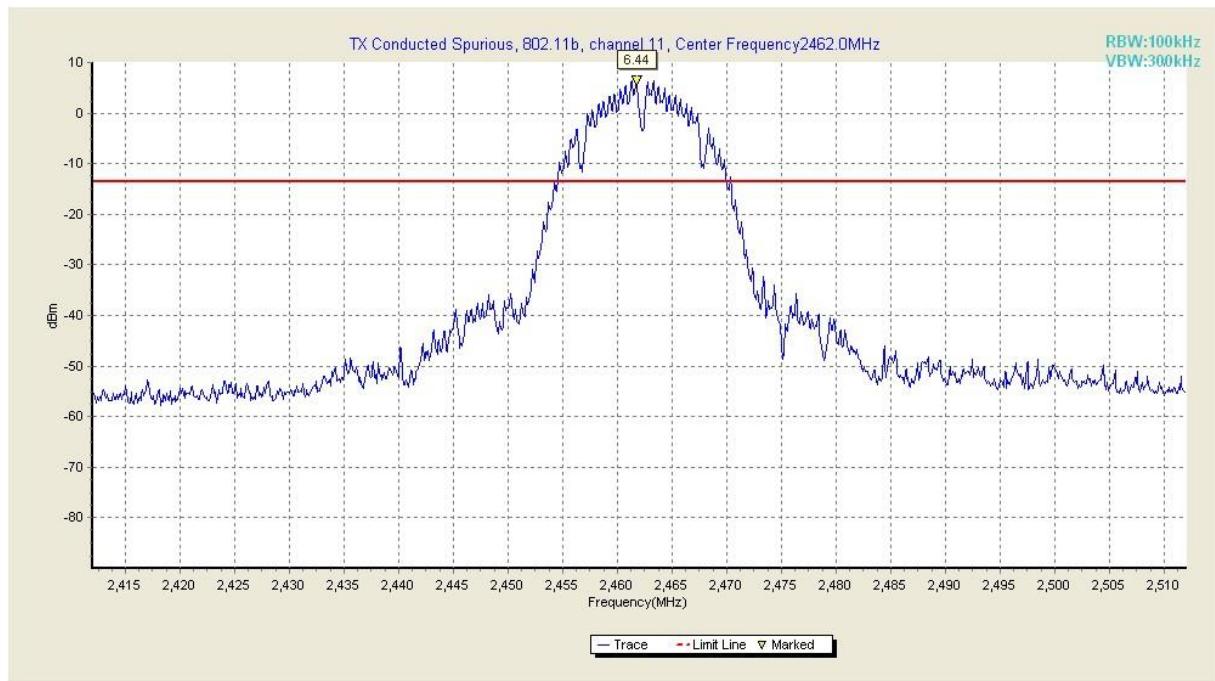


Fig. 29 Conducted Spurious Emission (802.11b, Ch11, Center Frequency)



Fig. 30 Conducted Spurious Emission (802.11b, Ch11, 30 MHz-26 GHz)

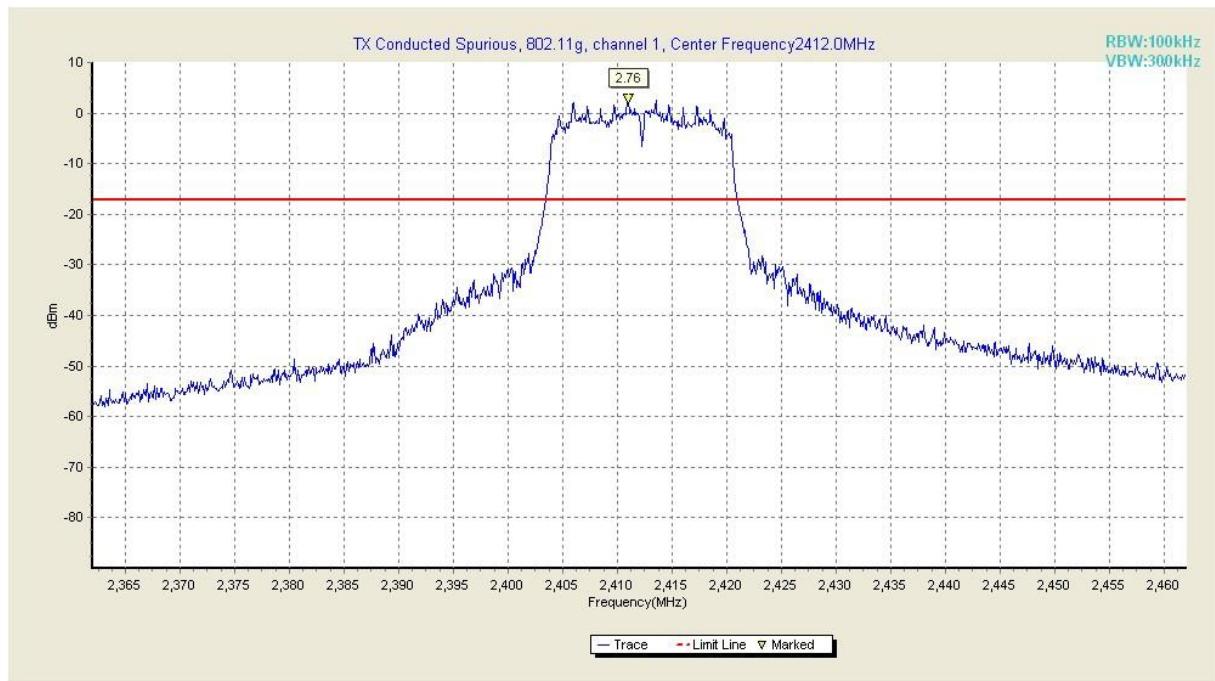


Fig. 31 Conducted Spurious Emission (802.11g, Ch1, Center Frequency)

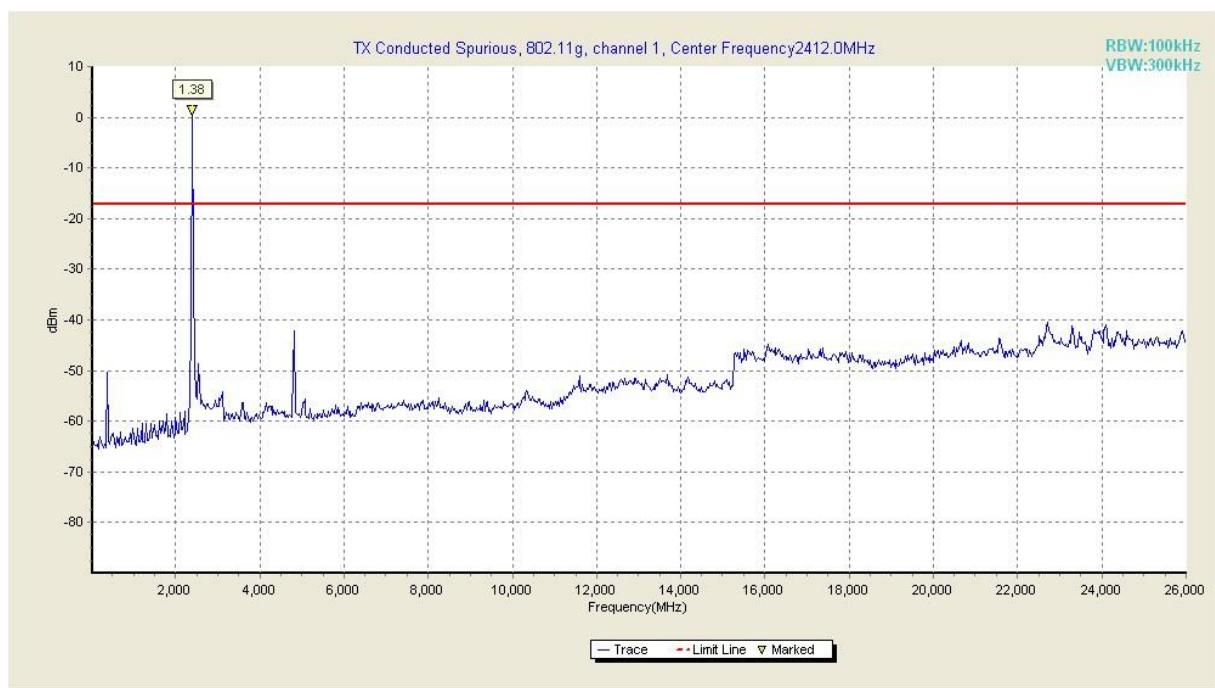


Fig. 32 Conducted Spurious Emission (802.11g, Ch1, 30 MHz-26 GHz)

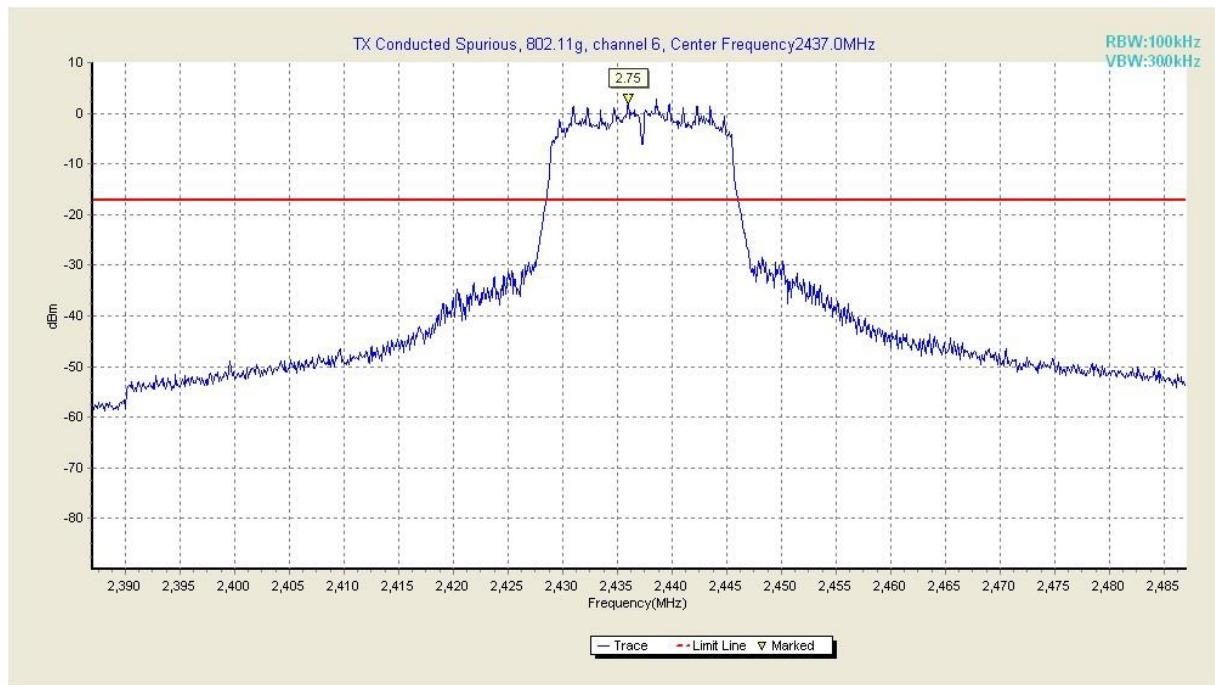


Fig. 33 Conducted Spurious Emission (802.11g, Ch6, Center Frequency)

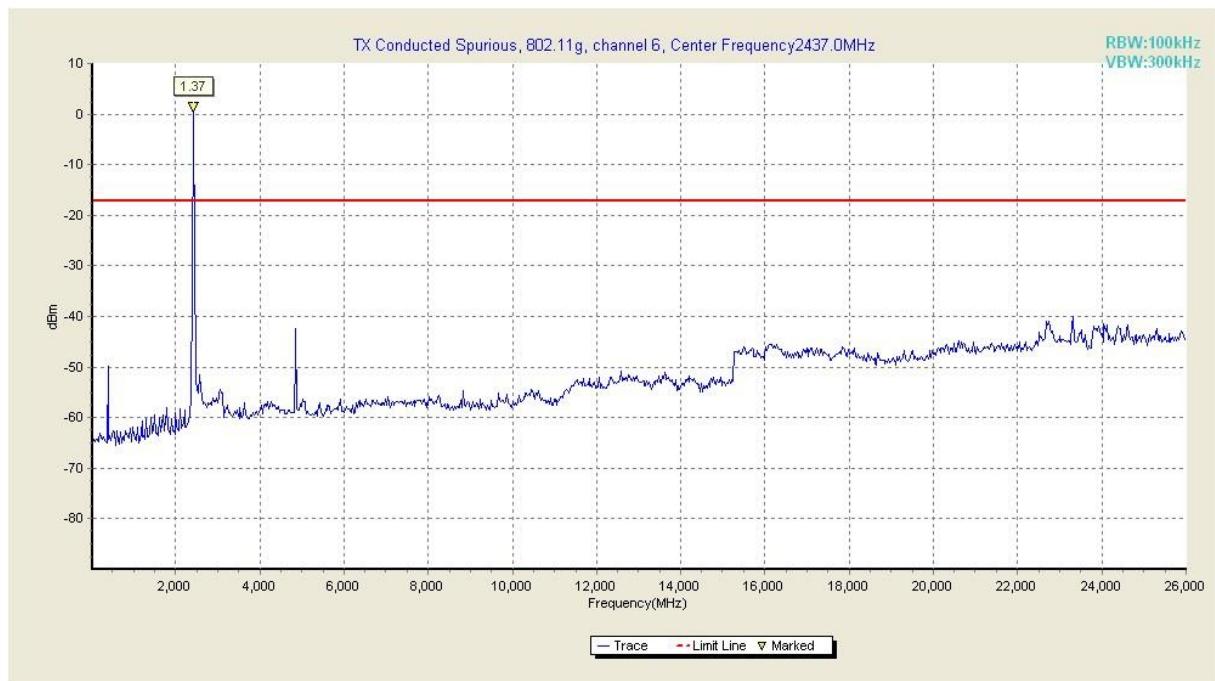


Fig. 34 Conducted Spurious Emission (802.11g, Ch6, 30 MHz-26 GHz)

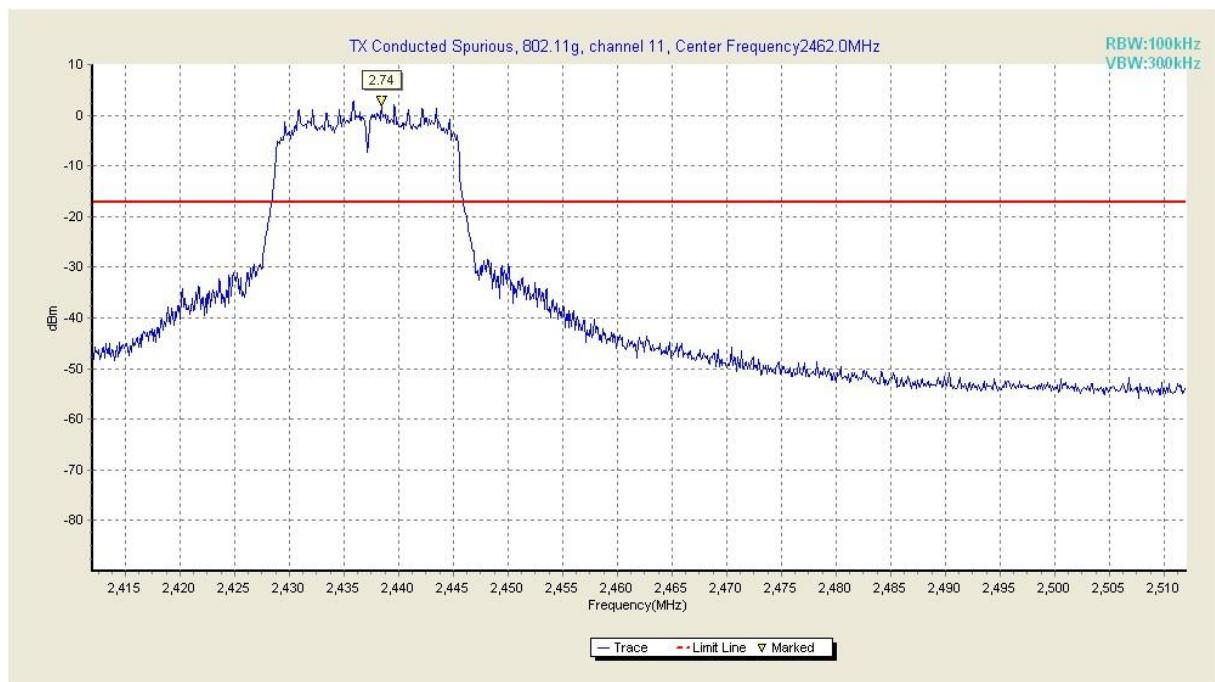


Fig. 35 Conducted Spurious Emission (802.11g, Ch11, Center Frequency)

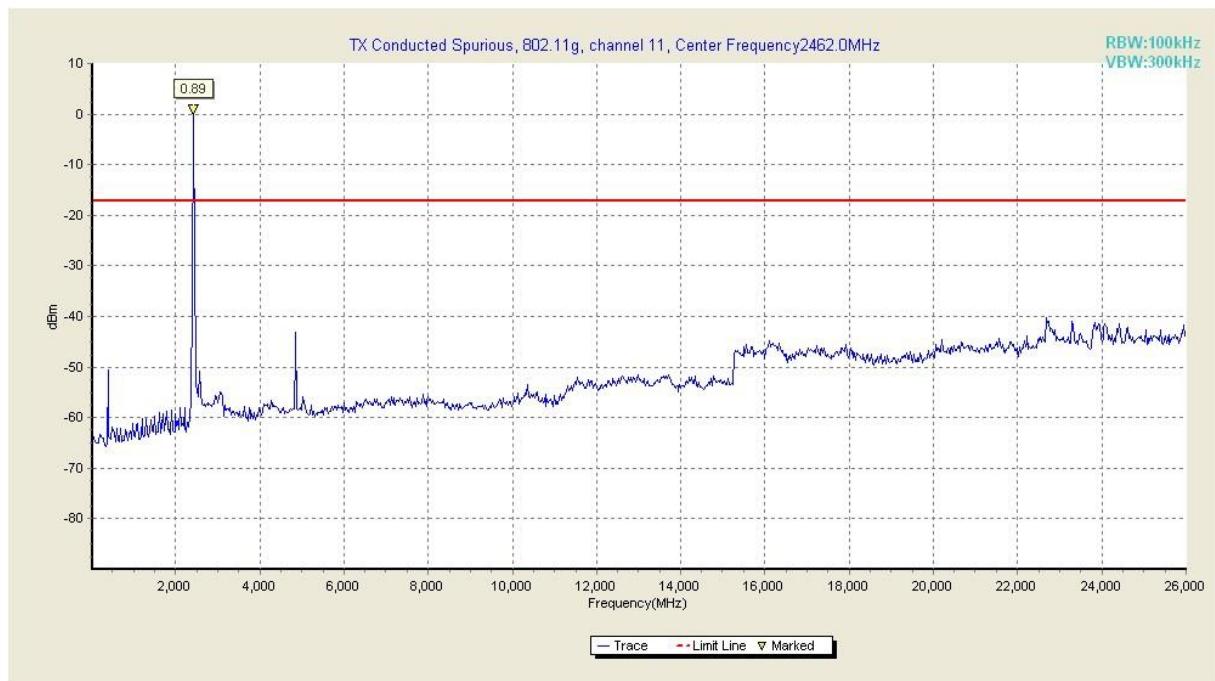


Fig. 36 Conducted Spurious Emission (802.11g, Ch11, 30 MHz-26 GHz)

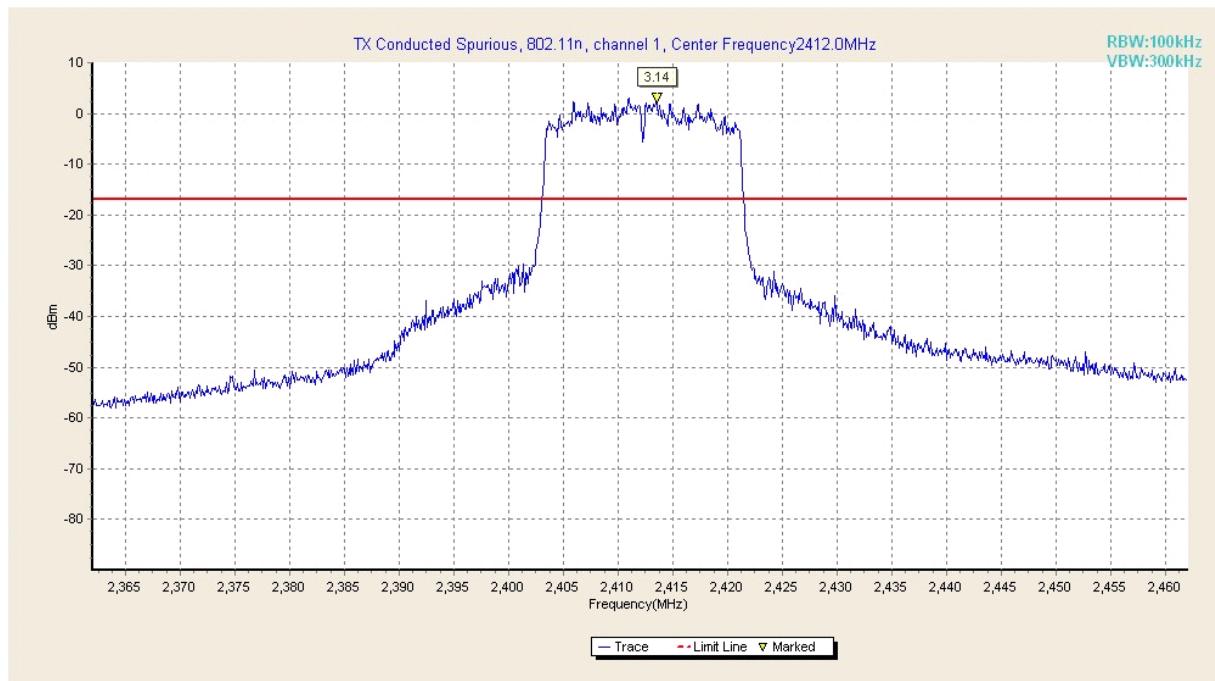


Fig. 37 Conducted Spurious Emission (802.11n-20MHz, Ch1, Center Frequency)

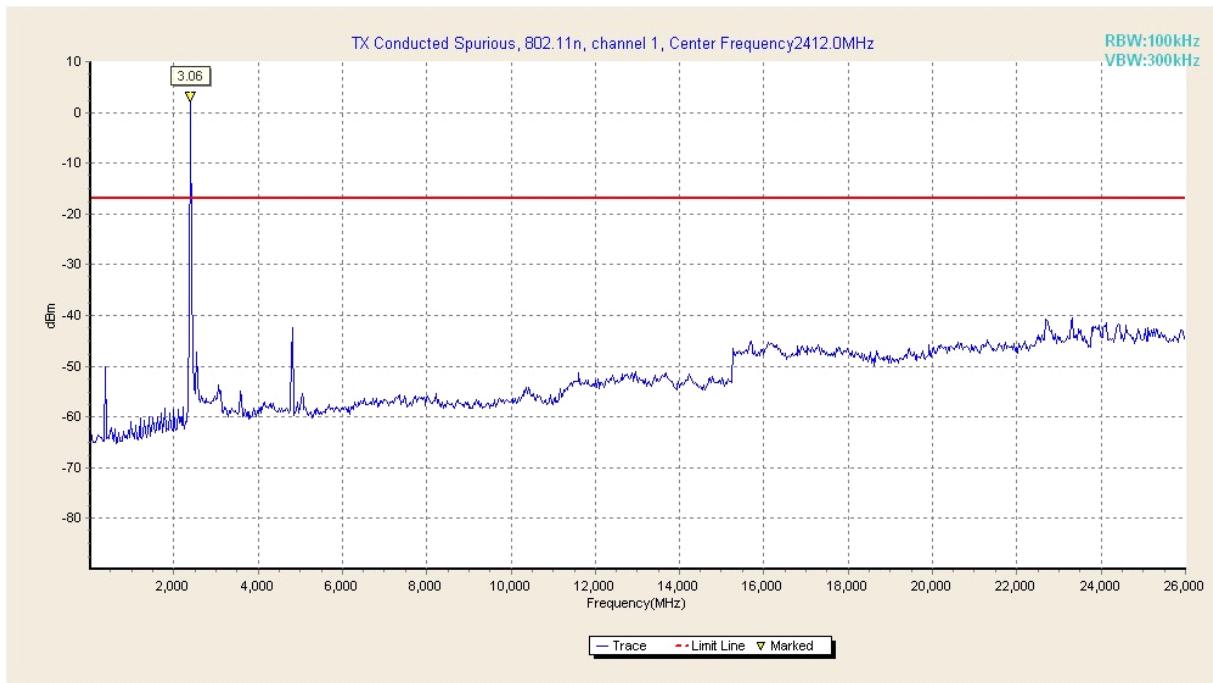


Fig. 38 Conducted Spurious Emission (802.11 n-20MHz, Ch1, 30 MHz-26 GHz)

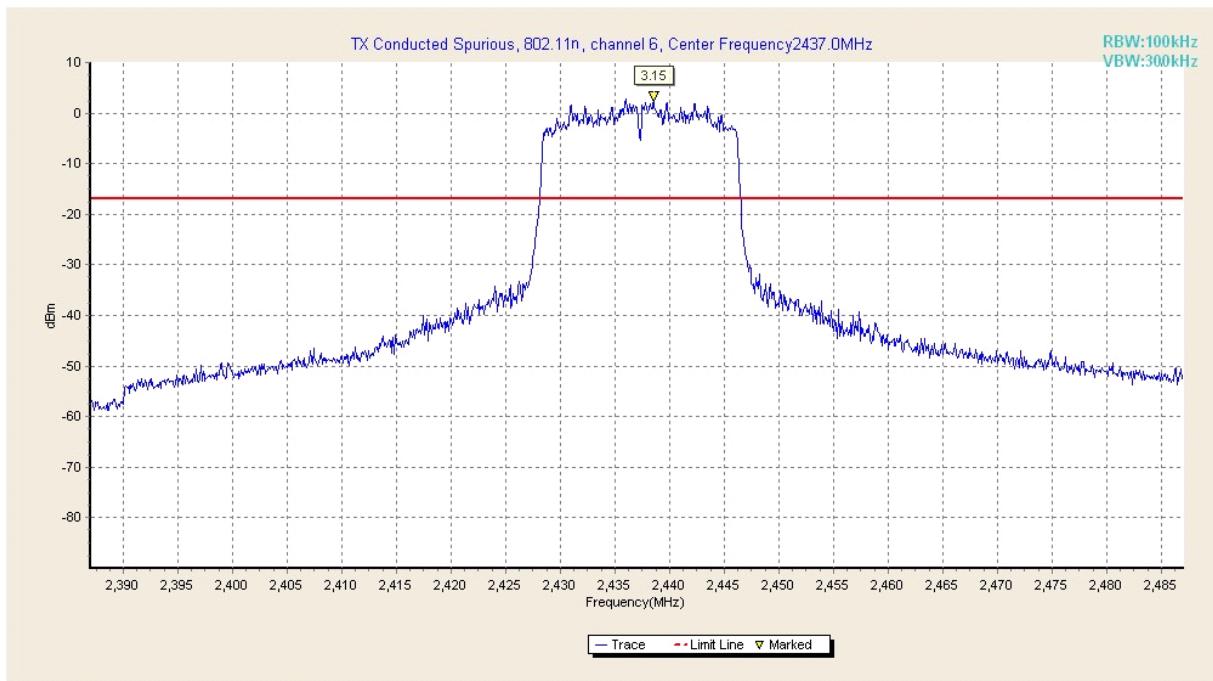


Fig. 39 Conducted Spurious Emission (802.11 n-20MHz, Ch6, Center Frequency)

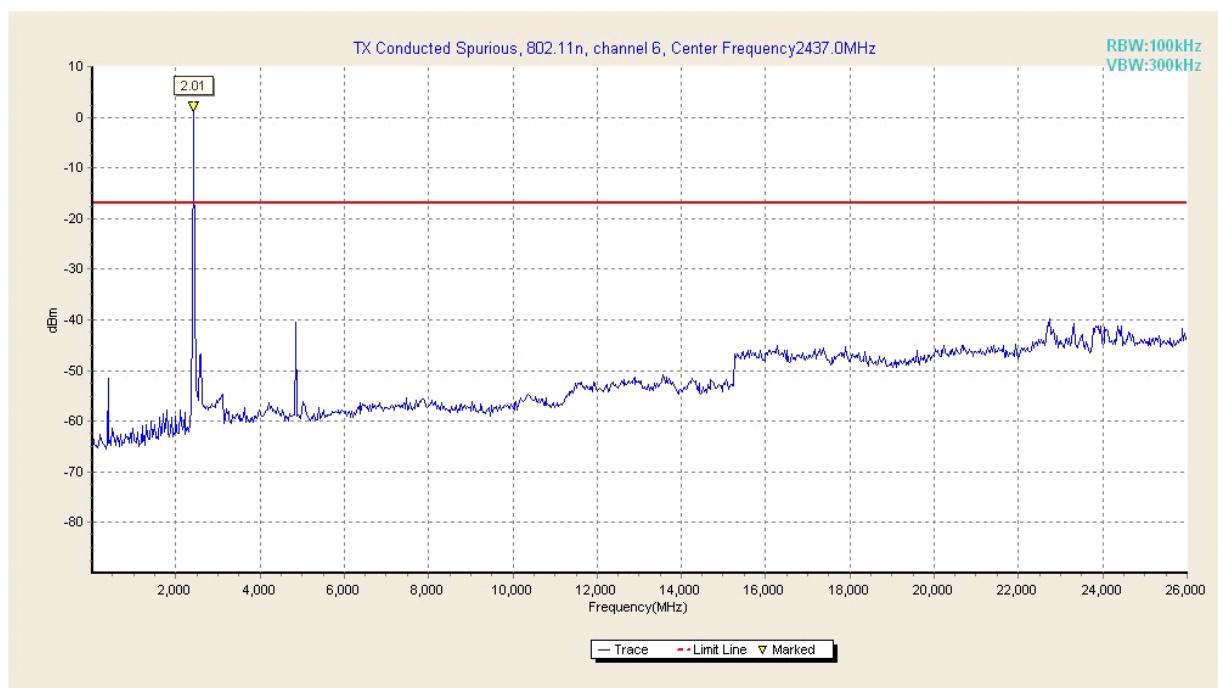


Fig. 40 Conducted Spurious Emission (802.11 n-20MHz, Ch6, 30 MHz-26 GHz)

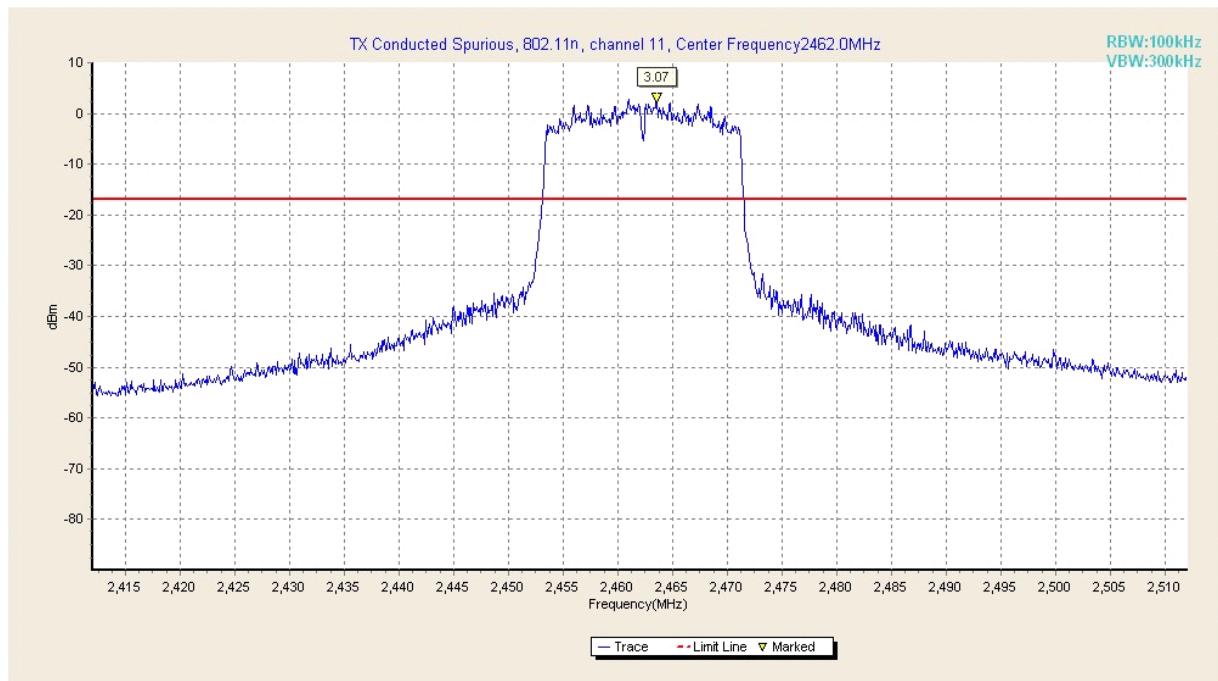


Fig. 41 Conducted Spurious Emission (802.11 n-20MHz, Ch11, Center Frequency)

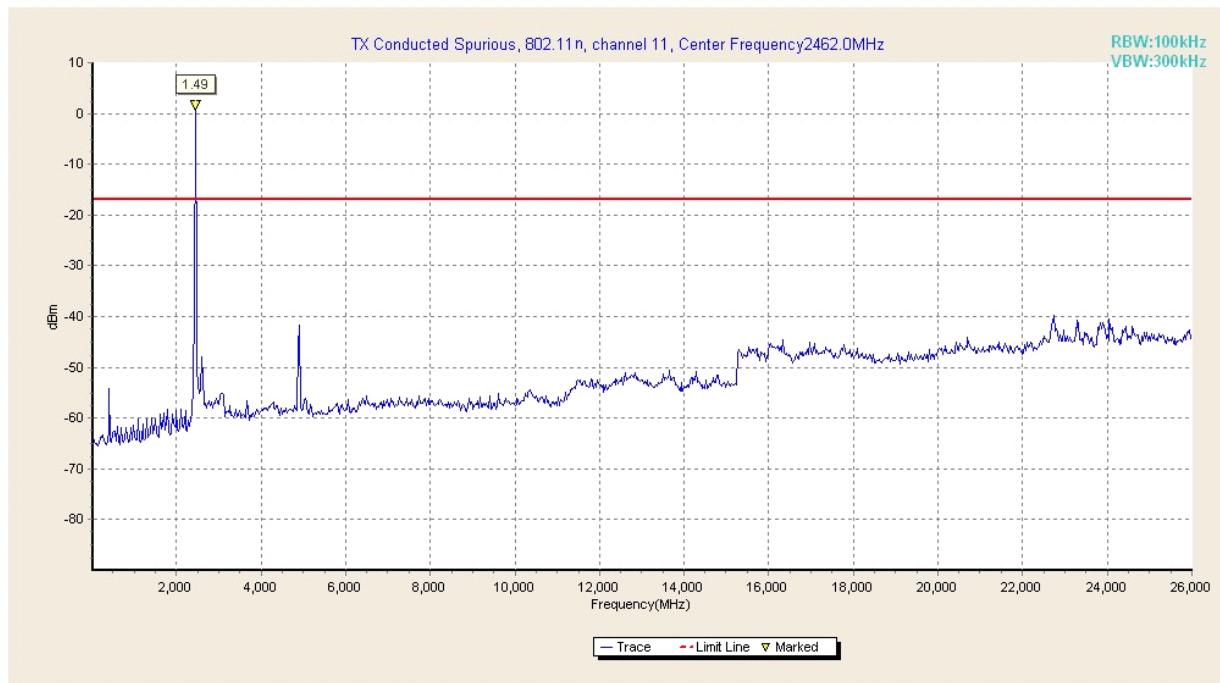


Fig. 42 Conducted Spurious Emission (802.11 n-20MHz, Ch11, 30 MHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.4 and KDB558074.

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:
802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	Power	Fig.43	P
		30 MHz ~1 GHz	Fig.44	P
		1 GHz ~ 4 GHz	Fig.45	P
		4 GHz ~ 18 GHz	Fig.46	P
	6	30 MHz ~1 GHz	Fig.47	P
		1 GHz ~ 4 GHz	Fig.48	P
		4 GHz ~ 18 GHz	Fig.49	P
	11	Power	Fig.50	P
		30 MHz ~1 GHz	Fig.51	P
		1 GHz ~ 4 GHz	Fig.52	P
		4 GHz ~ 18 GHz	Fig.53	P
802.11g	1	Power	Fig.54	P
		30 MHz ~1 GHz	Fig.55	P
		1 GHz ~ 4 GHz	Fig.56	P
		4 GHz ~ 18 GHz	Fig.57	P
	6	30 MHz ~1 GHz	Fig.58	P
		1 GHz ~ 4 GHz	Fig.59	P
		4 GHz ~ 18 GHz	Fig.60	P
	11	Power	Fig.61	P
		30 MHz ~1 GHz	Fig.62	P
		1 GHz ~ 4 GHz	Fig.63	P
		4 GHz ~ 18 GHz	Fig.64	P

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (20MHz)	1	Power	Fig.65	P
		30 MHz ~1 GHz	Fig.66	P
		1 GHz ~ 4 GHz	Fig.67	P
		4 GHz ~ 18 GHz	Fig.68	P
	6	30 MHz ~1 GHz	Fig.69	P
		1 GHz ~ 4 GHz	Fig.70	P
		4 GHz ~ 18 GHz	Fig.71	P
	11	Power	Fig.72	P
		30 MHz ~1 GHz	Fig.73	P
		1 GHz ~ 4 GHz	Fig.74	P
		4 GHz ~ 18 GHz	Fig.75	P
802.11n (40MHz)	/	Power	/	/
		/	/	/
		/	/	/

		/	/	/
/	Power	/	/	/
		/	/	/
		/	/	/
		/	/	/
/	All channels	18 GHz~ 26.5 GHz	Fig.76	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{RPL} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{RPL} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

802.11b

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2414.83	77.1	-18.7	27.5	68.3	VERTICAL
2410.822	71.39	-18.7	27.5	62.59	VERTICAL
2418.838	70.84	-18.7	27.5	62.04	HORIZONTAL
2406.814	53.7	-18.7	27.5	44.9	VERTICAL
2422.846	48.91	-18.8	27.5	40.21	HORIZONTAL
3705.411	41.3	-19.1	33.4	27	VERTICAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2438.878	78.49	-18.9	27.5	69.89	HORIZONTAL
2434.87	42.48	-18.9	27.5	33.88	VERTICAL
3705.411	38.35	-19.1	33.4	24.05	VERTICAL
3703.407	38.34	-19.1	33.4	24.04	VERTICAL
3701.403	38.33	-19.1	33.4	24.03	HORIZONTAL
3707.415	38.29	-19.1	33.4	23.99	HORIZONTAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2462.926	78.11	-18.6	27.5	69.21	VERTICAL
2458.918	77.79	-18.7	27.5	68.99	VERTICAL
2466.934	77.49	-18.6	27.5	68.59	HORIZONTAL
2470.942	73.3	-18.4	27.5	64.2	HORIZONTAL
2454.91	72.48	-18.7	27.5	63.68	VERTICAL
2474.95	46.96	-18.4	27.5	37.86	VERTICAL

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2414.83	75.86	-18.7	27.5	67.06	HORIZONTAL
2406.814	75.24	-18.7	27.5	66.44	VERTICAL
2410.822	75.22	-18.7	27.5	66.42	VERTICAL
2418.838	74.5	-18.7	27.5	65.7	HORIZONTAL
2422.846	52.02	-18.8	27.5	43.32	VERTICAL
2402.806	48.7	-18.7	27.5	39.9	VERTICAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2438.878	79.15	-18.9	27.5	70.55	HORIZONTAL
2434.87	42.21	-18.9	27.5	33.61	VERTICAL
3701.403	38.39	-19.1	33.4	24.09	HORIZONTAL
3703.407	38.34	-19.1	33.4	24.04	VERTICAL
3707.415	38.32	-19.1	33.4	24.02	HORIZONTAL
3705.411	38.31	-19.1	33.4	24.01	VERTICAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2462.926	81.38	-18.6	27.5	72.48	VERTICAL
2466.934	81.31	-18.6	27.5	72.41	HORIZONTAL
2458.918	81	-18.7	27.5	72.2	HORIZONTAL
2470.942	77.5	-18.4	27.5	68.4	VERTICAL
2454.91	75.3	-18.7	27.5	66.5	VERTICAL
2474.95	50.76	-18.4	27.5	41.66	HORIZONTAL

802.11n-20MHz

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2414.83	88.45	-18.7	27.5	79.65	HORIZONTAL
2410.822	87.95	-18.7	27.5	79.15	VERTICAL
2418.838	83.69	-18.7	27.5	74.89	VERTICAL
2406.814	81.53	-18.7	27.5	72.73	HORIZONTAL
2422.846	65.89	-18.8	27.5	57.19	HORIZONTAL
2402.806	63.25	-18.7	27.5	54.45	VERTICAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2438.878	83.38	-18.9	27.5	74.78	HORIZONTAL
2434.87	82.26	-18.9	27.5	73.66	VERTICAL
2442.886	79.95	-18.9	27.5	71.35	HORIZONTAL
2430.862	71.4	-18.9	27.5	62.8	VERTICAL
2446.894	63.76	-18.9	27.5	55.16	VERTICAL
3705.411	50.31	-19.1	33.4	36.01	HORIZONTAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2462.926	85.74	-18.6	27.5	76.84	HORIZONTAL
2466.934	85.48	-18.6	27.5	76.58	VERTICAL
2458.918	84.29	-18.7	27.5	75.49	VERTICAL
2470.942	82.27	-18.4	27.5	73.17	VERTICAL
2454.91	80.48	-18.7	27.5	71.68	HORIZONTAL
2474.95	54.39	-18.4	27.5	45.29	HORIZONTAL

Test graphs as below:

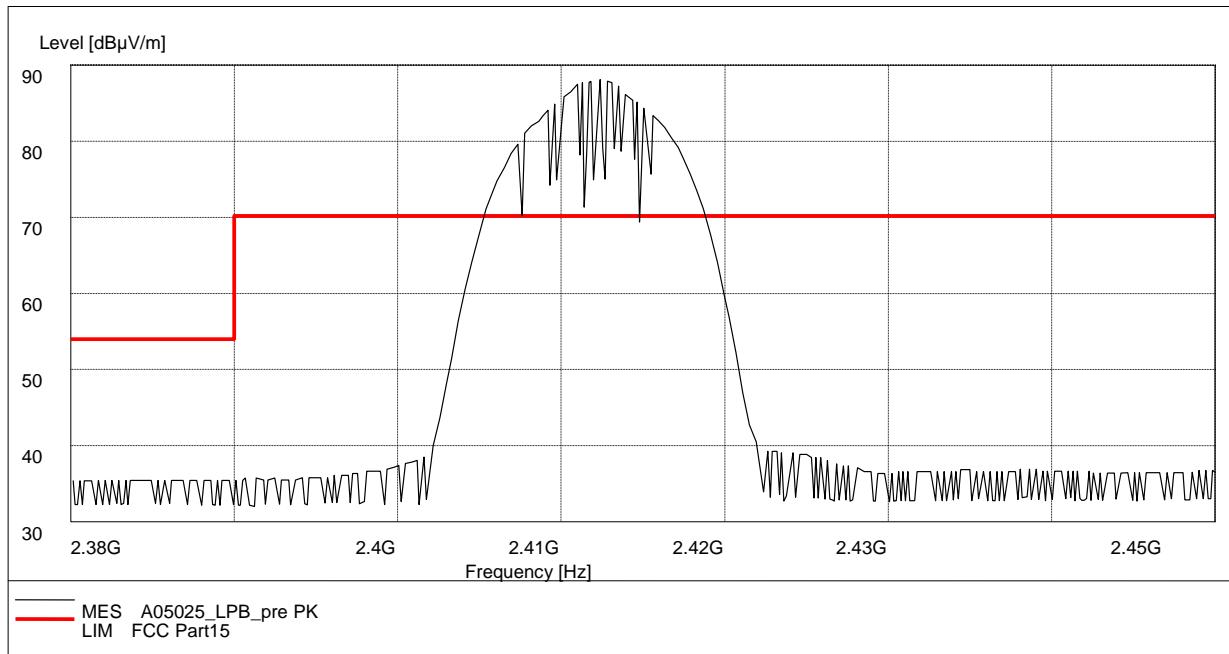


Fig. 43 Radiated Spurious Emission (Power): 802.11b, ch1, 2.38 GHz - 245GHz

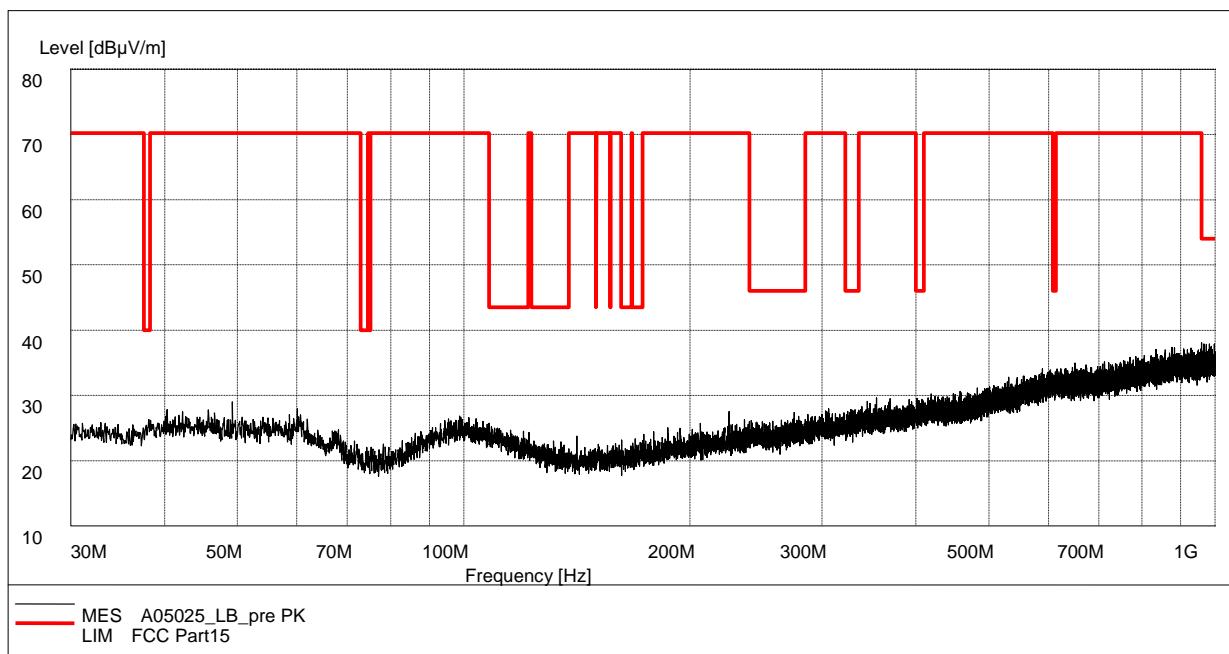


Fig. 44 Radiated Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)

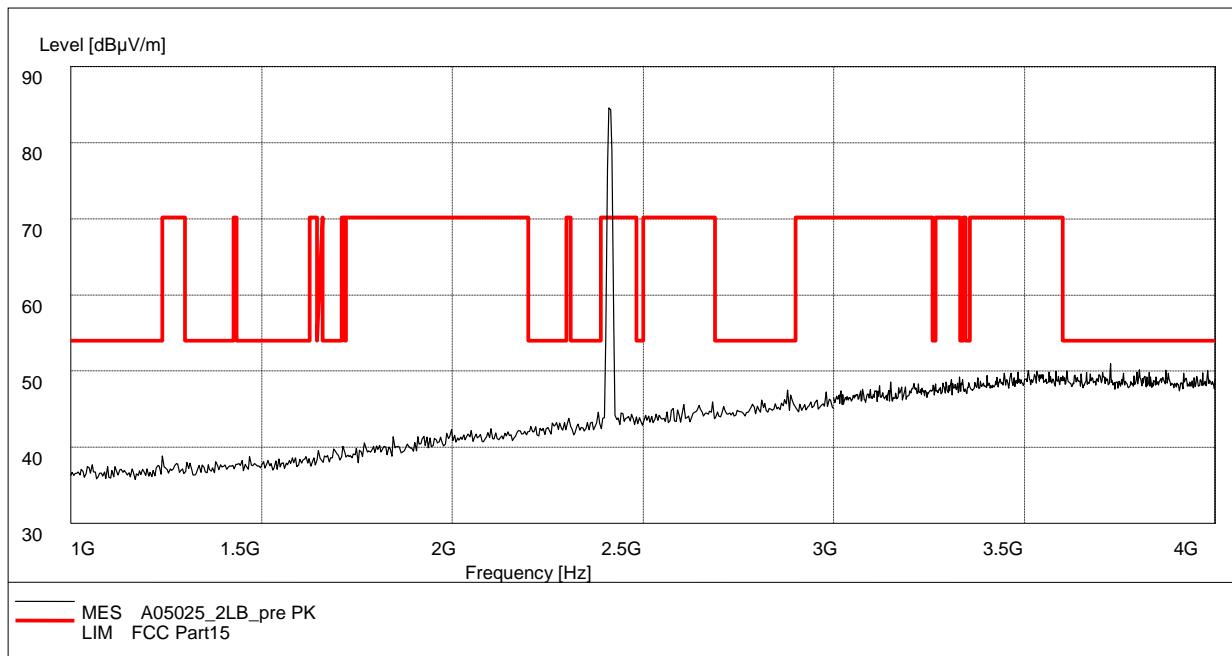


Fig. 45 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-4 GHz)

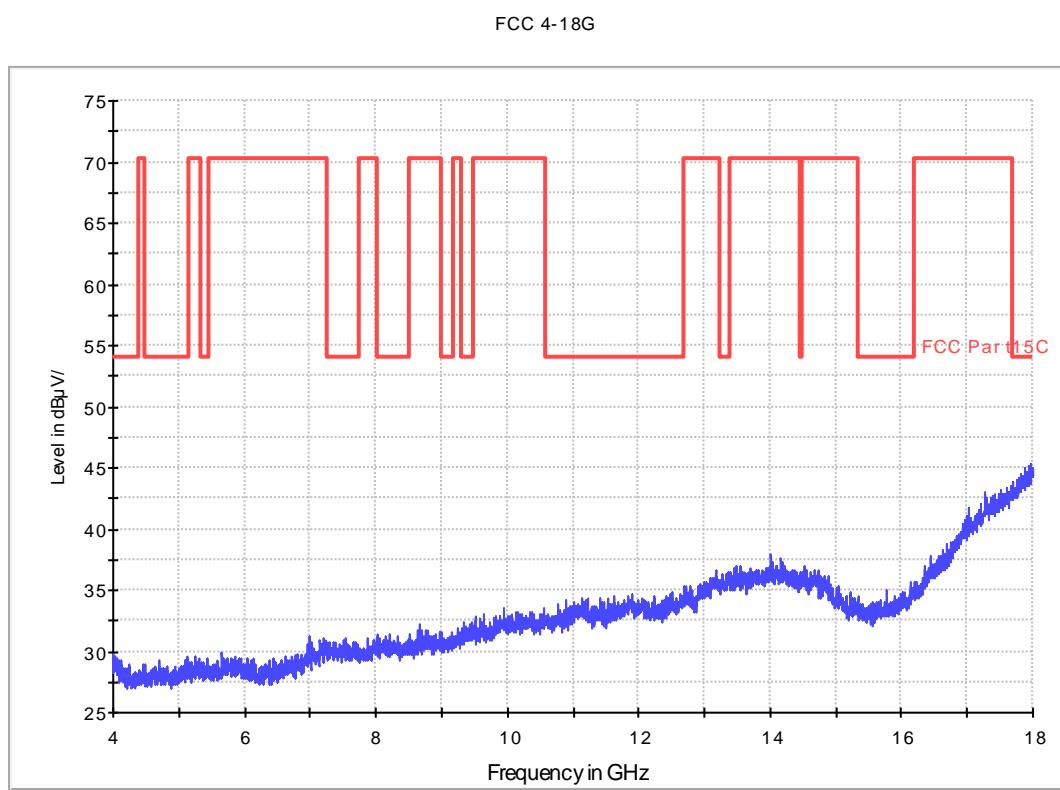


Fig. 46 Radiated Spurious Emission (802.11b, Ch1, 4 GHz-18 GHz)

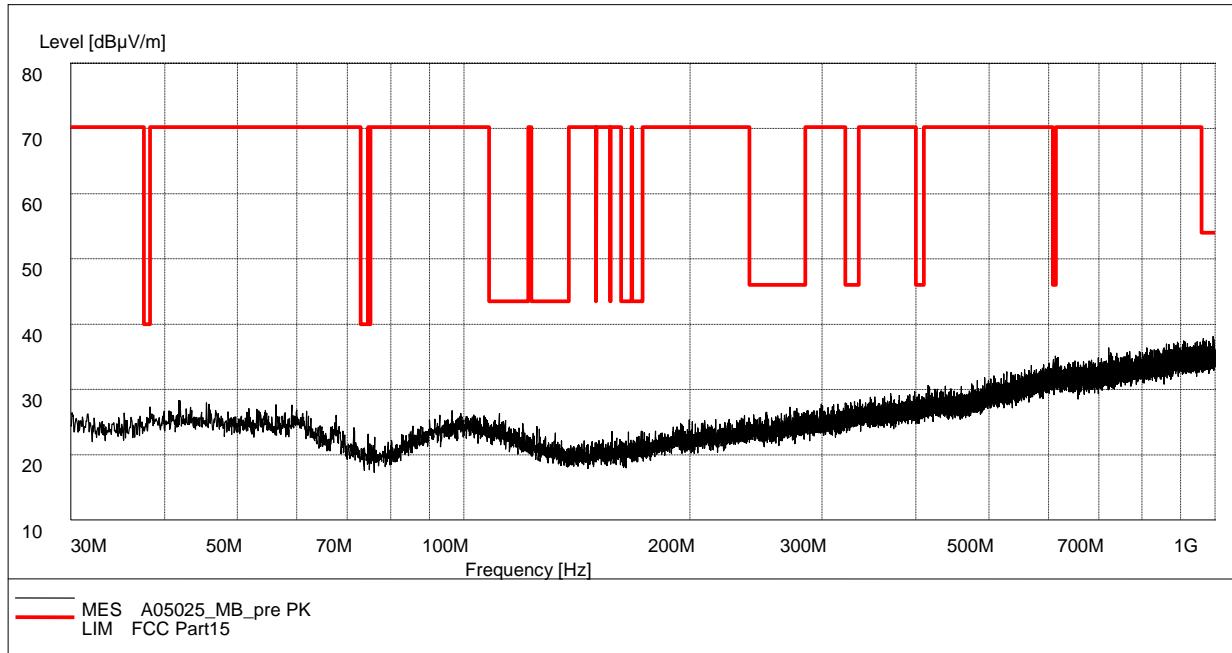


Fig. 47 Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)

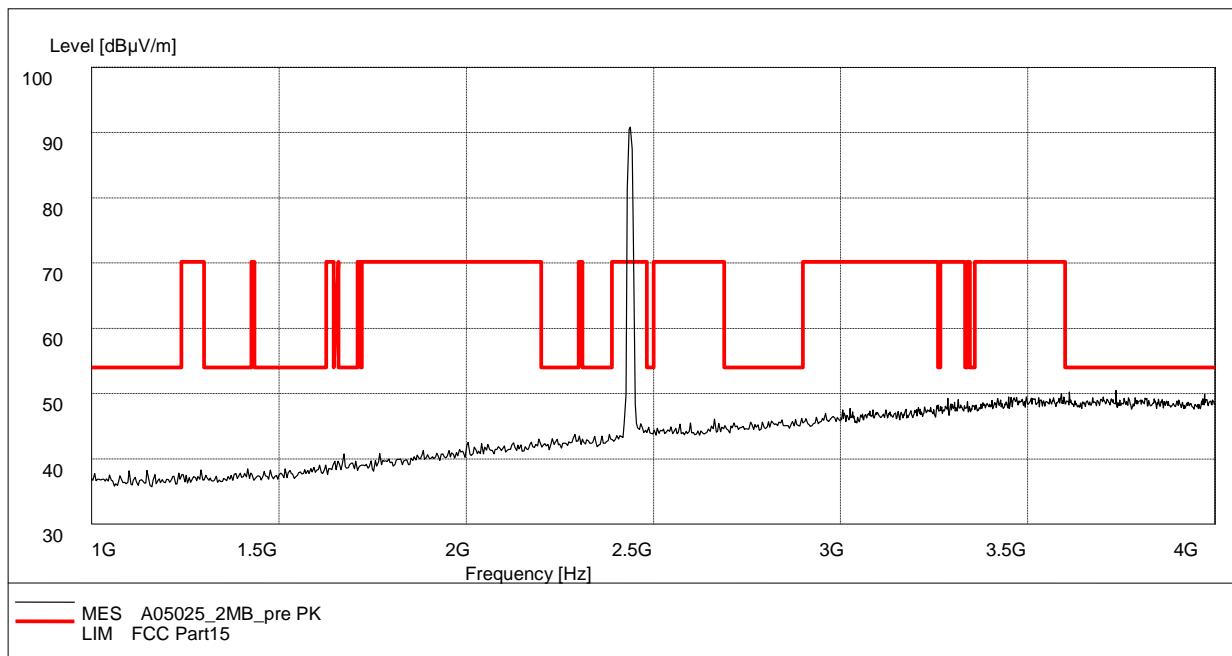
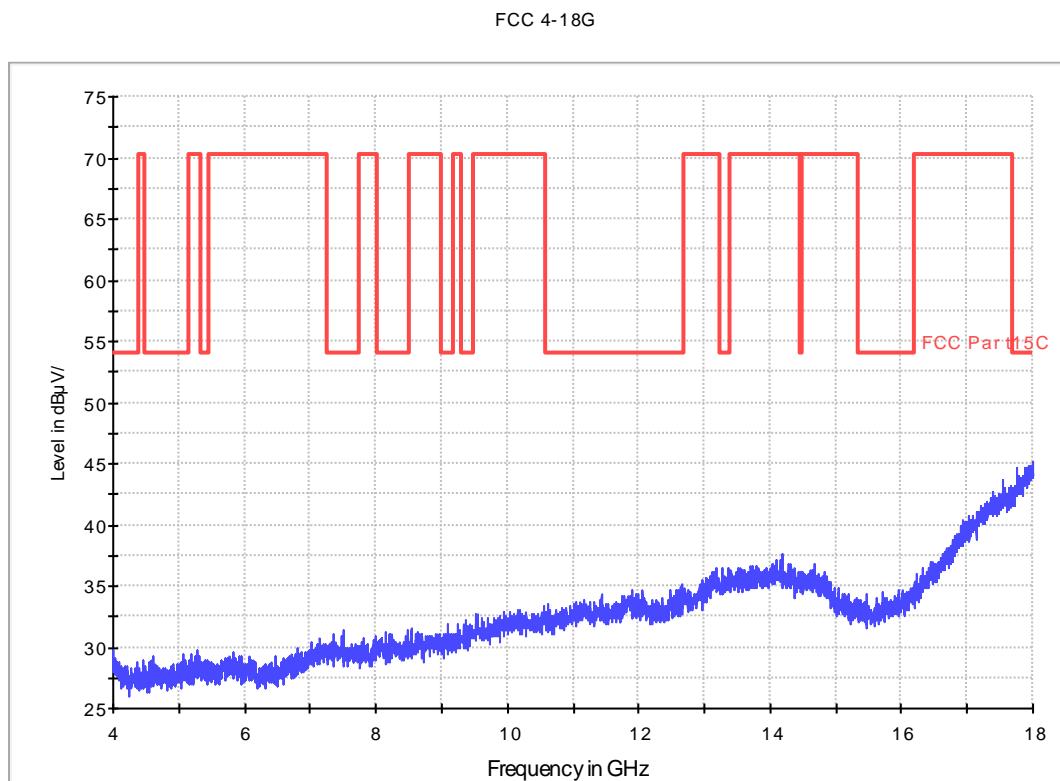
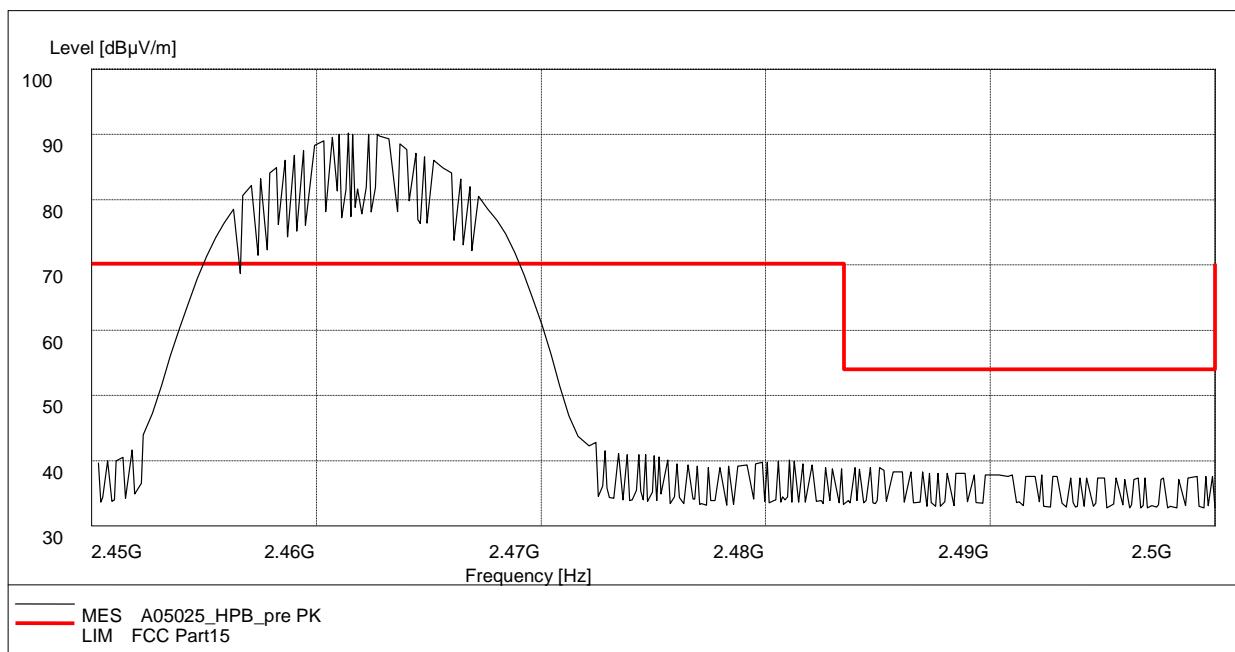


Fig. 48 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-4 GHz)

**Fig. 49 Radiated Spurious Emission (802.11b, Ch6, 4 GHz-18 GHz)****Fig. 50 Radiated Spurious Emission (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz**

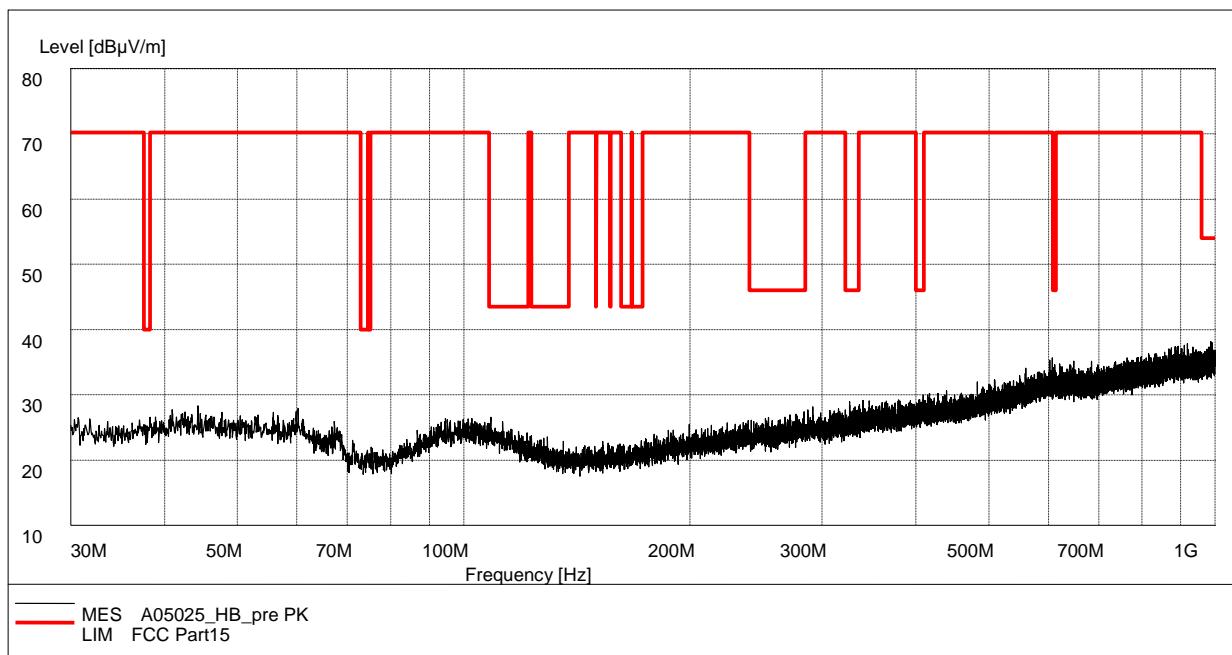


Fig. 51 Radiated Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)

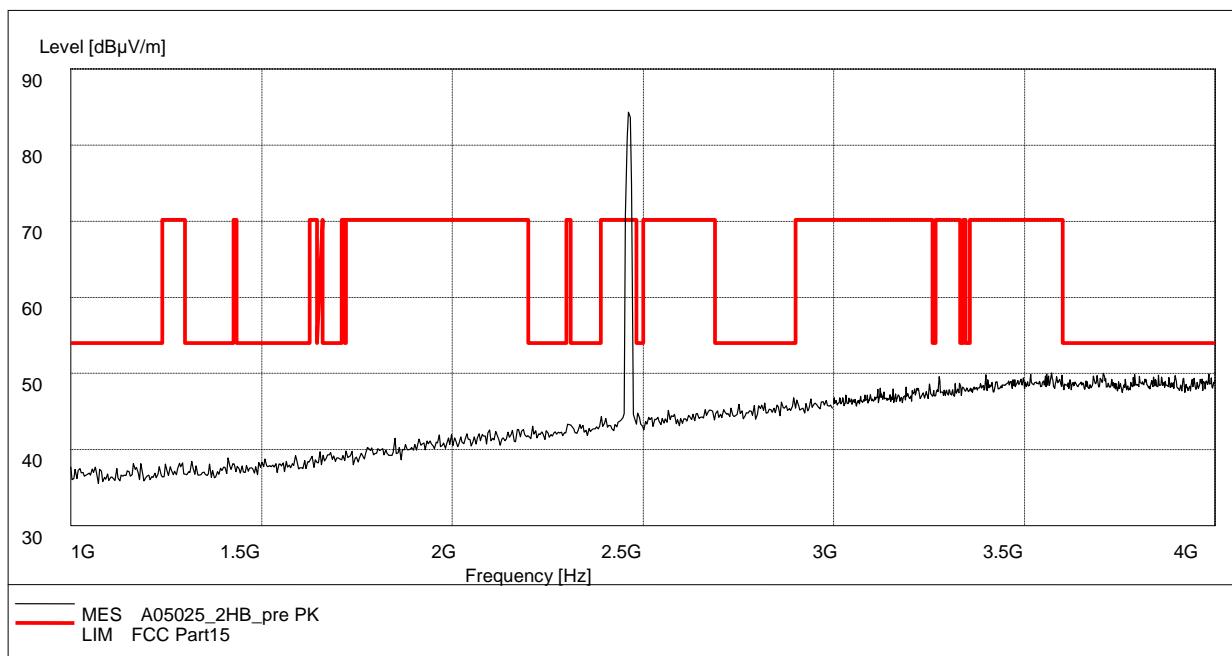


Fig. 52 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-4 GHz)

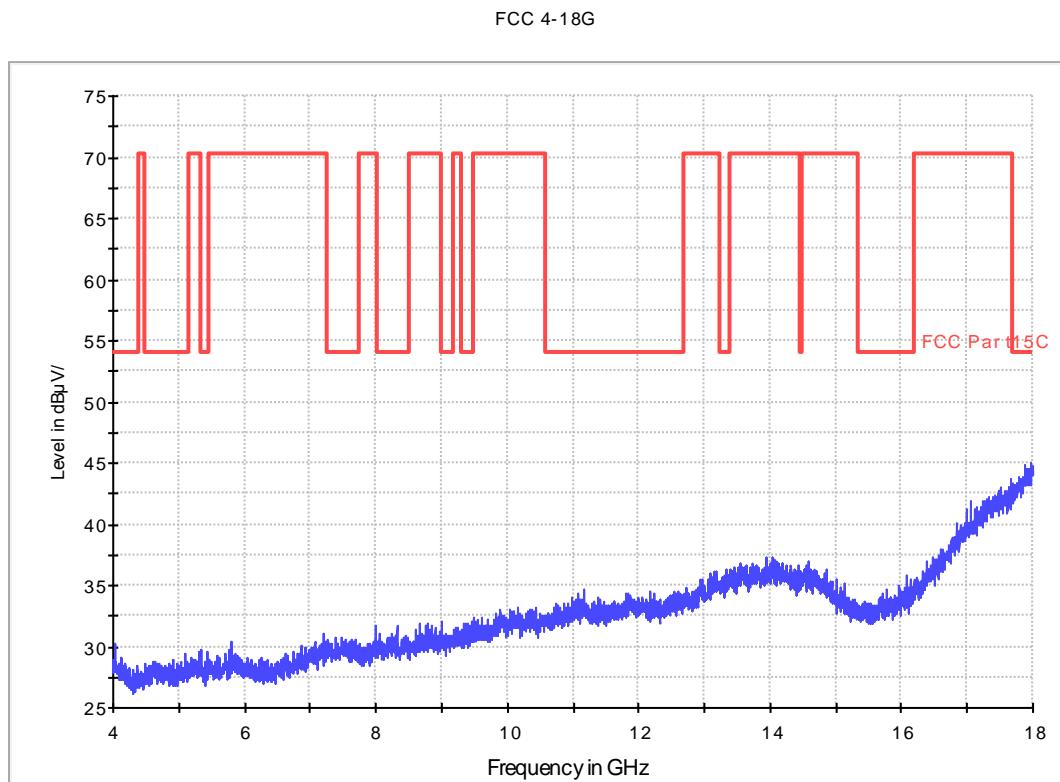


Fig. 53 Radiated Spurious Emission (802.11b, Ch11, 4 GHz-18 GHz)

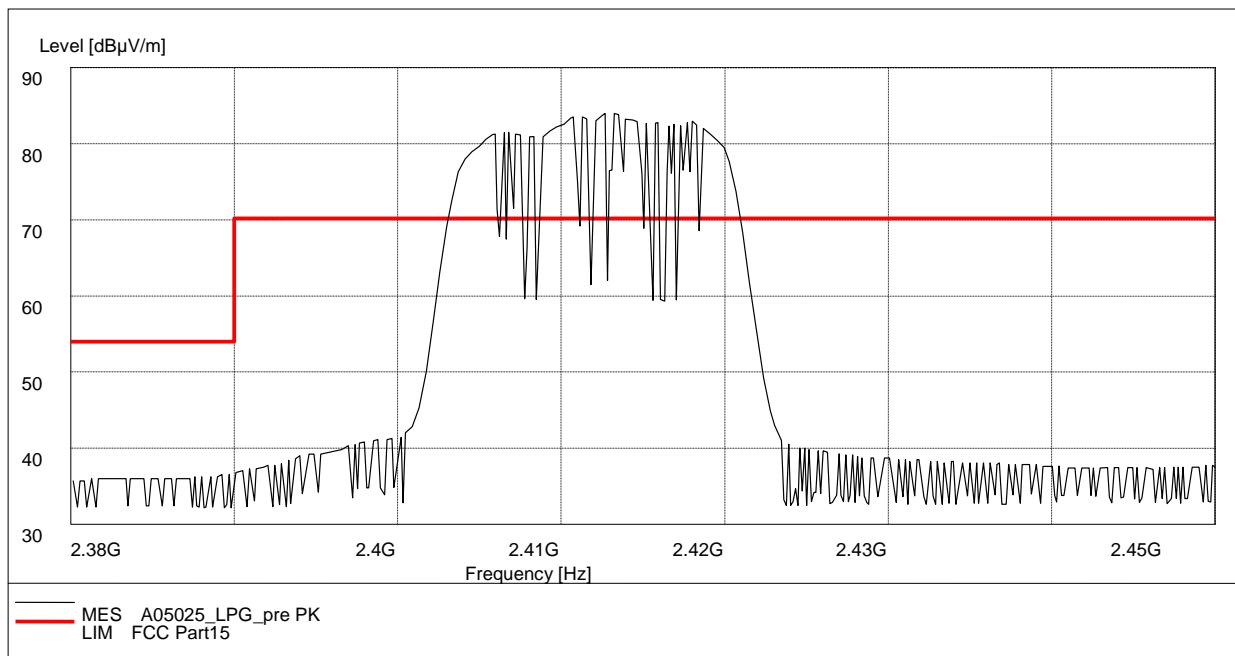
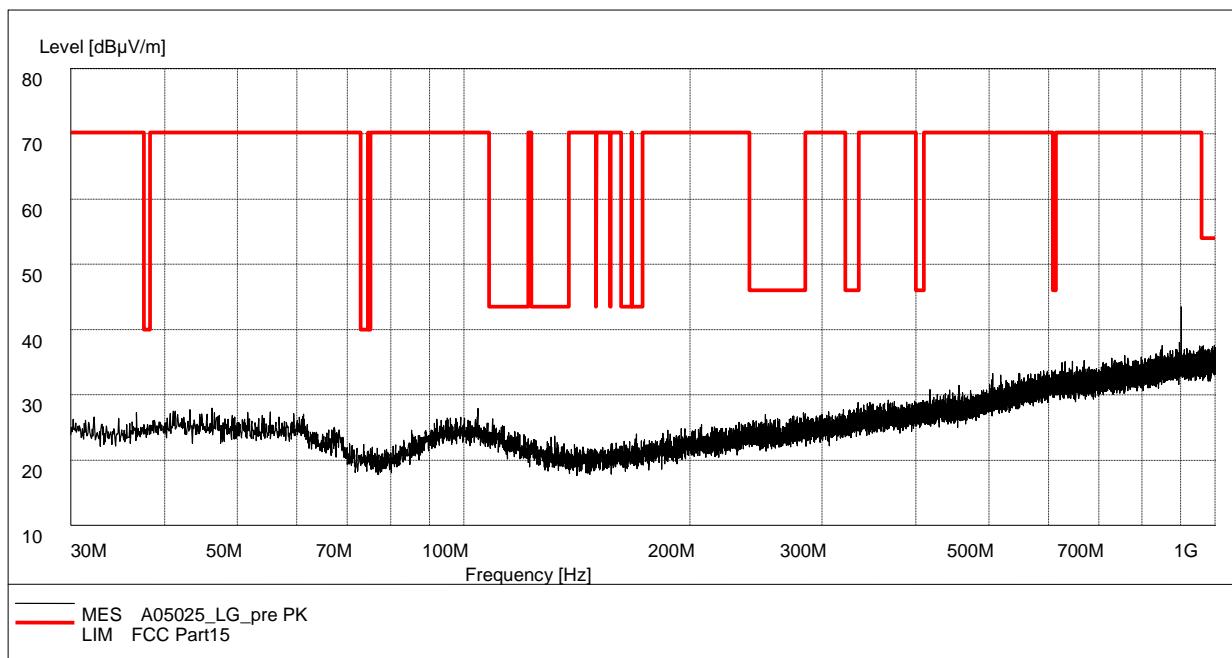
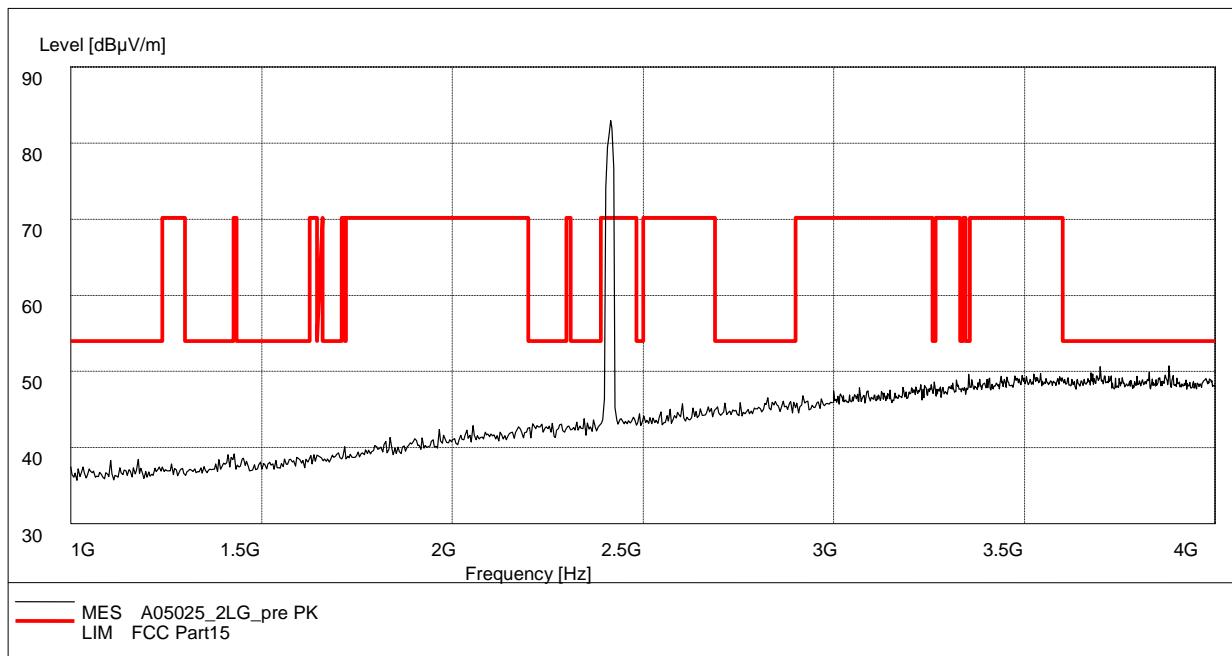


Fig. 54 Radiated Spurious Emission (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz


Fig. 55 Radiated Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)

Fig. 56 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-4 GHz)

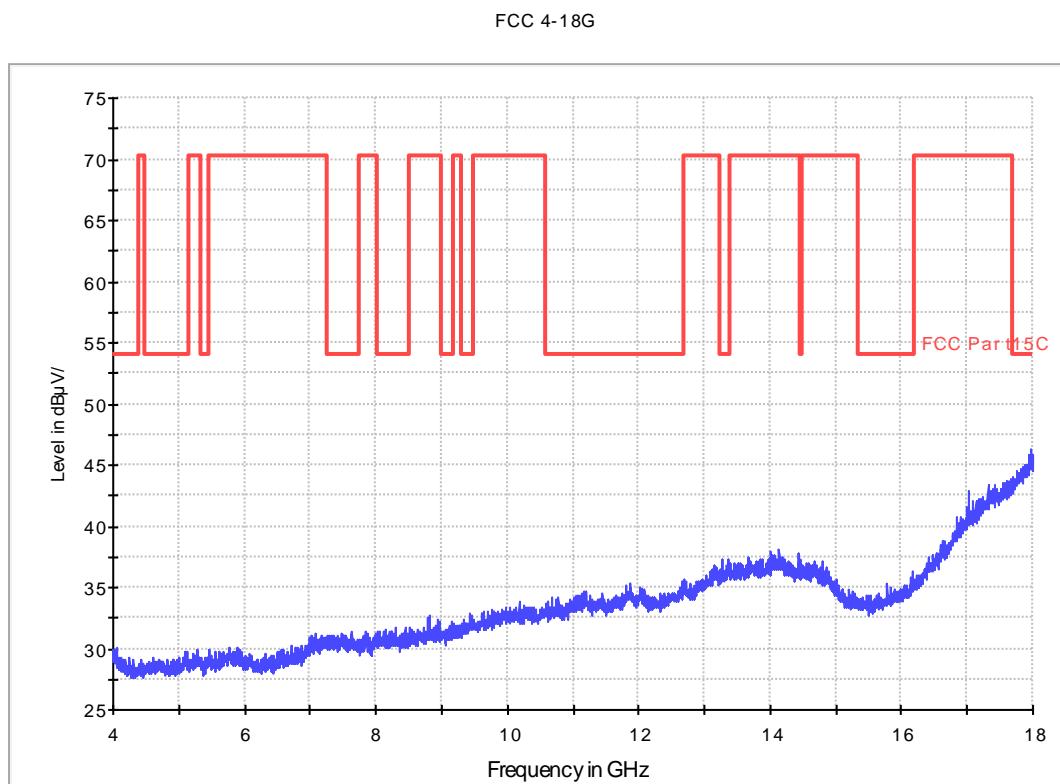


Fig. 57 Radiated Spurious Emission (802.11g, Ch1, 4 GHz-18 GHz)

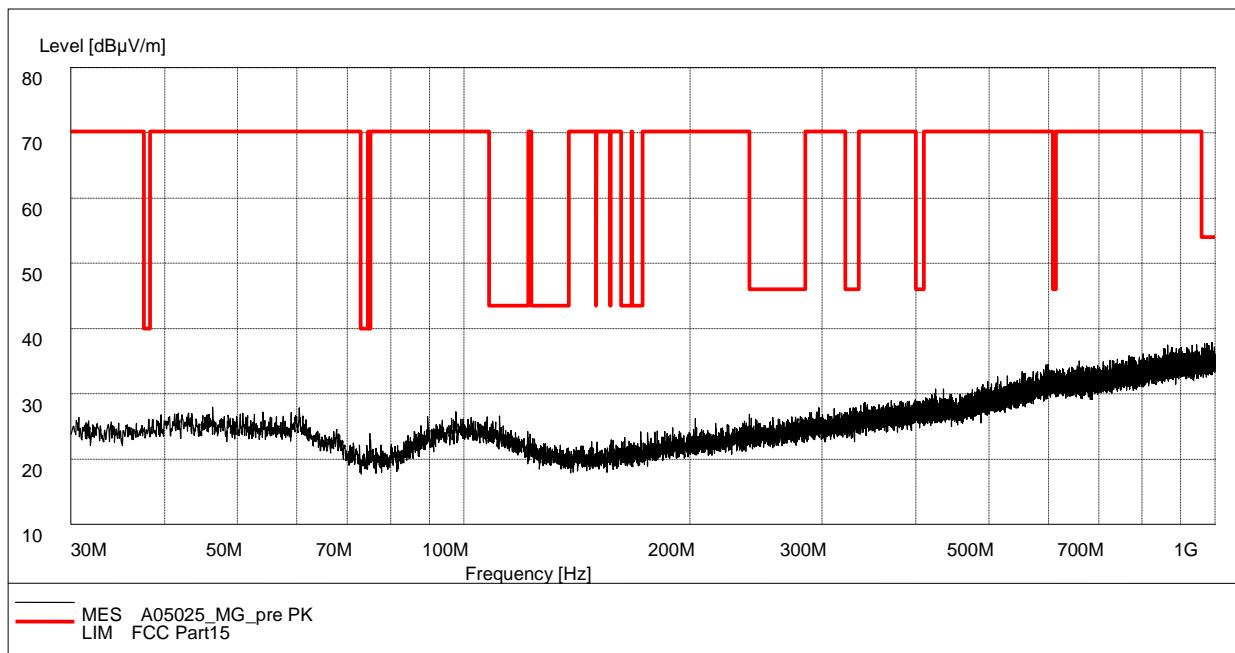


Fig. 58 Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)

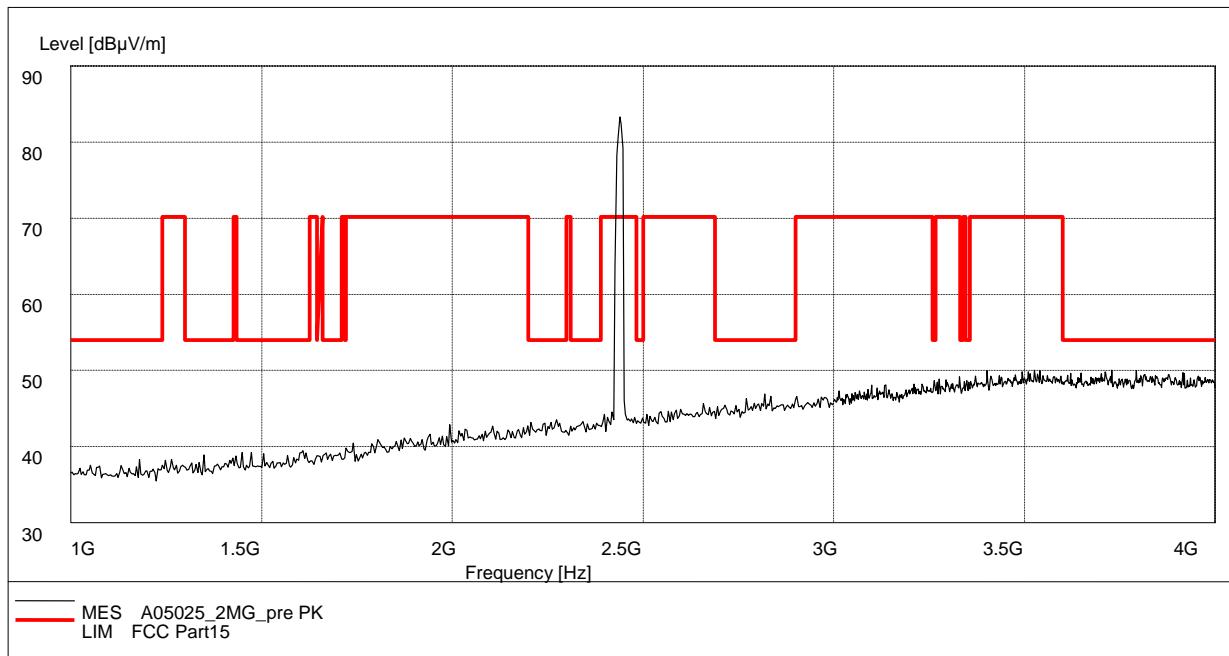


Fig. 59 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-4 GHz)

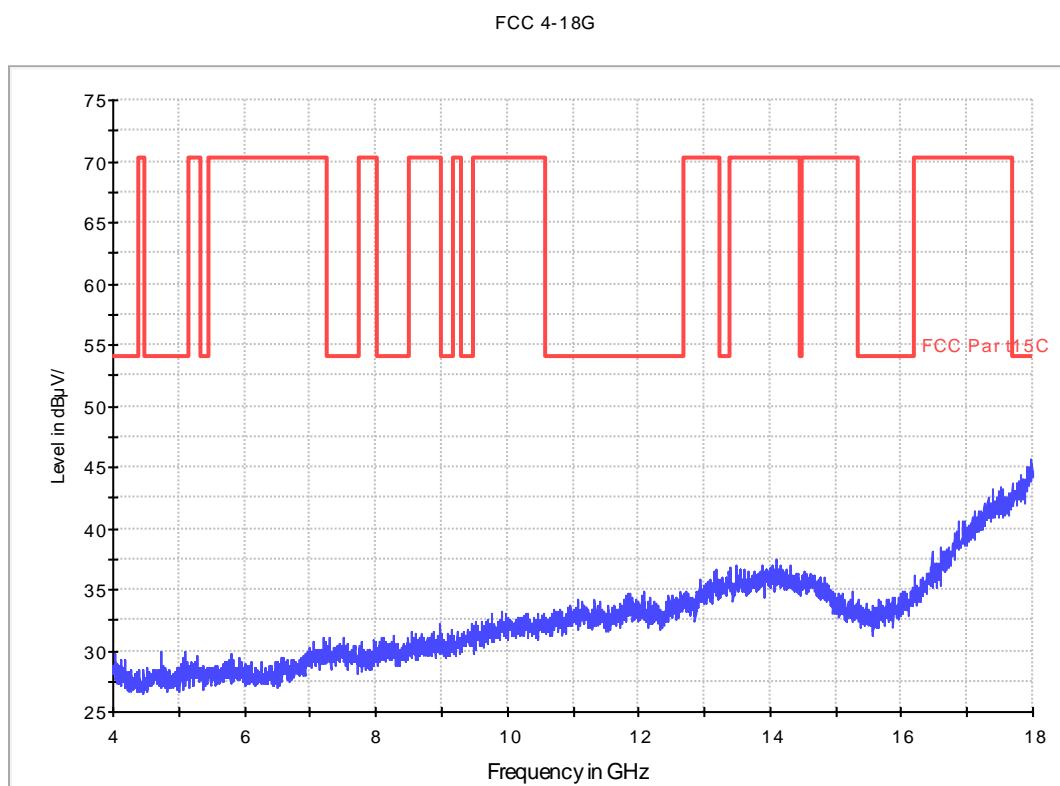


Fig. 60 Radiated Spurious Emission (802.11g, Ch6, 4 GHz-18 GHz)

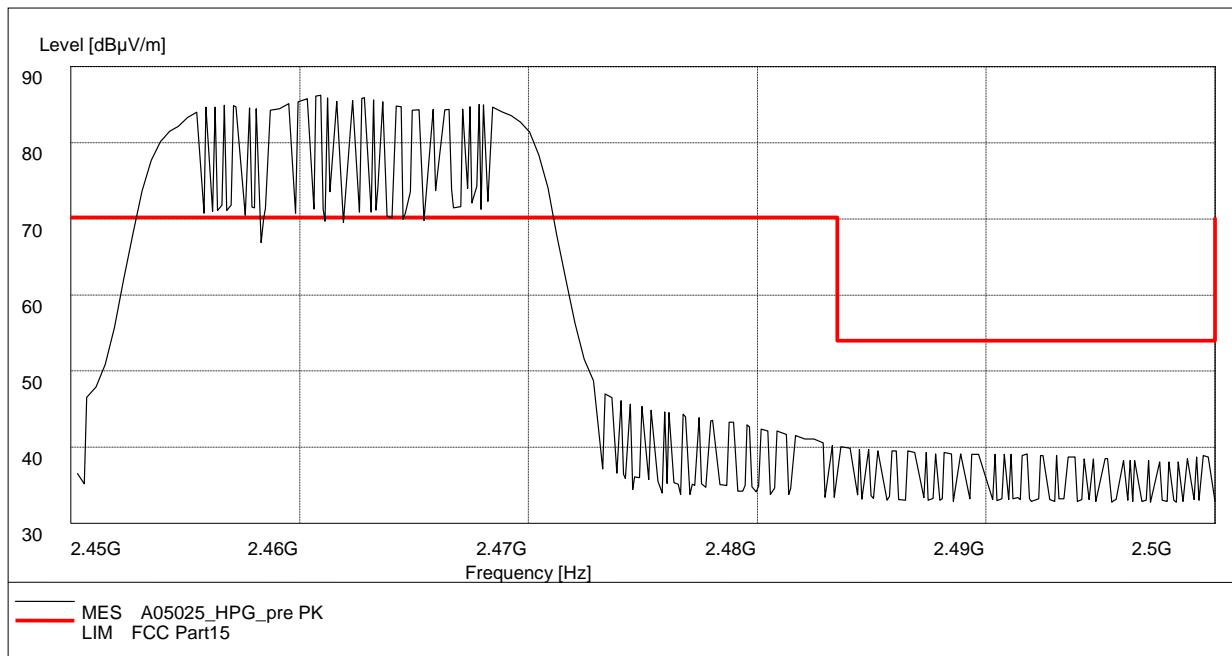


Fig. 61 Radiated Spurious Emission (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

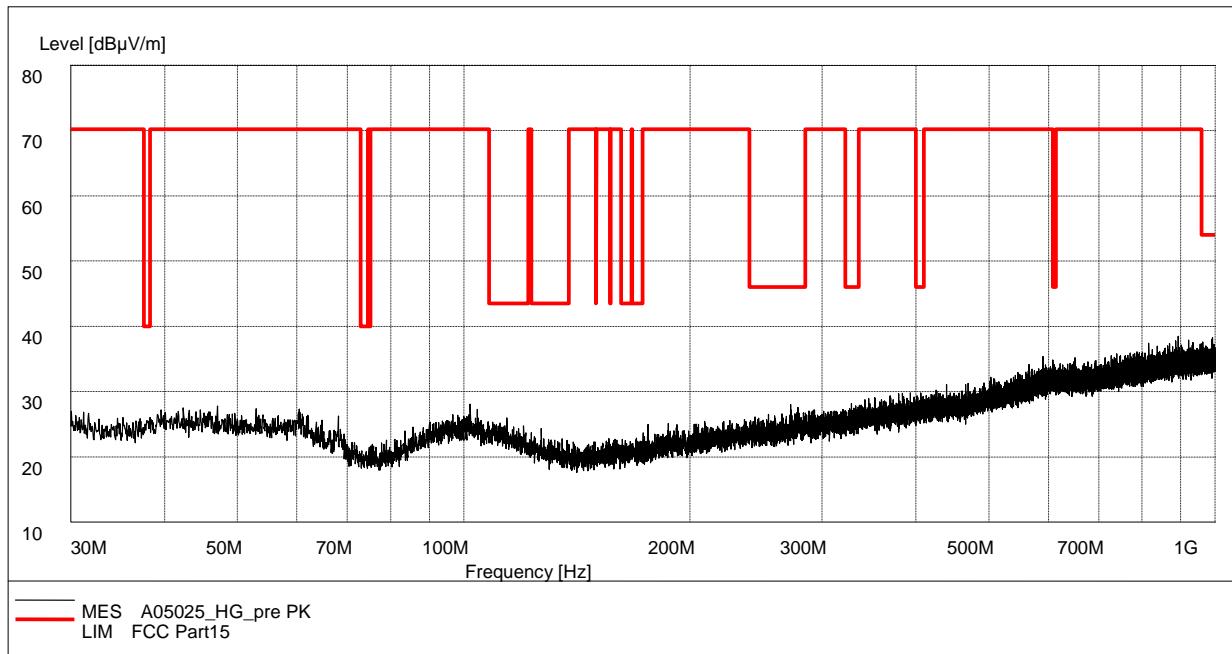


Fig. 62 Radiated Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)

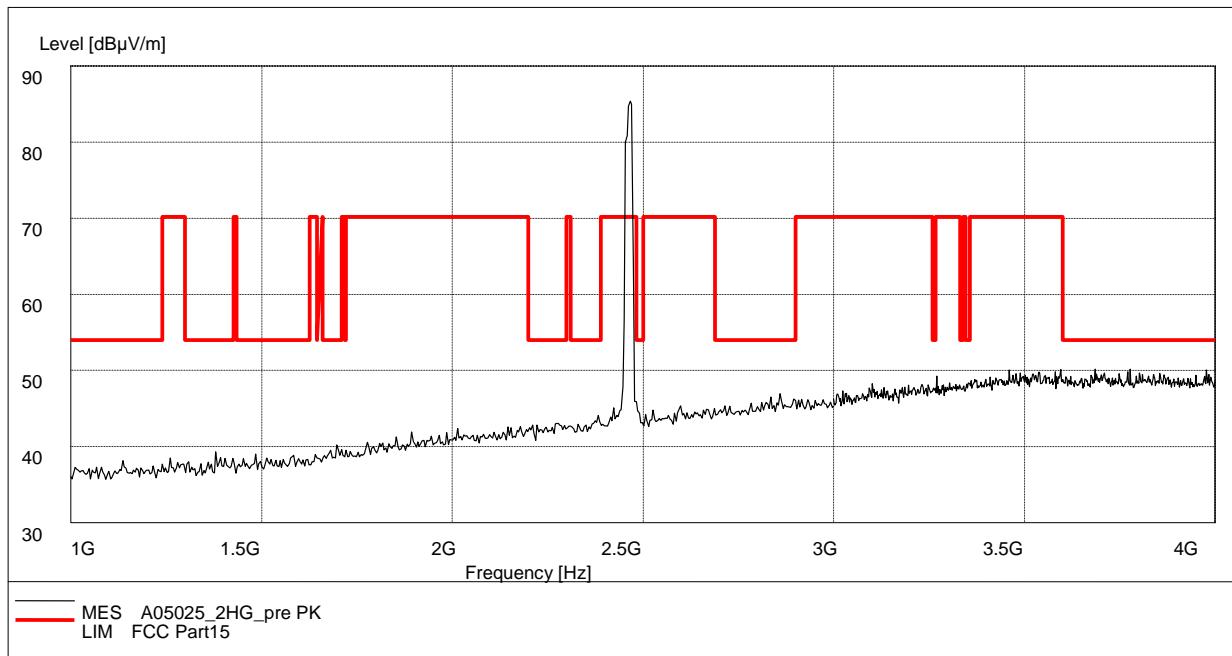


Fig. 63 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-4 GHz)

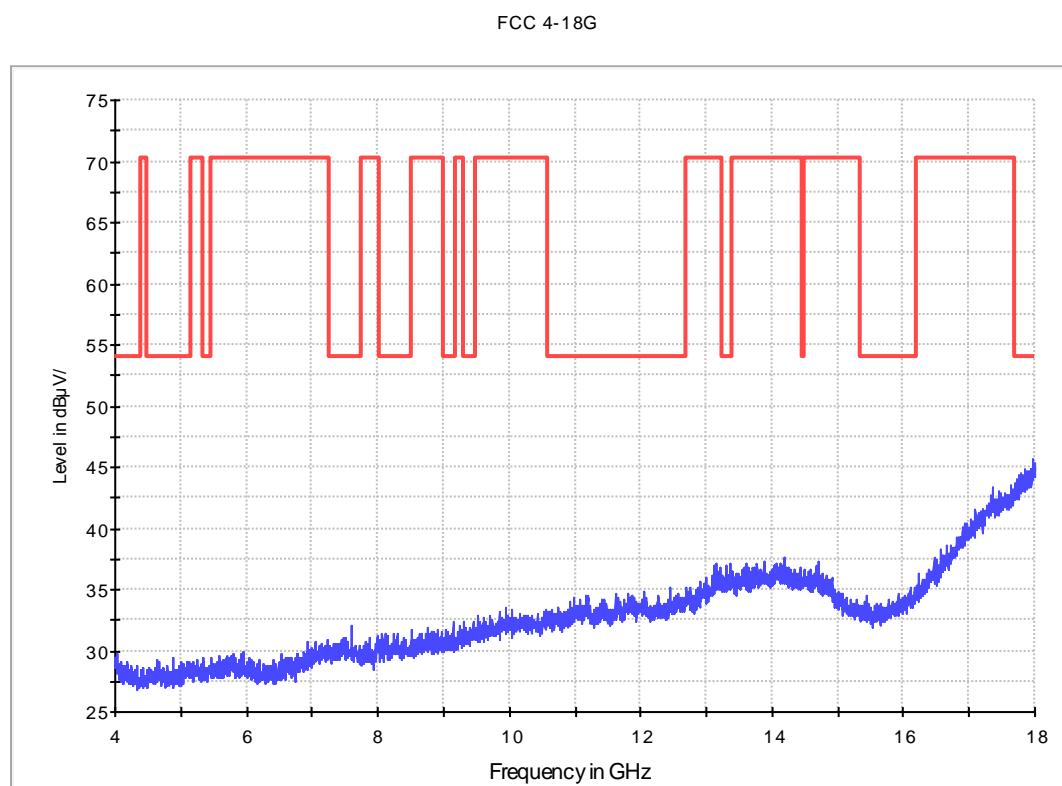


Fig. 64 Radiated Spurious Emission (802.11g, Ch11, 4 GHz-18 GHz)

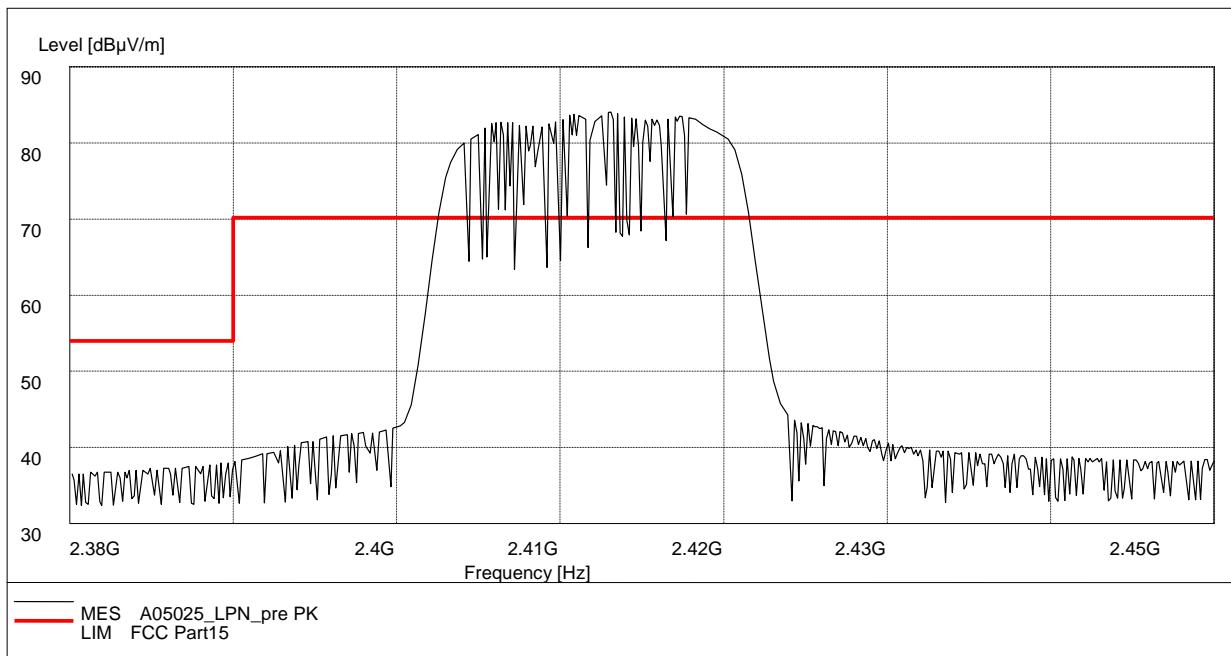


Fig. 65 Radiated Spurious Emission (Power): 802.11n-20MHz, ch1, 2.38 GHz - 2.45GHz

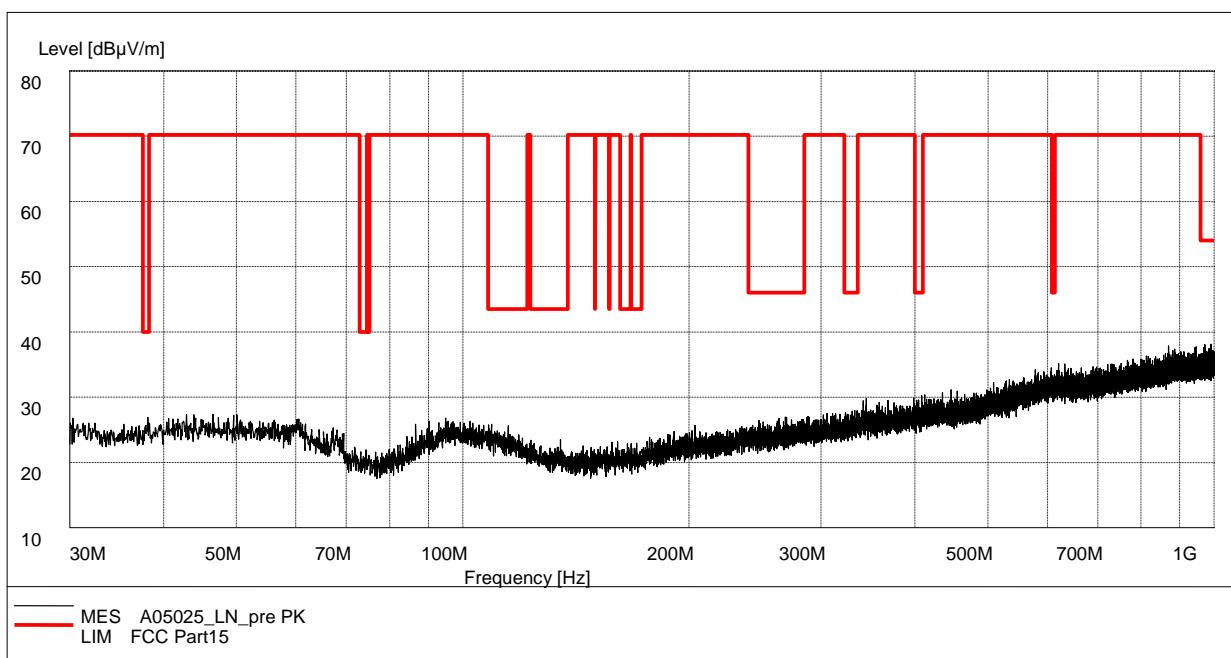


Fig. 66 Radiated Spurious Emission (802.11n-20MHz, Ch1, 30 MHz-1 GHz)

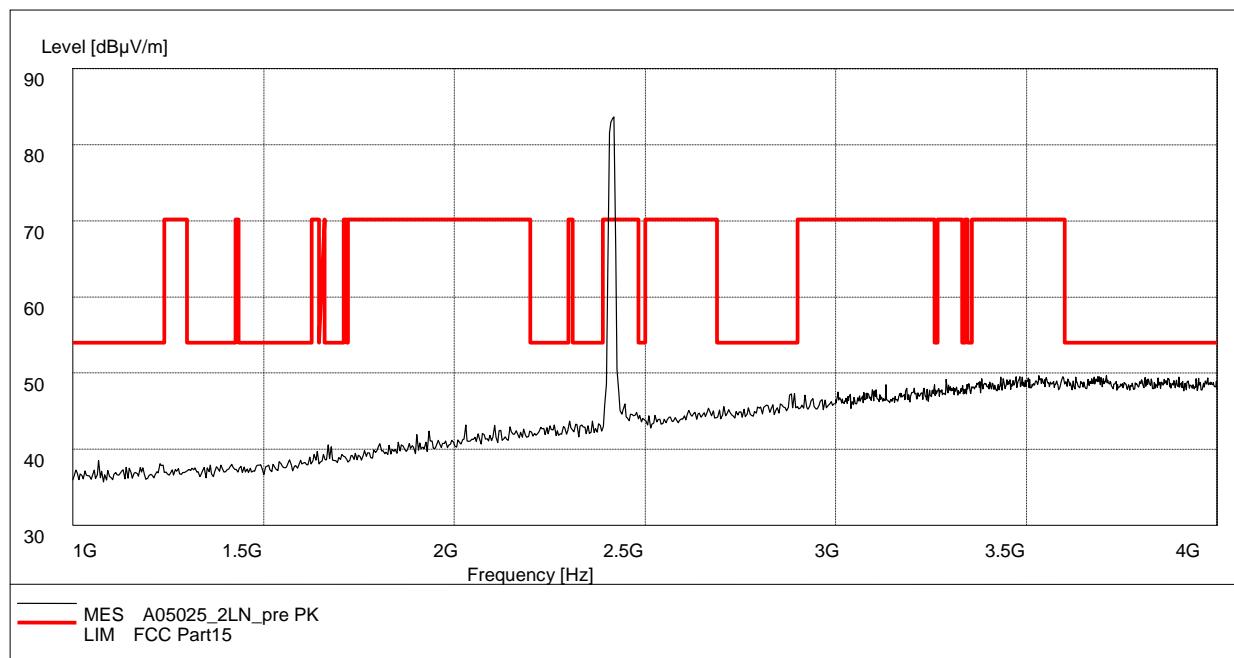


Fig. 67 Radiated Spurious Emission (802.11n-20MHz, Ch1, 1 GHz-4 GHz)

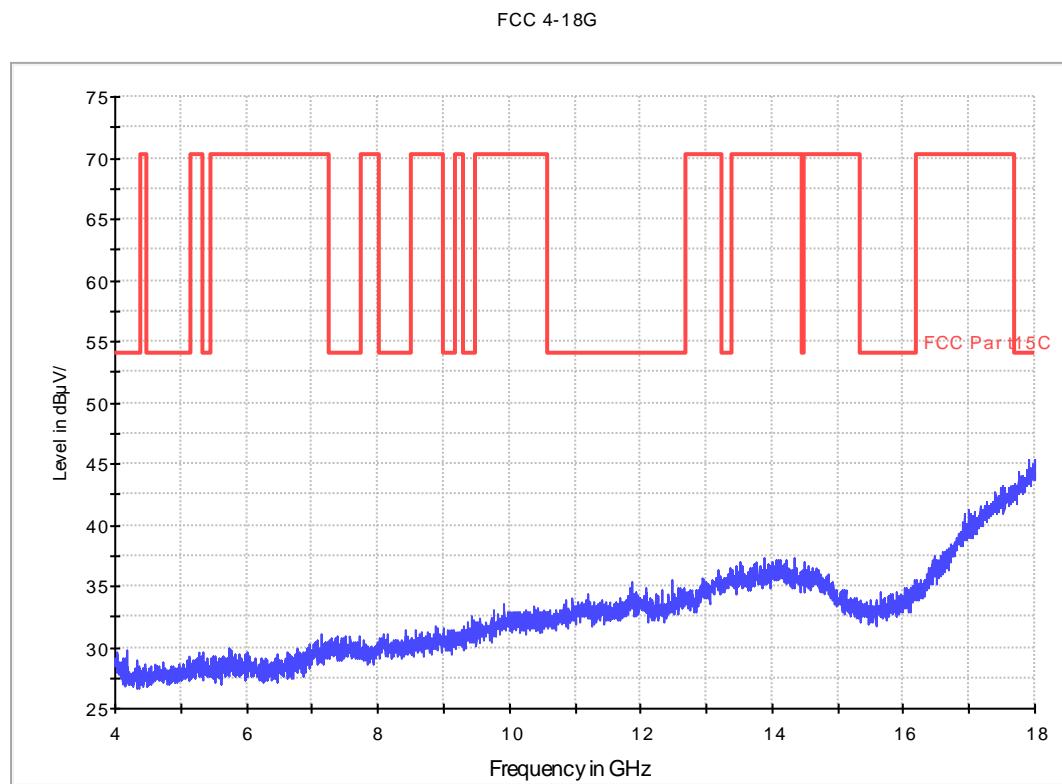
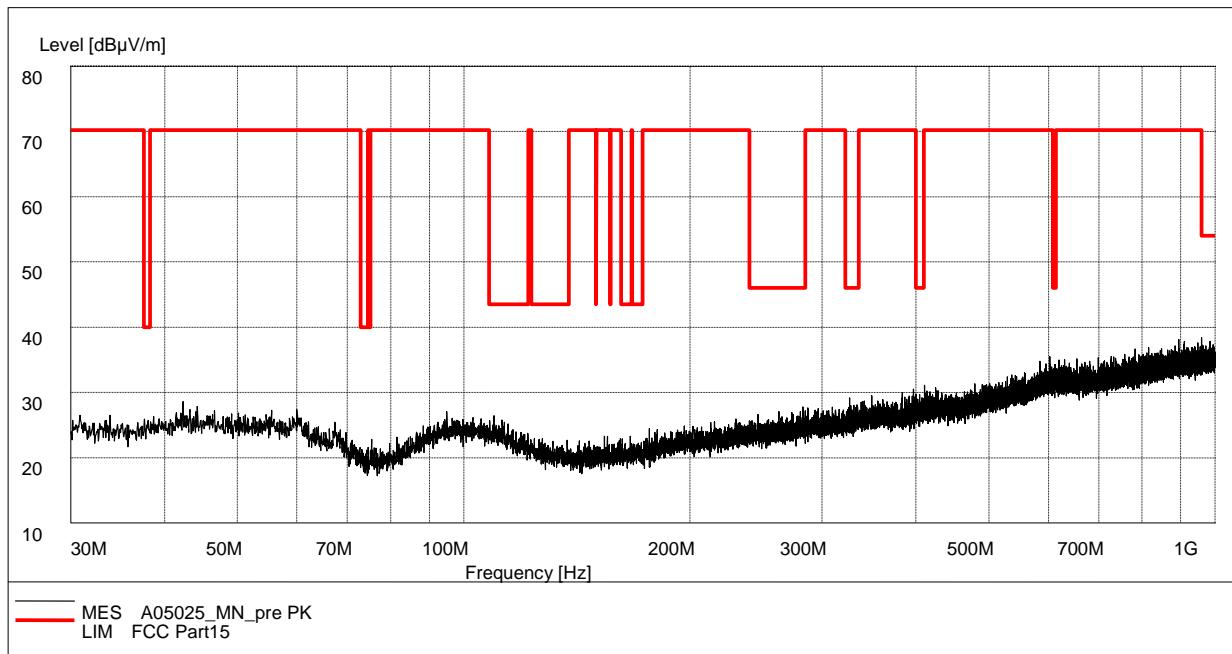
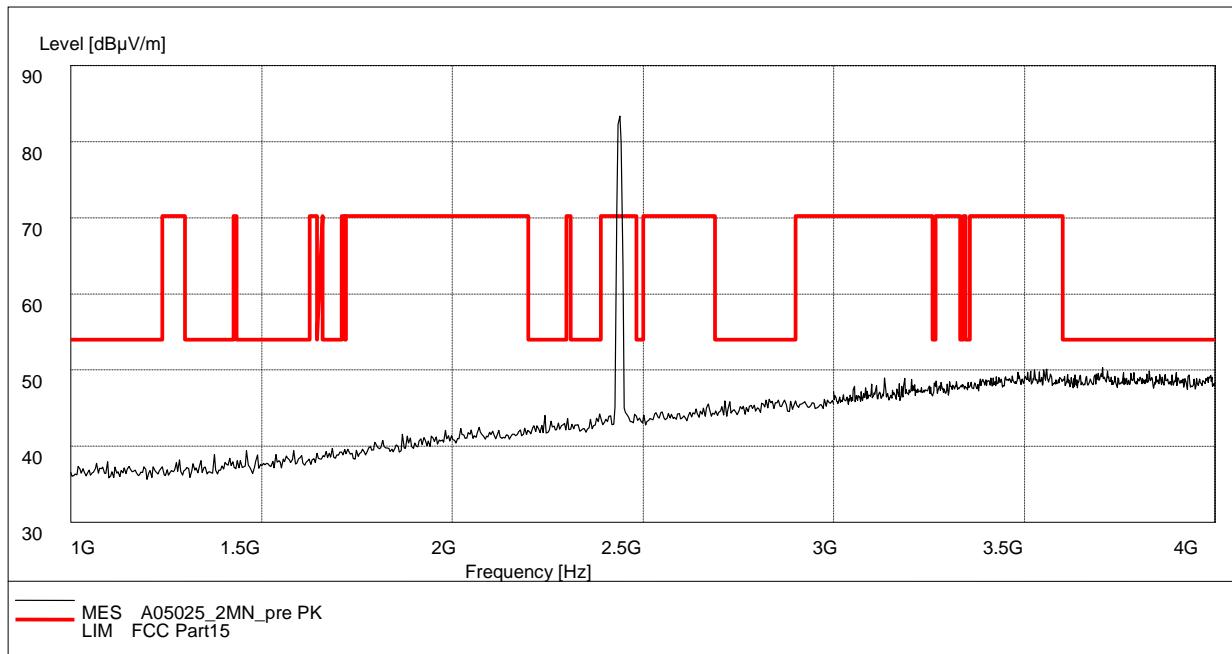


Fig. 68 Radiated Spurious Emission (802.11n-20MHz, Ch1, 4 GHz-18 GHz)

**Fig. 69 Radiated Spurious Emission (802.11n-20MHz, Ch6, 30 MHz-1 GHz)****Fig. 70 Radiated Spurious Emission (802.11n-20MHz, Ch6, 1 GHz-4 GHz)**

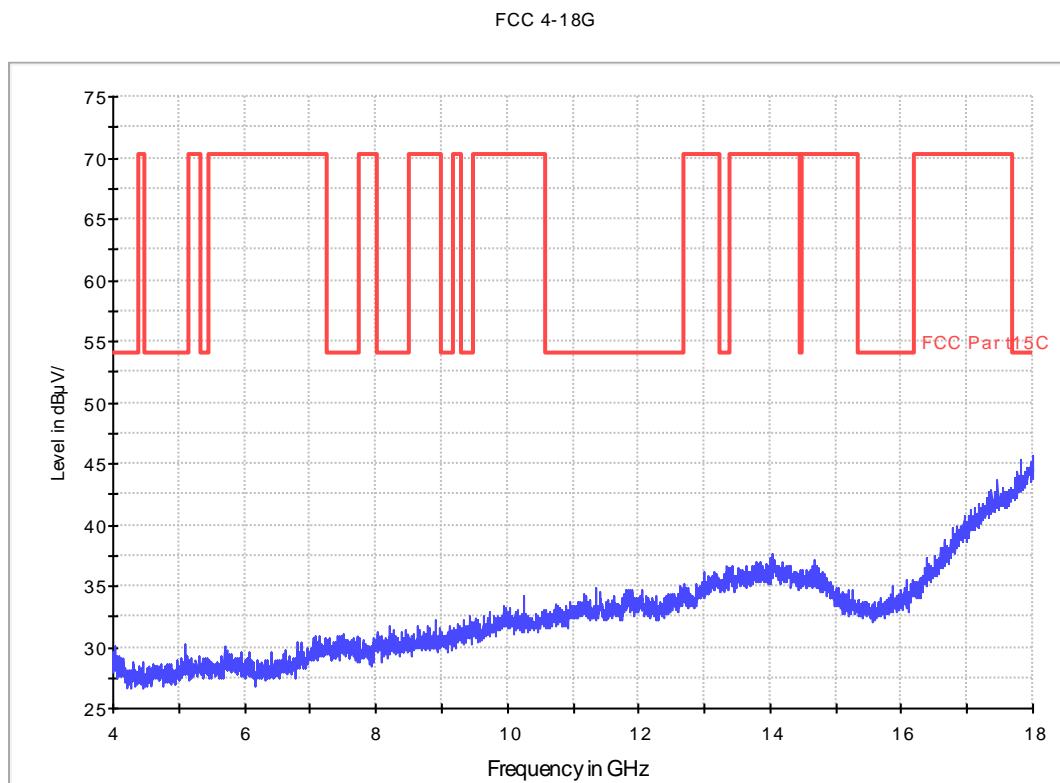


Fig. 71 Radiated Spurious Emission (802.11n-20MHz, Ch6, 4 GHz-18 GHz)

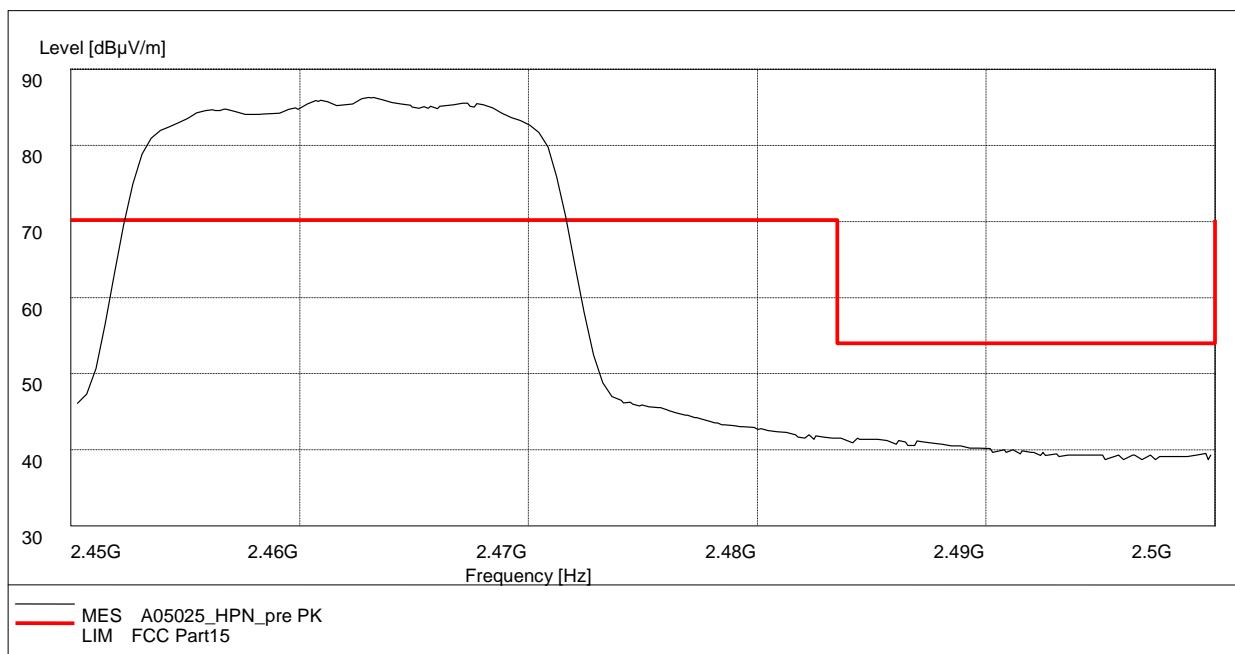


Fig. 72 Radiated Spurious Emission (Power): 802.11n-20MHz, ch11, 2.45 GHz - 2.50GHz

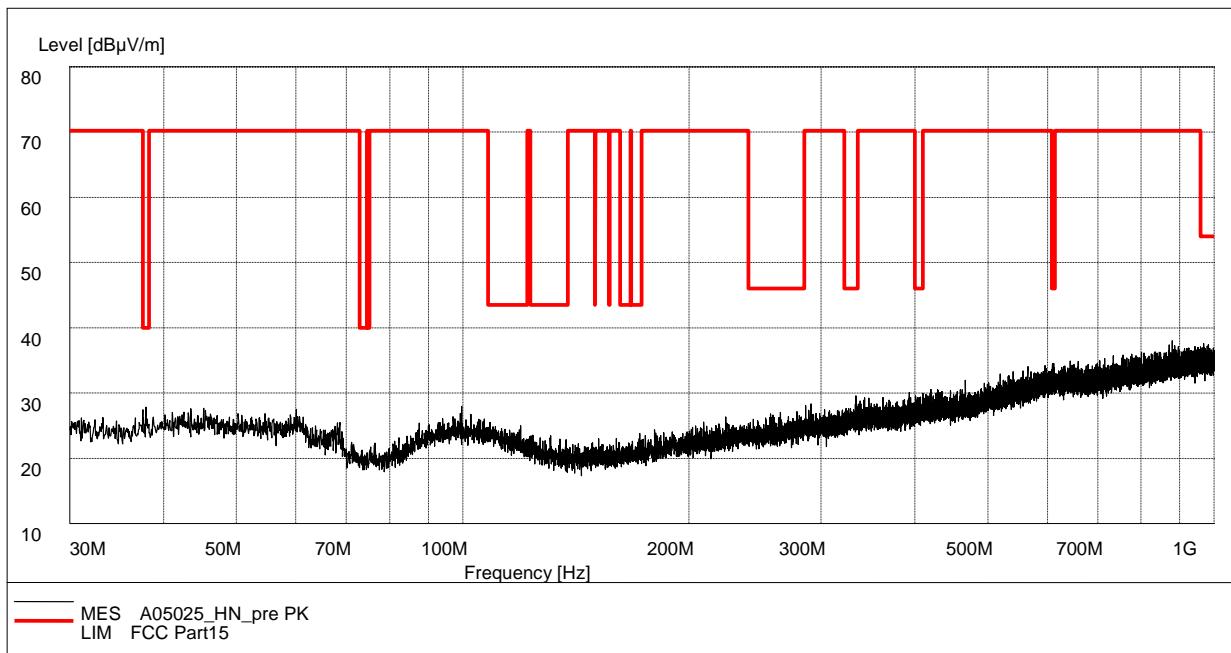


Fig. 73 Radiated Spurious Emission (802.11n-20MHz, Ch11, 30 MHz-1 GHz)

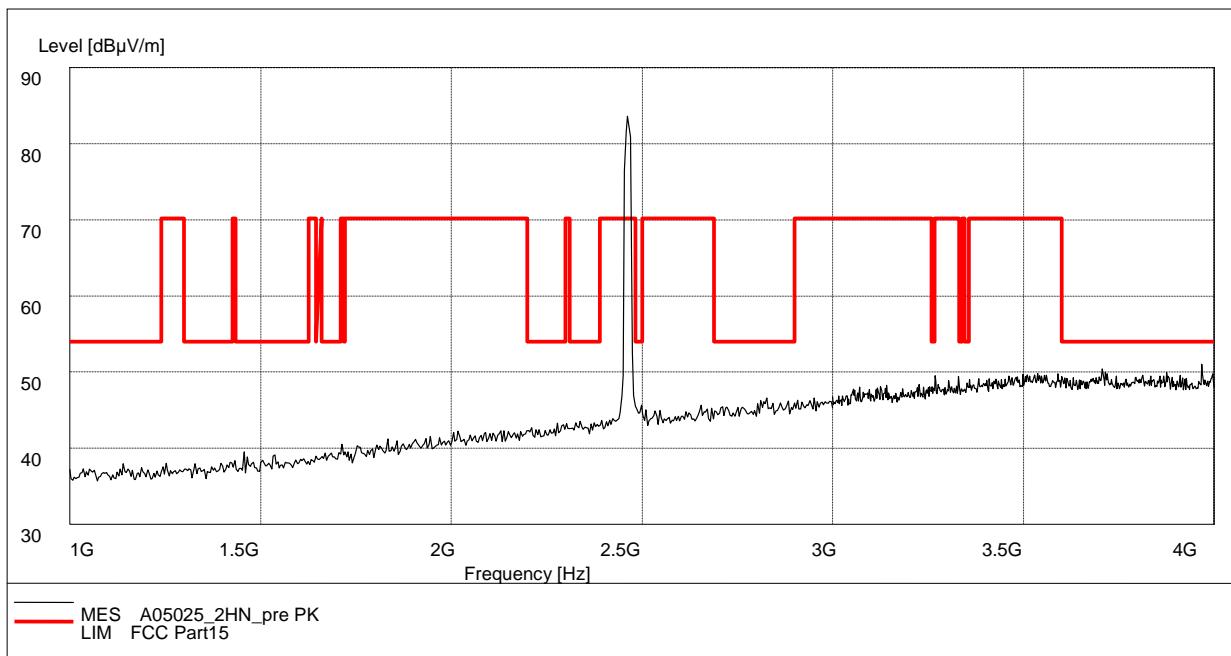


Fig. 74 Radiated Spurious Emission (802.11n-20MHz, Ch11, 1 GHz-4 GHz)

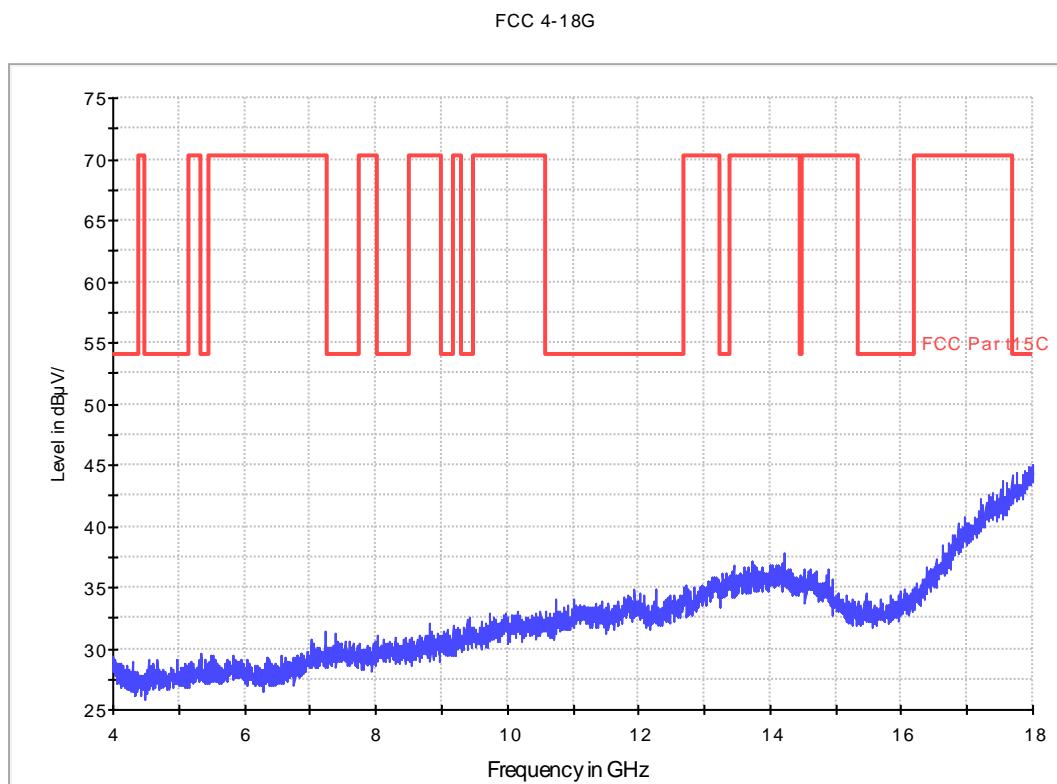


Fig. 75 Radiated Spurious Emission (802.11n-20MHz, Ch11, 4 GHz-18 GHz)

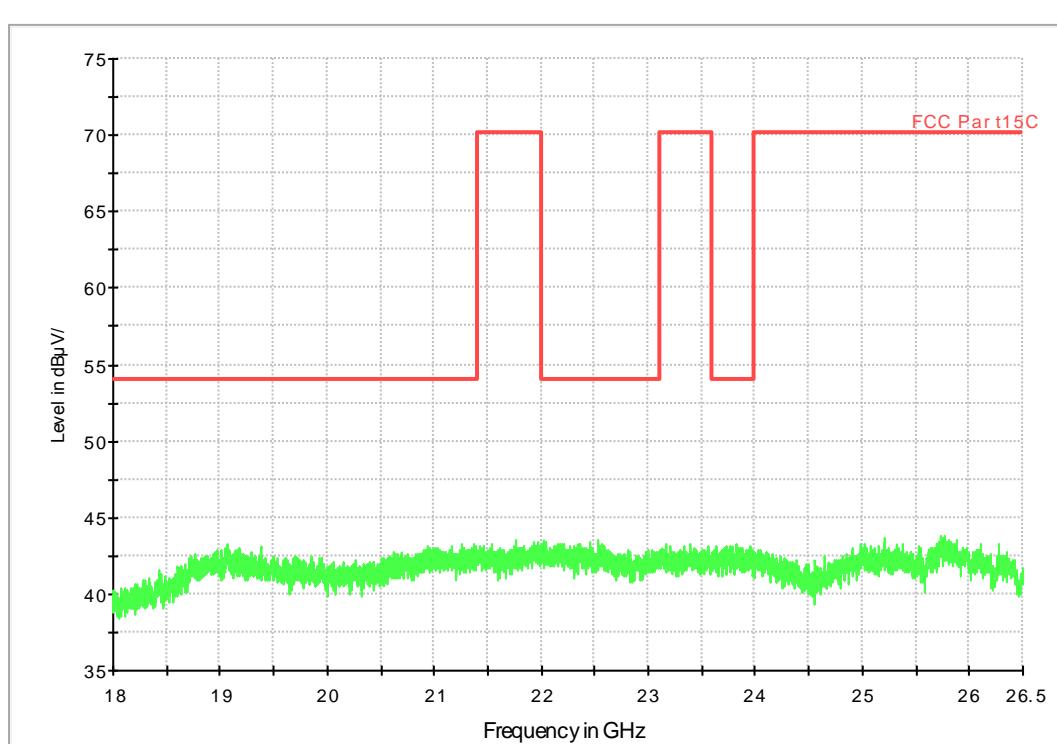


Fig. 76 Radiated emission: 18 GHz - 26.5 GHz

A.7. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)			Conclusion	
		With charger				
		802.11b	802.11g	802.11n		
0.15 to 0.5	66 to 56					
0.5 to 5	56				P	
5 to 30	60					

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)


Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)			Conclusion	
		With charger				
		802.11b	802.11g	802.11n		
0.15 to 0.5	56 to 46					
0.5 to 5	46				P	
5 to 30	50					

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.4 and KDB558074

Conclusion: PASS

Test graphs as below:

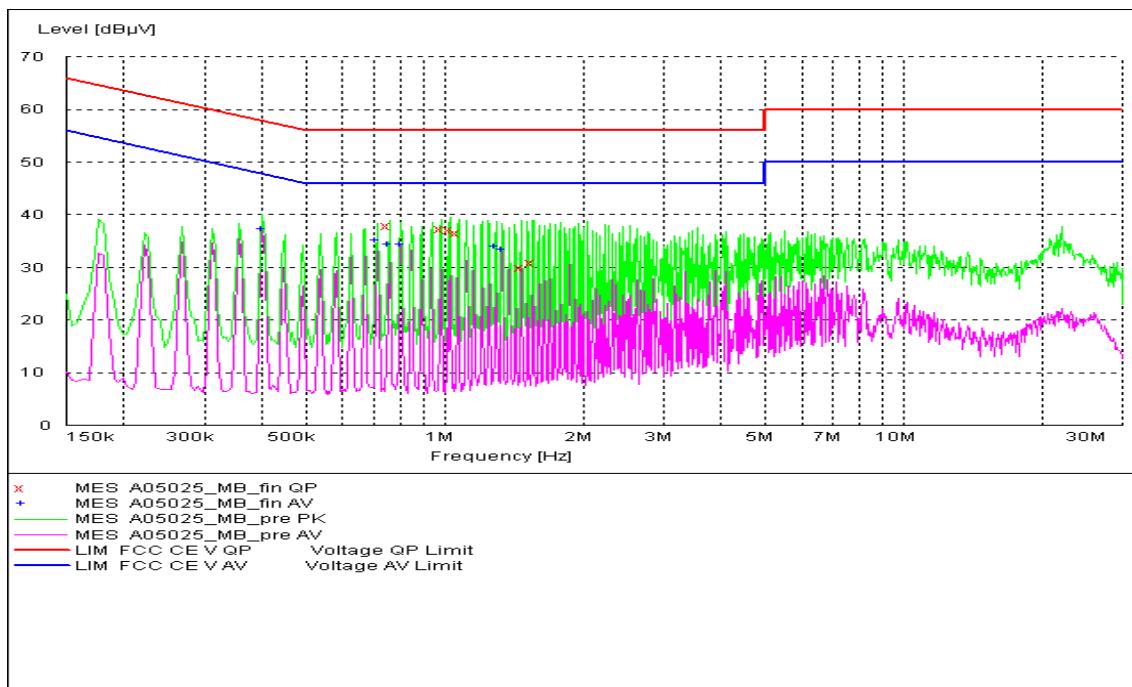

Fig. 77 AC Powerline Conducted Emission-802.11b

MEASUREMENT RESULT: "A05025_MB_fin QP"

Frequency (MHz)	Level (dB μ V)	Transd (dB)	Limit (dB μ V)	Margin (dB)	Line	PE
0.7575	37.9	10.1	56	18.1	N	FLO
0.9825	37.2	10.1	56	18.8	L1	GND
1.0275	37	10.1	56	19	L1	FLO
1.0725	36.5	10.1	56	19.5	L1	FLO
1.473	29.9	10.1	56	26.1	N	GND
1.5585	30.8	10.1	56	25.2	N	FLO

MEASUREMENT RESULT: "A05025_MB_fin AV"

Frequency (MHz)	Level (dB μ V)	Transd (dB)	Limit (dB μ V)	Margin (dB)	Line	PE
0.402	37.3	10.1	48	10.6	N	FLO
0.7125	35.1	10.1	46	10.9	N	GND
0.7575	34.4	10.1	46	11.6	N	GND
0.8025	34.4	10.1	46	11.6	N	GND
1.293	34	10.1	46	12	N	FLO
1.338	33.3	10.1	46	12.7	N	FLO

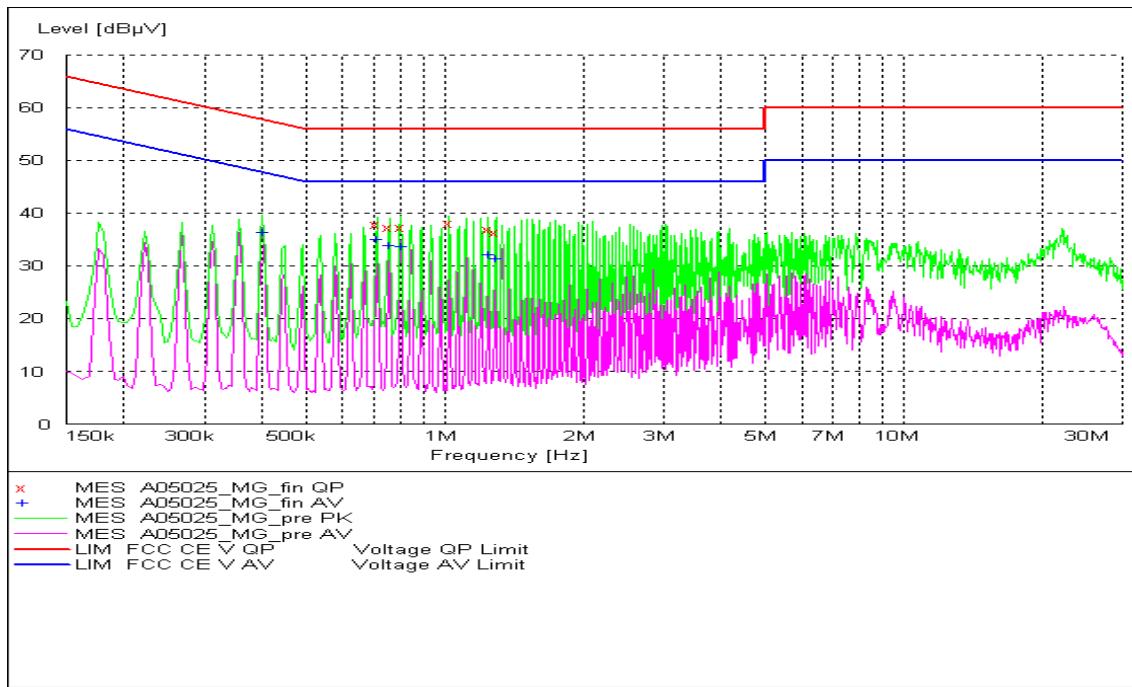

Fig. 78 AC Powerline Conducted Emission-802.11g

MEASUREMENT RESULT: "A05025_MG_fin QP"

Frequency (MHz)	Level (dB μ V)	Transd (dB)	Limit (dB μ V)	Margin (dB)	Line	PE
0.7125	37.9	10.1	56	18.1	N	FLO
0.7575	37.4	10.1	56	18.6	N	GND
0.8025	37.3	10.1	56	18.7	N	GND
1.023	38.2	10.1	56	17.8	L1	GND
1.248	36.9	10.1	56	19.1	N	FLO
1.293	36.3	10.1	56	19.7	N	FLO

MEASUREMENT RESULT: "A05025_MG_fin AV"

Frequency (MHz)	Level (dB μ V)	Transd (dB)	Limit (dB μ V)	Margin (dB)	Line	PE
0.402	36.5	10.1	48	11.3	N	FLO
0.7125	35.1	10.1	46	10.9	N	FLO
0.7575	34	10.1	46	12	N	GND
0.8025	33.8	10.1	46	12.2	N	FLO
1.248	32.1	10.1	46	13.9	N	GND
1.293	31.5	10.1	46	14.5	N	FLO

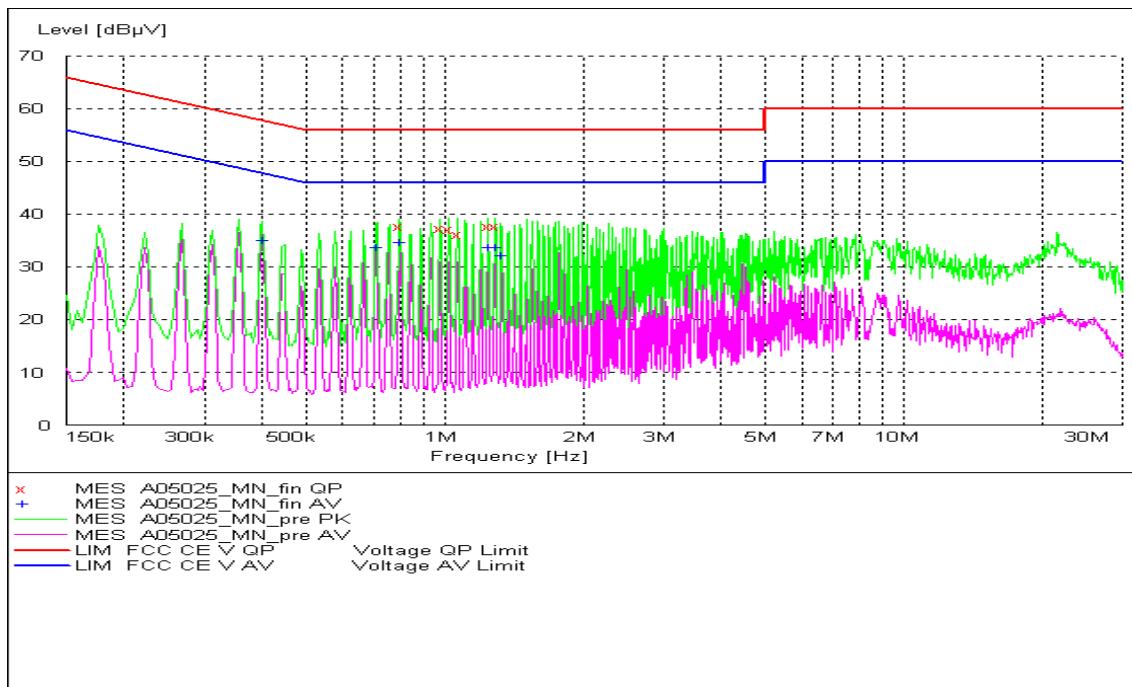
Fig. 79 AC Powerline Conducted Emission-802.11n-20MHz

MEASUREMENT RESULT: "A05025_MN_fin QP"

Frequency (MHz)	Level (dB μ V)	Transd (dB)	Limit (dB μ V)	Margin (dB)	Line	PE
0.798	37.8	10.1	56	18.2	N	FLO
0.978	37.3	10.1	56	18.7	L1	FLO
1.023	37.2	10.1	56	18.8	L1	FLO
1.068	36.2	10.1	56	19.8	L1	FLO
1.2435	37.8	10.1	56	18.2	N	GND
1.2885	37.7	10.1	56	18.3	N	FLO

MEASUREMENT RESULT: "A05025_MN_fin AV"

Frequency (MHz)	Level (dB μ V)	Transd (dB)	Limit (dB μ V)	Margin (dB)	Line	PE
0.402	35.1	10.1	48	12.7	N	FLO
0.7125	33.7	10.1	46	12.3	N	FLO
0.798	34.7	10.1	46	11.3	N	FLO
1.2435	33.8	10.1	46	12.2	N	FLO
1.2885	33.8	10.1	46	12.2	N	FLO
1.329	32.2	10.1	46	13.8	N	GND

*** END OF REPORT BODY ***