



TEST REPORT

No. 2011TAR400

for

TCT Mobile Limited

HSDPA/UMTS dual band / GSM four bands mobile phone

Model Name: Tequila US1

Marketing Name: one touch 909A

FCC ID : RAD184

with

Hardware Version: PIO

Software Version: V940

Issued Date: 2011-08-25

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633 , Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS	6
4.1. REFERENCE DOCUMENTS FOR TESTING	6
5. LABORATORY ENVIRONMENT	7
6. SUMMARY OF TEST RESULTS	8
7. TEST EQUIPMENTS UTILIZED	9
ANNEX A: MEASUREMENT RESULTS	10

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: Jul 20, 2011
Testing End Date: Aug 04, 2011

1.4. Signature




Liu Baodian

(Prepared this test report)



Sun Xiangqian

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: +86-21-61460890
Fax: +86-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: +86-21-61460890
Fax: +86-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSDPA/UMTS dual band / GSM four bands mobile phone
Model Name	one touch 909A
FCC ID	RAD184
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	012717000004429	PIO	V940

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Travel Adapter	/
AE2	Travel Adapter	/
AE3	Battery	/
AE4	USB Cable	/
AE5	USB Cable	/

AE1

Model	CBA3001AG0C1
Manufacturer	BYD
Length of DC line	With 10cm USB Connector

AE2

Model	CBA3002AG0C1
Manufacturer	BYD
Length of DC line	122cm

AE3

Model	CAB31P0000C1
Manufacturer	BYD
Capacitance	1300mAh
Nominal Voltage	3.7V

AE4

Model	CDA3122002C1
Manufacturer	
Length of DC line	100cm

AE5

Model	CDA3122002C2
Manufacturer	
Length of DC line	100cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1+AE3+AE4/AE5	Charging
Set.2	EUT1+ AE2+AE3	Charging
Set.3	EUT1+ AE3 +AE4/AE5	USB

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2012-03-12
2	Test Receiver	ESCI	100766	R&S	2011-12-06
3	Test Receiver	ESI40	831564/002	R&S	2012-02-12
4	BiLog Antenna	VUL9163	9163-302	Schwarzbeck	2012-02-10
5	Signal Generator	SMB100A	102063	R&S	2012-03-05
6	LISN	ESH2-Z5	829991/012	R&S	2012-04-20
7	Universal Radio Communication Tester	CMU200	102228	R&S	2011-09-05
8	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2012-01-18
9	PC	OPTIPLEX 755	3908243625	DELL	N/A
10	Monitor	E178FPc	CN-OWR979-64 180-7AJ-D2MS	DELL	N/A
11	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
12	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A
13	Mouse	VR-301	6927225500198	XINGYU	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

A.1.2 EUT Operating Mode:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + F_A + G_{\text{PL}}$$

Where

F_A : Receive Antenna Factor

G_{PL} : Cable Loss

P_{Mea} : The measurement result on receiver.

Charging Mode(set.1)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3613.226	50.1	-19.7	33.4	36.4	VERTICAL
3595.19	50.06	-19.6	33.4	36.26	VERTICAL
3472.946	49.96	-19.7	31.2	38.46	HORIZONTAL
3701.403	49.96	-19.4	33.4	35.96	VERTICAL
3981.964	49.95	-19.3	33.4	35.85	VERTICAL
3989.98	49.95	-19.3	33.4	35.85	HORIZONTAL

Charging Mode(set.2)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3681.363	50.45	-19.5	33.4	36.55	HORIZONTAL
3709.419	50.32	-19.4	33.4	36.32	VERTICAL
3707.415	50.26	-19.4	33.4	36.26	HORIZONTAL
3581.162	50.23	-19.6	33.4	36.43	HORIZONTAL
3701.403	50.02	-19.4	33.4	36.02	HORIZONTAL
3795.591	50	-19.7	33.4	36.3	HORIZONTAL

USB Mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{mea} (dBuV)	Polarity
3561.122	51.13	-19.5	33.4	37.23	HORIZONTAL
3496.994	50.62	-19.7	31.2	39.12	VERTICAL
3498.998	50.59	-19.7	31.2	39.09	VERTICAL
3711.423	50.51	-19.5	33.4	36.61	HORIZONTAL
3739.479	50.34	-19.7	33.4	36.64	HORIZONTAL
3769.539	50.33	-19.6	33.4	36.53	VERTICAL

Charging Mode

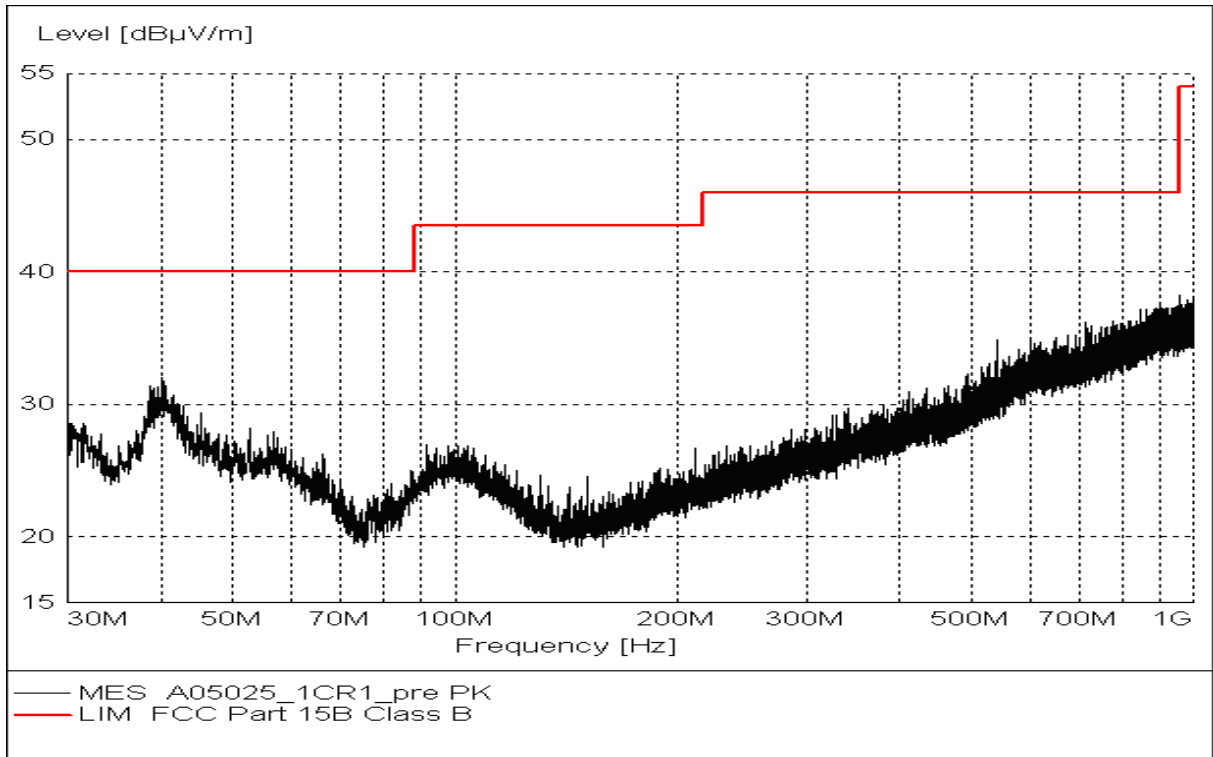


Figure A.1 Radiated Emission from 30MHz to 1GHz (set.1)

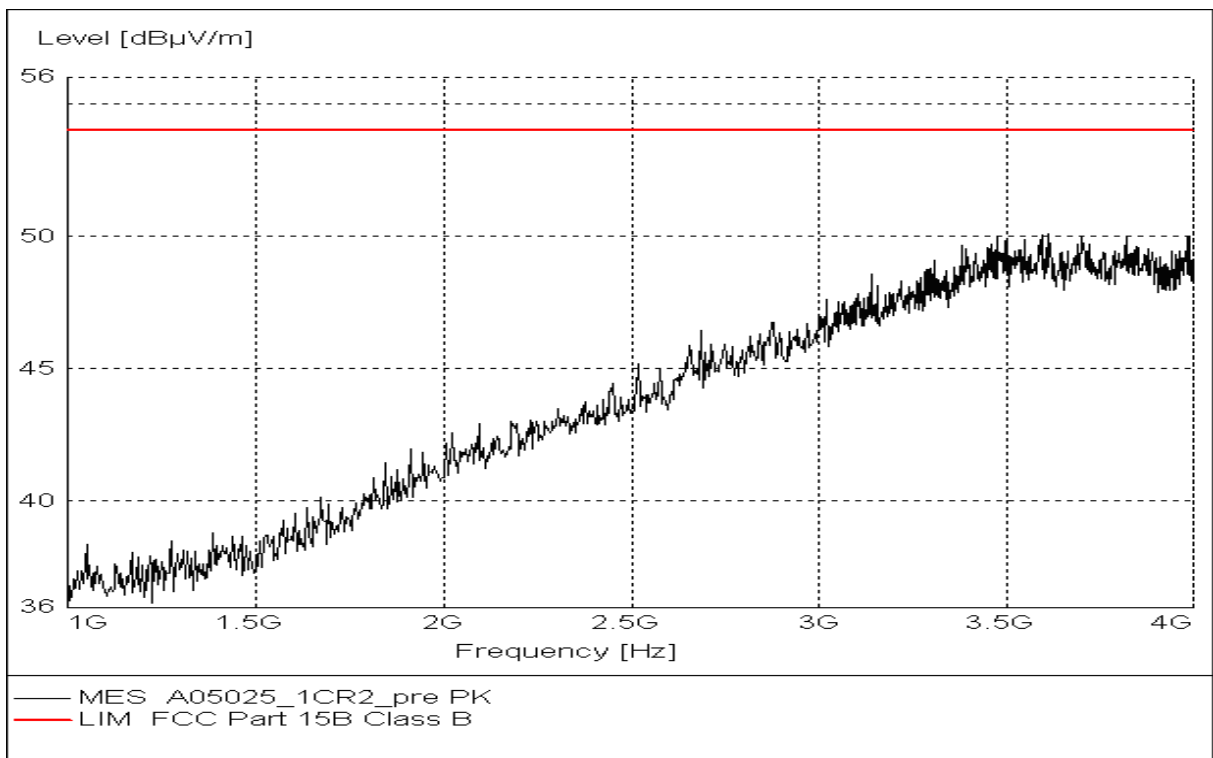


Figure A.2 Radiated Emission from 1GHz to 4GHz(set.1)

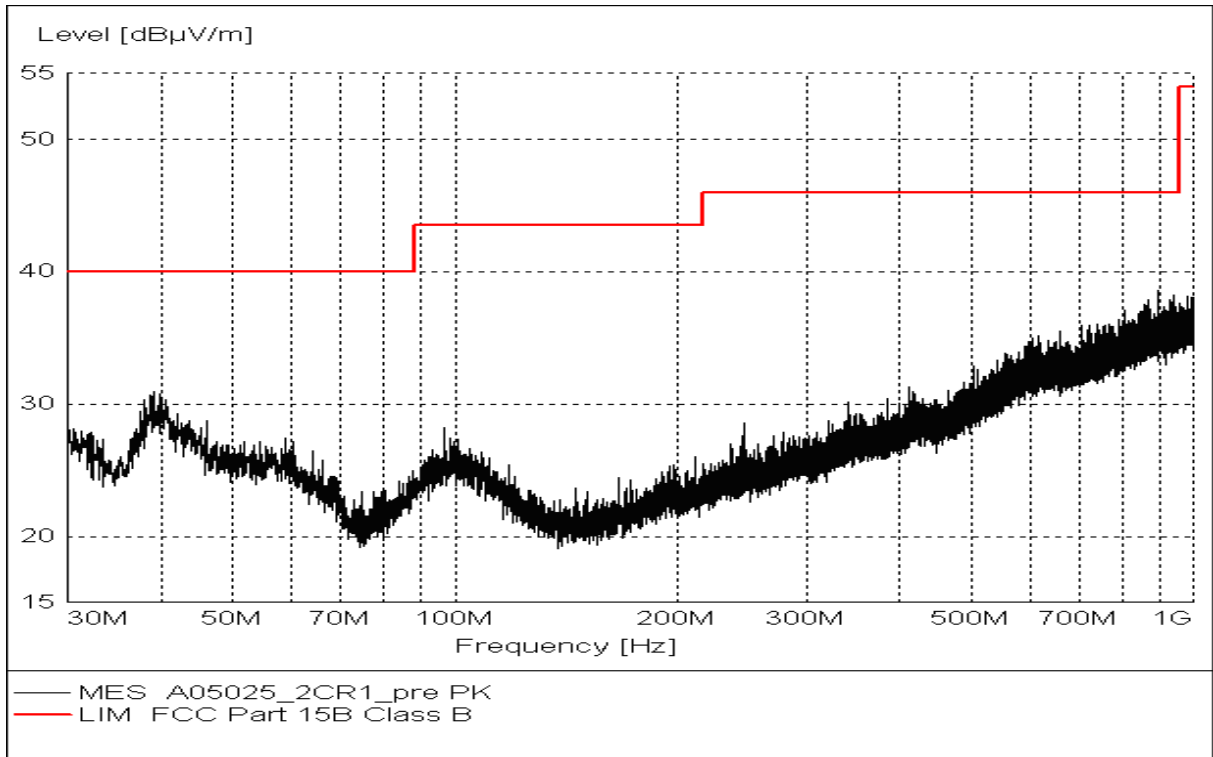


Figure A.3 Radiated Emission from 30MHz to 1GHz (set.2)

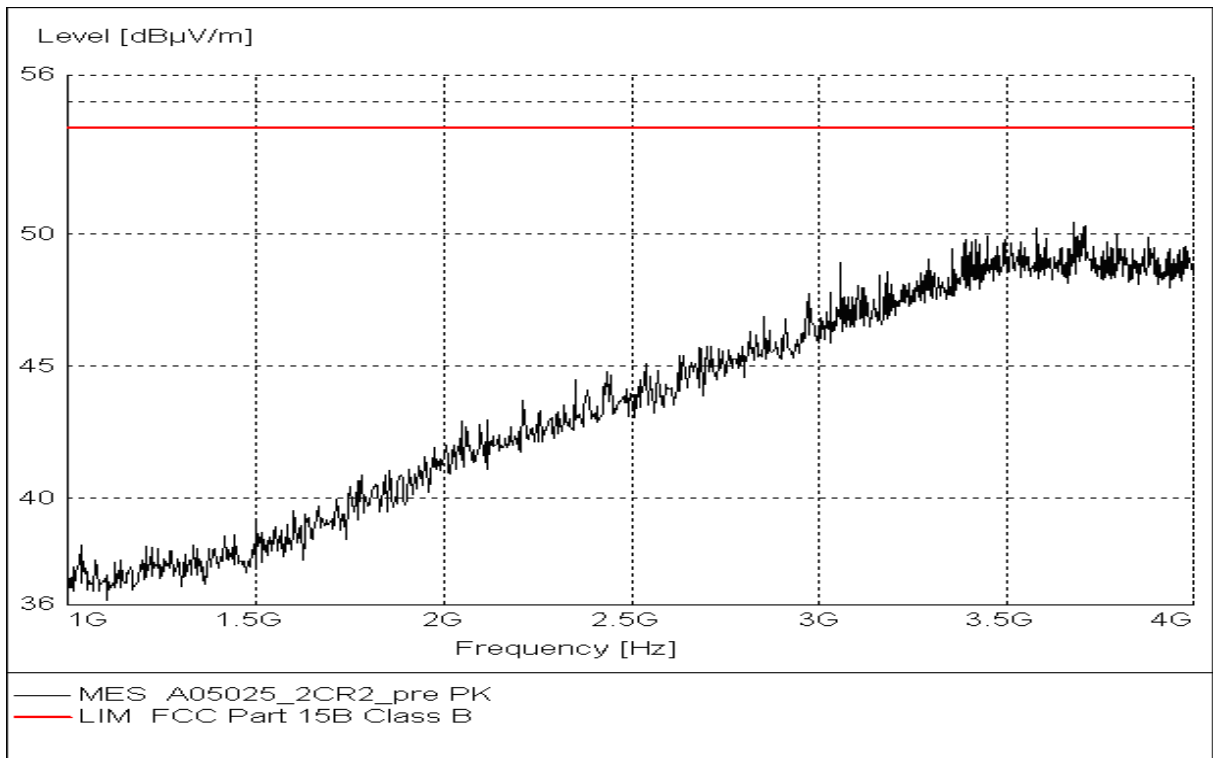


Figure A.4 Radiated Emission from 1GHz to 4GHz(set.2)

USB Mode

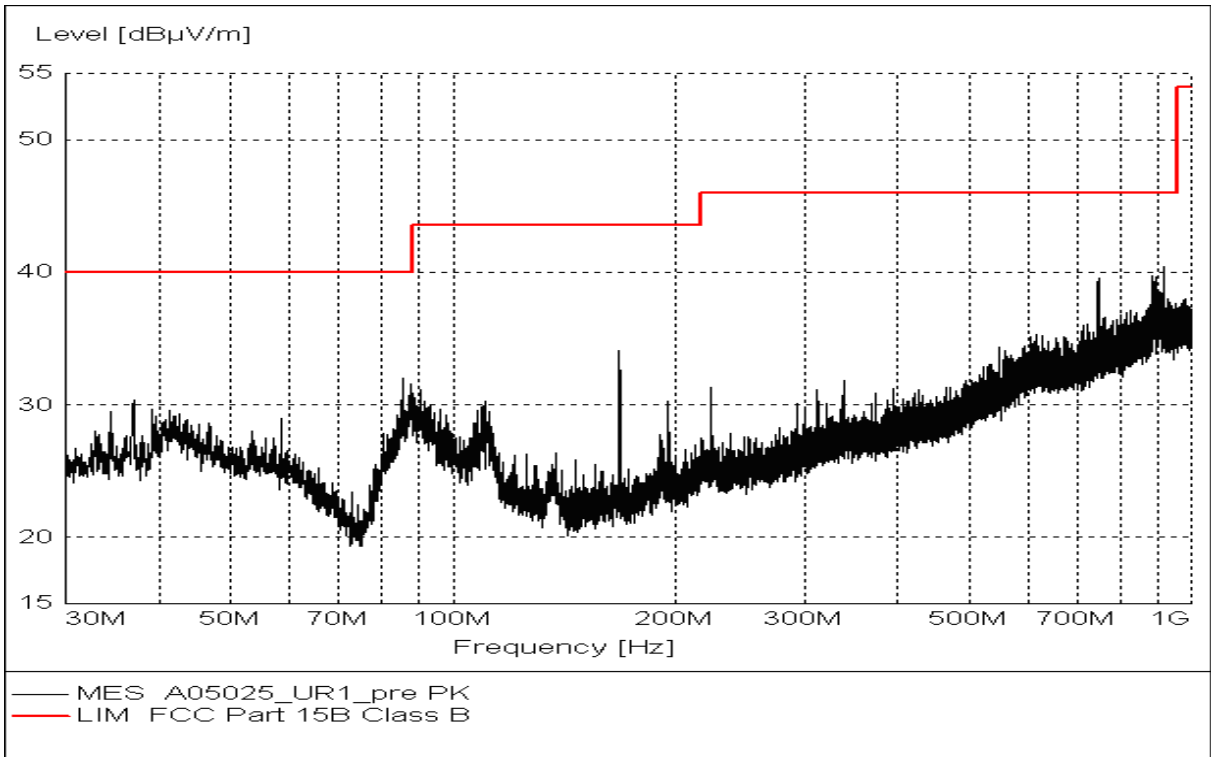


Figure A.5 Radiated Emission from 30MHz to 1GHz

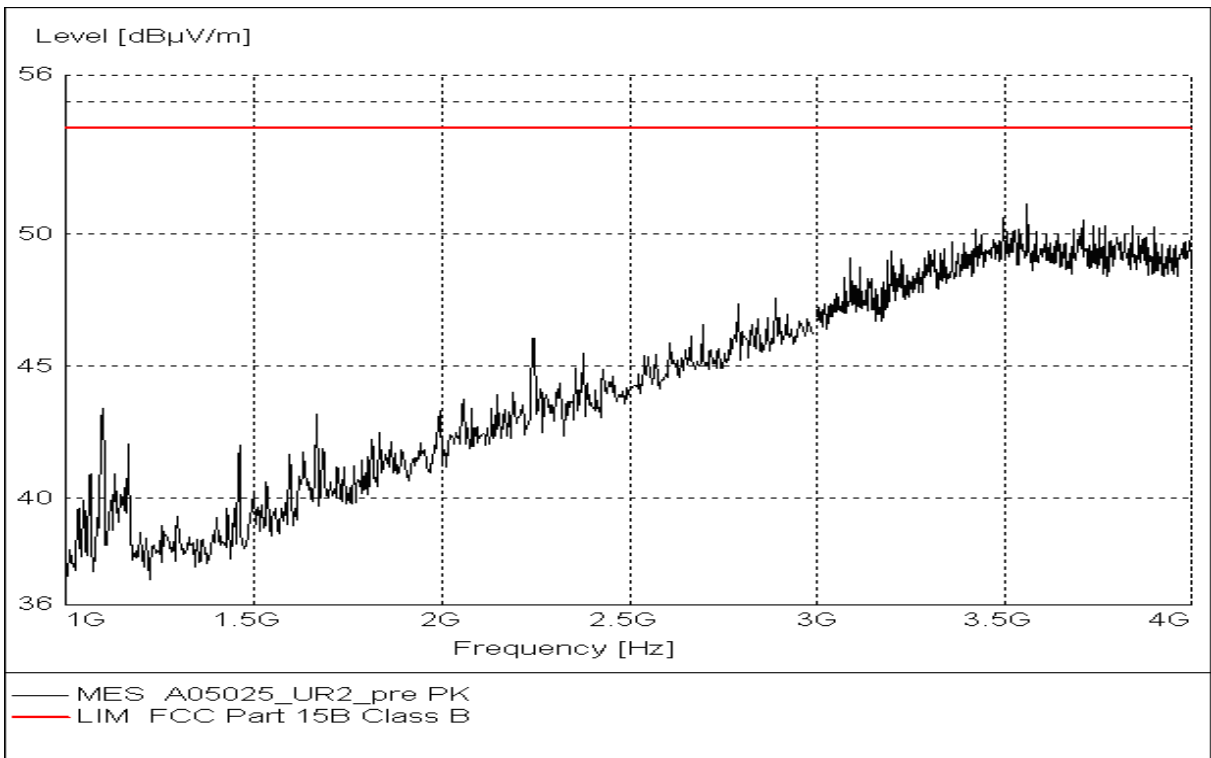


Figure A.6 Radiated Emission from 1GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

A.2.4 Measurement Results
Charging Mode

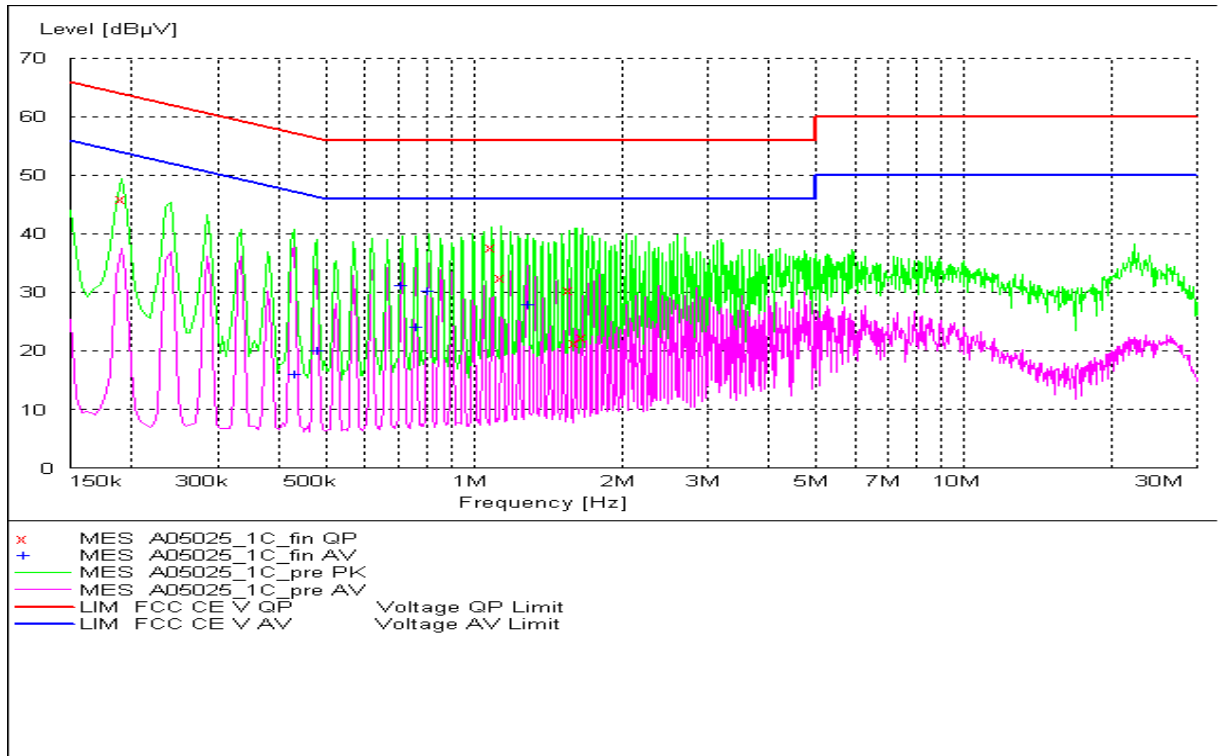


Figure A.7 Conducted Emission(set.1)

MEASUREMENT RESULT: "A05025_1C_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.190500	46.00	10.1	64	18.0	L1	GND
1.090500	37.70	10.1	56	18.3	L1	GND
1.140000	32.60	10.1	56	23.4	L1	GND
1.567500	30.50	10.1	56	25.5	L1	FLO
1.617000	21.40	10.1	56	34.6	L1	GND
1.662000	22.40	10.1	56	33.6	L1	GND

MEASUREMENT RESULT: "A05025_1C_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.429000	16.10	10.1	47	31.2	N	GND
0.478500	20.00	10.1	46	26.4	N	GND
0.712500	31.20	10.1	46	14.8	N	GND
0.762000	24.20	10.1	46	21.8	N	GND
0.807000	30.30	10.1	46	15.7	N	GND
1.284000	27.90	10.1	46	18.1	N	FLO

Charging Mode

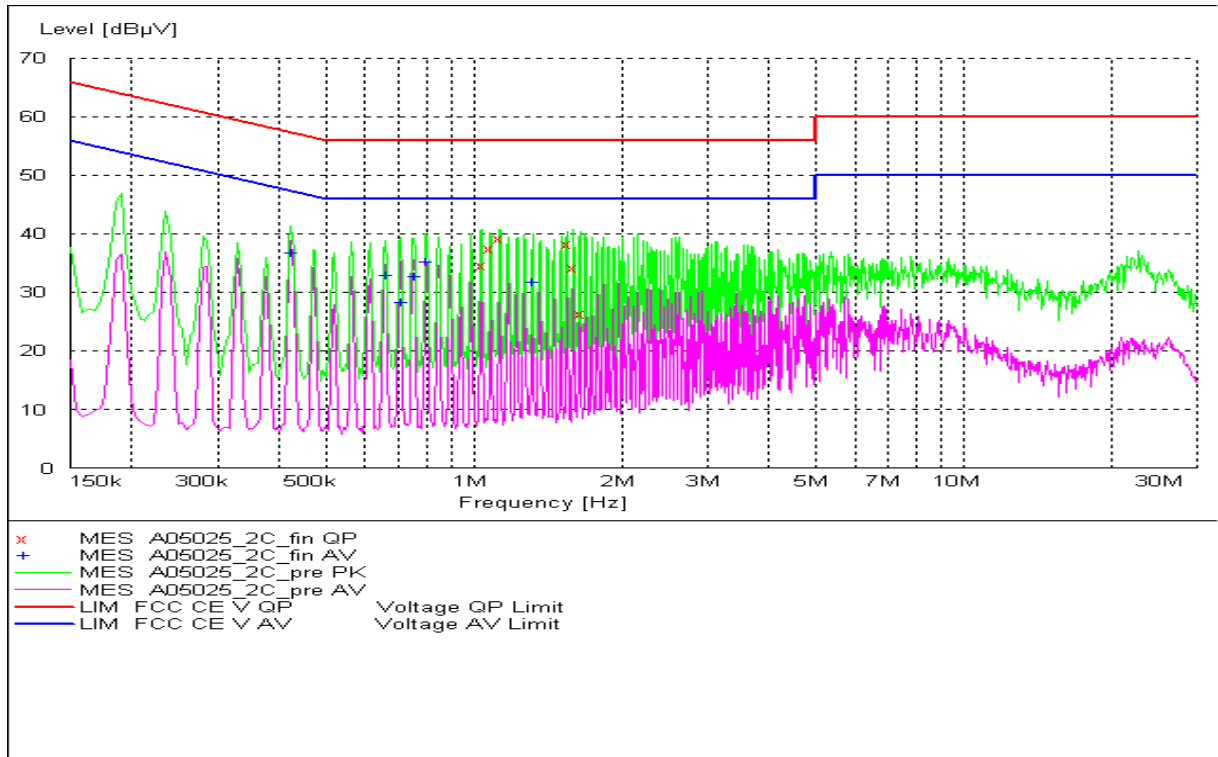


Figure A.8 Conducted Emission(set.2)

MEASUREMENT RESULT: "A05025_2C_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
1.036500	34.60	10.1	56	21.4	L1	GND
1.081500	37.60	10.1	56	18.4	L1	GND
1.126500	39.20	10.1	56	16.8	L1	FLO
1.549500	38.30	10.1	56	17.7	L1	FLO
1.599000	34.30	10.1	56	21.7	L1	GND
1.648500	26.40	10.1	56	29.6	L1	GND

MEASUREMENT RESULT: "A05025_2C_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.424500	36.80	10.1	47	10.6	N	GND
0.658500	32.90	10.1	46	13.1	N	GND
0.708000	28.30	10.1	46	17.7	N	FLO
0.753000	32.70	10.1	46	13.3	N	GND
0.798000	35.20	10.1	46	10.8	N	FLO
1.315500	31.80	10.1	46	14.2	N	FLO

USB Mode

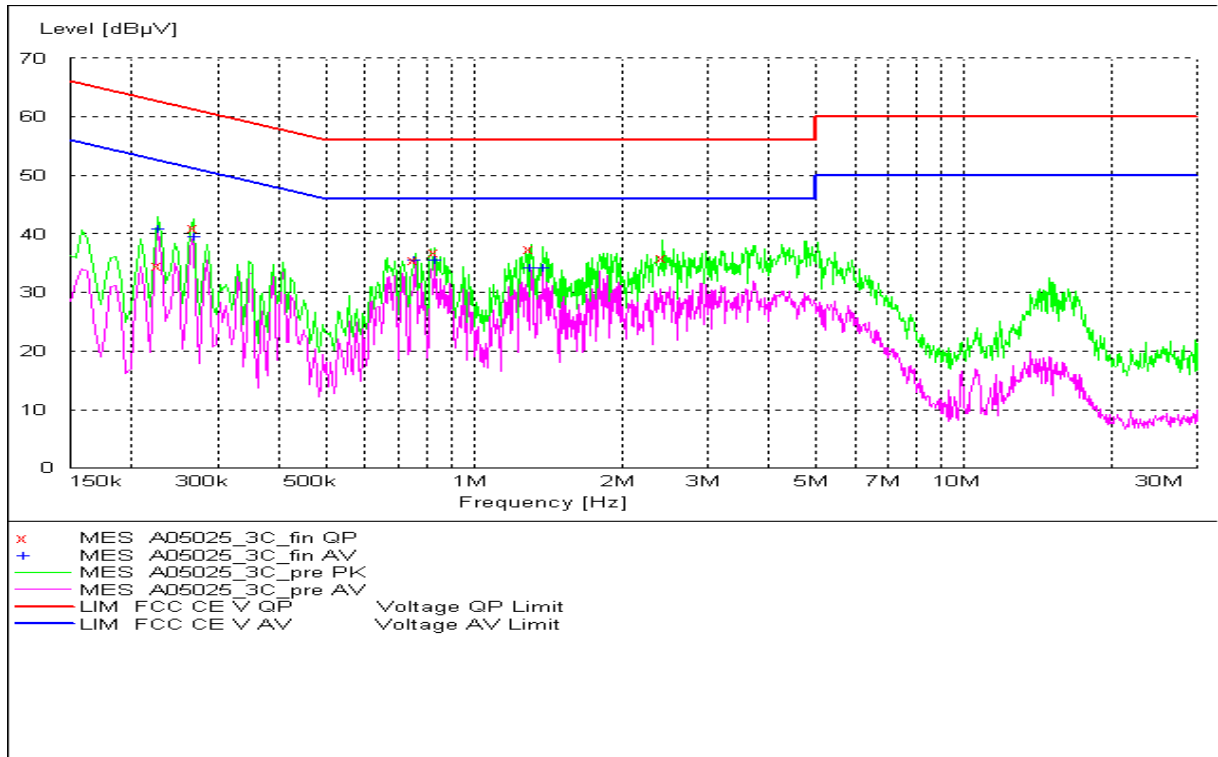


Figure A.9 Conducted Emission

MEASUREMENT RESULT: "A05025_3C_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.226500	34.60	10.1	63	28.0	L1	GND
0.267000	41.10	10.1	61	20.1	N	GND
0.757500	35.50	10.1	56	20.5	N	GND
0.834000	36.90	10.1	56	19.1	N	GND
1.306500	37.40	10.1	56	18.6	N	GND
2.429441	35.90	10.1	56	20.1	L1	GND

MEASUREMENT RESULT: "A05025_3C_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.226500	40.90	10.1	53	11.6	N	GND
0.267000	39.50	10.1	51	11.7	N	GND
0.757500	35.60	10.1	46	10.4	N	GND
0.834000	35.60	10.1	46	10.4	N	GND
1.306500	34.20	10.1	46	11.8	N	GND
1.383000	34.30	10.1	46	11.7	N	GND

END OF REPORT