



FCC TEST REPORT

Issued to

TCT Mobile Limited.

For

Tablet PC

Model Name: one touch T60
Trade Name: alcatel one touch
Brand Name: alcatel one touch
FCC ID RAD189
Standard 47 CFR Part 15 Subpart C
Test date March 28, 2011 – April 8, 2011
Issue date May 11, 2011

by

Shenzhen Morlab Communications Technology Co., Ltd.

Tested by Tu Lang
Tu Lang
Date 2011.5.11



Review by Huang Pulong
Huang Pulong
Date 2011.5.11

CTIA Authorized Test Lab
LAB CODE 20081223-00

IEEE 1725 **OTA**

OFTA
電訊管理局



GCF • **Bluetooth**
Official Observer of
Global Certification Forum

BQTF

FCC
Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 EUT Description	4
1.2 Test Standards and Results	5
1.3 Facilities and Accreditations.....	6
1.3.1 Facilities	6
1.3.2 Test Environment Conditions.....	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 Number of Hopping Frequency.....	7
2.1.1 Requirement	7
2.1.2 Test Description	7
2.1.3 Test Result.....	7
2.2 Peak Output Power	10
2.2.1 Requirement	10
2.2.2 Test Description	10
2.2.3 Test Result.....	10
2.3 20dB Bandwidth	17
2.3.1 Definition	17
2.3.2 Test Description	17
2.3.3 Test Result.....	17
2.4 Carried Frequency Separation.....	24
2.4.1 Definition	24
2.4.2 Test Description	24
2.4.3 Test Result.....	24
2.5 Time of Occupancy (Dwell time).....	26
2.5.1 Requirement	26
2.5.2 Test Description	26
2.5.3 Test Result.....	26
2.6 Conducted Spurious Emissions	32
2.6.1 Requirement	32
2.6.2 Test Description	32
2.6.3 Test Result.....	32



2.7 Band Edge	43
2.7.1 Requirement	43
2.7.2 Test Description	43
2.7.3 Test Result.....	44
2.8 Conducted Emission.....	52
2.8.1 Requirement.....	52
2.8.2 Test Description	52
2.8.3 Test Result.....	53
2.9 Radiated Emission	55
2.9.1 Requirement.....	55
2.9.2 Test Description	55
2.9.3 Test Result.....	56

Change History		
Issue	Date	Reason for change
1.0	May 11, 2011	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type: Tablet PC
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: V1.1
Software Version: tablet-eng 2.2.1 MASTER 257 Magnet II 1312
Applicant: TCT Mobile Limited
5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China
Manufacturer: TCT Mobile Limited
16F/B, TCL Tower, Gaoxin Nanyi Road, Nanshan District, Shenzhen, Guangdong, P.R.China 518057
Frequency Range: The frequency range used is 2402MHz - 2480MHz (79 channels, at intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.
Modulation Type.....: FHSS
Power Supply:
Brand Name: TCL
Model No.: CAB14G0000C1
Serial No.: (n.a. marked #1 by test site)
Capacitance: 3000mAh
Rated Voltage: 3.7V
Charge Limit: 4.2V
Ancillary Equipments.....: AC Adapter (Charger for Battery)
Brand Name: NA
Model Name: S005SC0500100
Serial No.: (n.a. marked #1 by test site)
Rated Input: ~ 100-240V, 150mA, 60Hz
Rated Output: == 5V, 1000mA

Note 1: The EUT is a Tablet PC, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC/IC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.247(a)	Number of Hopping Frequency	PASS
2	15.247(b)	Peak Output Power	PASS
3	15.247(a)	20dB Bandwidth	PASS
4	15.247(a)	Carrier Frequency Separation	PASS
5	15.247(a)	Time of Occupancy (Dwell time)	PASS
6	15.247(c)	Conducted Spurious Emission	PASS
7	15.247(c)	Band Edge	PASS
8	15.207	Conducted Emission	PASS
9	15.209 15.247(c)	Radiated Emission	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.



1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS


2.1 Number of Hopping Frequency

2.1.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.1.2 Test Description

A. Test Setup:

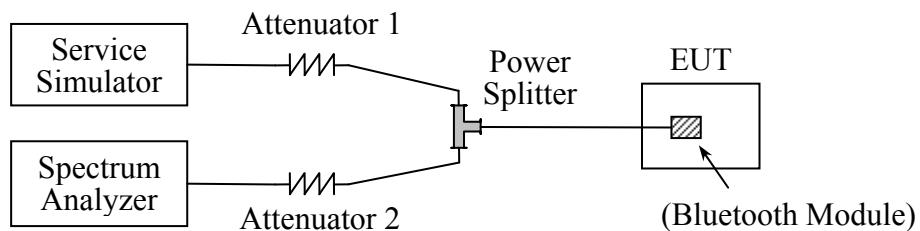

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
Service Simulator	Agilent	E5515C	GB43130131	2010.09
Spectrum Analyzer	Agilent	E7405A	US44210471	2010.09
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)


2.1.3 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.


A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS


B. Test Plot:

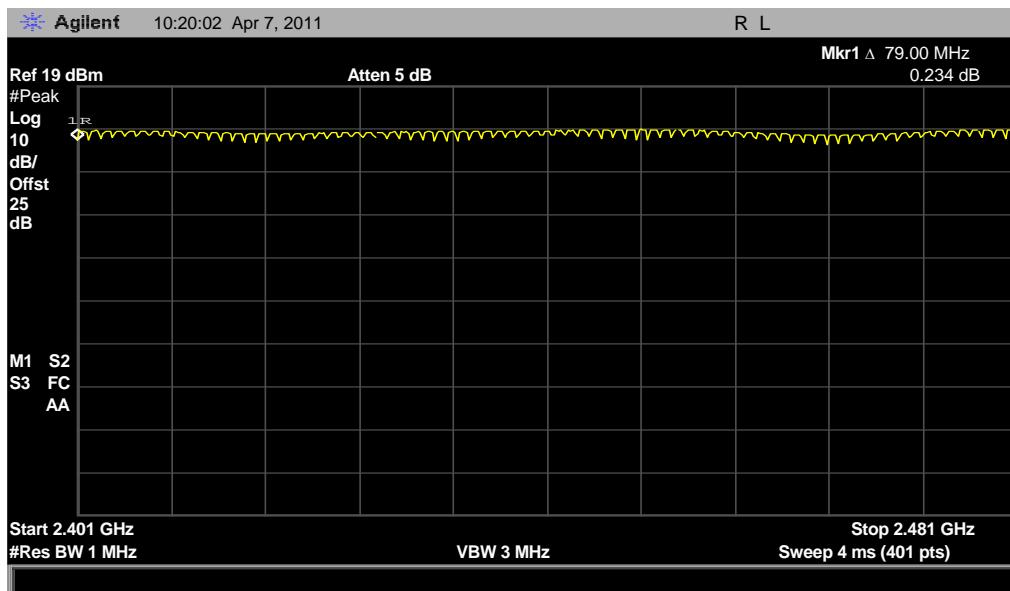

(Plot A: GFSK)

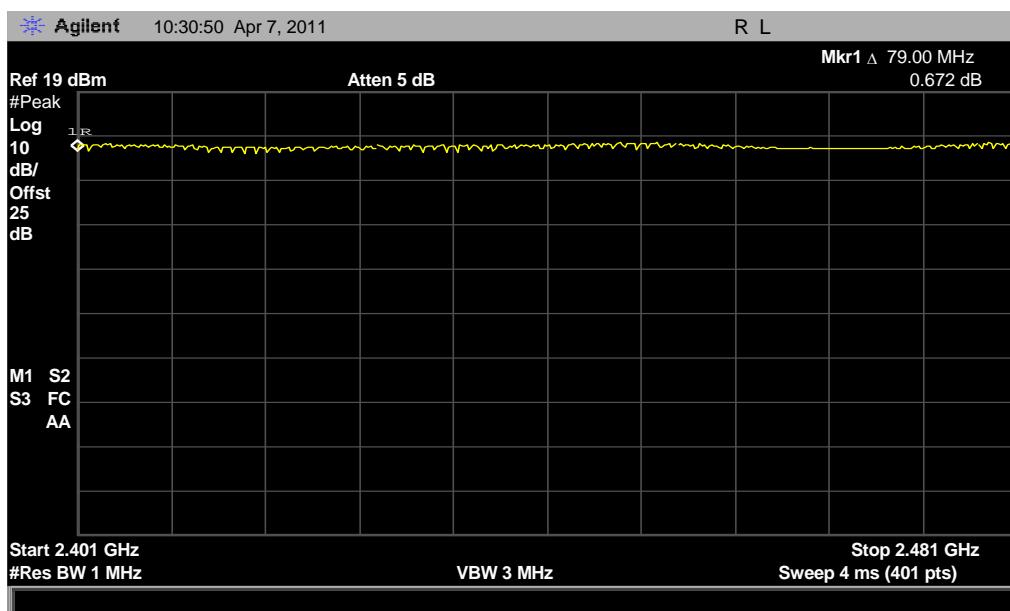

(Plot B: $\pi/4$ -DQPSK)

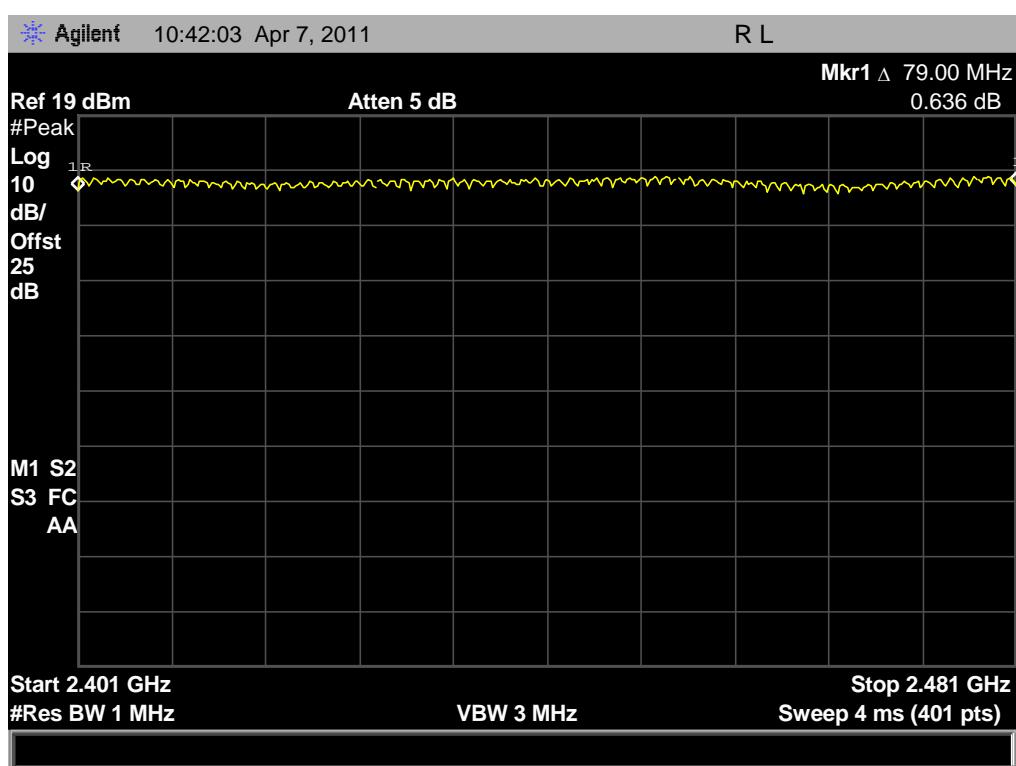

(Plot C: 8- DPSK)

2.2 Peak Output Power

2.2.1 Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.2.2 Test Description

See section 2.1.2 of this report.


2.2.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	8.606	0.007254	Plot A	30	1	PASS
39	2441	8.556	0.007171	Plot B			PASS
78	2480	8.835	0.007647	Plot C			PASS

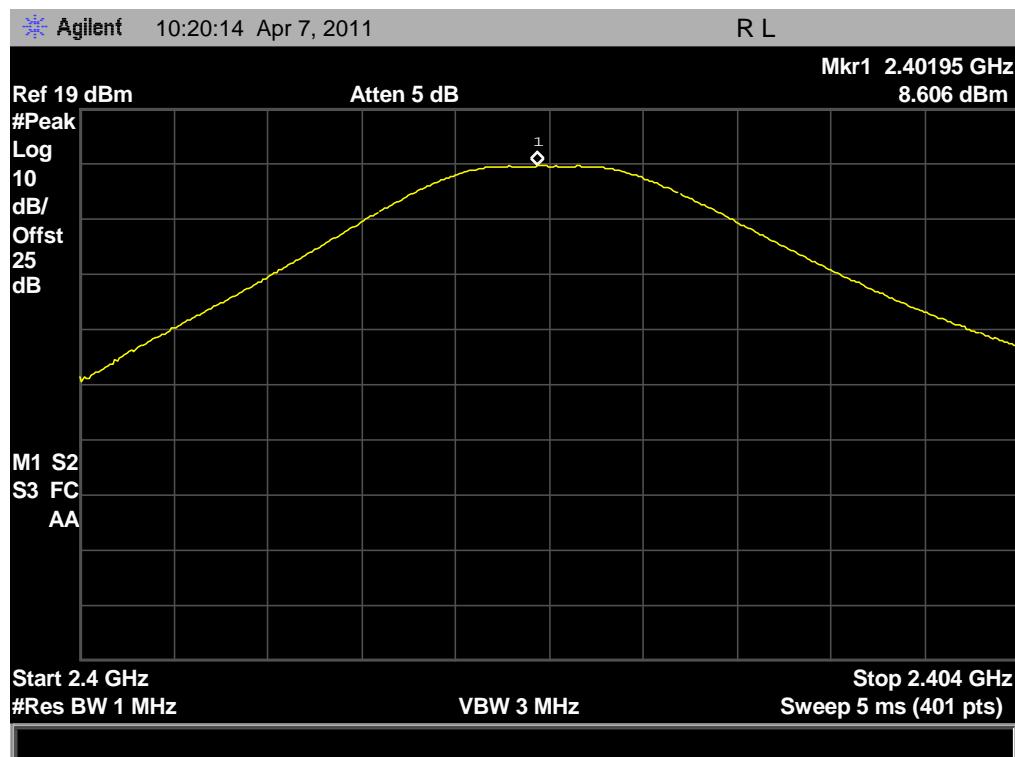B. Test Plot:


(Plot A: Channel = 2402)

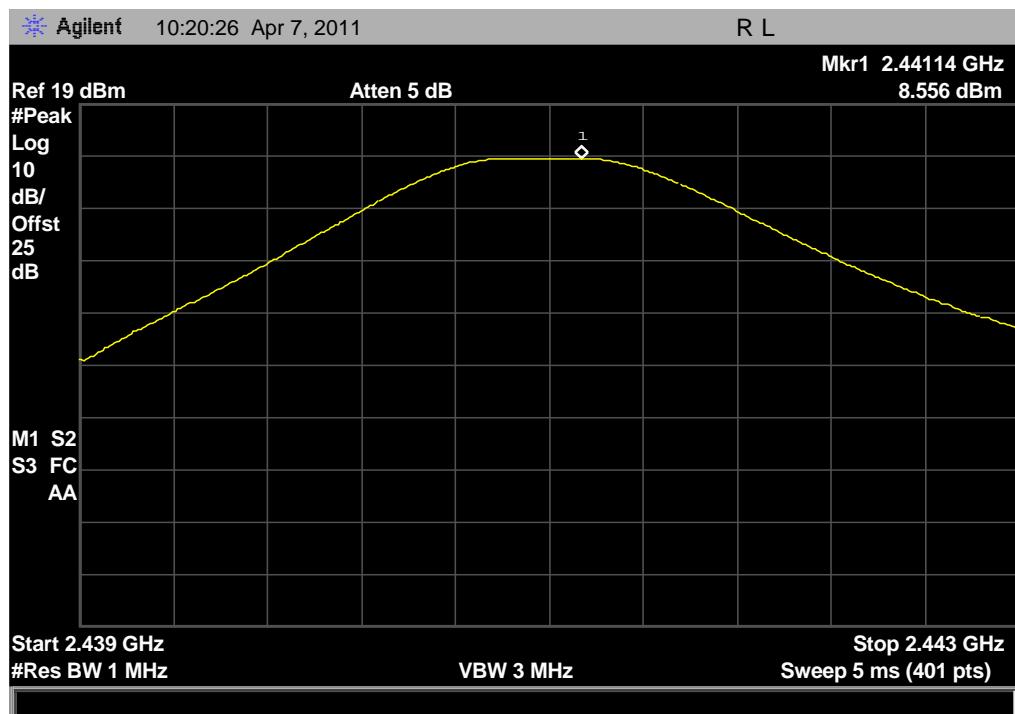

(Plot B: Channel = 2441)

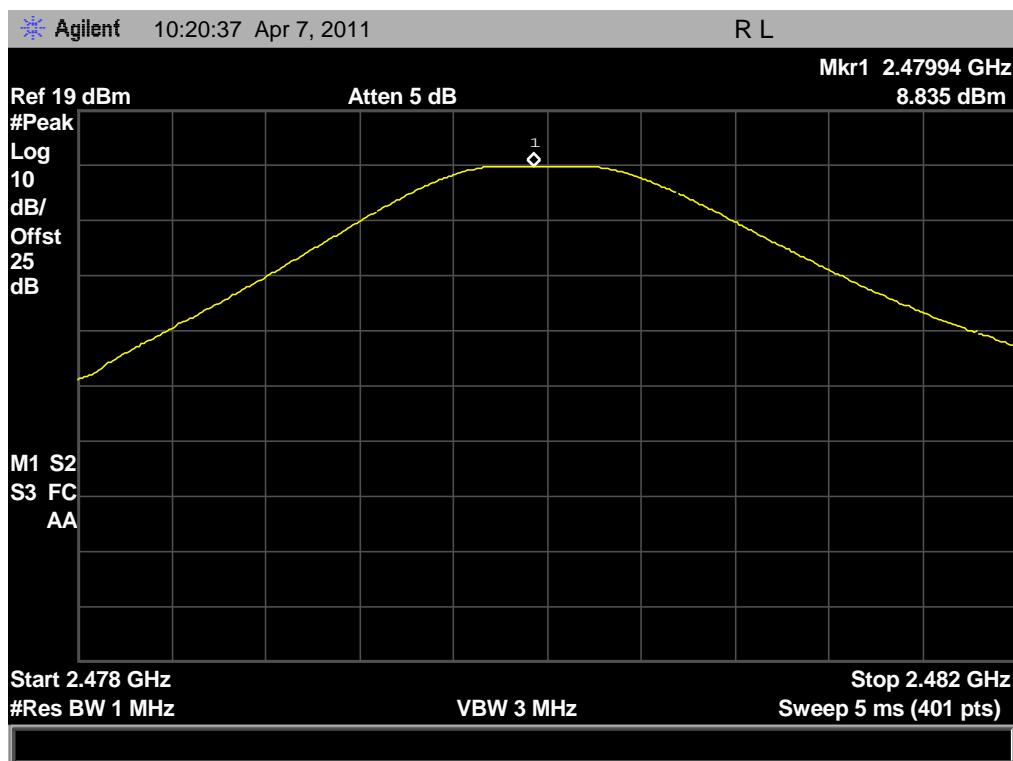


(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	8.557	0.007173	Plot D	30	1	PASS
39	2441	8.540	0.007145	Plot E			PASS
78	2480	8.822	0.007624	Plot F			PASS

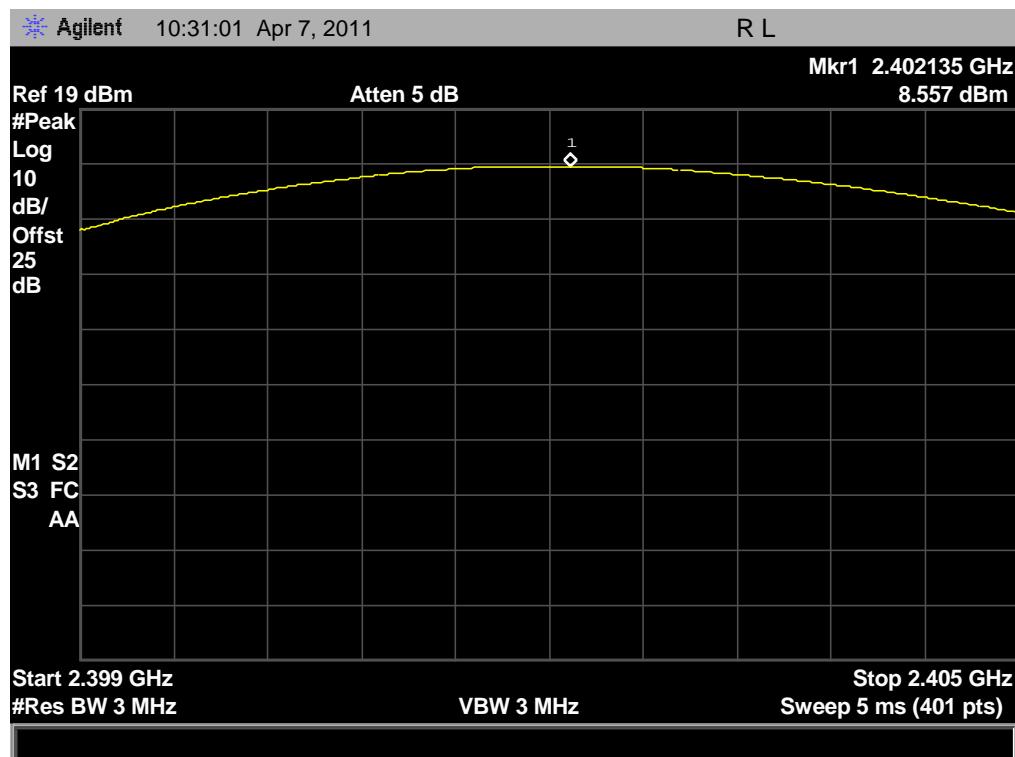D. Test Plot:


(Plot D: Channel = 2402)

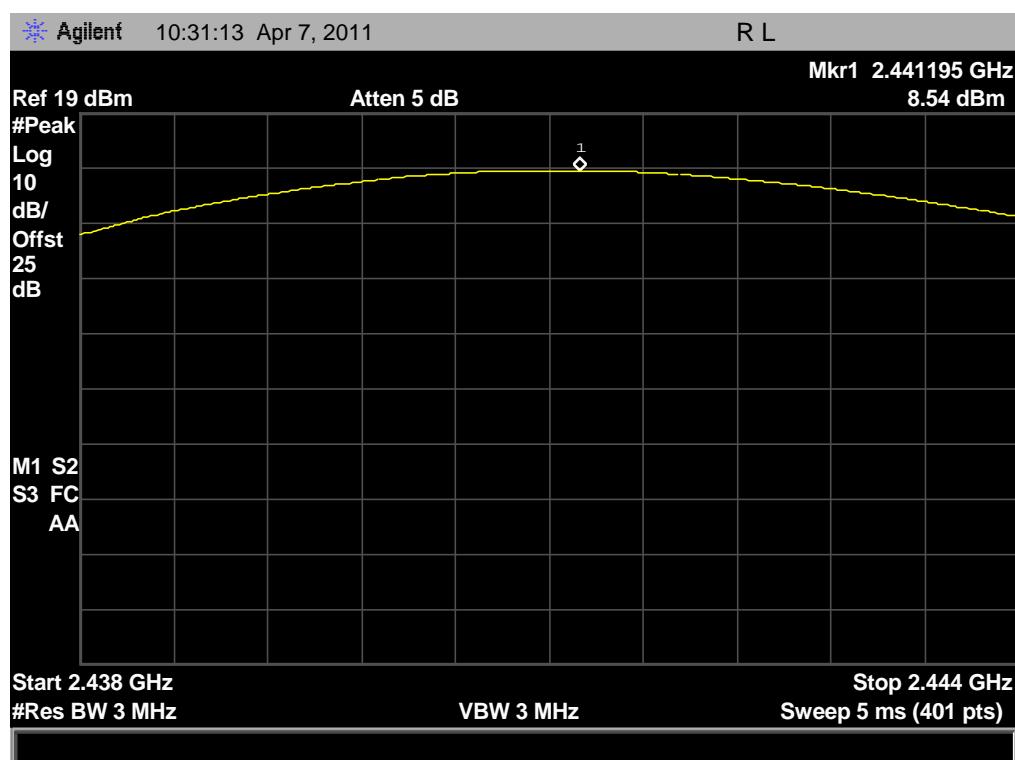

(Plot E: Channel = 2441)

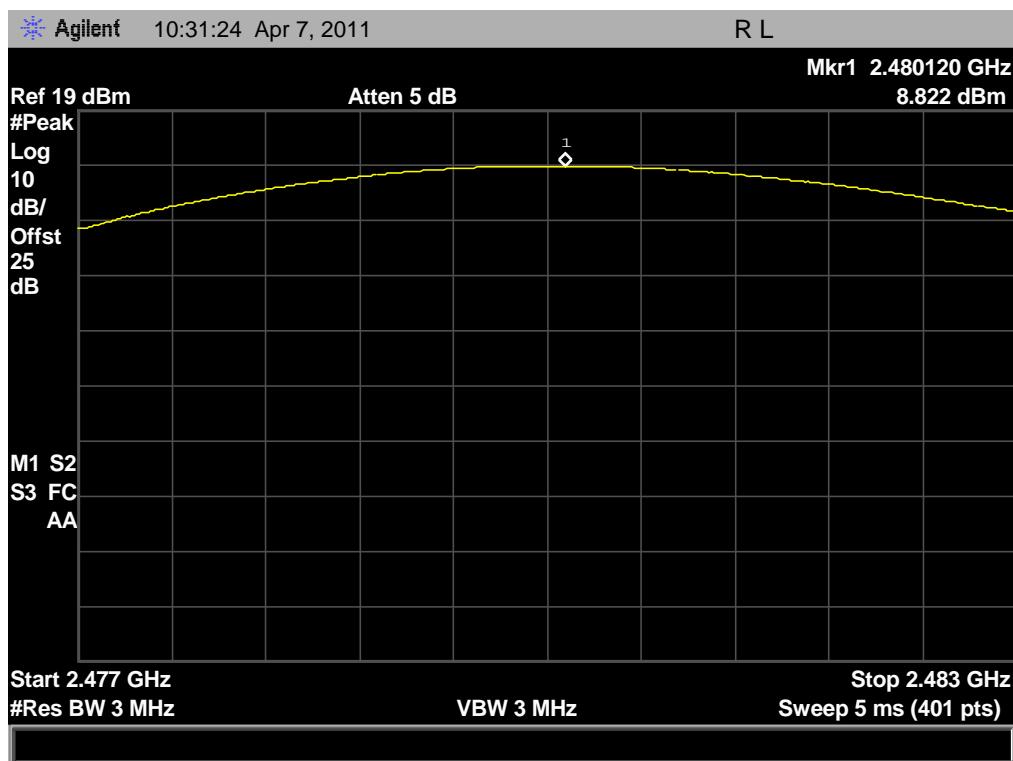


(Plot F: Channel = 2480)


E. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	9.418	0.008746	Plot G	30	1	PASS
39	2441	9.428	0.008766	Plot H			PASS
78	2480	9.751	0.009443	Plot I			PASS

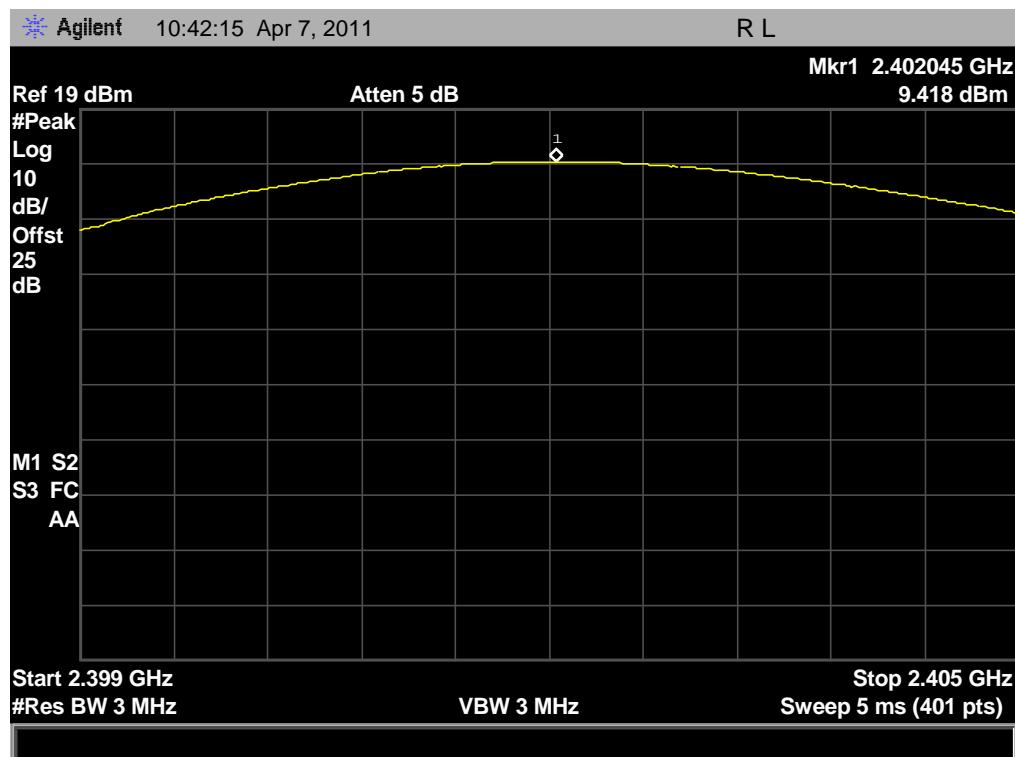F. Test Plot:


(Plot G: Channel = 2402)

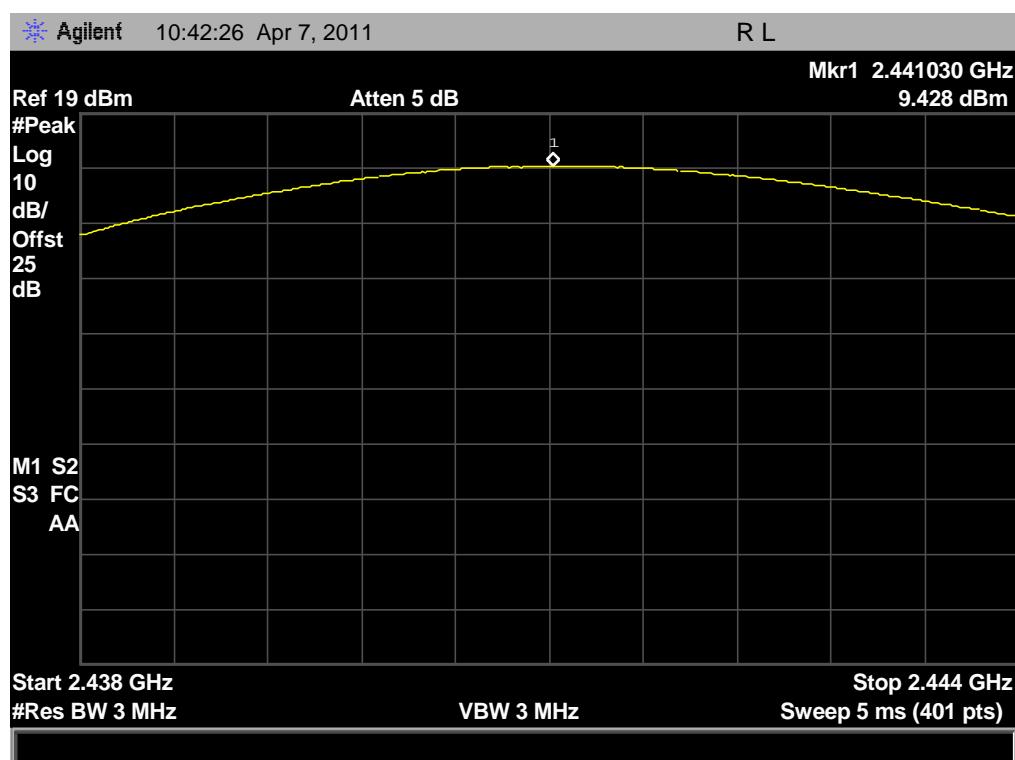

(Plot H: Channel = 2441)

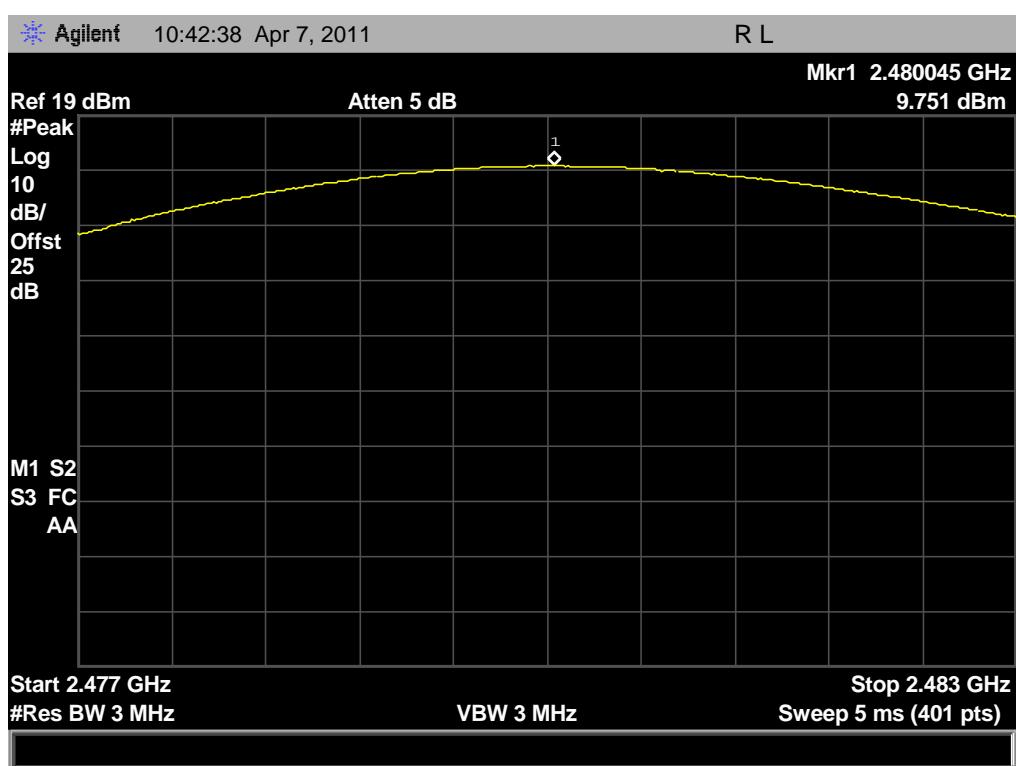

(Plot I: Channel = 2480)

2.3 20dB Bandwidth

2.3.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \times \log 1\% = 20\text{dB}$) taking the total RF output power.

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

A. Test Verdict:


GFSK Mode

The maximum 20dB bandwidth measured is 918.75KHz according to the table below.


Channel	Frequency (MHz)	20dB Bandwidth (KHz)	Refer to Plot
0	2402	918.75	Plot A
39	2441	918.75	Plot B
78	2480	918.75	Plot C

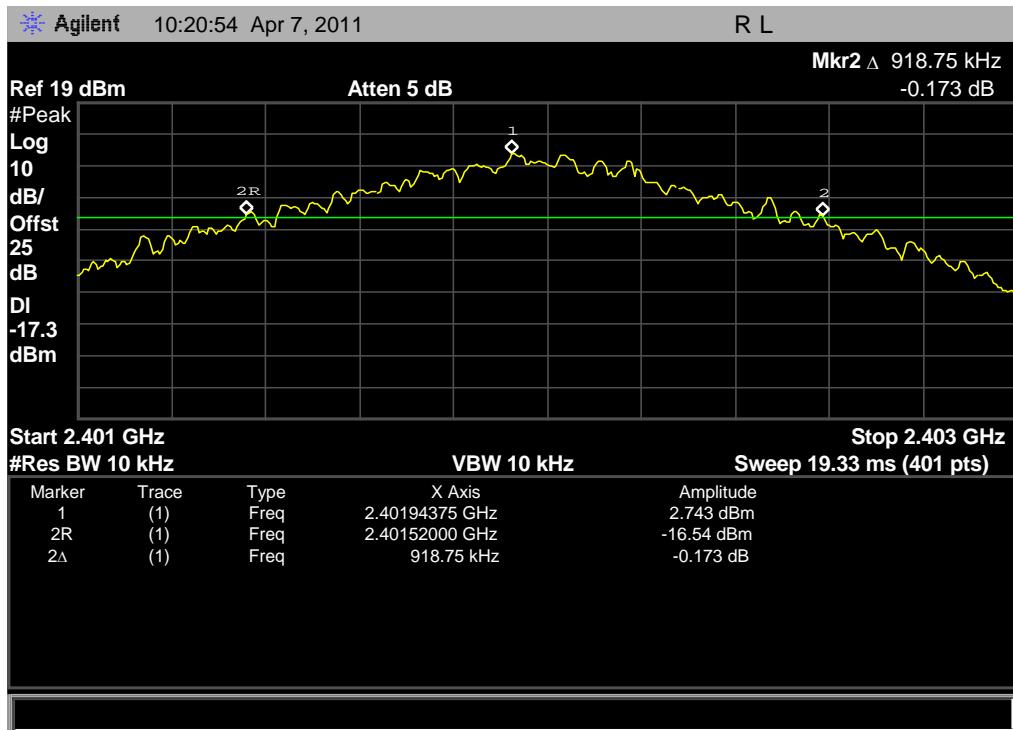B. Test Plot:


(Plot A: Channel = 2402)

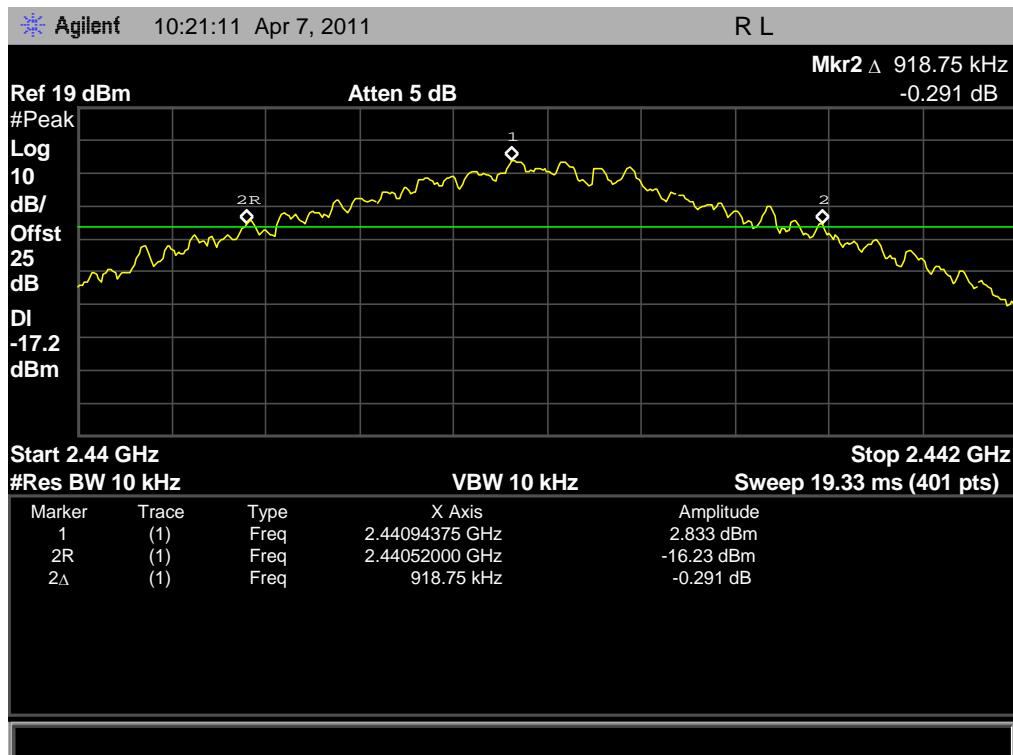

(Plot B: Channel = 2441)

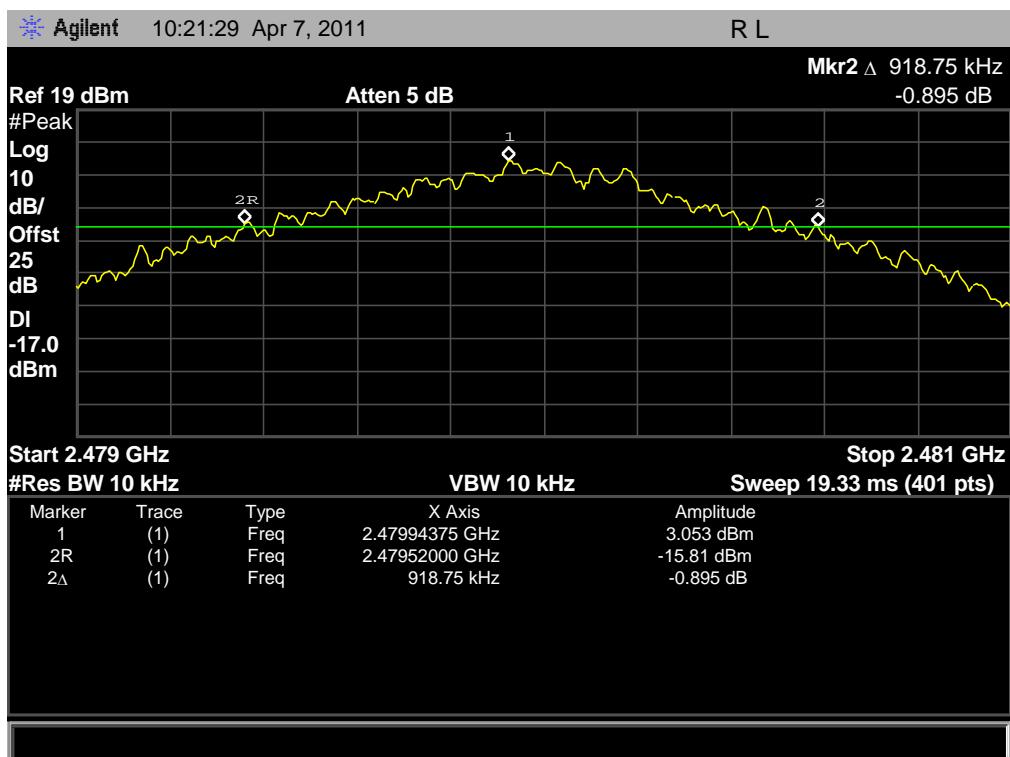


(Plot C: Channel = 2480)

A. Test Verdict:


$\pi/4$ -DQPSK Mode

The maximum 20dB bandwidth measured is 1.32MHz according to the table below.


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.32	Plot D
39	2441	1.32	Plot E
78	2480	1.32	Plot F

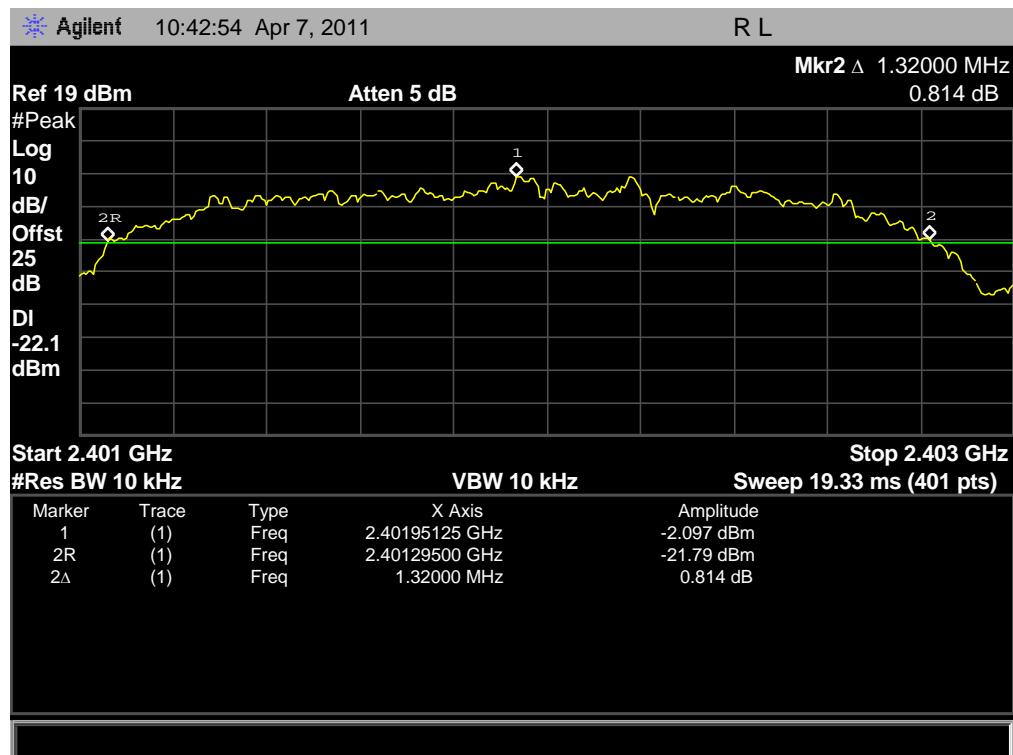B. Test Plot:


(Plot D: Channel = 2402)

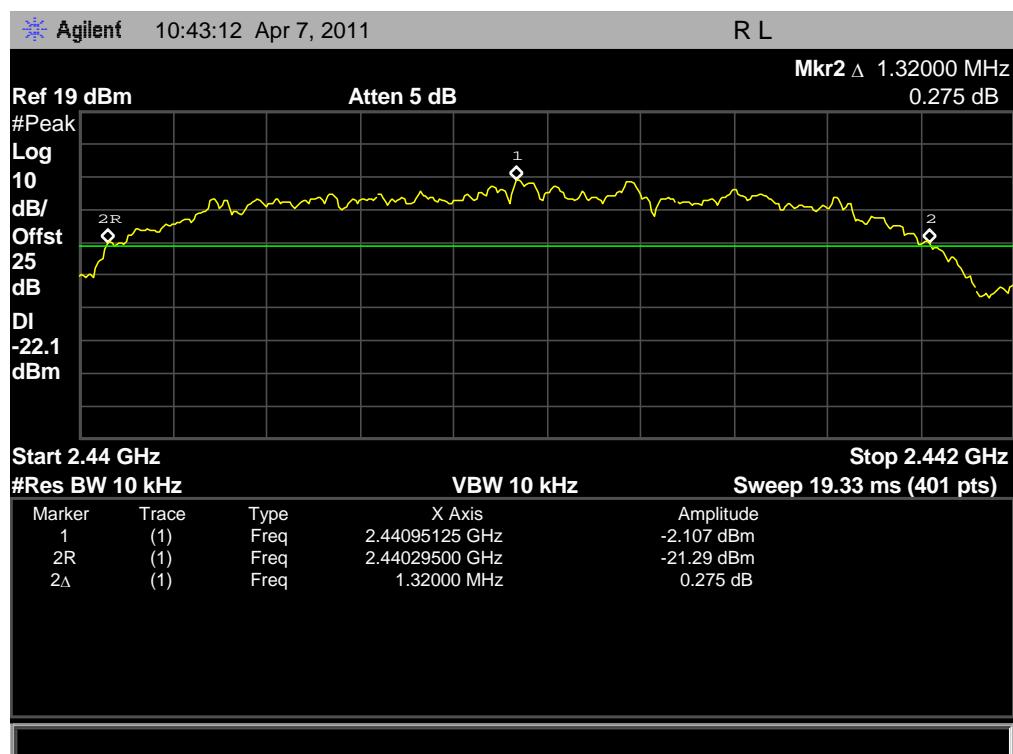

(Plot E: Channel = 2441)

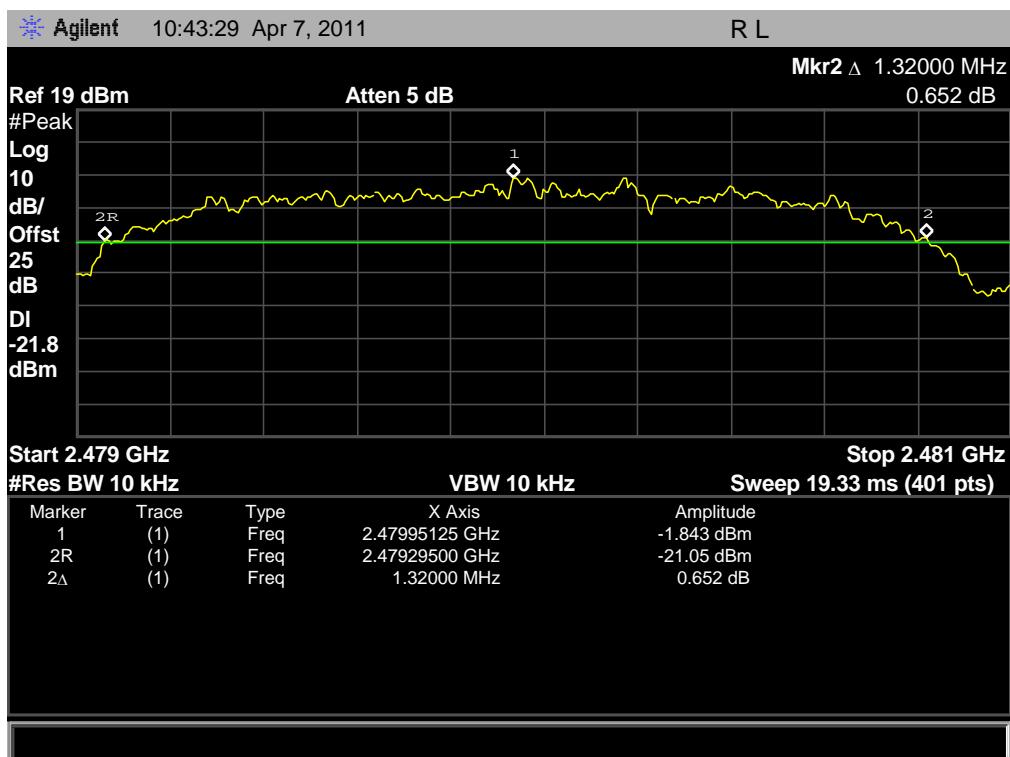



(Plot F: Channel = 2480)


A. Test Verdict:

8-DPSK Mode

The maximum 20dB bandwidth measured is 1.313MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.313	Plot G
39	2441	1.313	Plot H
78	2480	1.313	Plot I

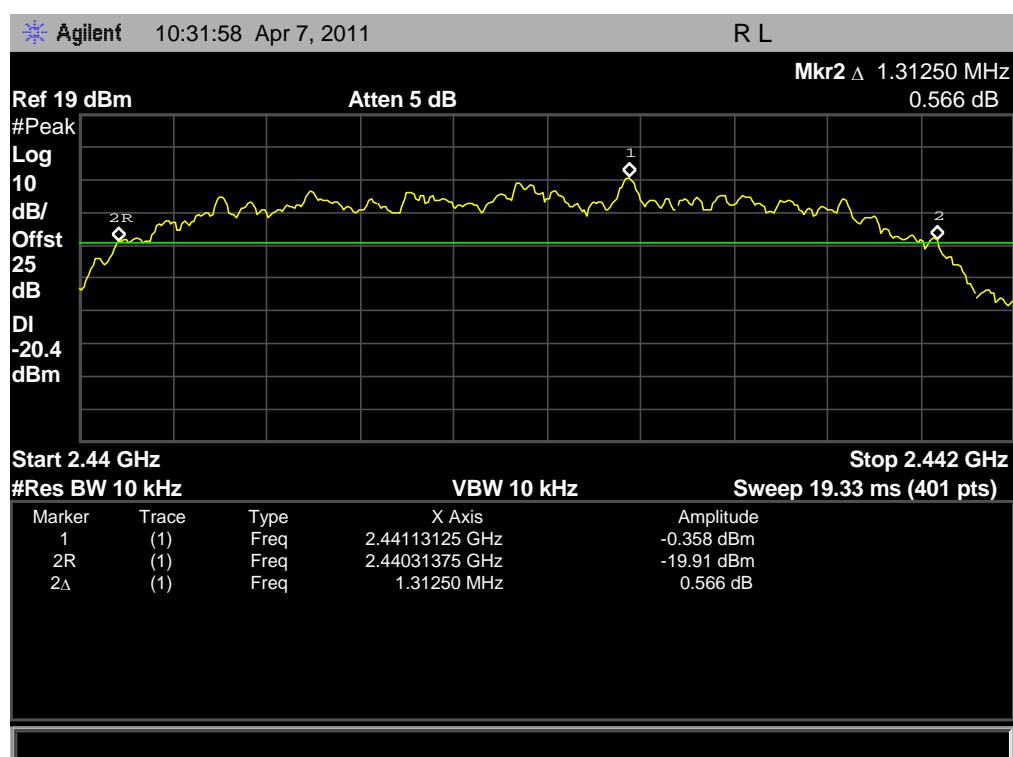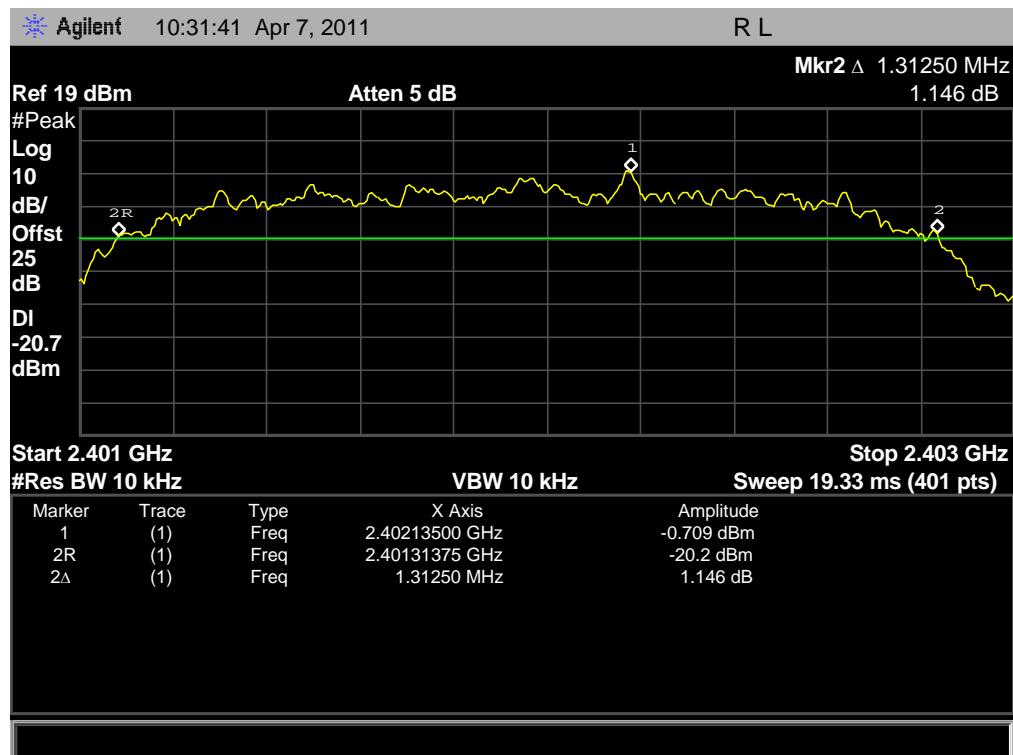B. Test Plot:

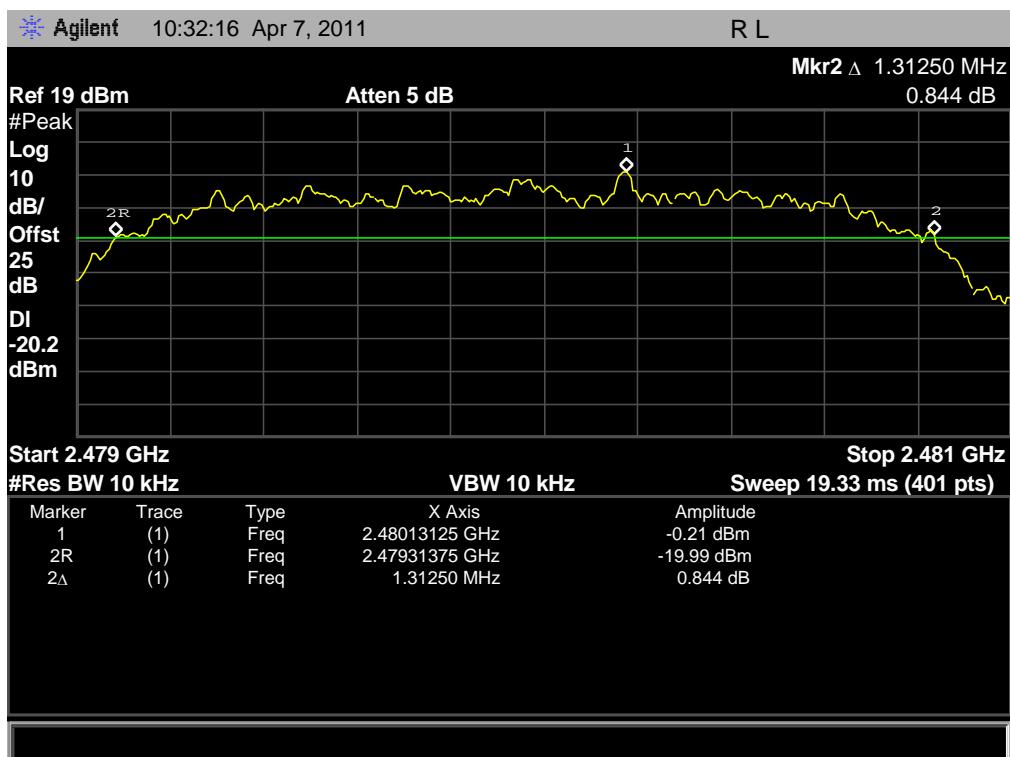


(Plot I: Channel = 2480)

2.4 Carried Frequency Separation

2.4.1 Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


2.4.2 Test Description

See section 2.1.2 of this report.



2.4.3 Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (918.75KHz for GFSK mode, 1.32MHz for $\pi/4$ -DQPSK mode and 1.313MHz for 8-DPSK mode, refer to section 2.3.3), whichever is greater. So, the verdict is PASS.

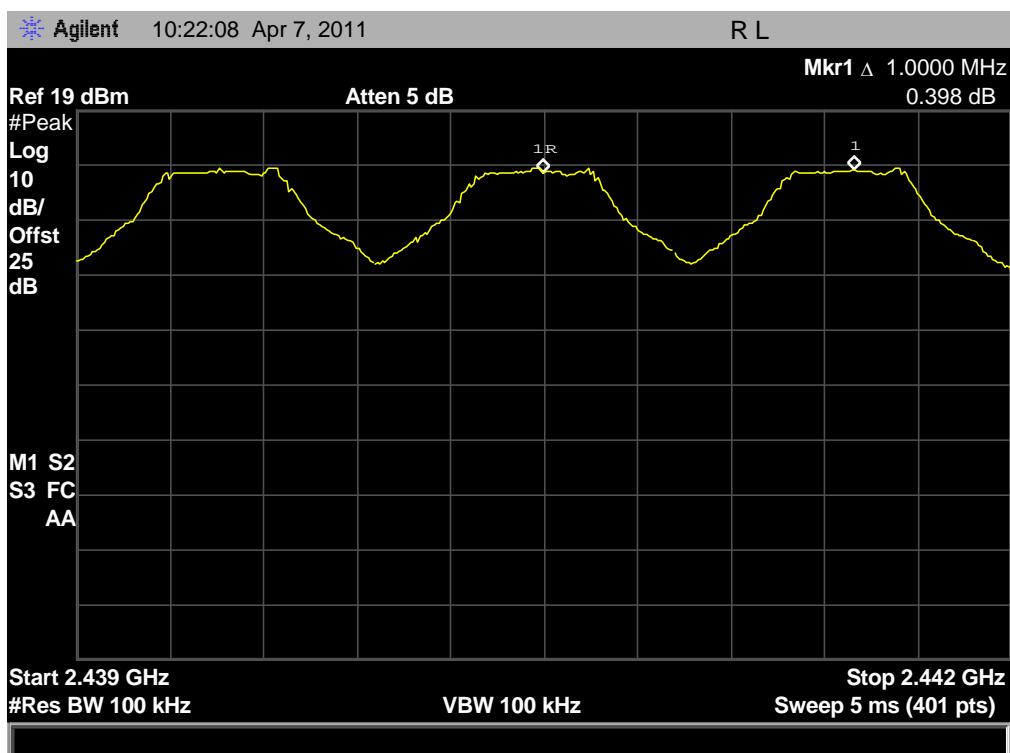

(Plot A: GFSK)

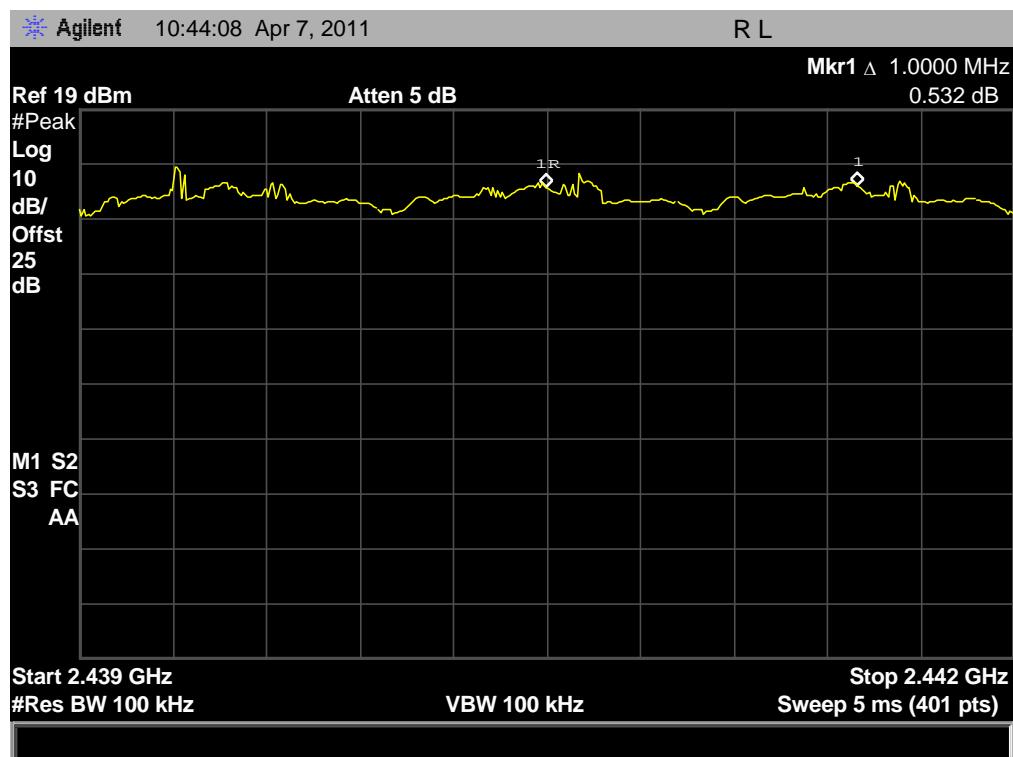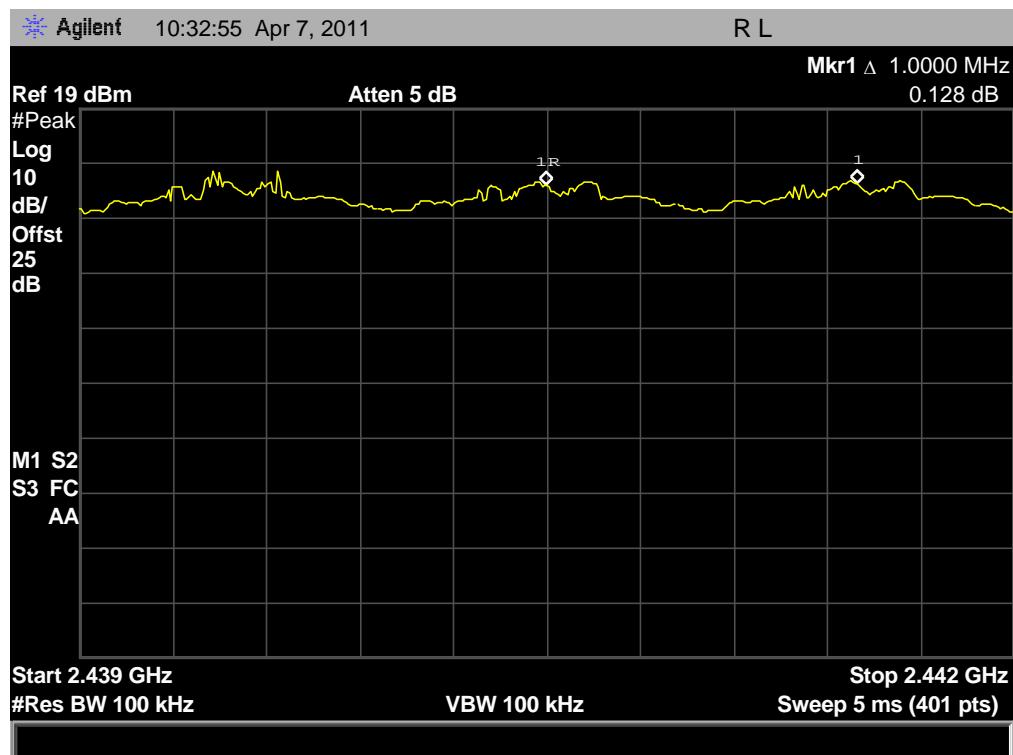
 (Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)

2.5 Time of Occupancy (Dwell time)

2.5.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4s * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.900	Plot A	309.333	400	PASS
39	2441	2.875	Plot B	306.667		PASS
78	2480	2.900	Plot C	309.333		PASS

B. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

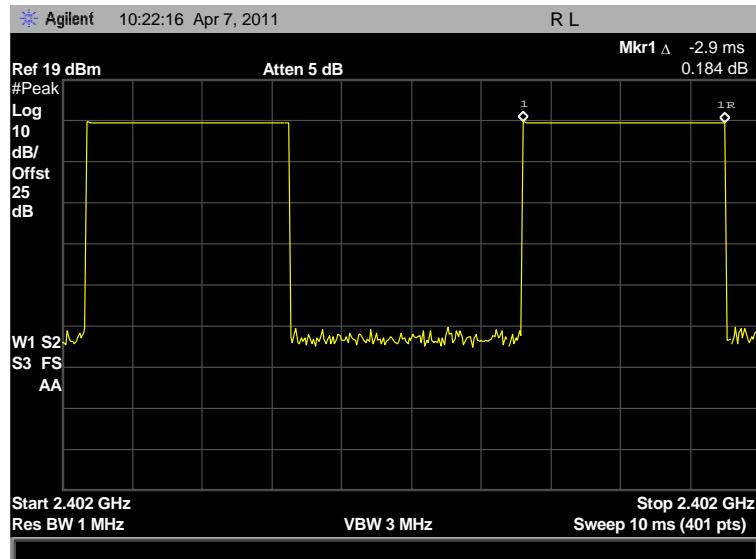

(Plot A: Channel = 2402)

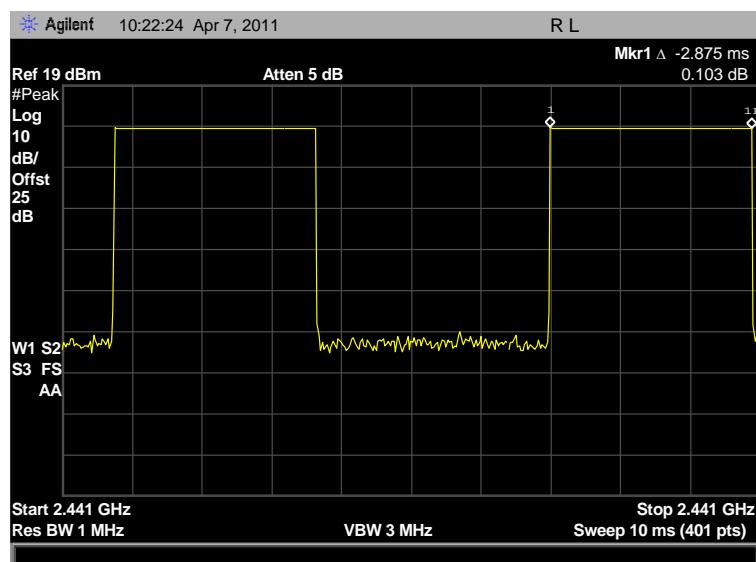

(Plot B: Channel = 2441)

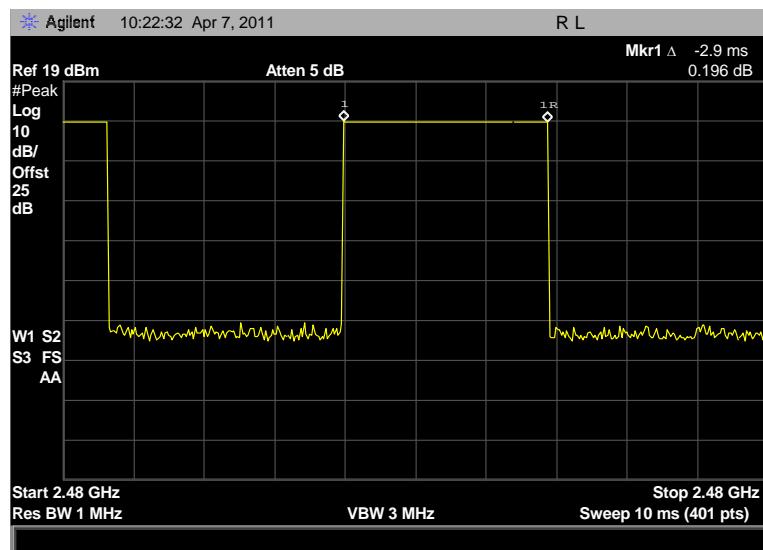

(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.900	Plot D	309.333	400	PASS
39	2441	2.900	Plot E	309.333		PASS
78	2480	2.900	Plot F	309.333		PASS

D. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

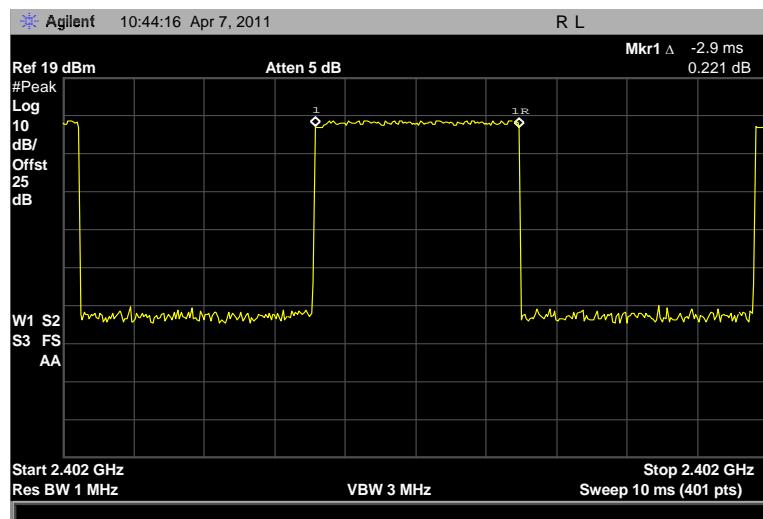

(Plot D: Channel = 2402)

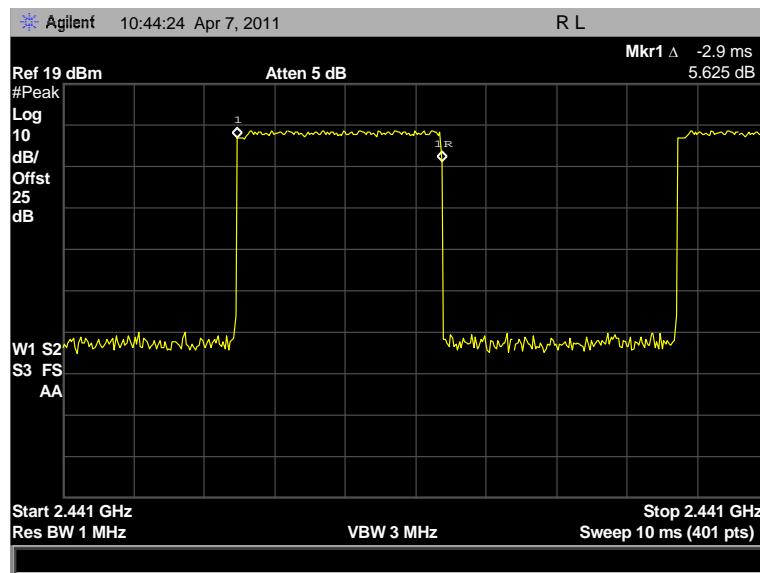

(Plot E: Channel = 2441)

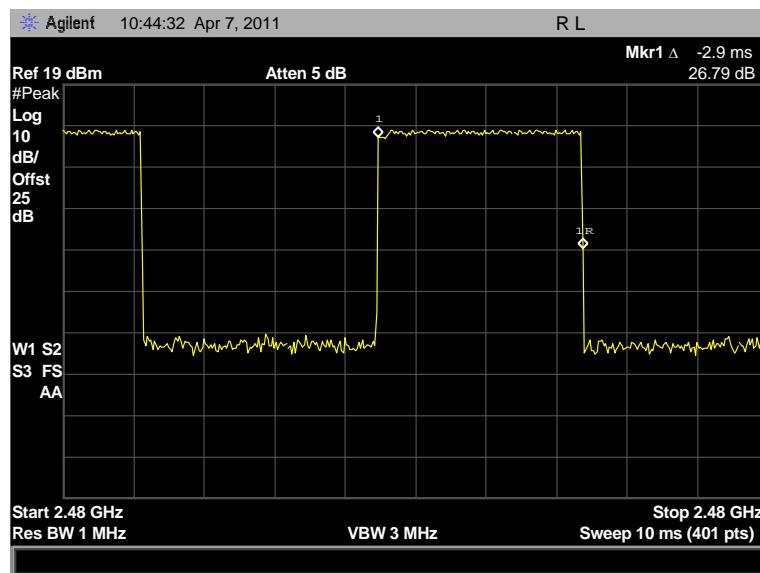

(Plot F: Channel = 2480)


E. Test Verdict (8-DPSK mode):

8-DPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.900	Plot G	309.333	400	PASS
39	2441	2.900	Plot H	309.333		PASS
78	2480	2.900	Plot I	309.333		PASS

F. Test Plot:

Note: the following plots record the Pulse Time of the Module carrier.

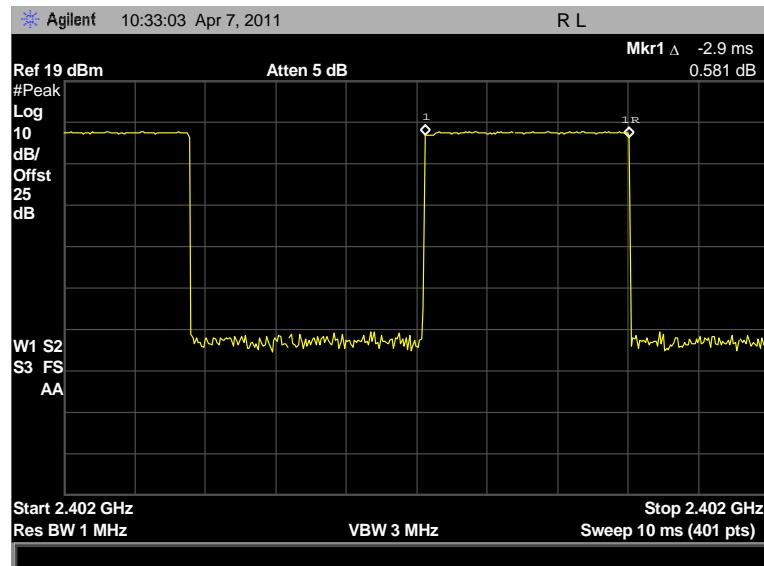

(Plot G: Channel = 2402)

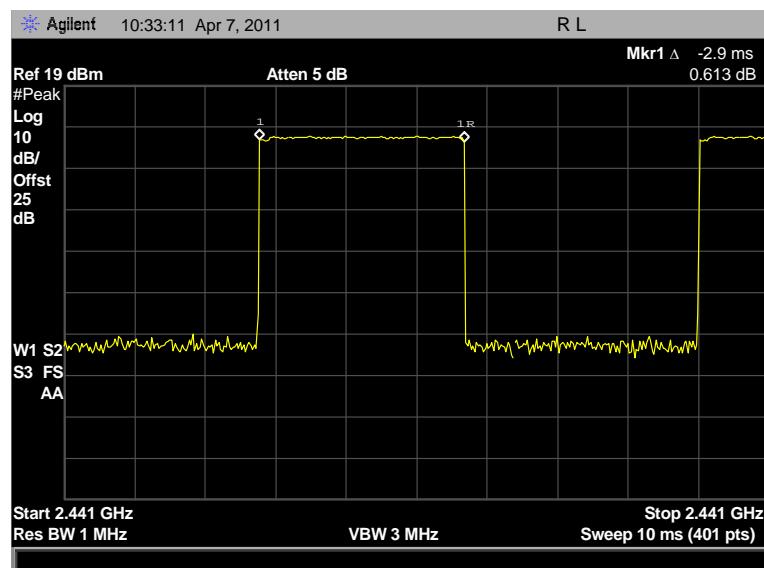

(Plot H: Channel = 2441)



(Plot I: Channel = 2480)

2.6 Conducted Spurious Emissions

2.6.1 Requirement

According to FCC §15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2 Test Description

See section 2.1.2 of this report.

2.6.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBC Limit	
0	2402	-45.17	Plot A.1/A.2	8.009	-12.0	PASS
39	2441	-45.69	Plot B.1/B.2	7.901	-12.1	PASS
78	2480	-45.42	Plot C.1/C.2	8.301	-11.7	PASS

B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

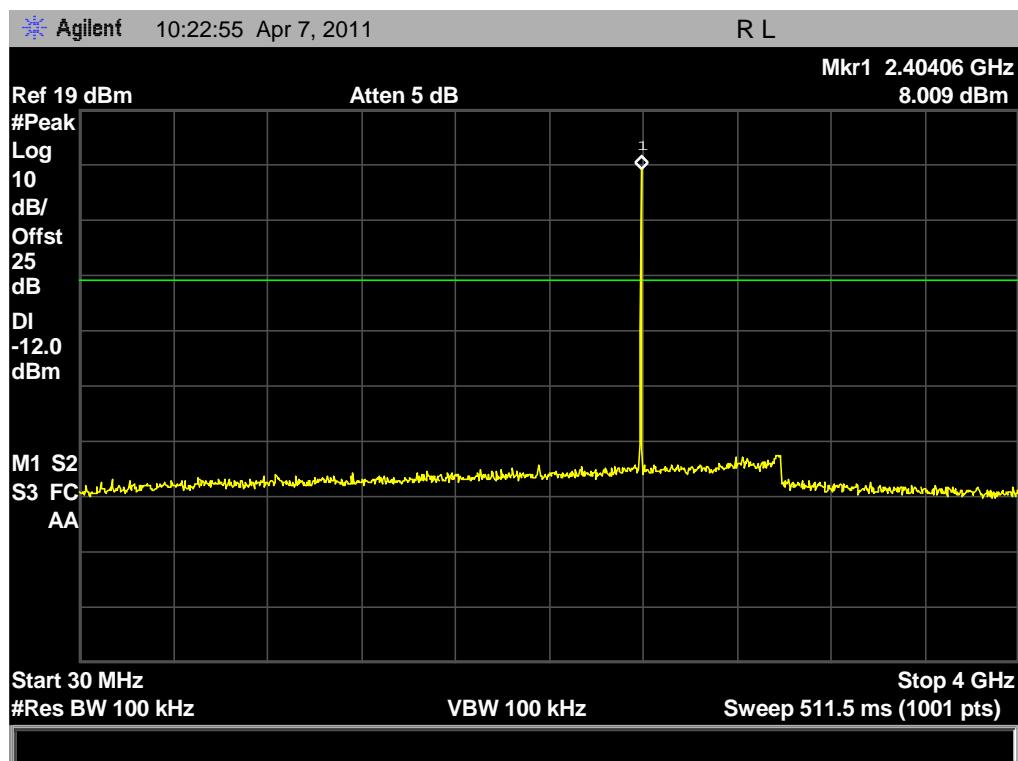


(Plot A.1: Channel = 0, 30MHz to 4GHz)

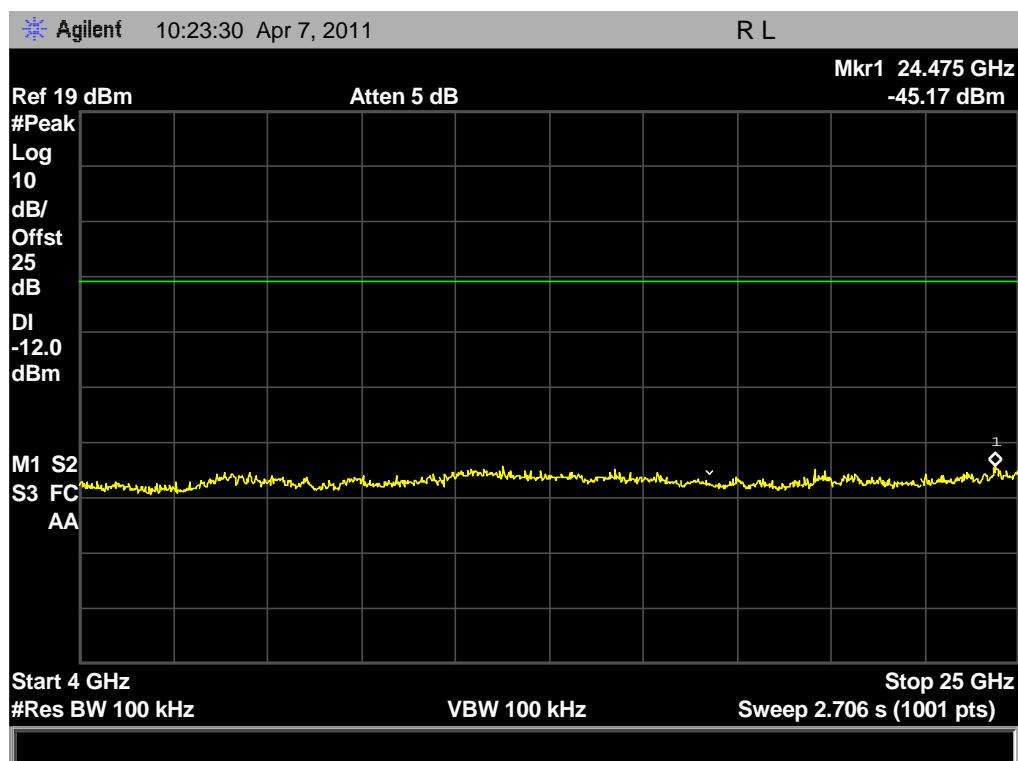


(Plot A.2: Channel = 0, 4GHz to 25GHz)

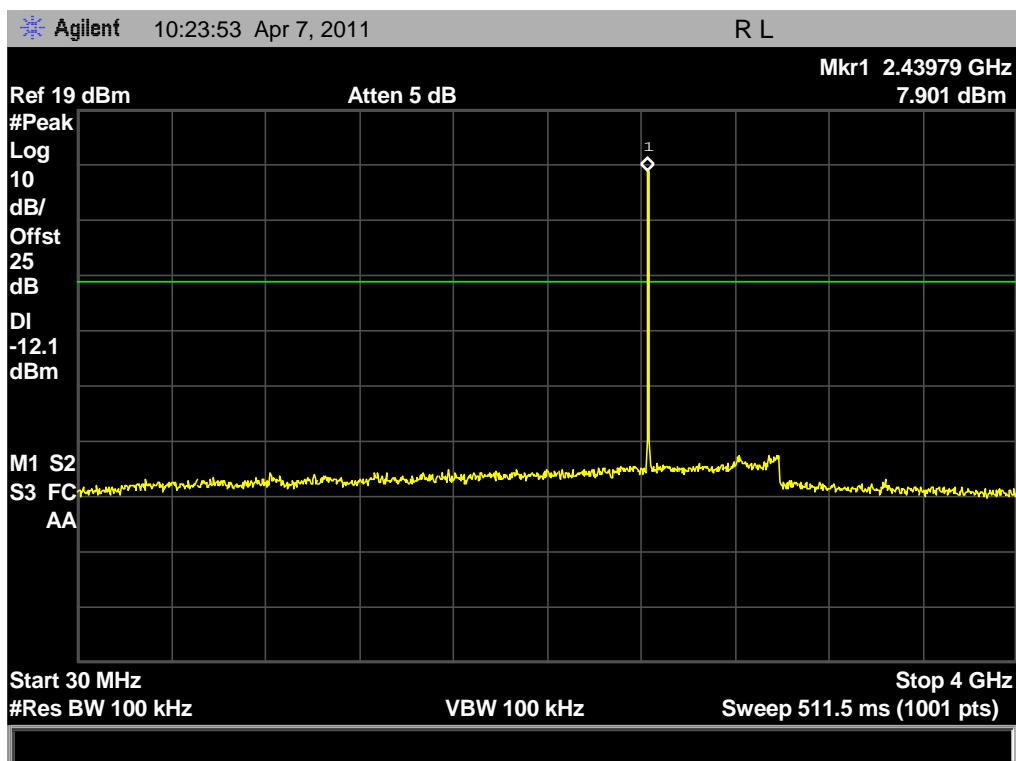


(Plot B.1: Channel = 39, 30MHz to 4GHz)

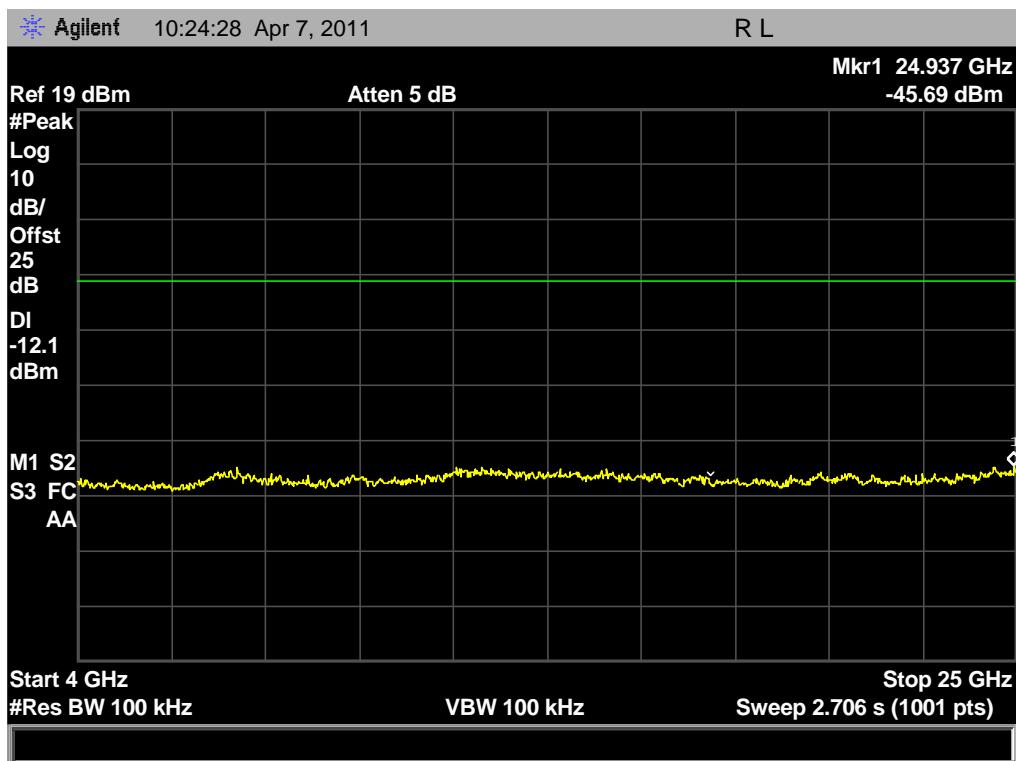

(Plot B.2: Channel = 39, 4GHz to 25GHz)

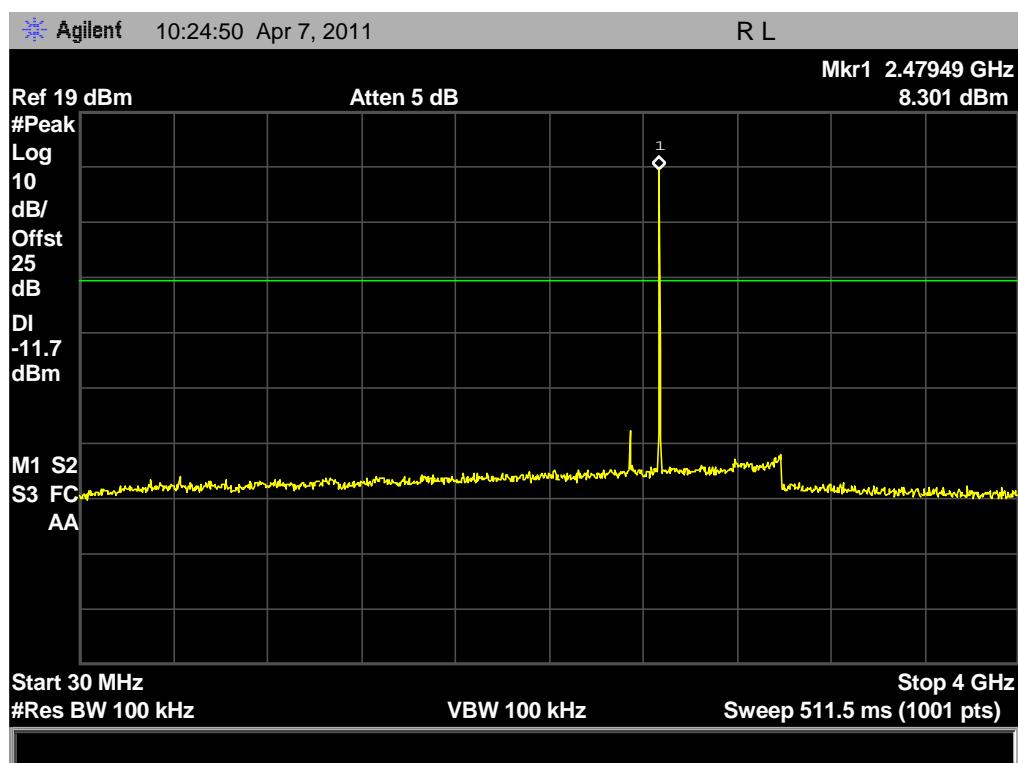

(Plot C.1: Channel = 78, 30MHz to 4GHz)

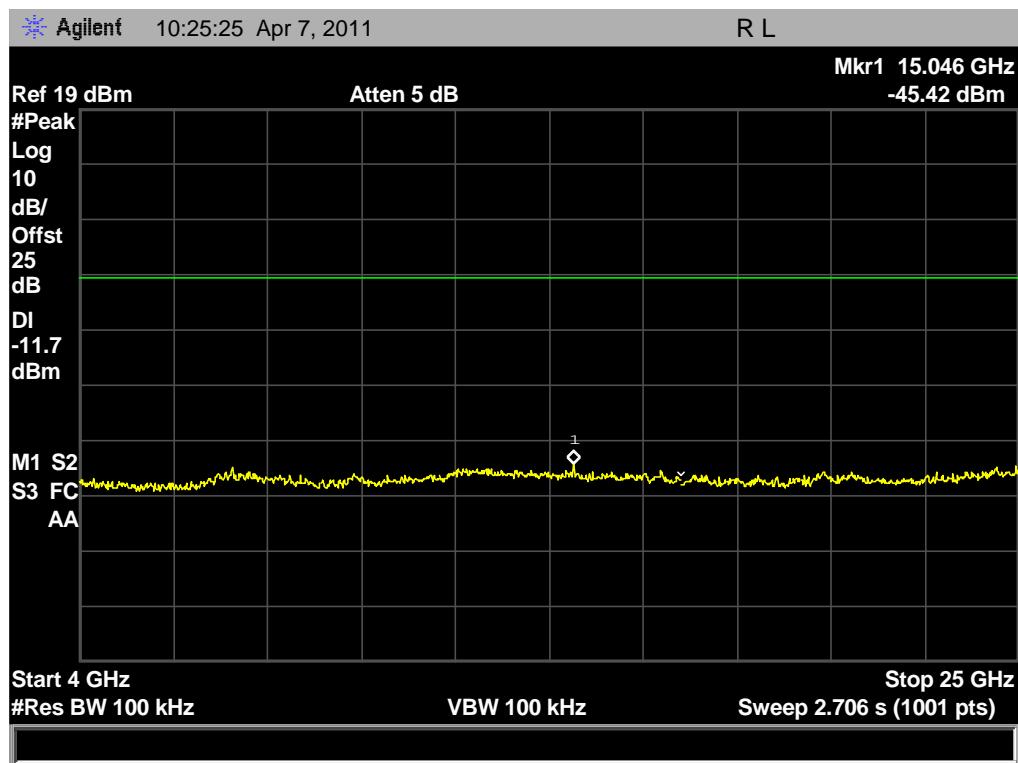

(Plot C.2: Channel = 78, 4GHz to 25GHz)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-45.85	Plot D.1/D.2	3.448	-16.7	PASS
39	2441	-45.68	Plot E.1/E.2	4.478	-15.5	PASS
78	2480	-45.78	Plot F.1/F.2	3.471	-16.5	PASS

D. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

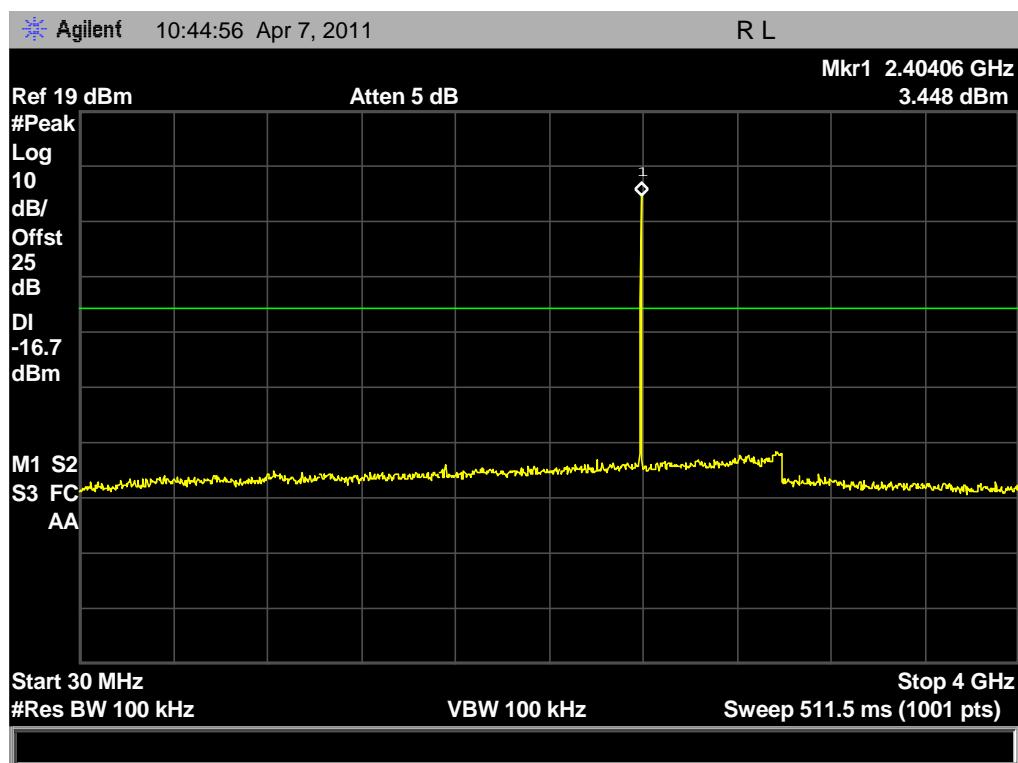


(Plot D.1: Channel = 0, 30MHz to 4GHz)

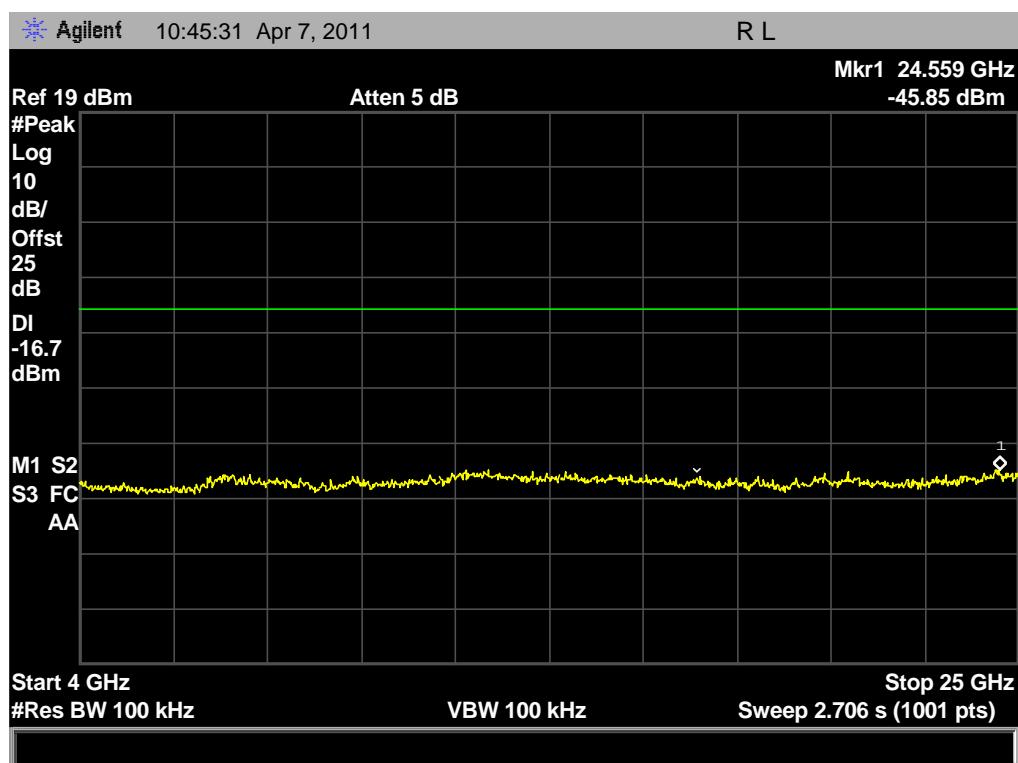


(Plot D.2: Channel = 0, 4GHz to 25GHz)

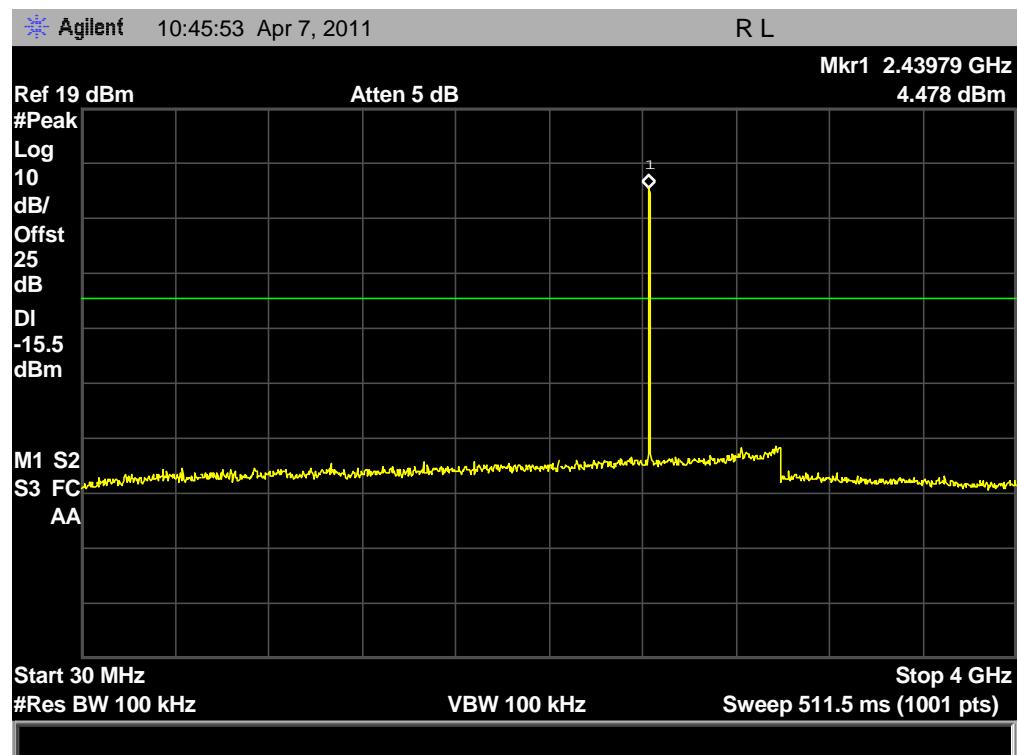


(Plot E.1: Channel = 39, 30MHz to 4GHz)

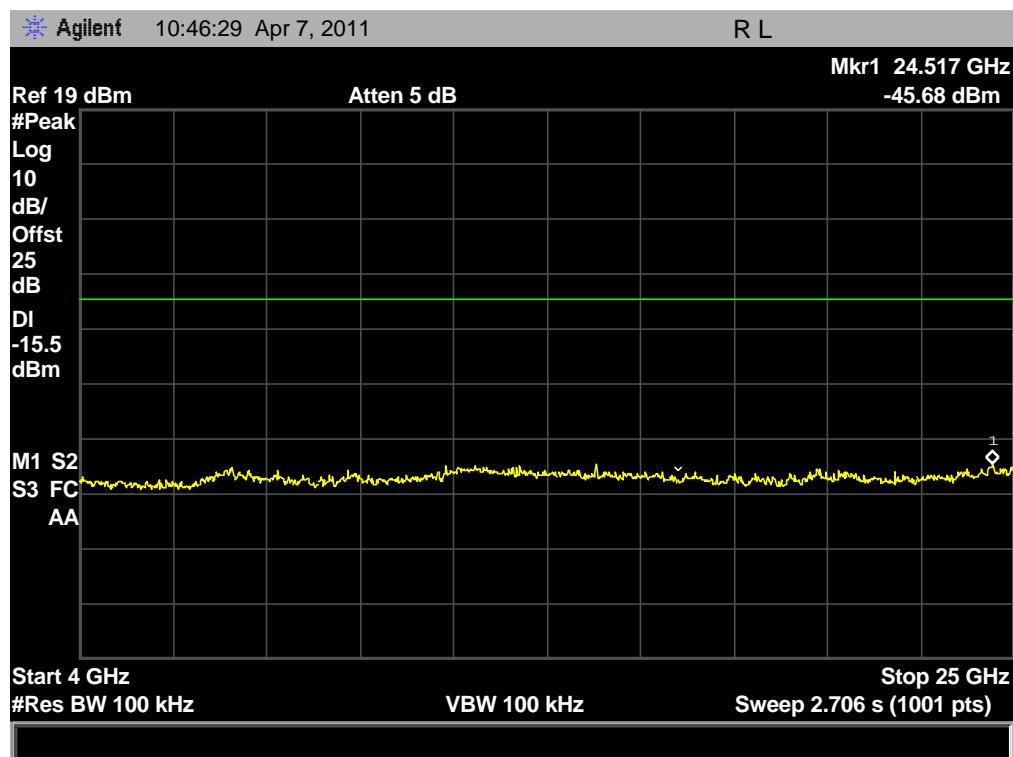

(Plot E.2: Channel = 39, 4GHz to 25GHz)

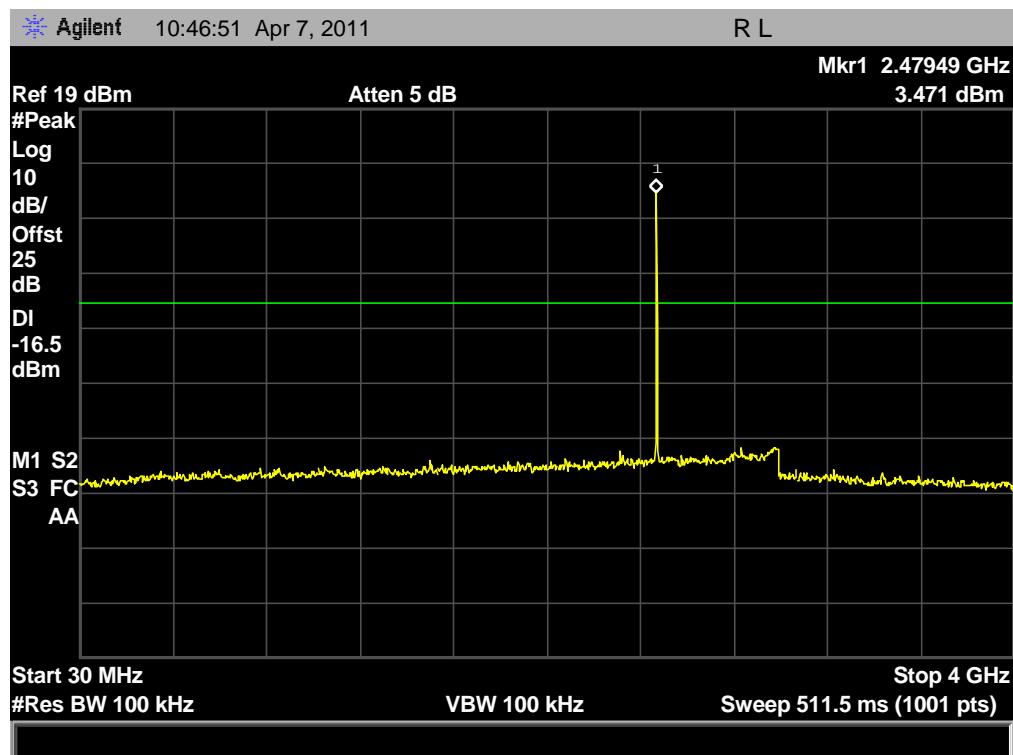

(Plot F.1: Channel = 78, 30MHz to 4GHz)

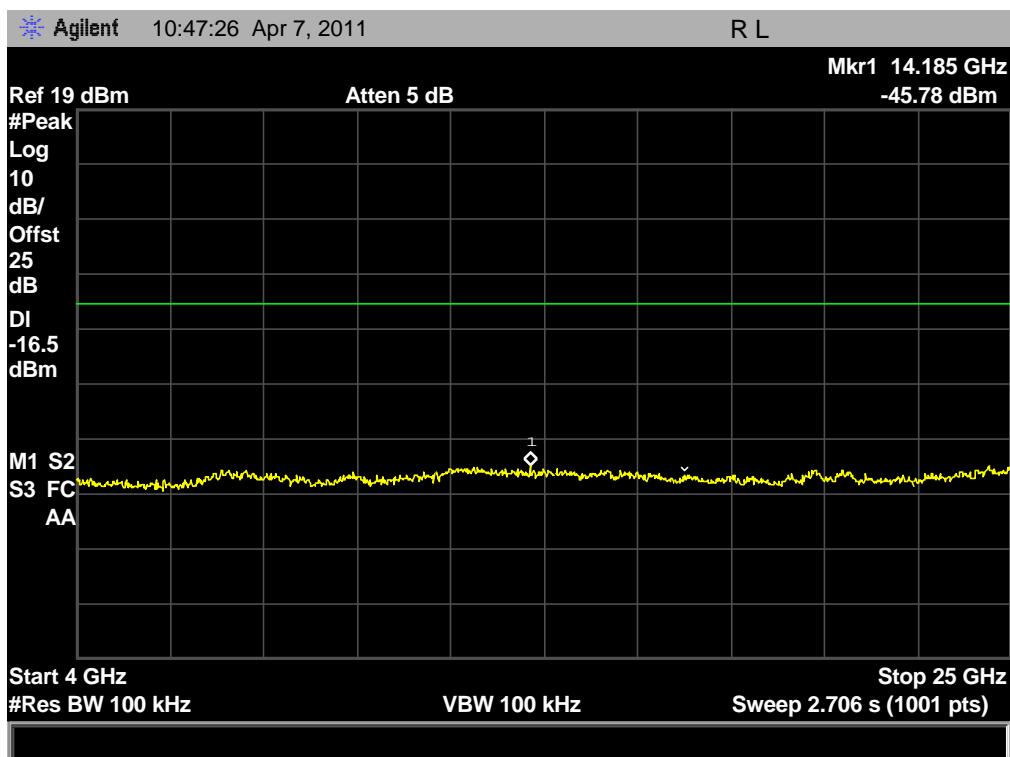

(Plot F.2: Channel = 78, 4GHz to 25GHz)


E. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-45.38	Plot G.1/G.2	3.894	-16.1	PASS
39	2441	-45.55	Plot H.1/H.2	3.418	-16.6	PASS
78	2480	-44.13	Plot I.1/I.2	4.042	-16.0	PASS

F. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

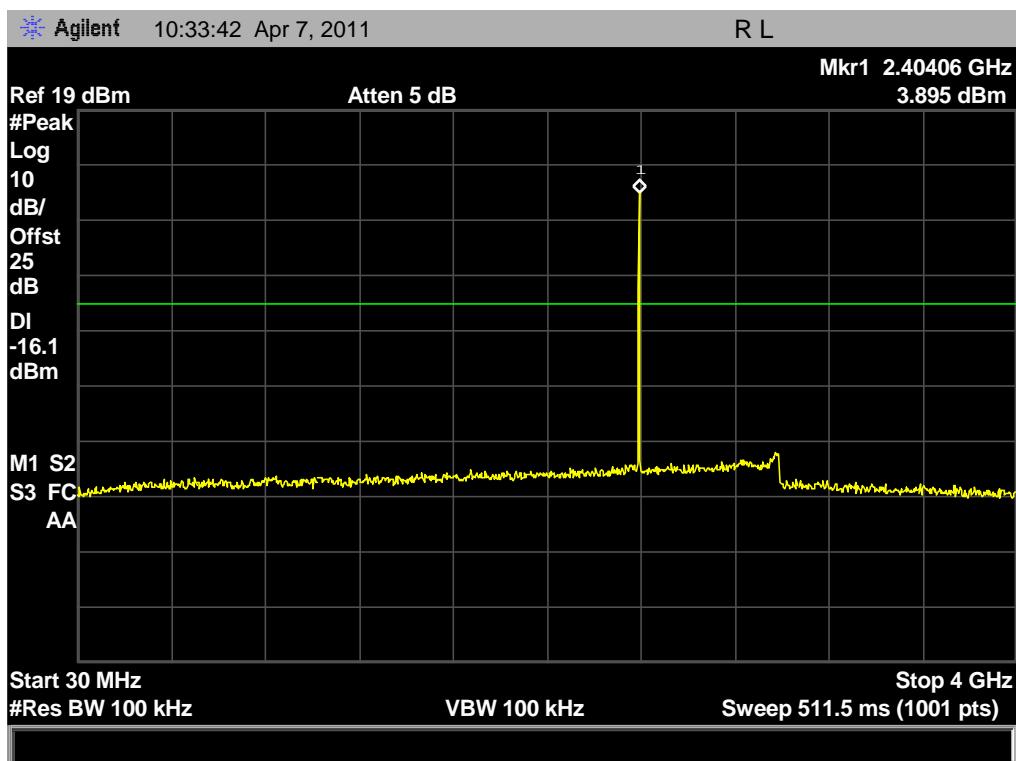


(Plot G.1: Channel = 0, 30MHz to 4GHz)

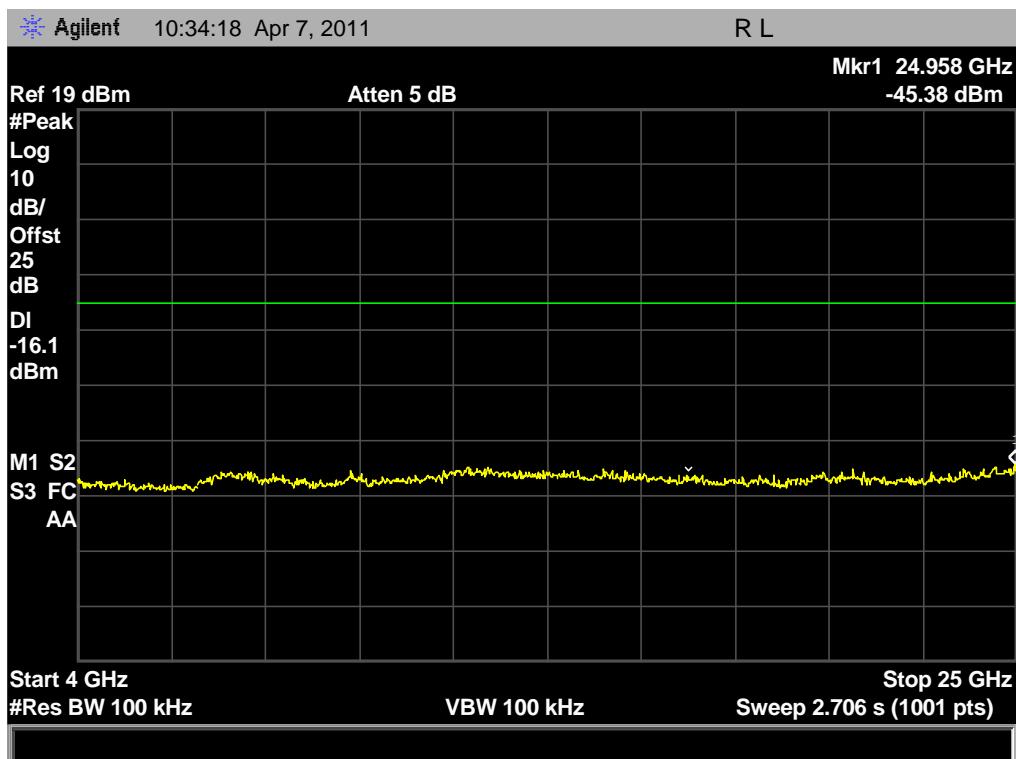


(Plot G.2: Channel = 0, 4GHz to 25GHz)

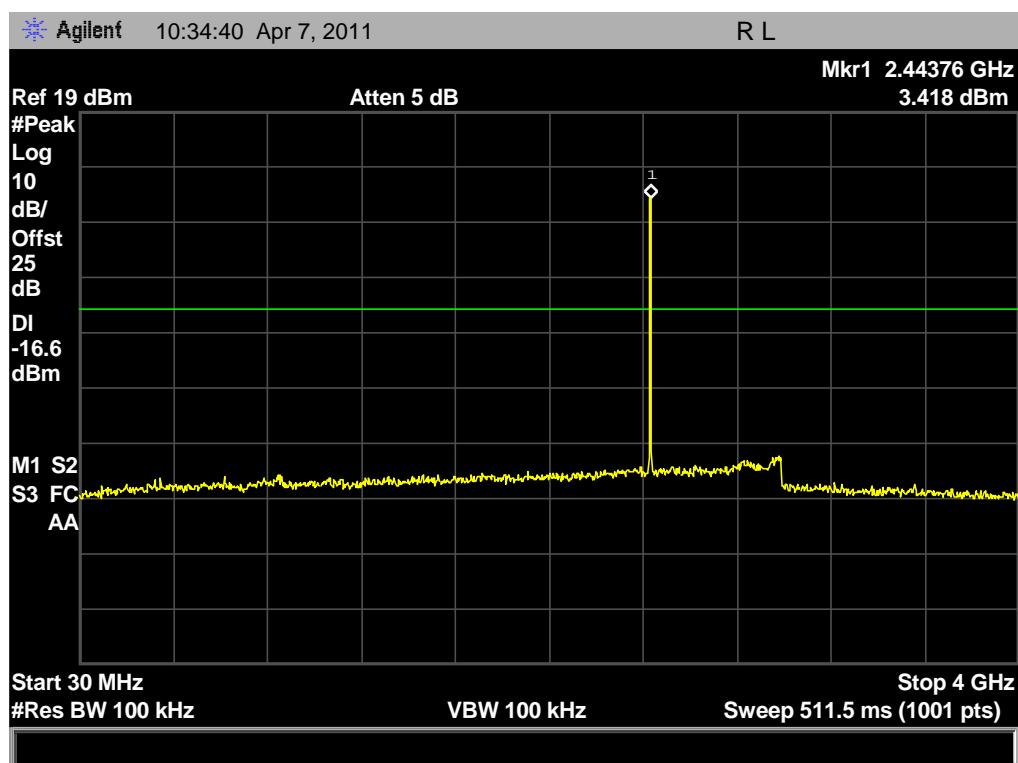


(Plot H.1: Channel = 39, 30MHz to 4GHz)

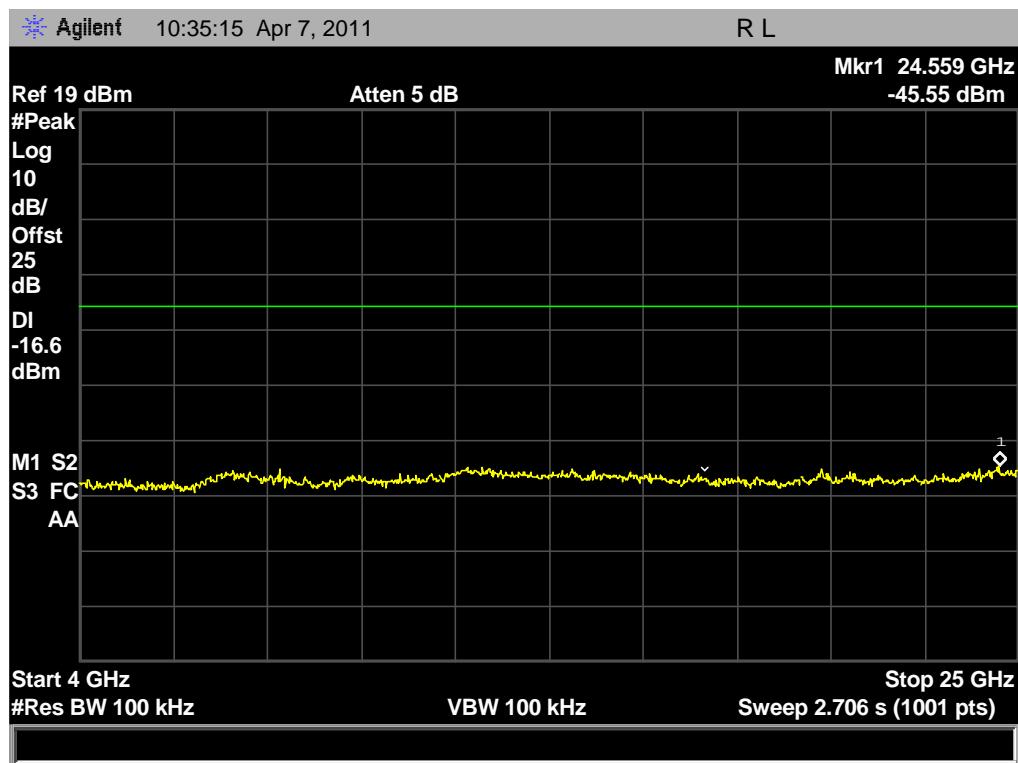

(Plot H.2: Channel = 39, 4GHz to 25GHz)

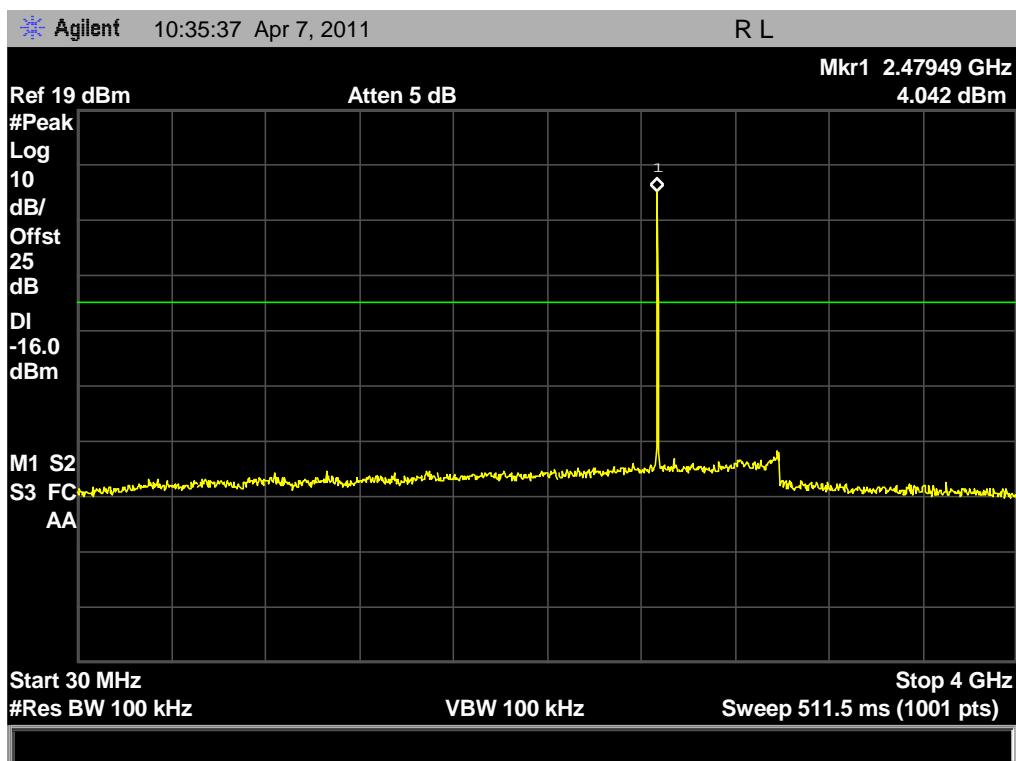

(Plot I.1: Channel = 78, 30MHz to 4GHz)

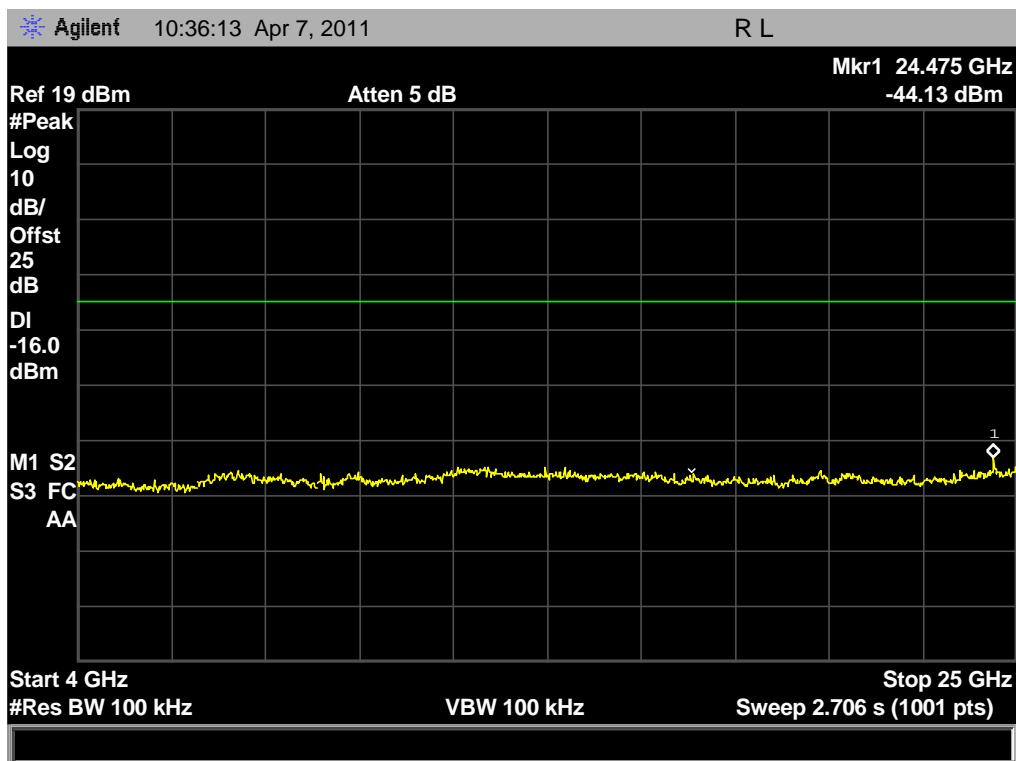

(Plot I.2: Channel = 78, 4GHz to 25GHz)


2.7 Band Edge

2.7.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

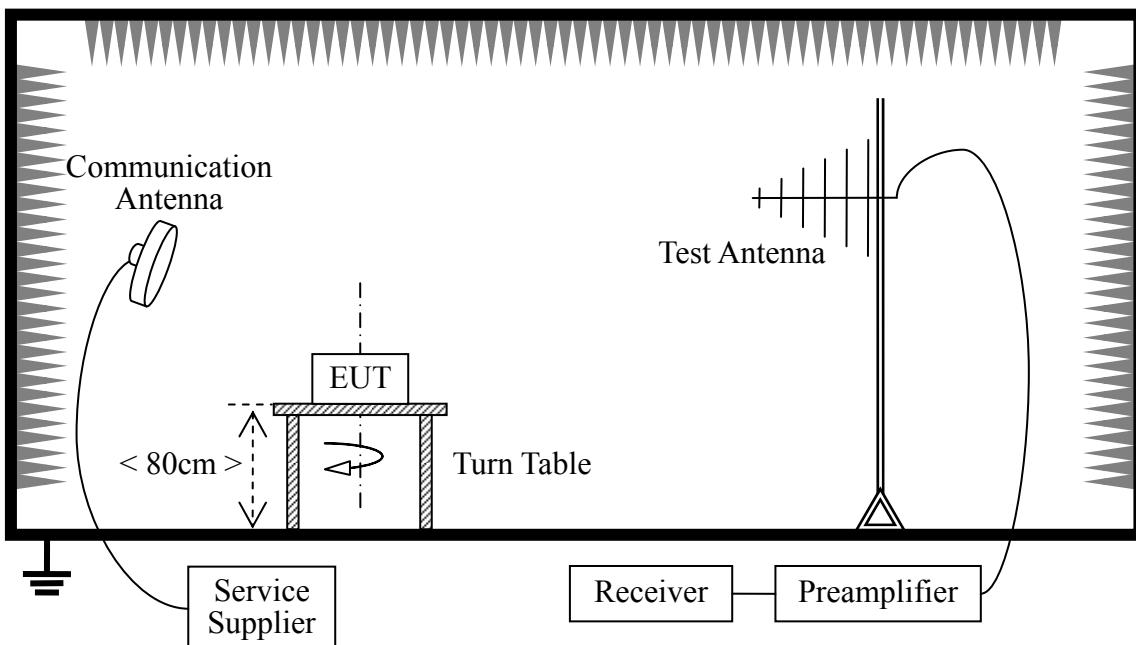

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength..

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2010.9
Receiver	Agilent	E7405A	US44210471	2010.9
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2010.9
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2010.9

2.7.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	49.45	45.78	74	54	PASS
78	2480	38.59	38.03	74	54	PASS


B. Test Plot:

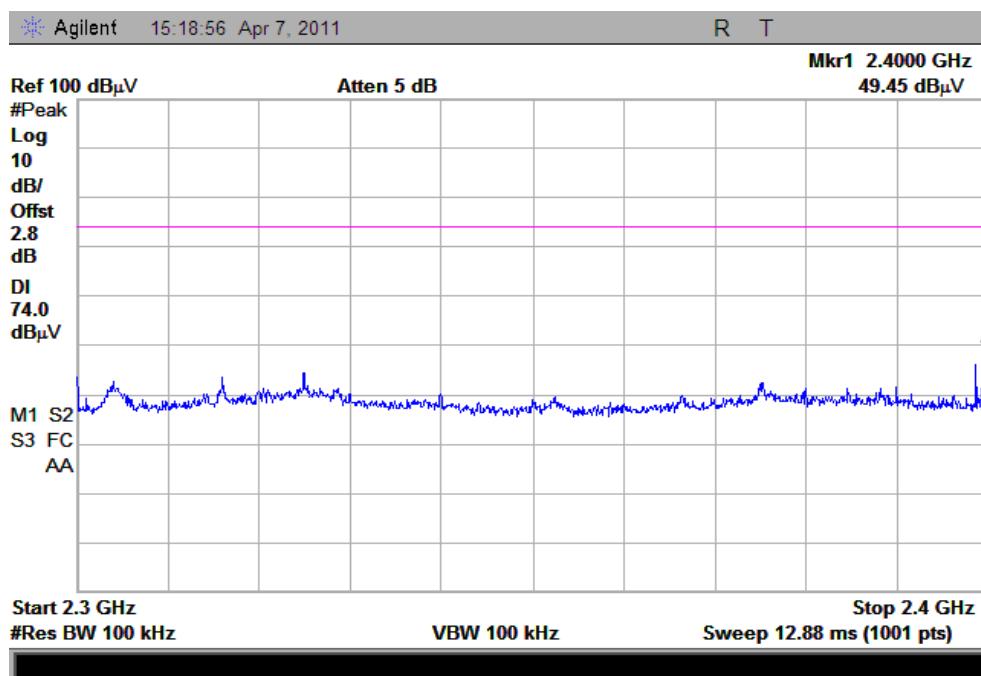


(Plot A1: Channel = 0 PEAK)

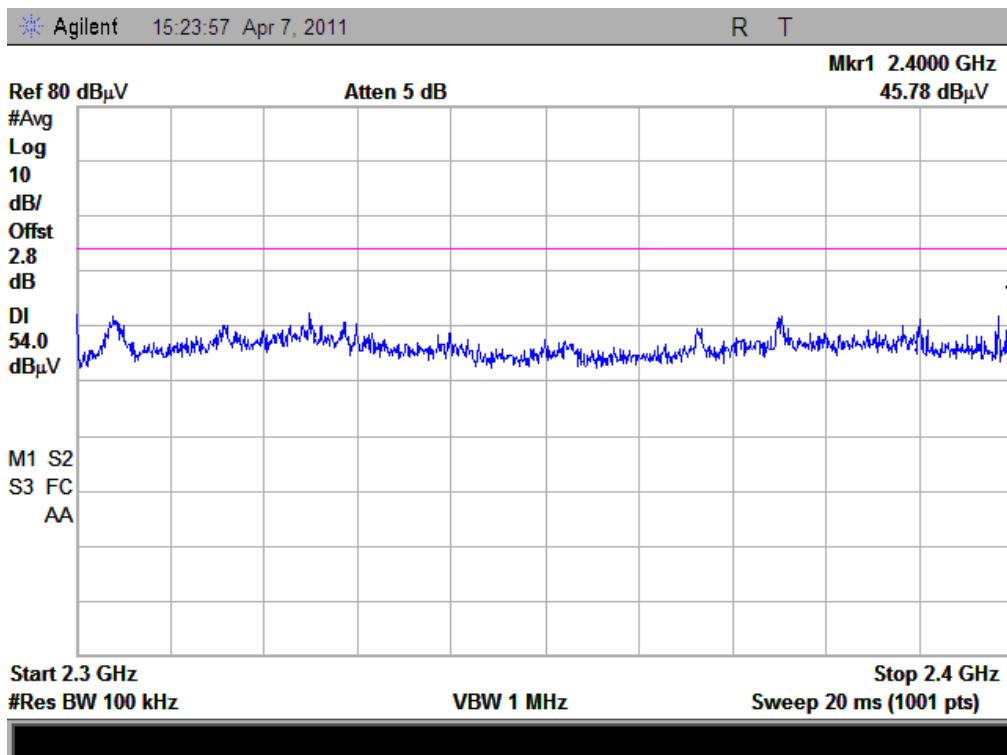

(Plot A2: Channel = 0 AVERAGE)

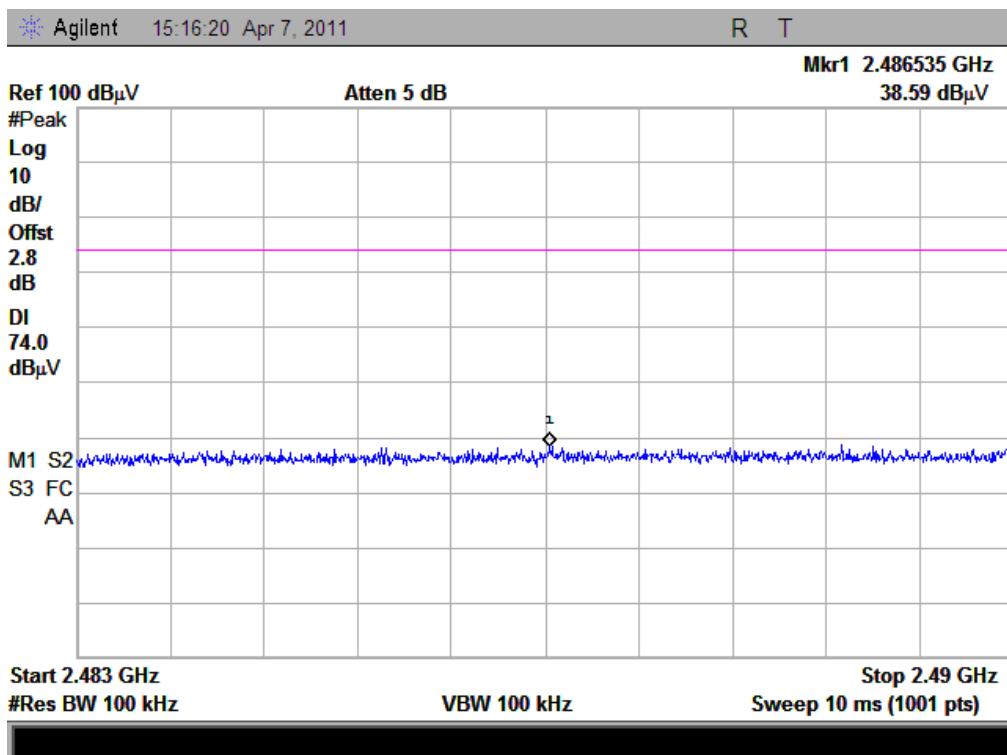

(Plot B1: Channel = 78 PEAK)

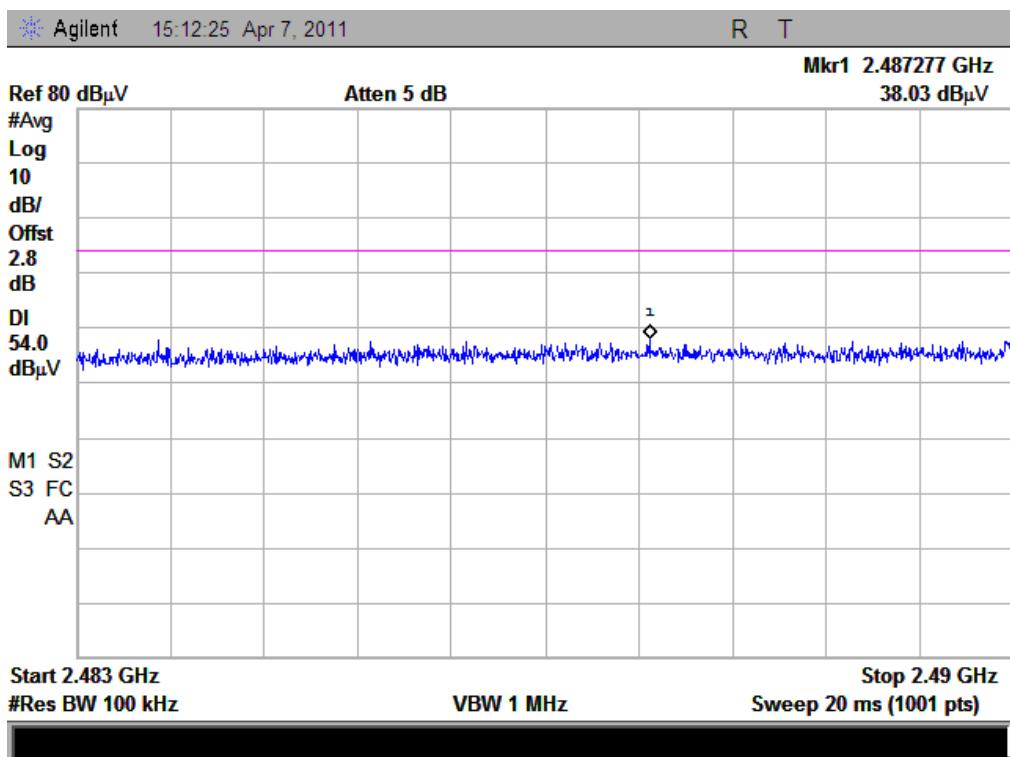


(Plot B2: Channel = 78 AVERAGE)


A. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	49.14	48.65	74	54	PASS
78	2480	38.88	37.3	74	54	PASS

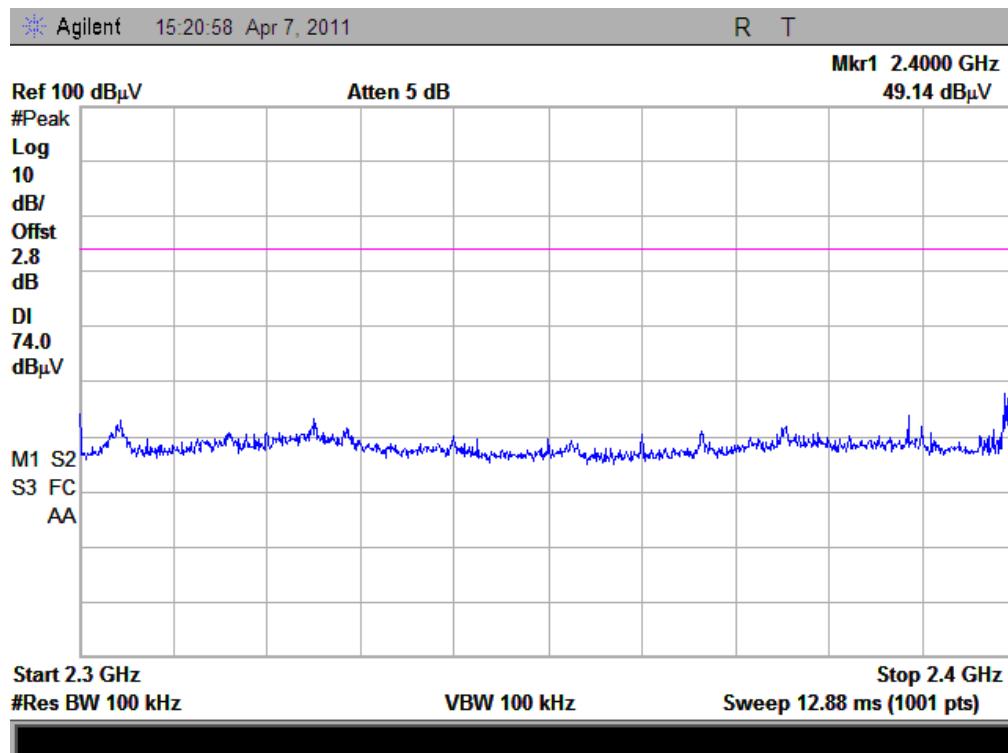B. Test Plot:


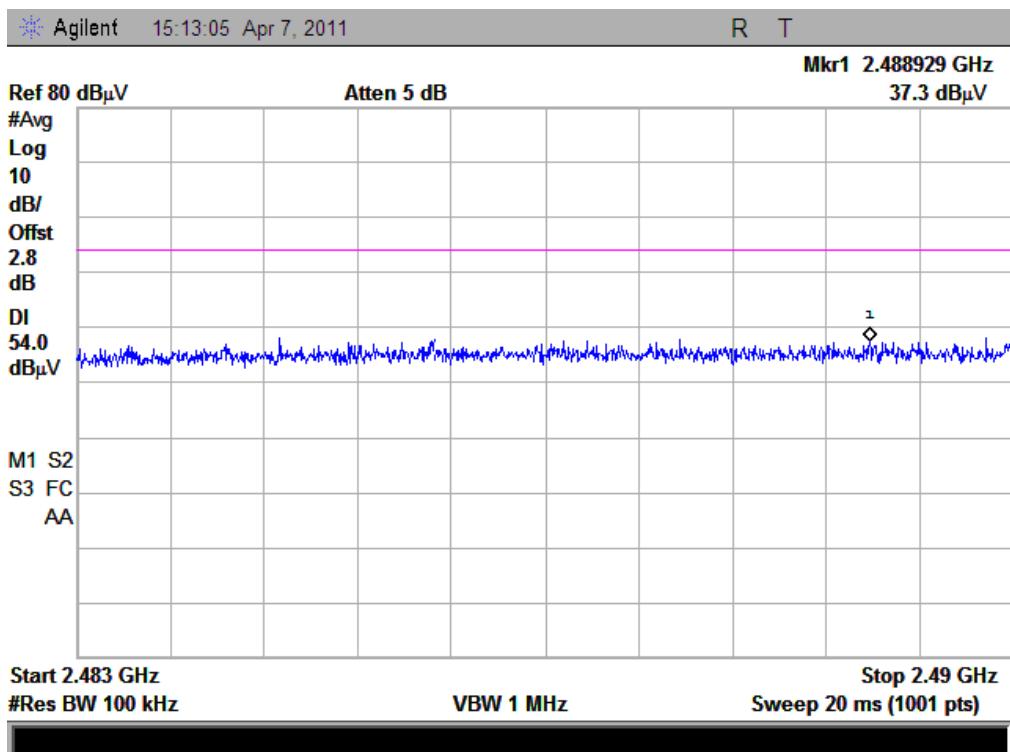
(Plot A1: Channel = 0 PEAK)

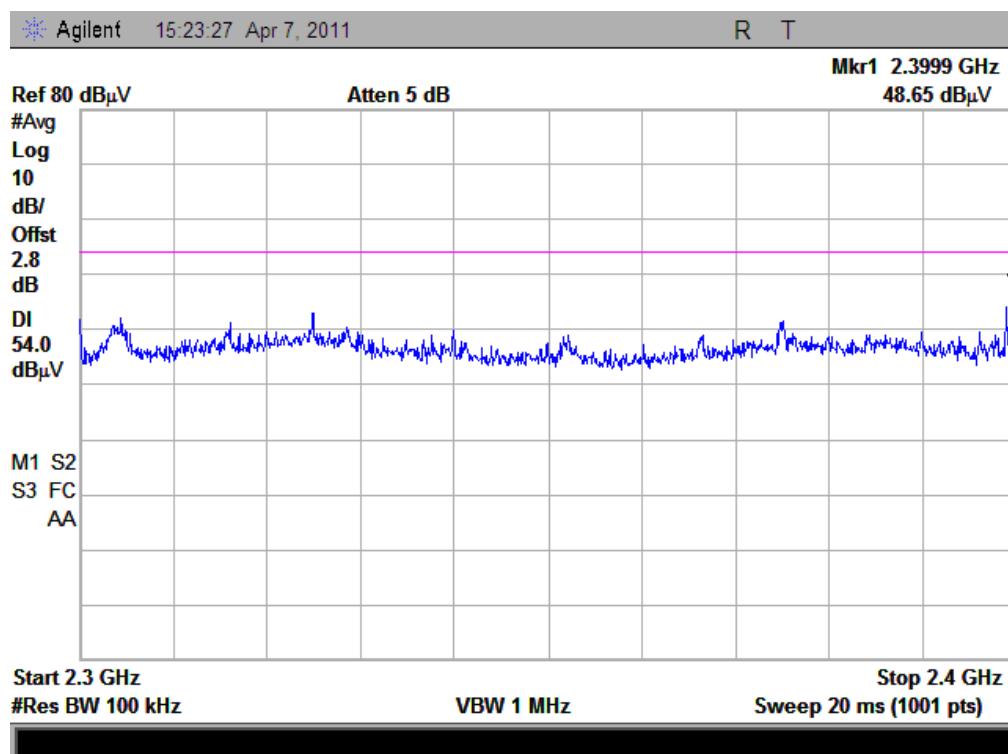

(Plot A2: Channel = 0 AVERAGE)

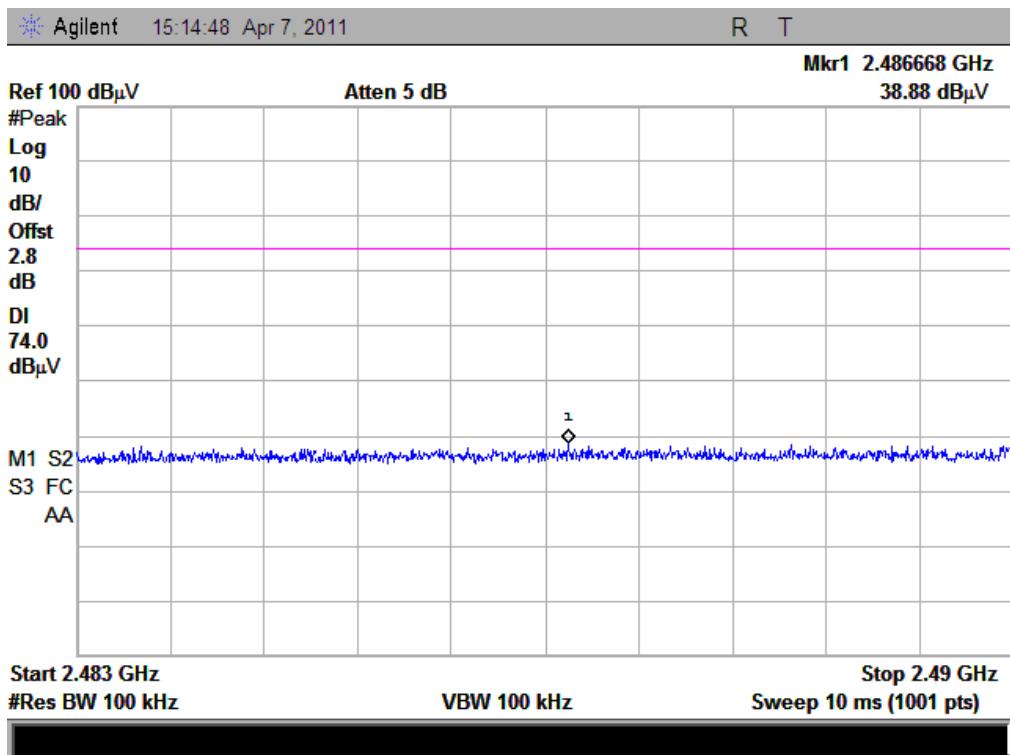


(Plot B1: Channel = 78 PEAK)




(Plot B2: Channel = 78 AVERAGE)

A. Test Verdict:
8-DPSK Mode


Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	48.35	48.03	74	54	PASS
78	2480	38.81	37.74	74	54	PASS

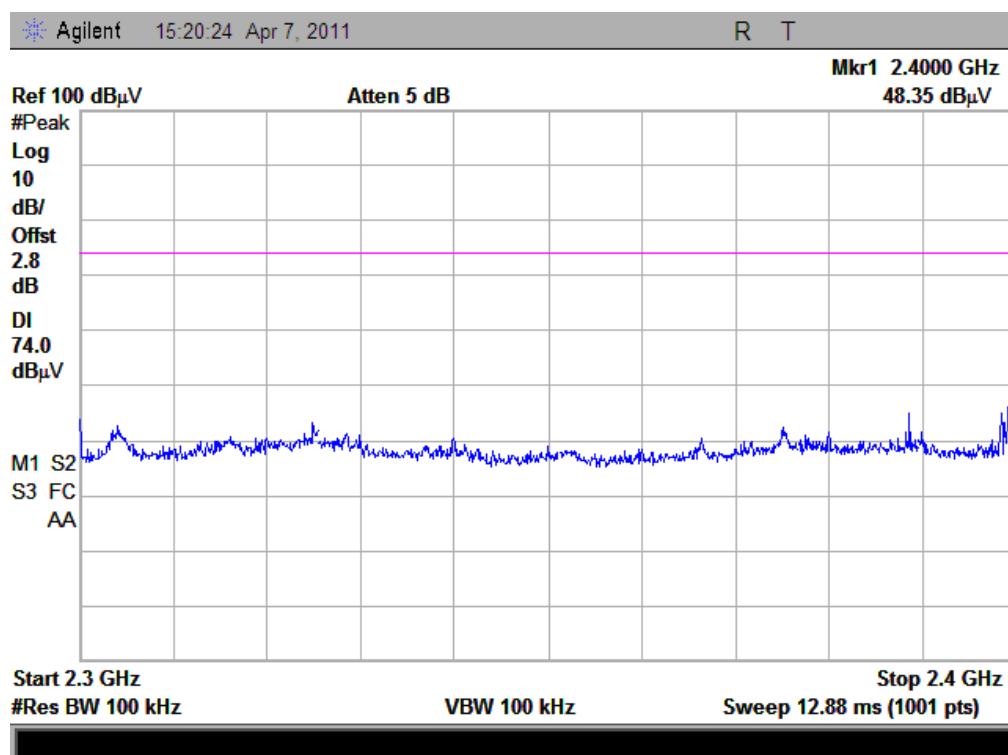B. Test Plot:


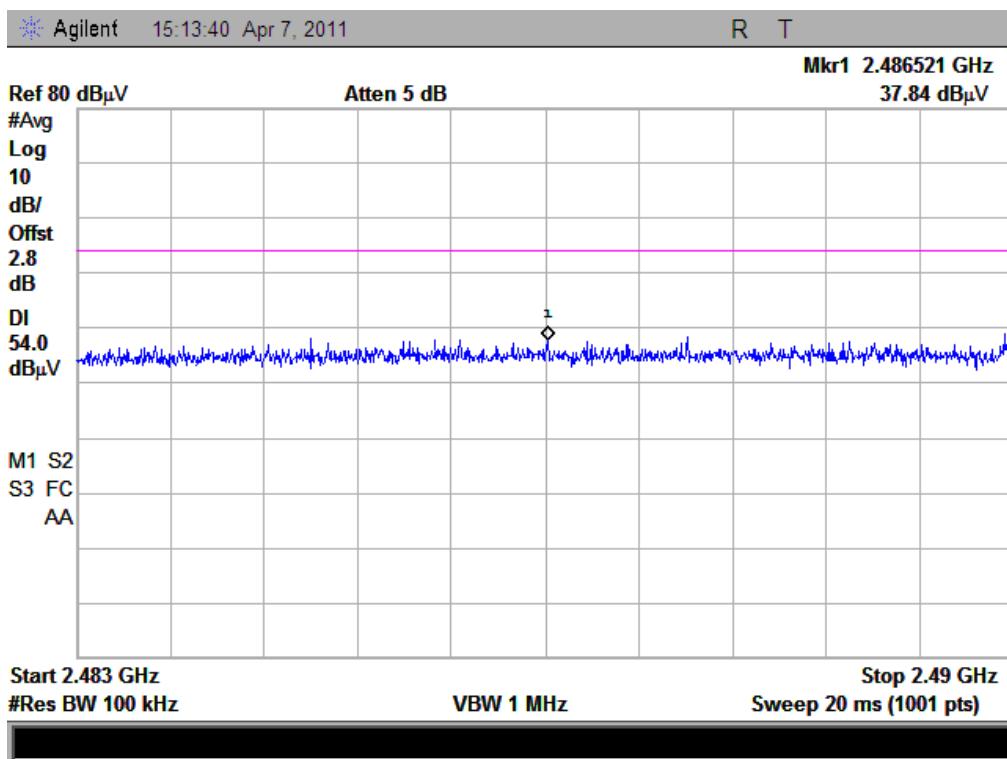
(Plot A1: Channel = 0 PEAK)

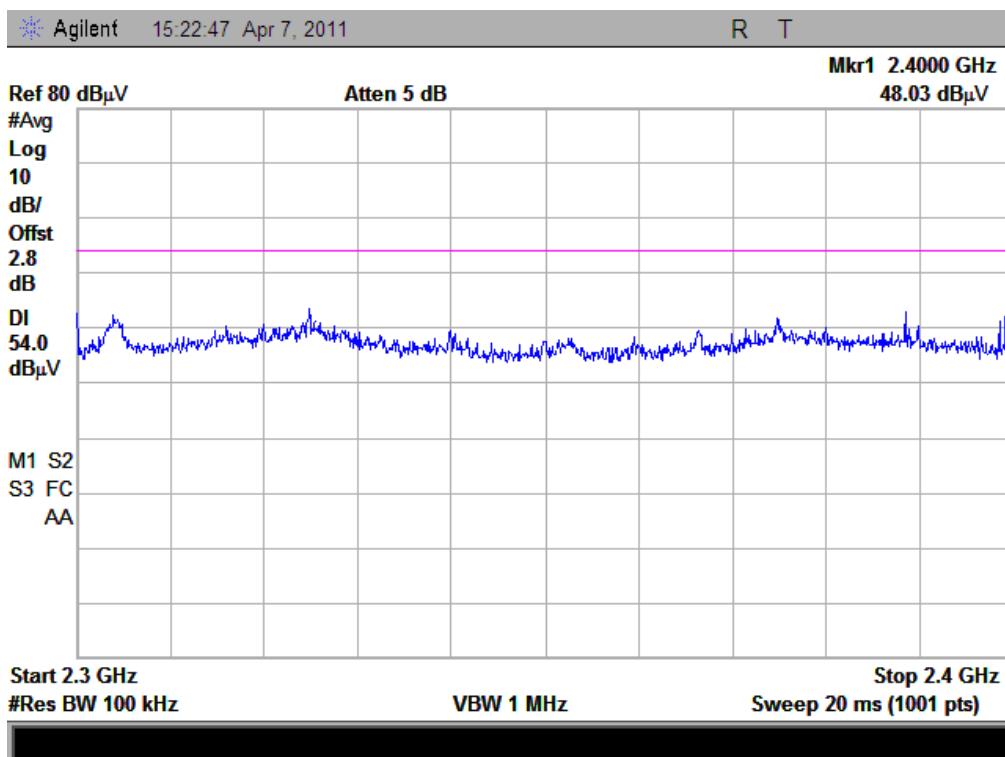

(Plot A2: Channel = 0 AVERAGE)

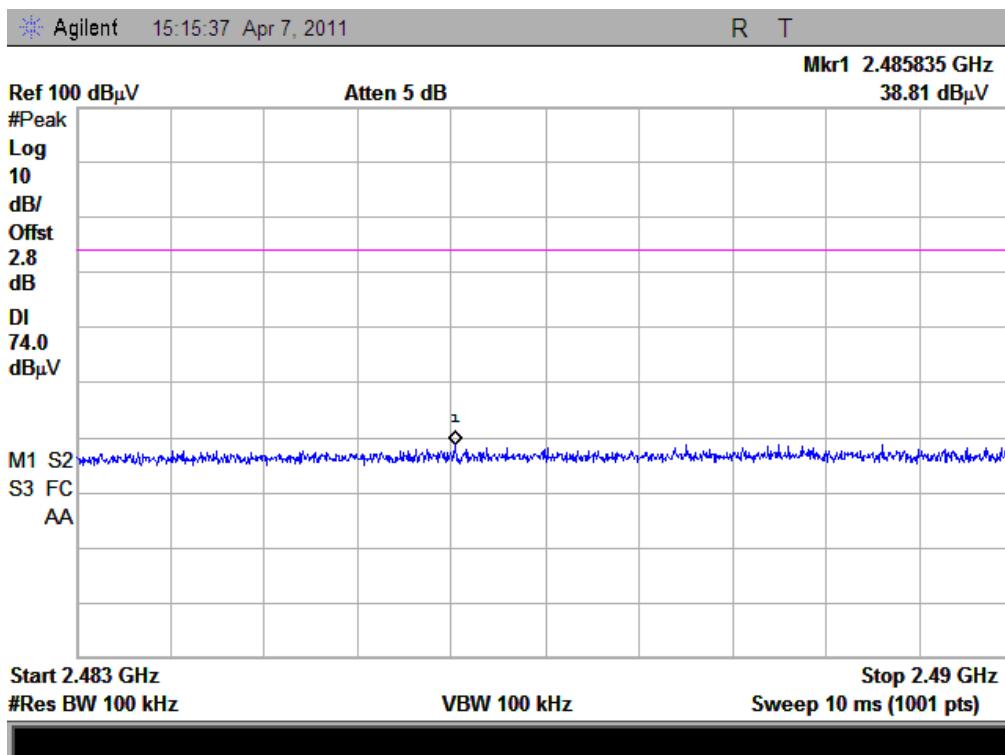

(Plot B1: Channel = 78 PEAK)



(Plot B2: Channel = 78 AVERAGE)

2.8 Conducted Emission

2.8.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2 Test Description

A. Test Setup:

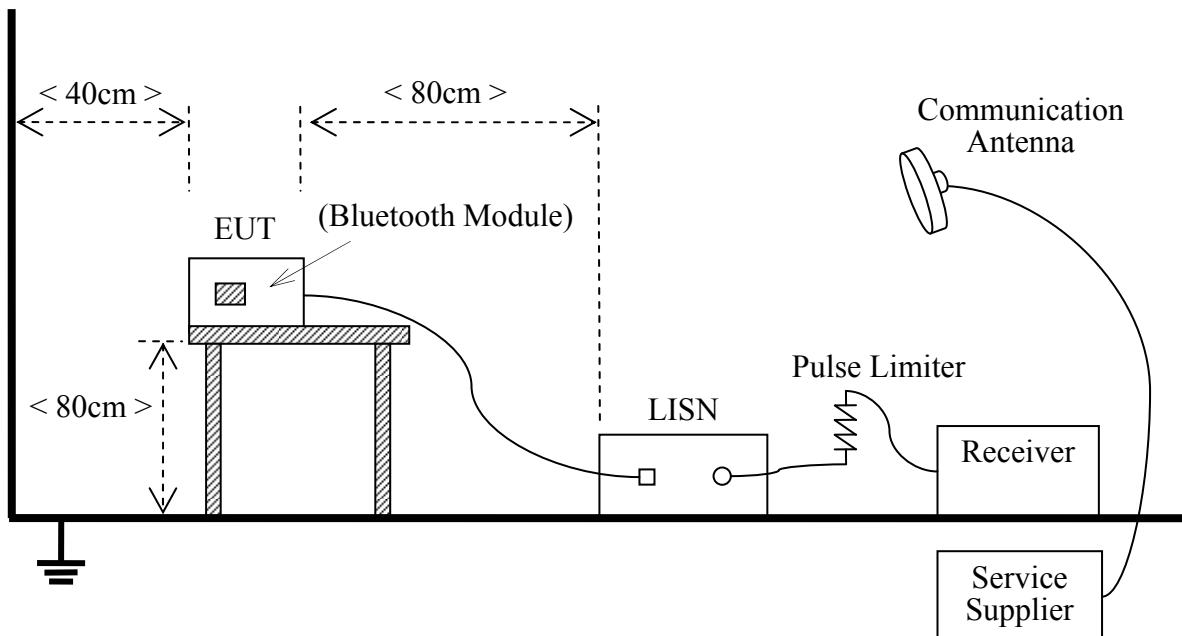

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2003


The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date
Receiver	Agilent	E7405A	US44210471	2010.09
LISN	Schwarzbeck	NSLK 8127	812744	2010.09
Service Supplier	R&S	CMU200	100448	2010.09
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)

2.8.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

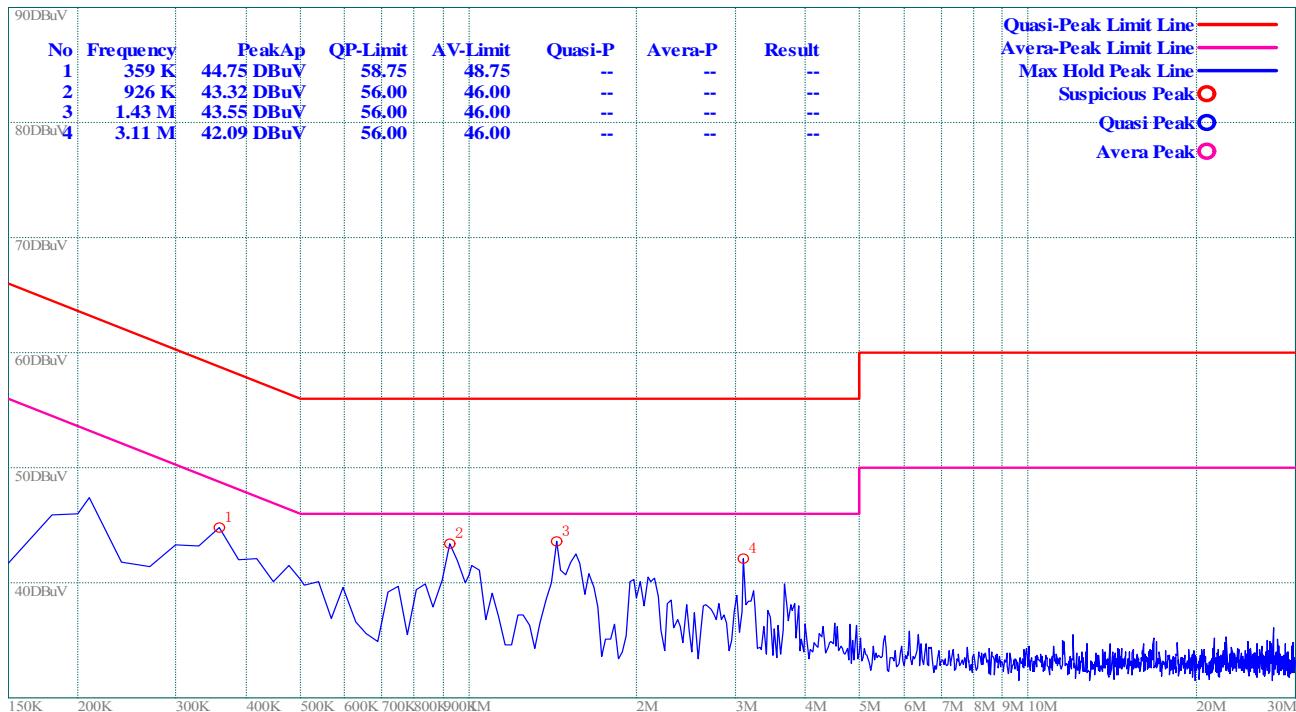

(Plot A: L Phase)

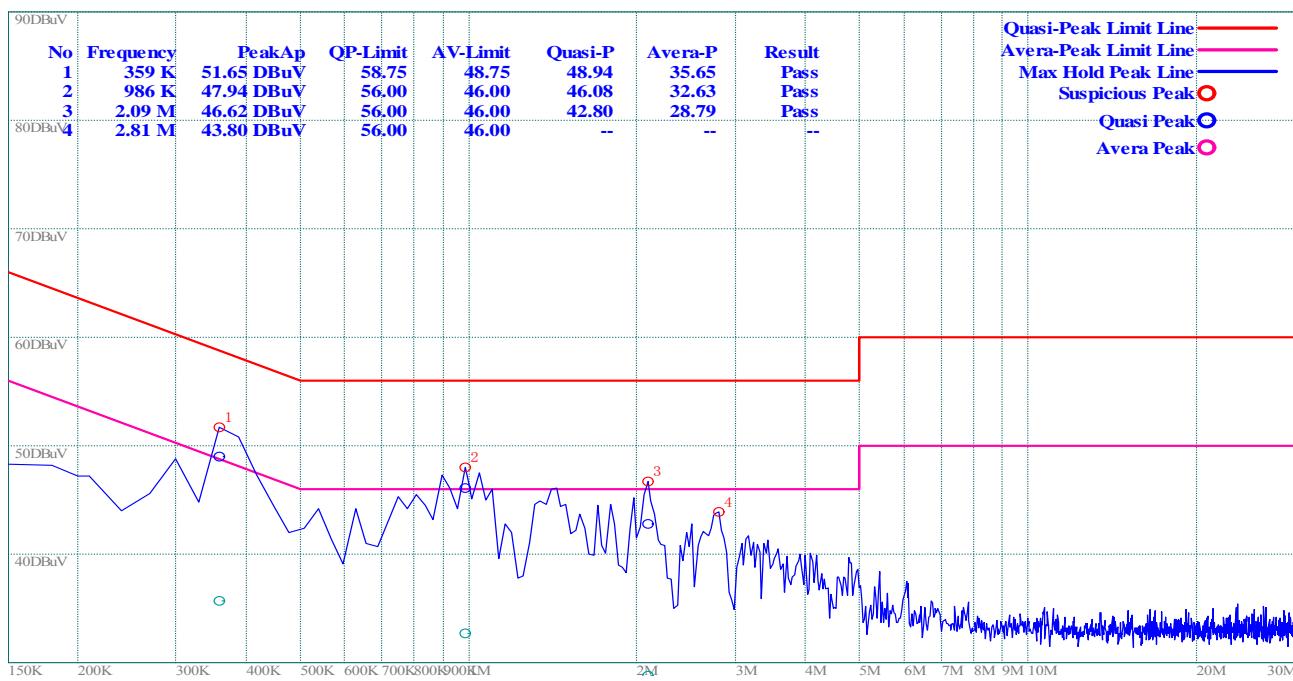

(Plot B: N Phase)

2.9 Radiated Emission

2.9.1 Requirement

According to FCC section 15.247(c) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)	Detector
30 - 88	100	3	QP
88 - 216	150	3	QP
216 - 960	200	3	QP
960 - 1000	500	3	QP
Above 1000	500	3	AV

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

2.9.2 Test Description

A. Test Setup:

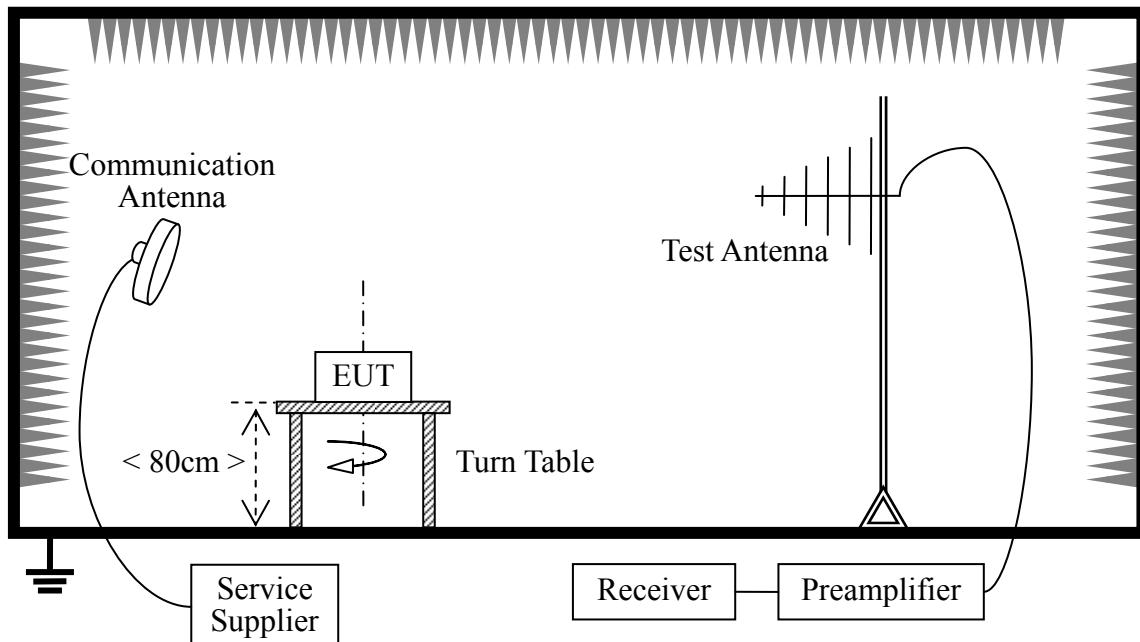

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna: In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength, the azimuth range of turntable was 0° to 360°, the receive antenna has two polarizations horizontal and vertical. When doing measurements above 1GHz, the EUT was placed within the 3dB beam width range of the horn antenna, and the EUT was tested in 3 orthogonal positions as recommended in ANSI C63.4 for Radiated Emissions and the worst-case data was presented.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2010.9
Receiver	Agilent	E7405A	US44210471	2010.9
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2010.9
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2010.9
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2010.9
Test Antenna - circular	R&S	AC004R1	0749.3000.03	2010.9

2.9.3 Test Result

GFSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	89.53	84.92	Horizontal	Plot A.1
		93.82	87.25	Vertical	Plot A.2
39	2441	92.09	87.54	Horizontal	Plot B.1
		97.08	91.88	Vertical	Plot B.2
78	2480	91.10	85.69	Horizontal	Plot C.1

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
		96.49	91.22		

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	37.33	46	-8.67	100	243	Horizontel
8.418 G	44.73	54	-9.27	100	130	Horizontel
468.4 M	31.76	46	-14.24	100	92	Vertical
13.975 G	44.54	54	-9.46	100	354	Vertical
1.041 G	32.59	54	-21.41	100	356	Vertical

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	38.54	46	-7.46	100	238	Horizontel
8.418 G	44.73	54	-9.27	100	130	Horizontel
676.0 M	33.48	46	-12.52	100	317	Vertical
1.041 G	32.77	54	-21.23	100	350	Vertical
3.895 G	44.22	54	-9.78	100	175	Vertical

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	38.13	46	-7.87	100	230	Horizontel
1.041 G	36.94	54	-17.06	100	70	Horizontel
390.8 M	31.7	46	-14.3	100	51	Vertical
7.945 G	44.56	54	-9.44	100	177	Vertical
1.041 G	34.38	54	-19.62	100	359	Vertical

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

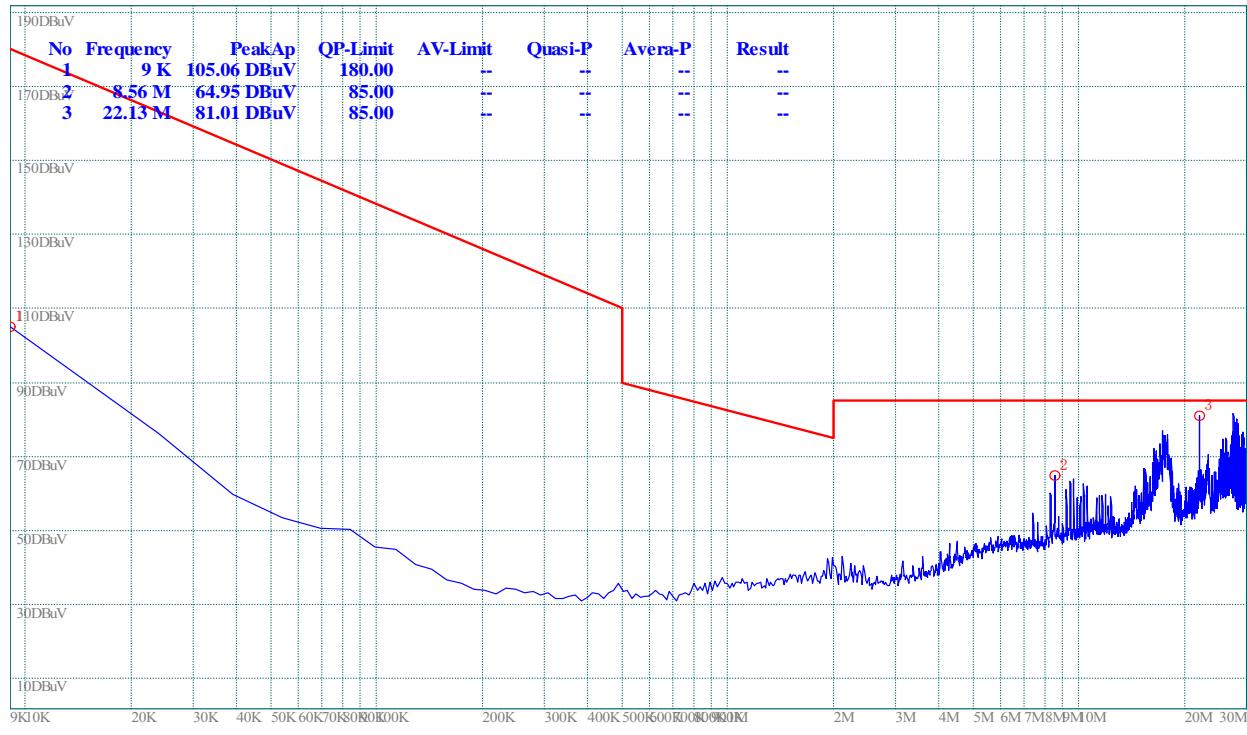

(Plot A.0: 9kHz to 30MHz)

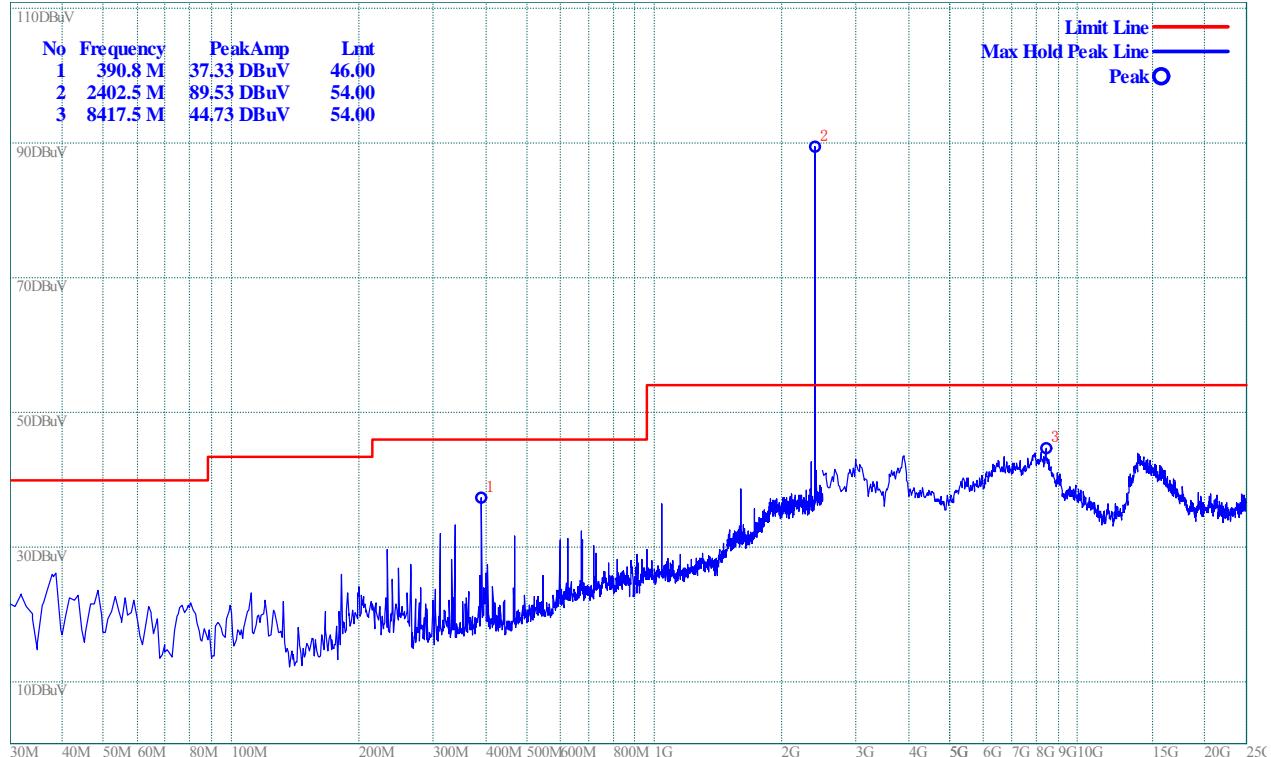


(Plot A.1: Antenna Horizontal)

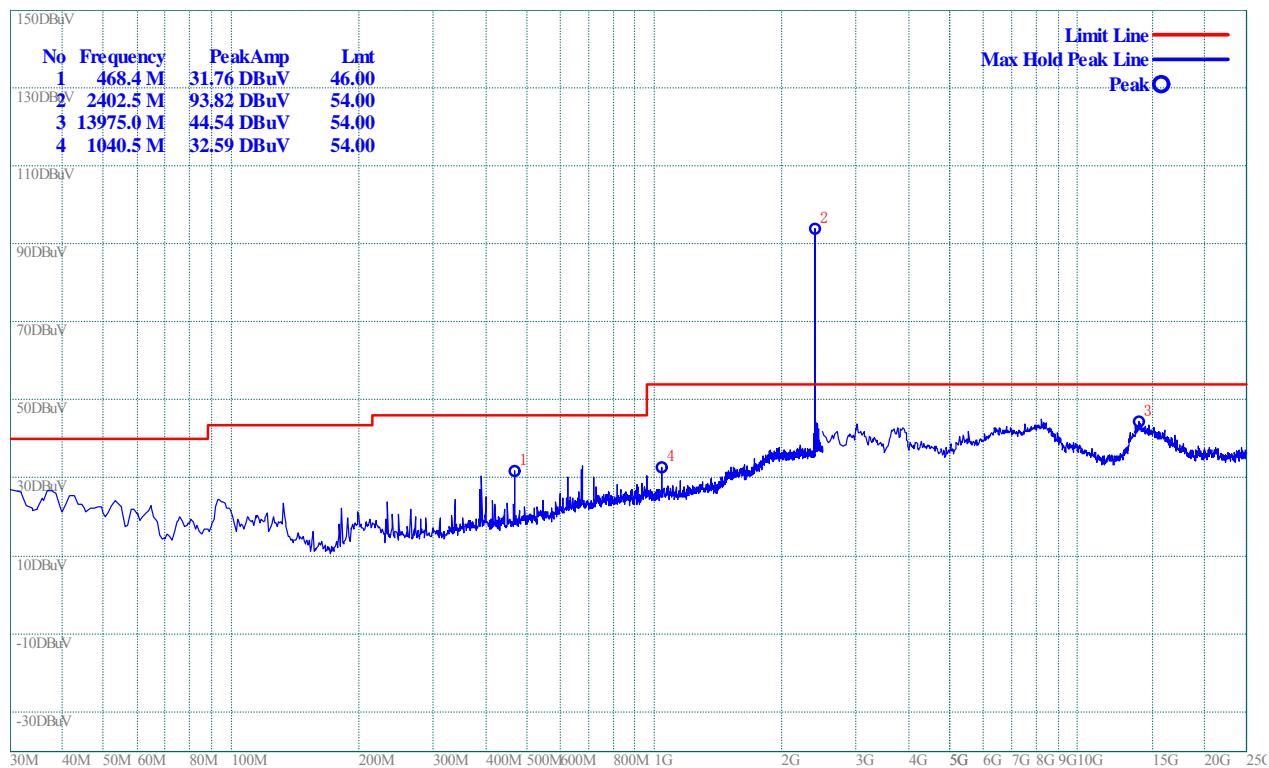


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

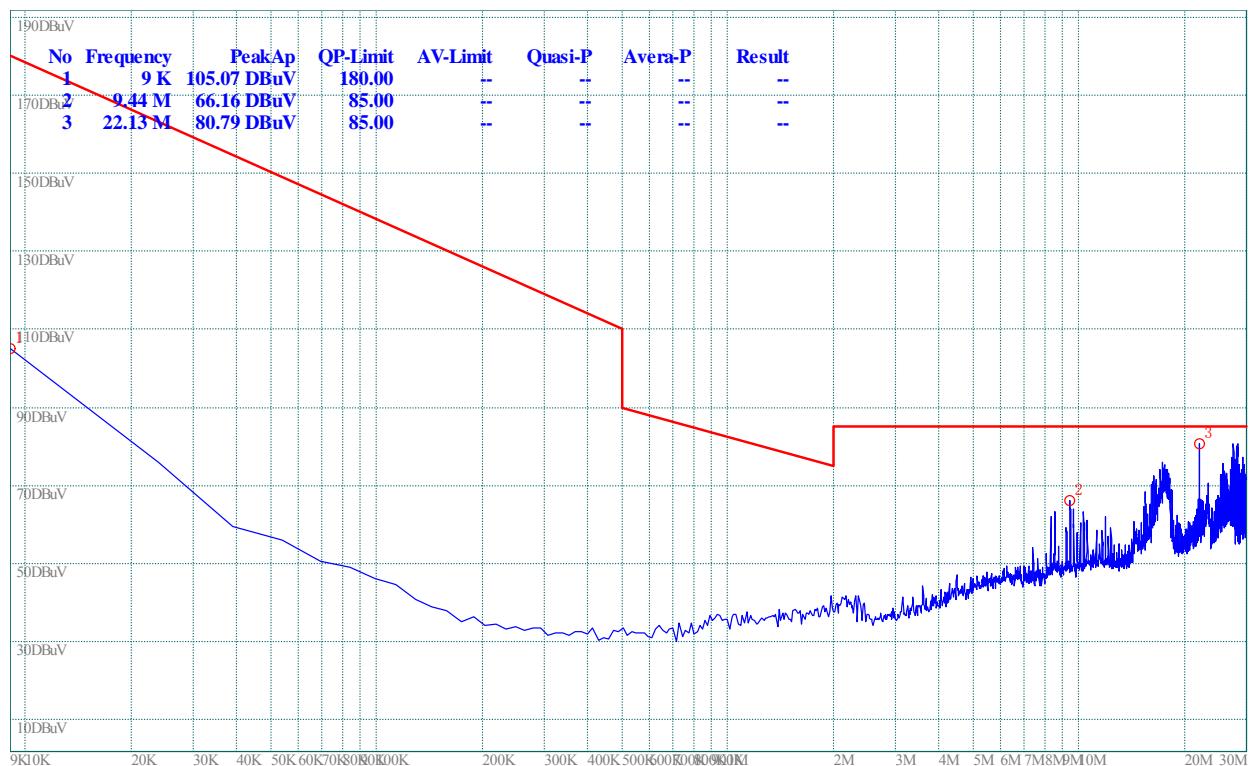


(Plot B.0: 9kHz to 30MHz)

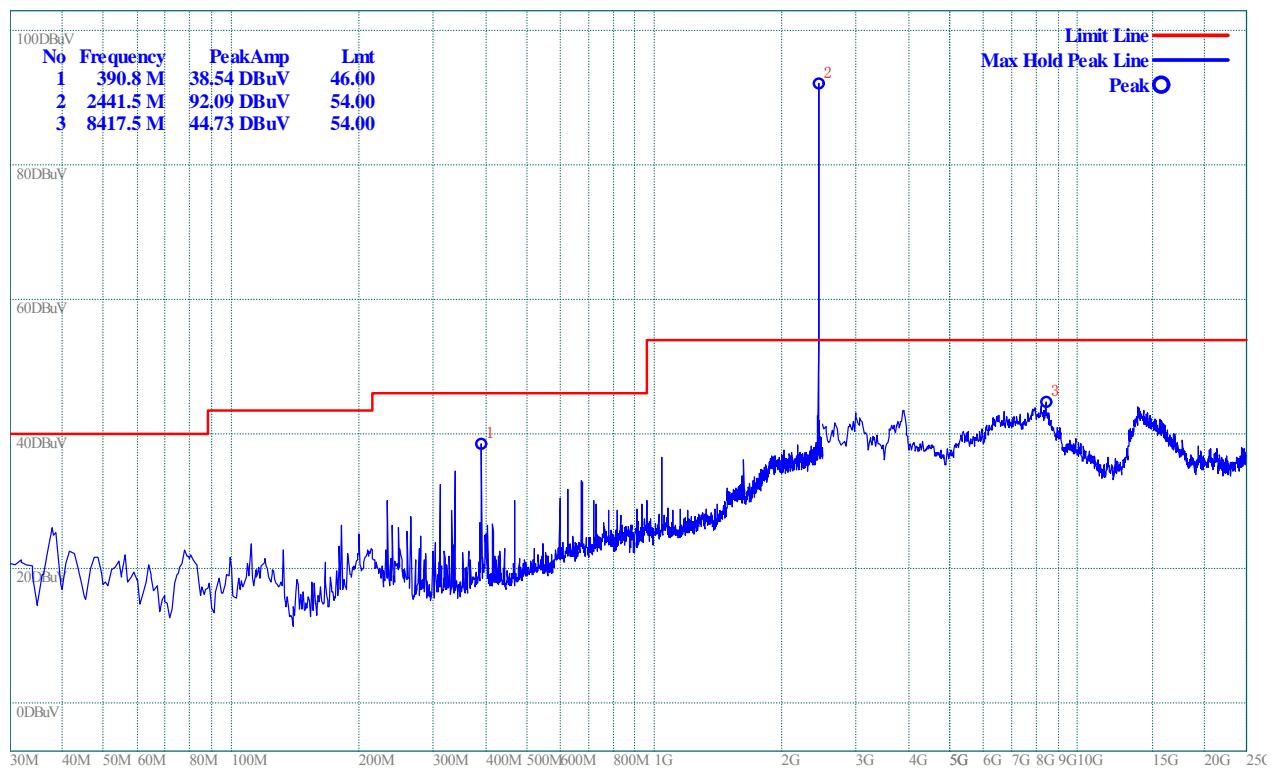


(Plot B.1: Antenna Horizontal)

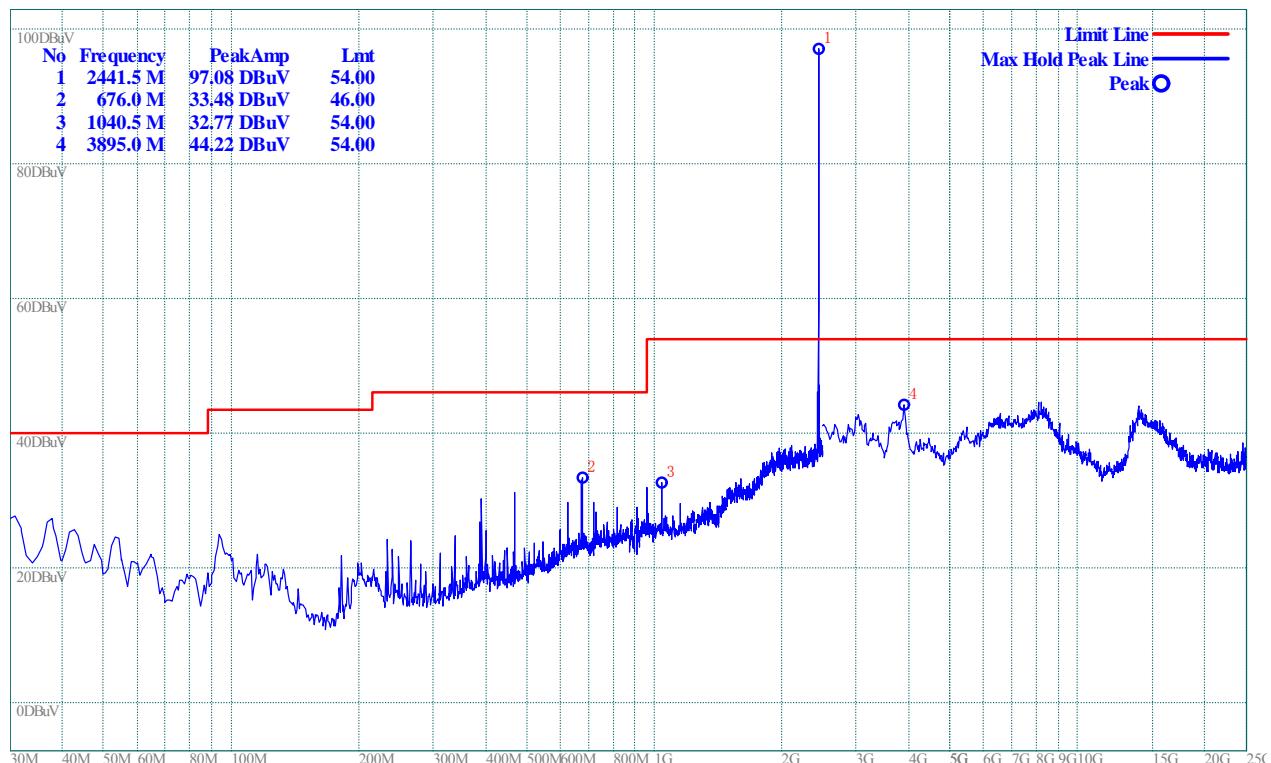


(Plot B.2: Antenna Vertical)

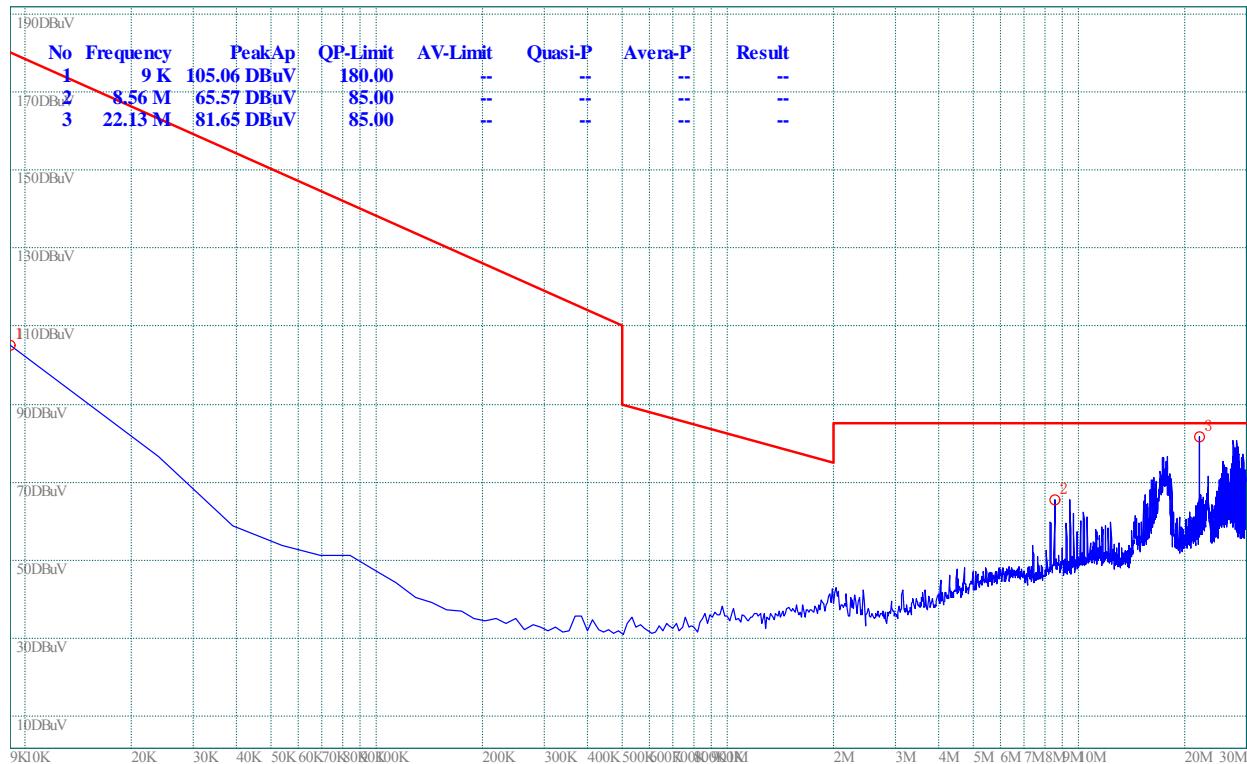Plot for Channel = 78


(Plot C.0: 9kHz to 30MHz)

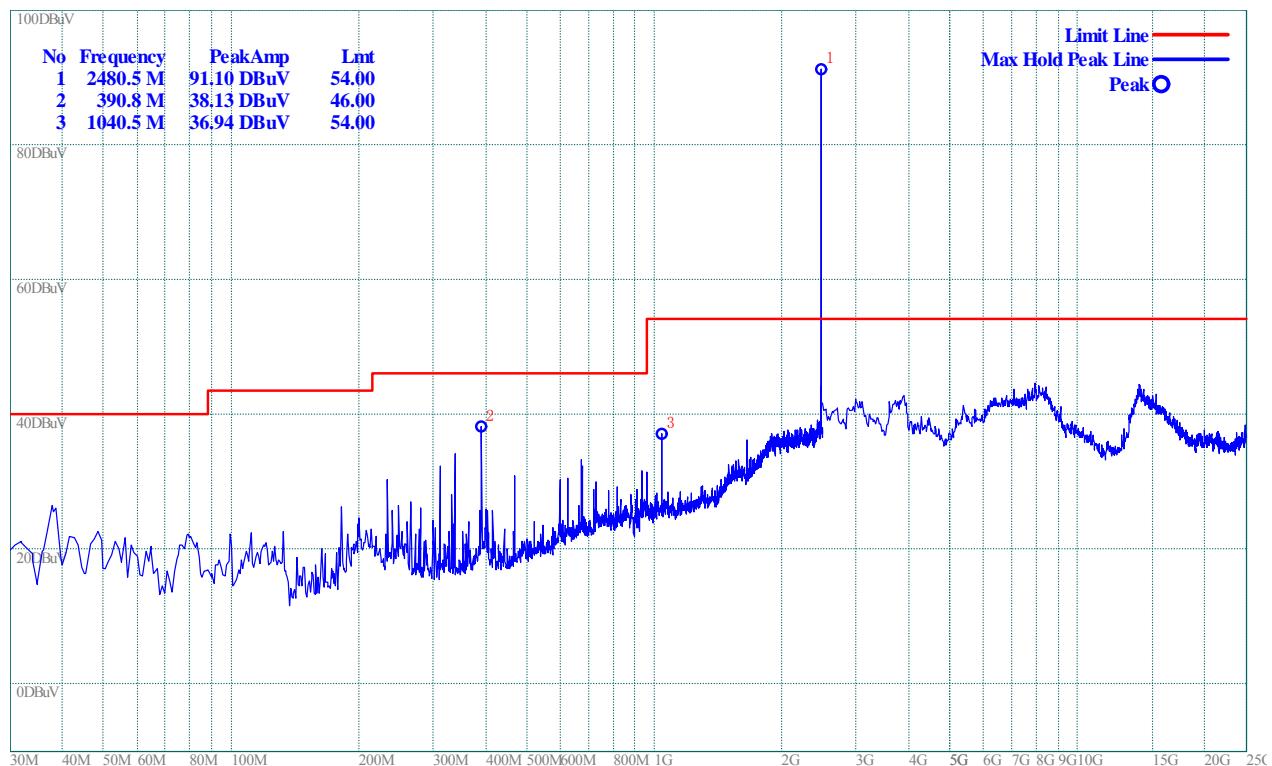

(Plot C.1: Antenna Horizontal)

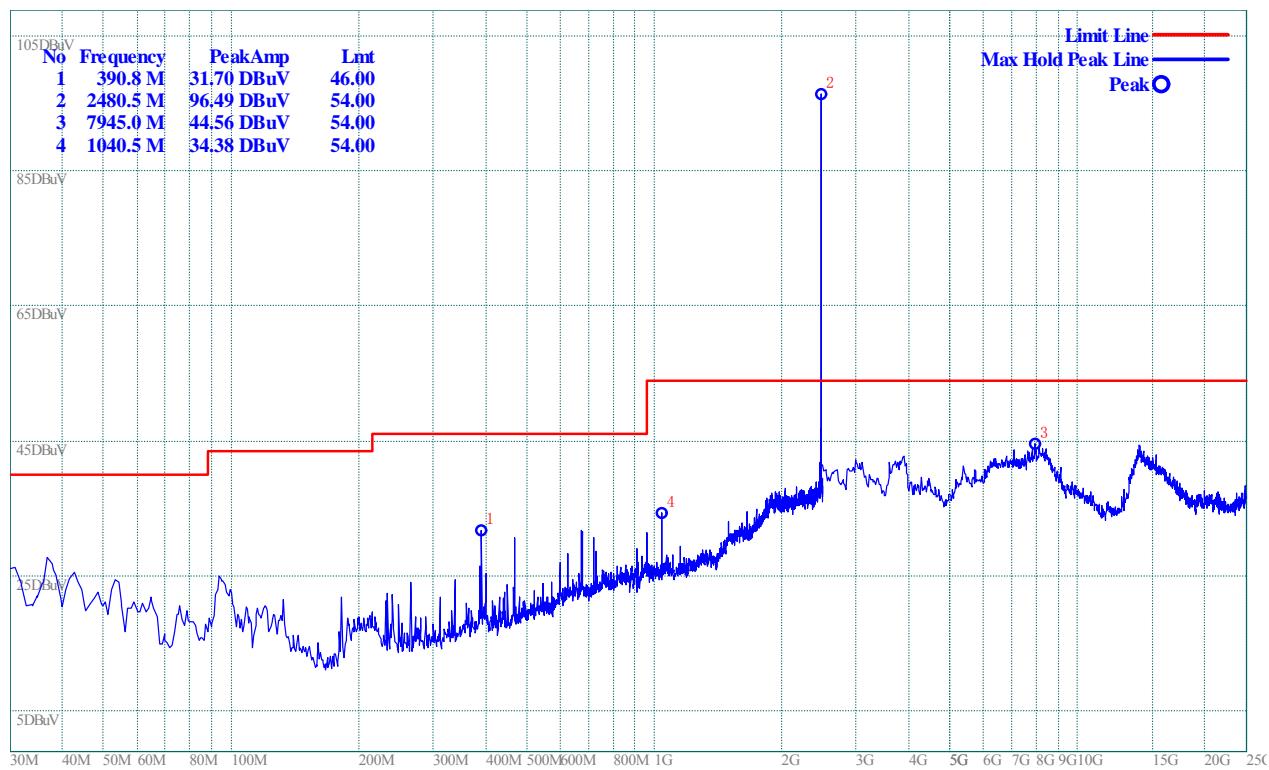

(Plot C.2: Antenna Vertical)

$\pi/4$ -DQPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	88.90	83.26	Horizontal	Plot A.1
		95.17	89.97	Vertical	Plot A.2
39	2441	91.96	86.54	Horizontal	Plot B.1
		96.82	91.88	Vertical	Plot B.2
78	2480	87.85	81.55	Horizontal	Plot C.1
		96.49	90.08	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	38.9	46	-7.1	100	238	Horizontel
1.041 G	35.08	54	-18.92	100	70	Horizontel
3.895 G	43.57	54	-10.43	100	356	Horizontel
390.8 M	30.73	46	-15.27	100	50	Vertical
1.041 G	32.56	54	-21.44	100	0	Vertical
13.975 G	44.54	54	-9.46	100	354	Vertical

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	38.72	46	-7.28	100	253	Horizontel
1.041 G	37.03	54	-16.97	100	72	Horizontel
390.8 M	30.35	46	-15.65	100	42	Vertical
677.0 M	32.61	46	-13.39	100	314	Vertical

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	38.38	46	-7.62	100	242	Horizontel
1.041 G	35.01	54	-18.99	100	64	Horizontel
676.0 M	32.69	46	-13.31	100	308	Vertical
1.041 G	34.38	54	-19.62	100	359	Vertical

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

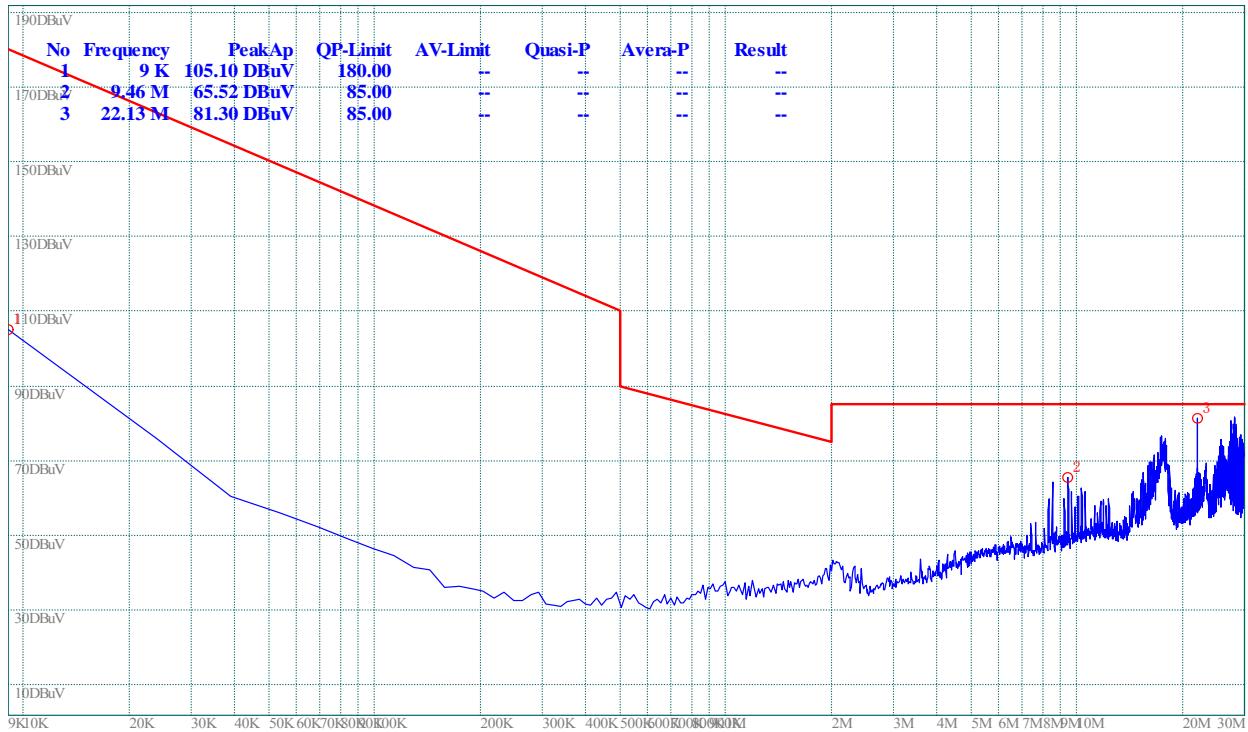

(Plot A.0: 9kHz to 30MHz)

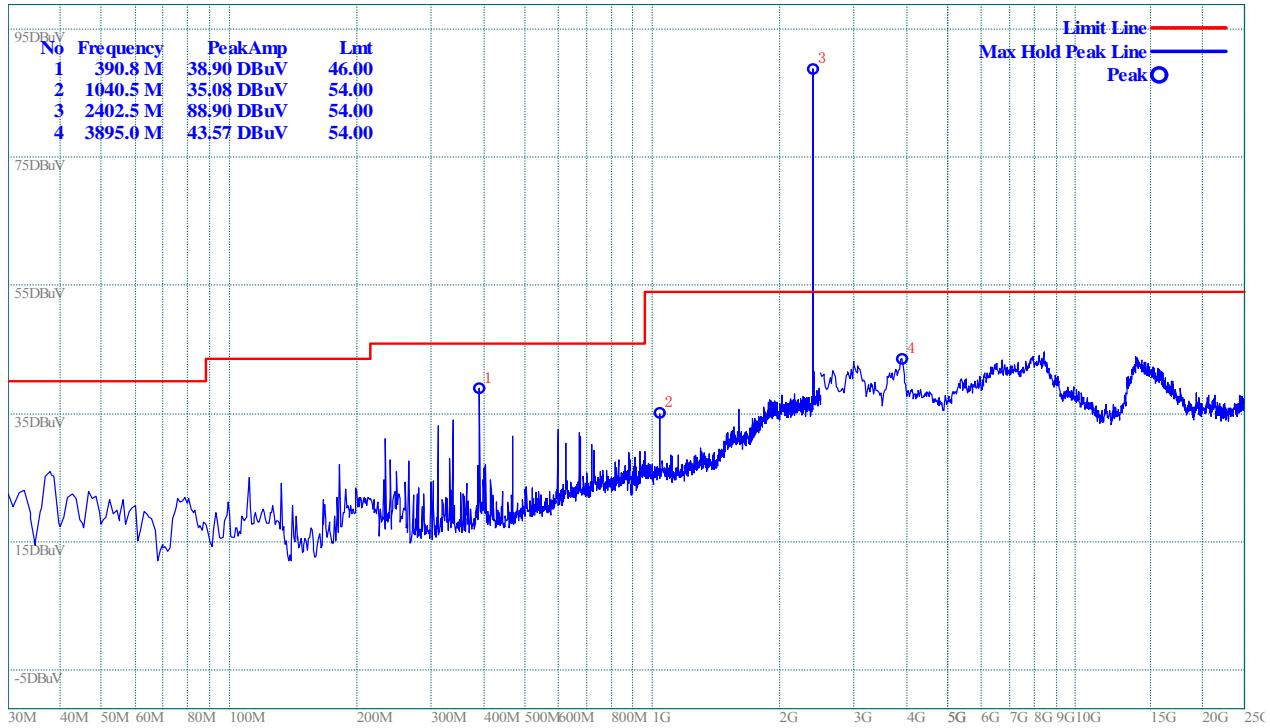


(Plot A.1: Antenna Horizontal)

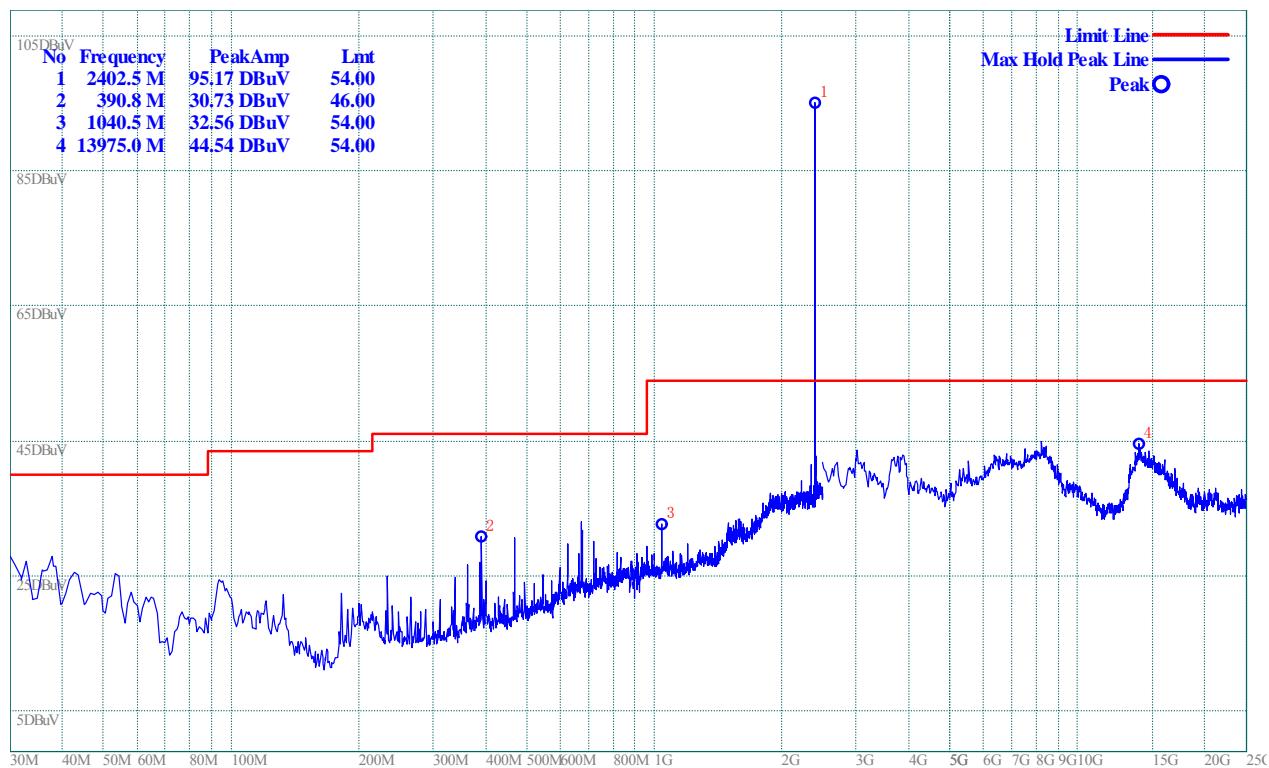


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

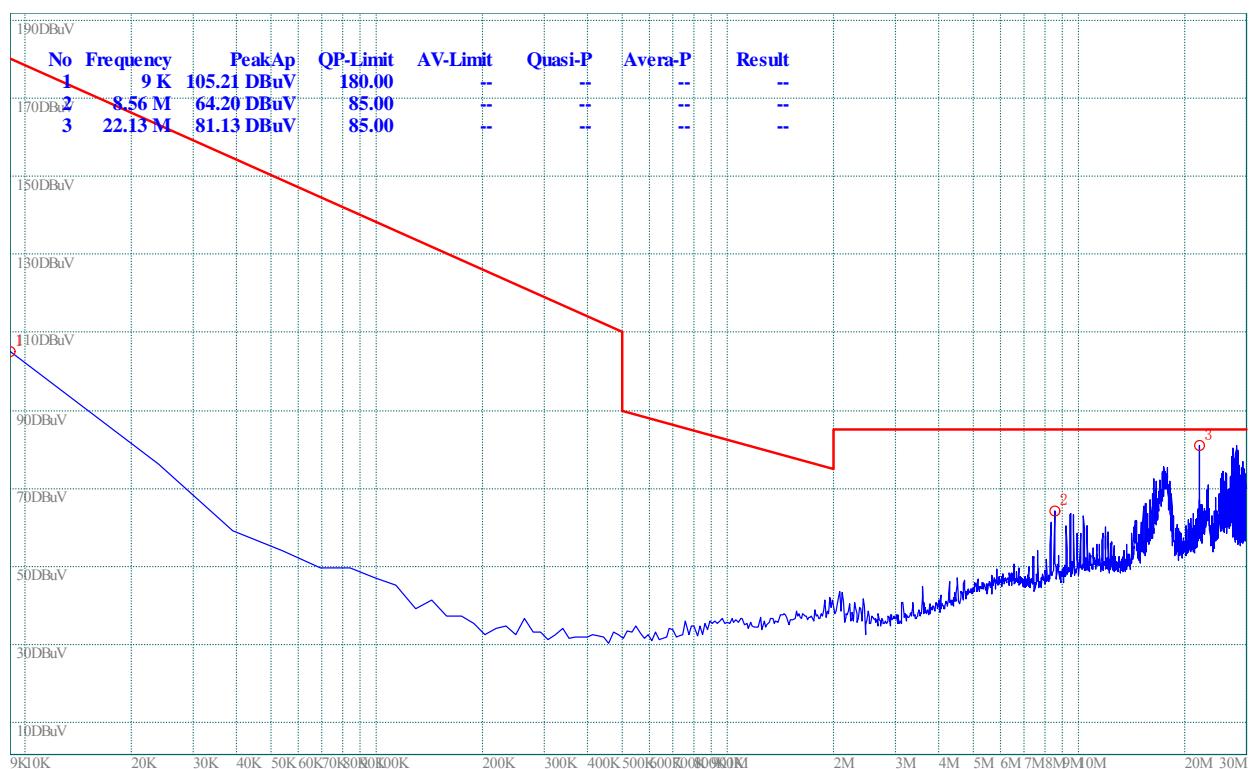


(Plot B.0: 9kHz to 30MHz)

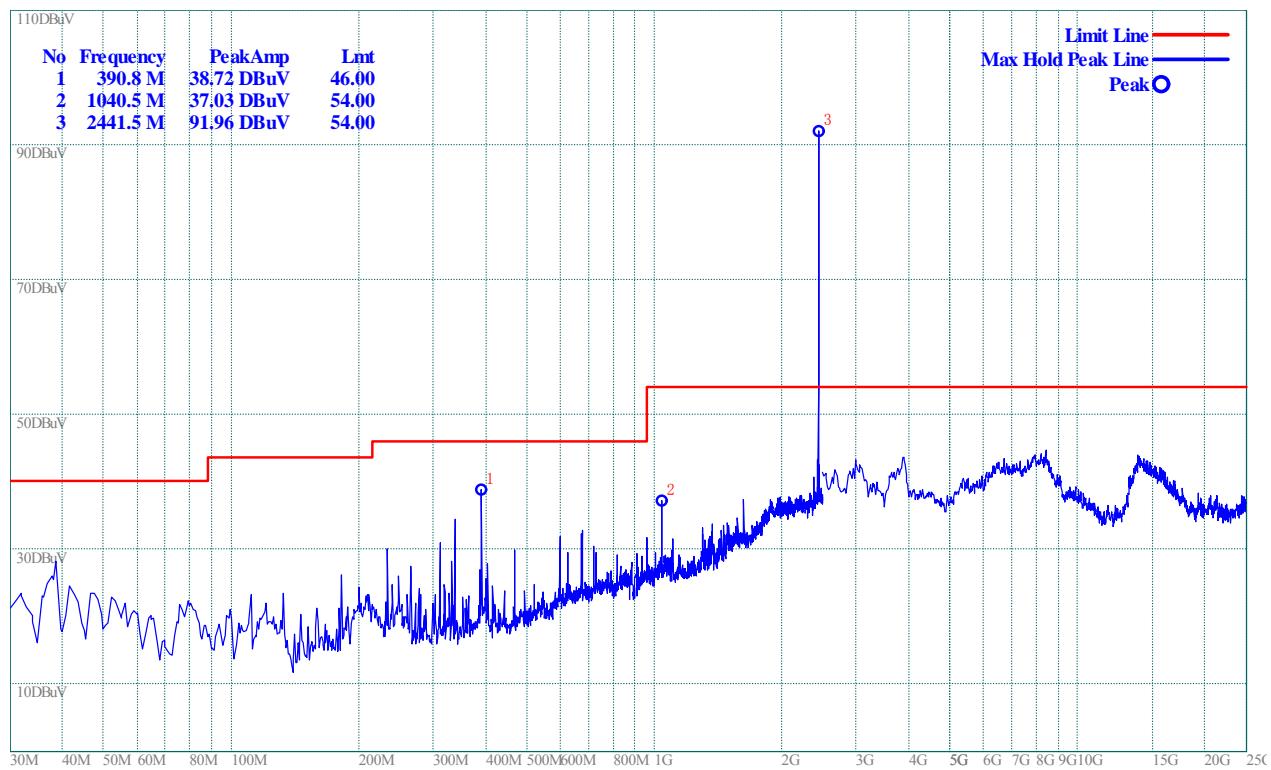


(Plot B.1: Antenna Horizontal)

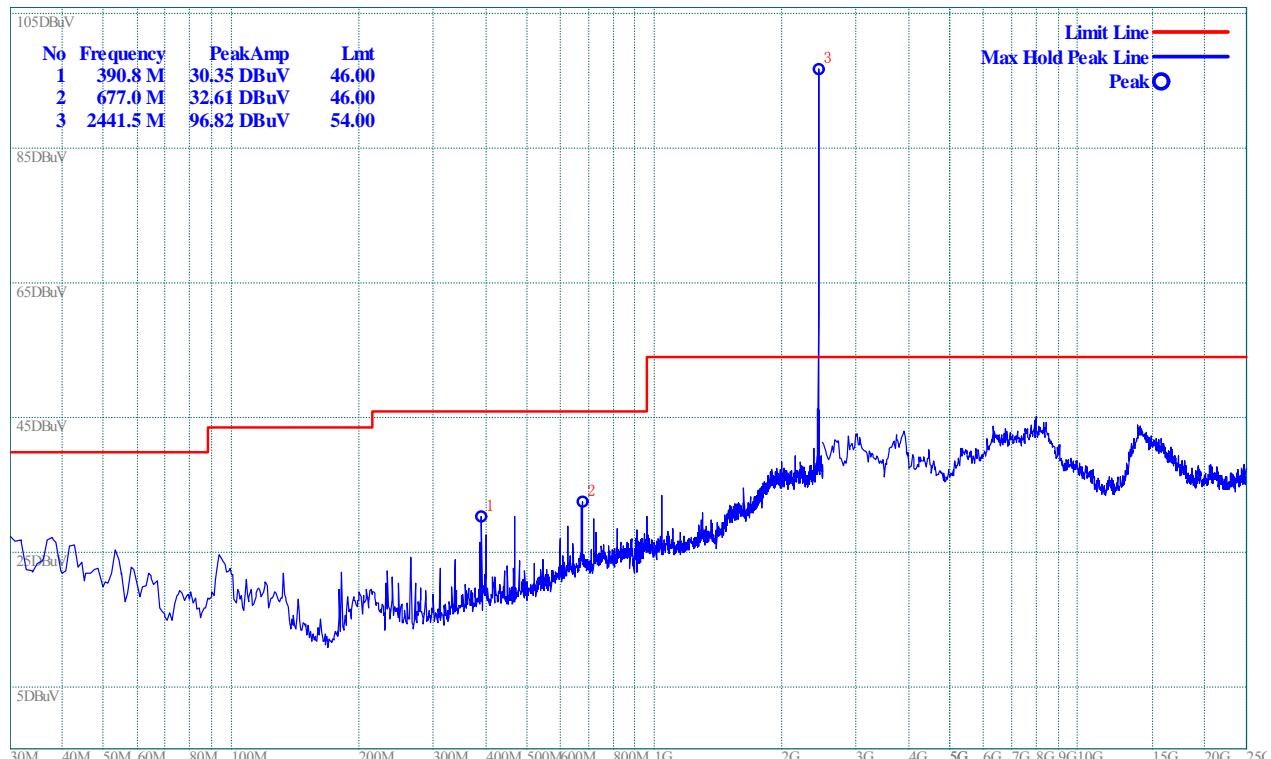


(Plot B.2: Antenna Vertical)

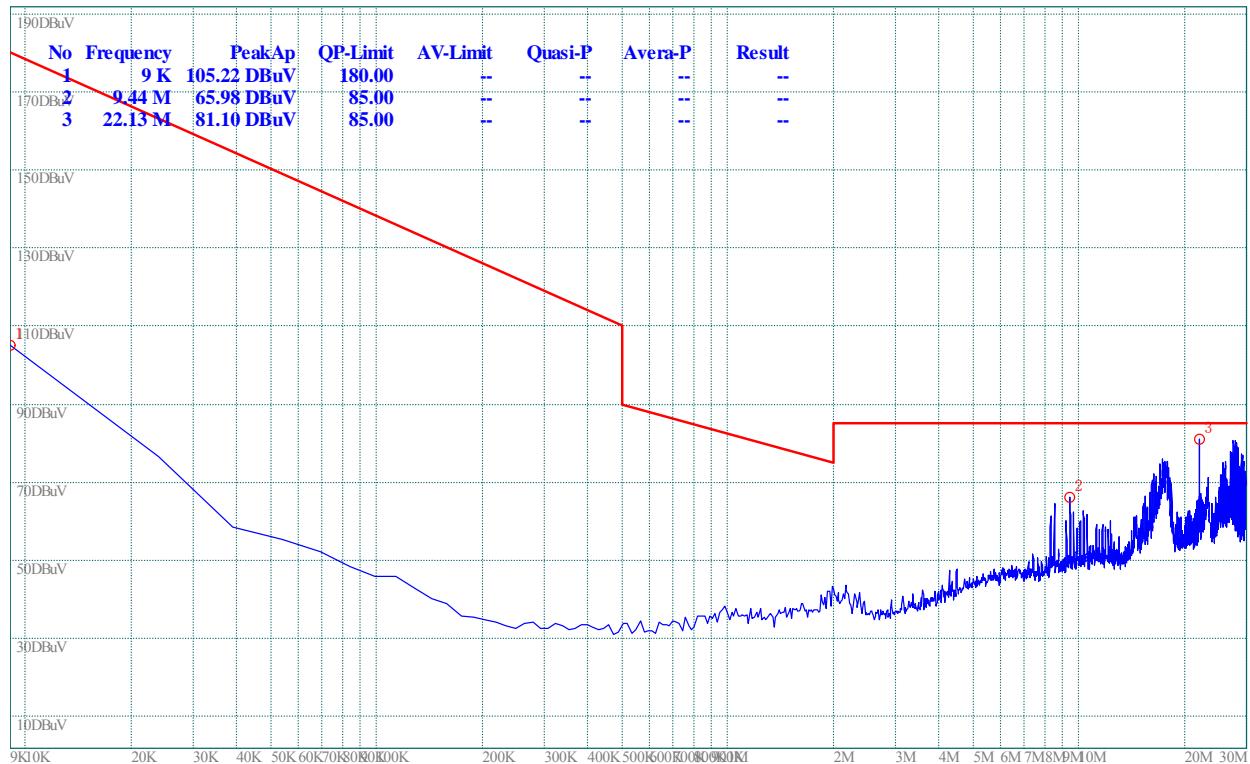Plot for Channel = 78


(Plot C.0: 9kHz to 30MHz)

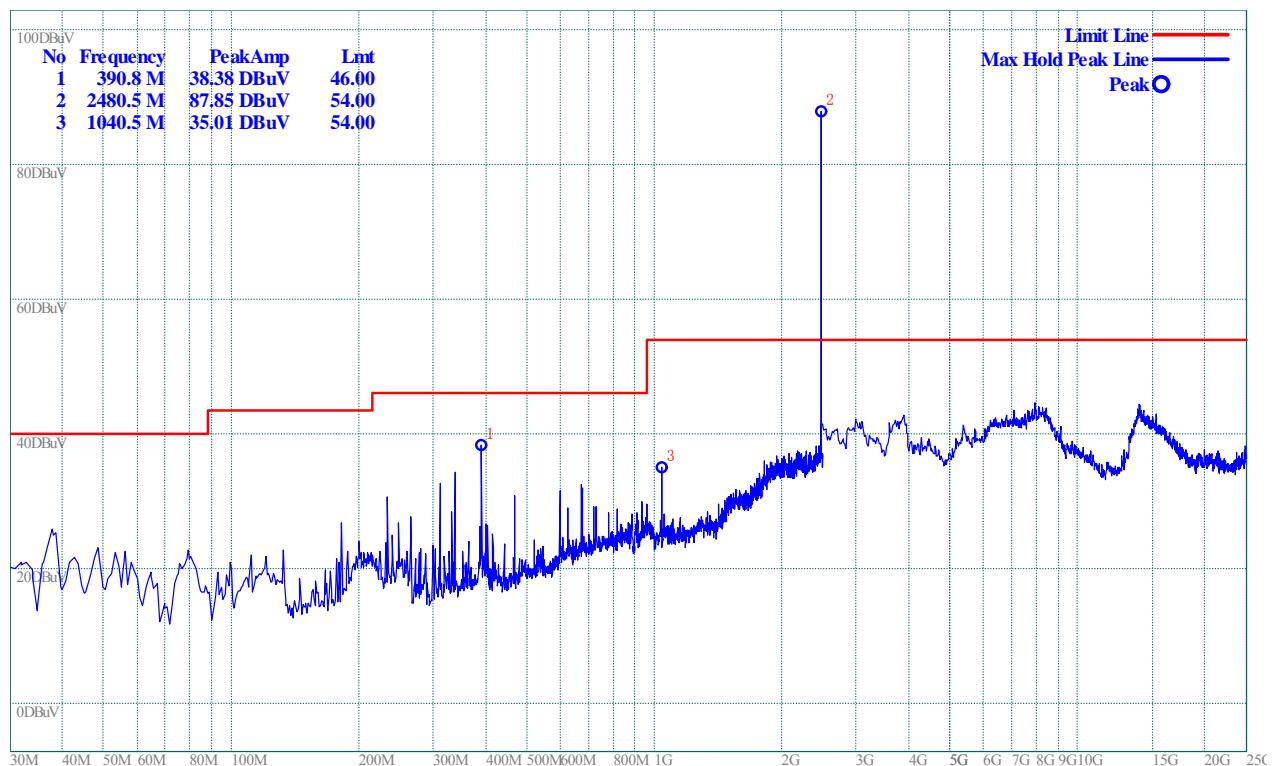

(Plot C.1: Antenna Horizontal)

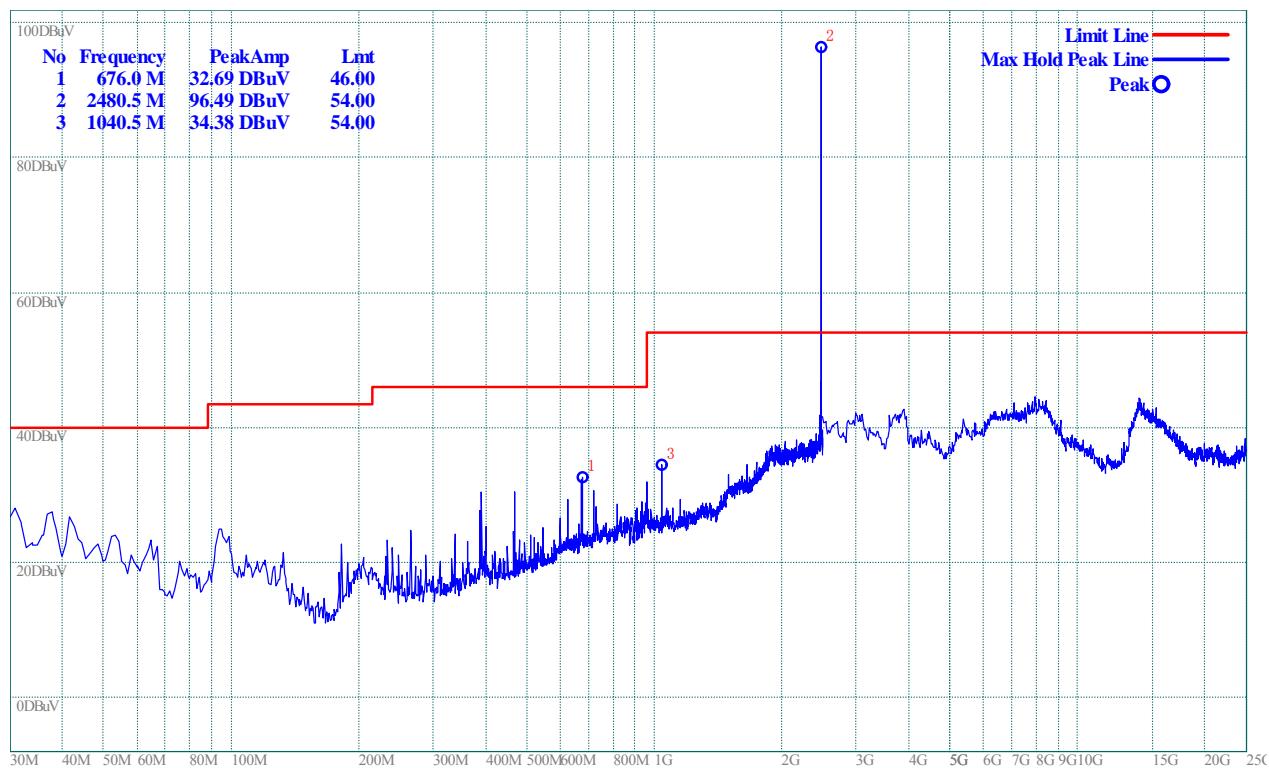

(Plot C.2: Antenna Vertical)

8-DPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	88.71	82.13	Horizontal	Plot A.1
		94.91	89.65	Vertical	Plot A.2
39	2441	91.80	87.05	Horizontal	Plot B.1
		96.81	90.11	Vertical	Plot B.2
78	2480	91.88	86.72	Horizontal	Plot C.1
		96.49	90.05	Vertical	Plot C.2

The un-wanted Emissions:
Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	39.01	46	-6.99	100	238	Horizontel
3.895 G	43.57	54	-10.43	100	356	Horizontel
390.8 M	31.5	46	-14.5	100	55	Vertical
676.0 M	32.69	46	-13.31	100	324	Vertical
1.041 G	33.14	54	-20.86	100	356	Vertical

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	38.36	46	-7.64	100	240	Horizontel
3.895 G	43.57	54	-10.43	100	356	Horizontel
390.8 M	31.84	46	-14.16	100	85	Vertical
677.0 M	33.2	46	-12.8	100	332	Vertical
960.2 M	33.1	54	-20.9	100	1	Vertical

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
390.8 M	38.65	46	-7.35	100	242	Horizontel
1.041 G	35.31	54	-18.69	100	64	Horizontel
468.4 M	31.36	46	-14.64	100	98	Vertical
1.041 G	34.38	54	-19.62	100	359	Vertical
14.020 G	44.42	54	-9.58	100	356	Vertical

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

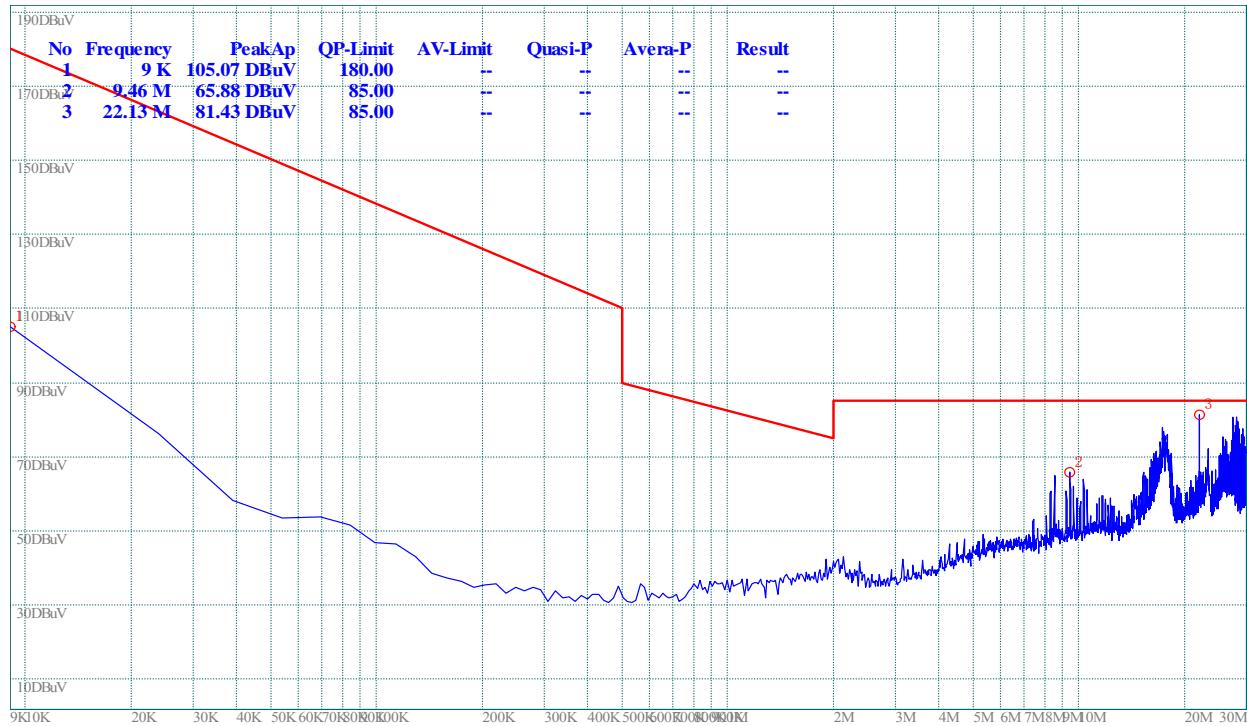

(Plot A.0: 9kHz to 30MHz)

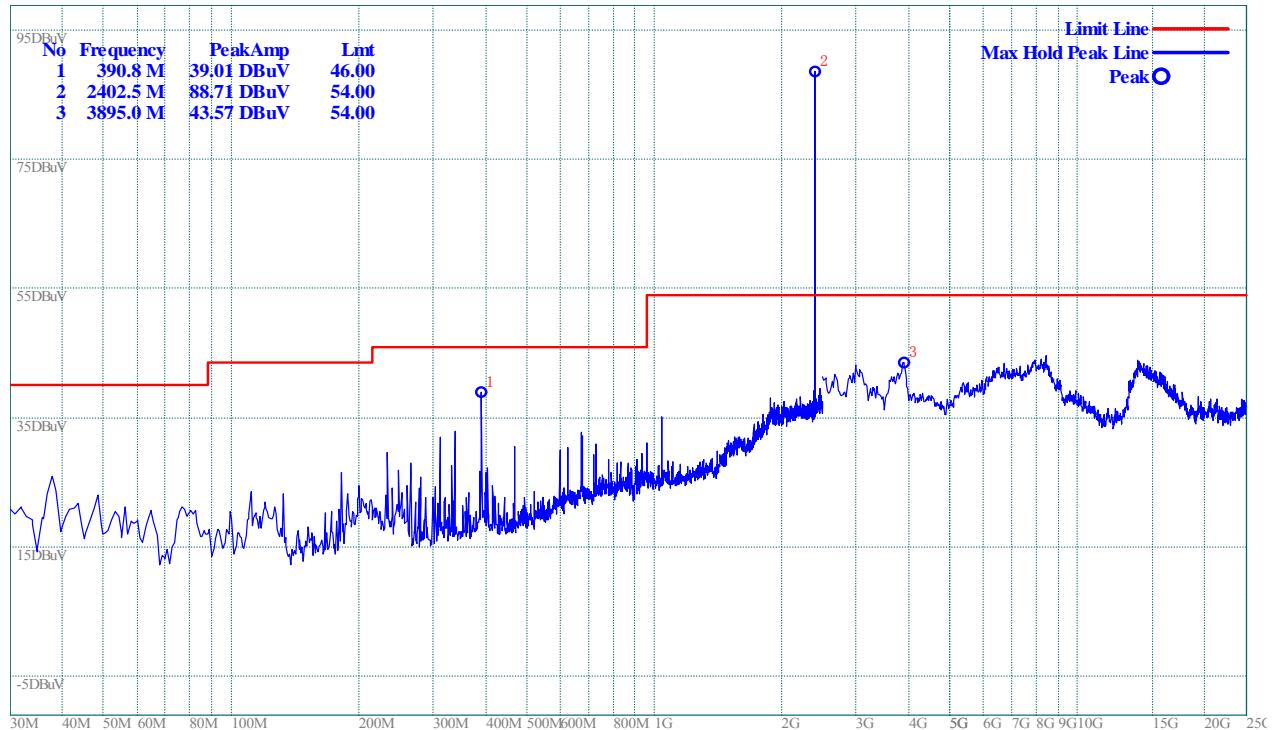


(Plot A.1: Antenna Horizontal)

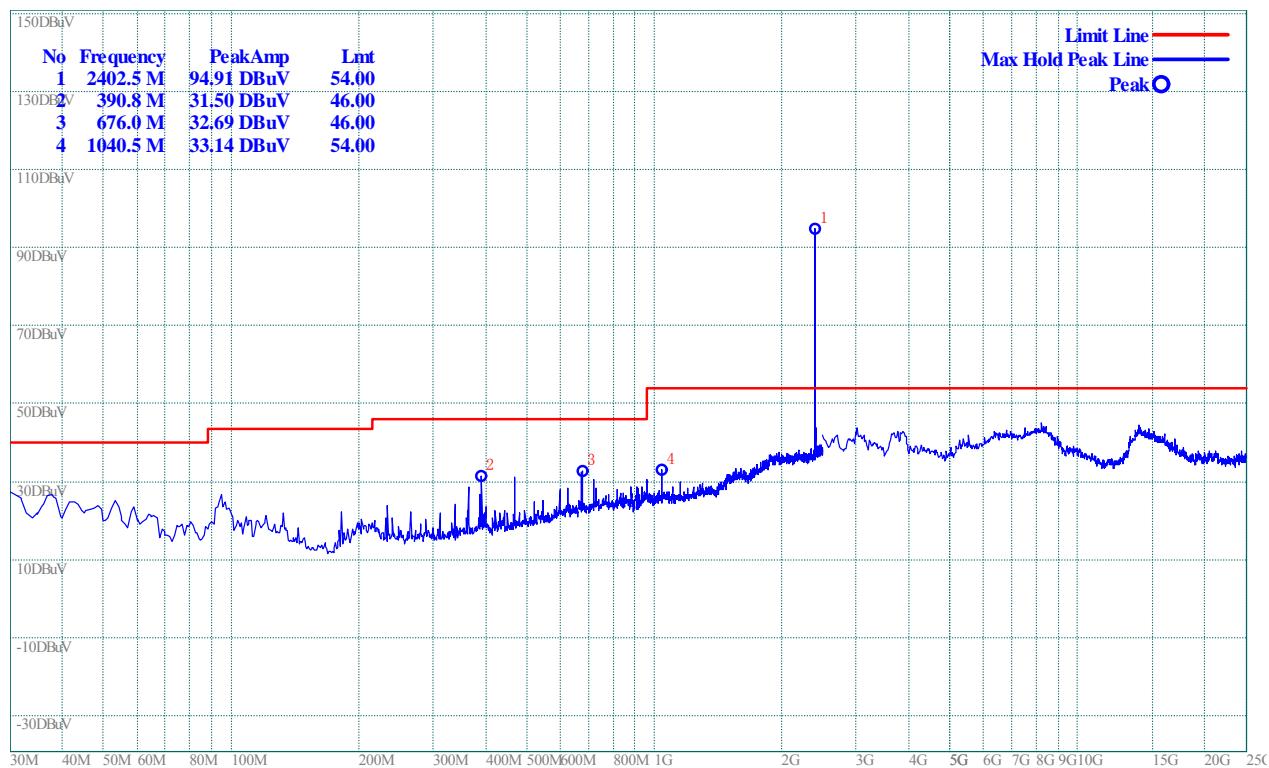


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

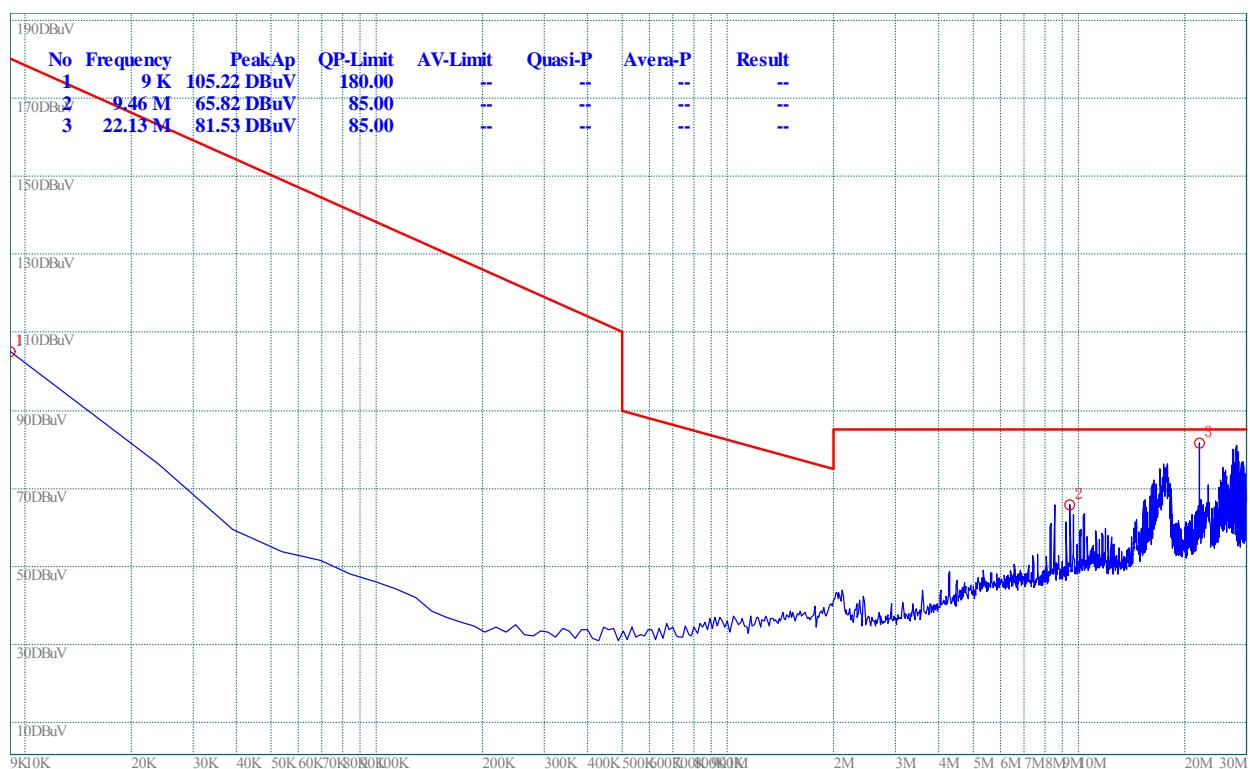


(Plot B.0: 9kHz to 30MHz)

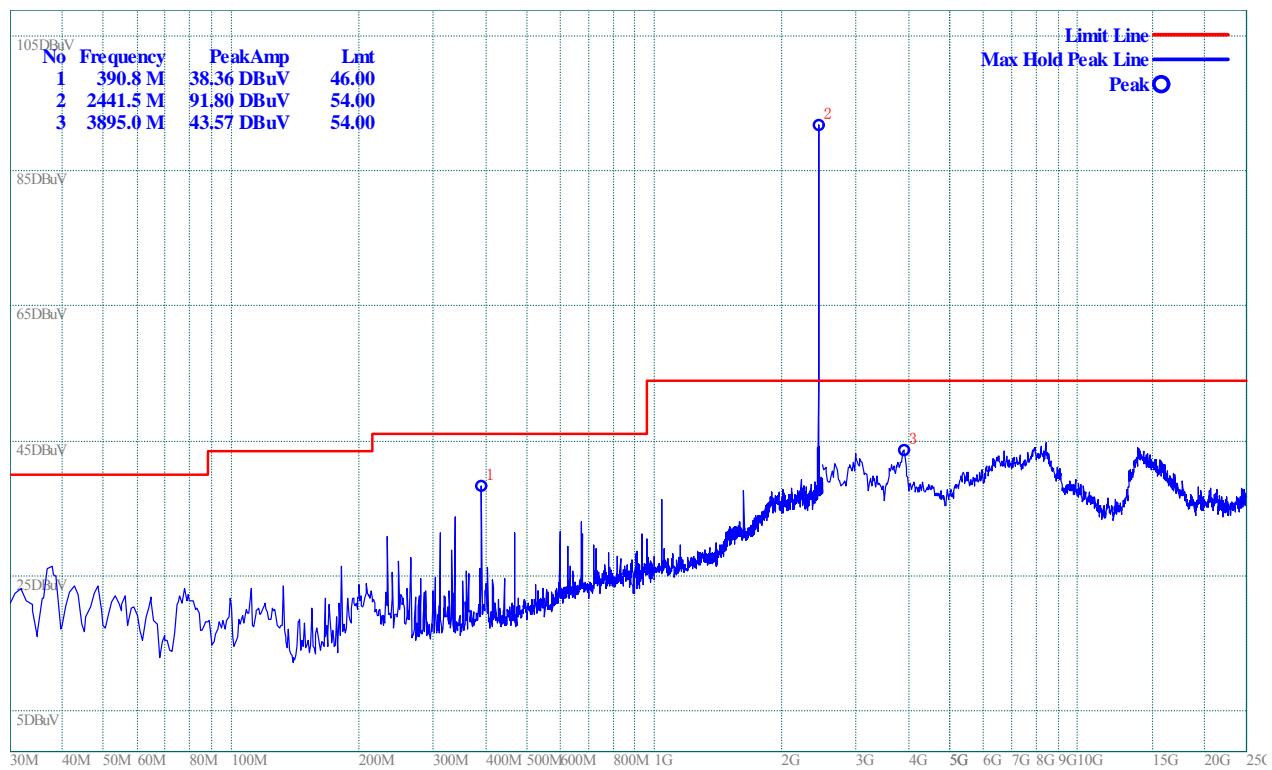


(Plot B.1: Antenna Horizontal)

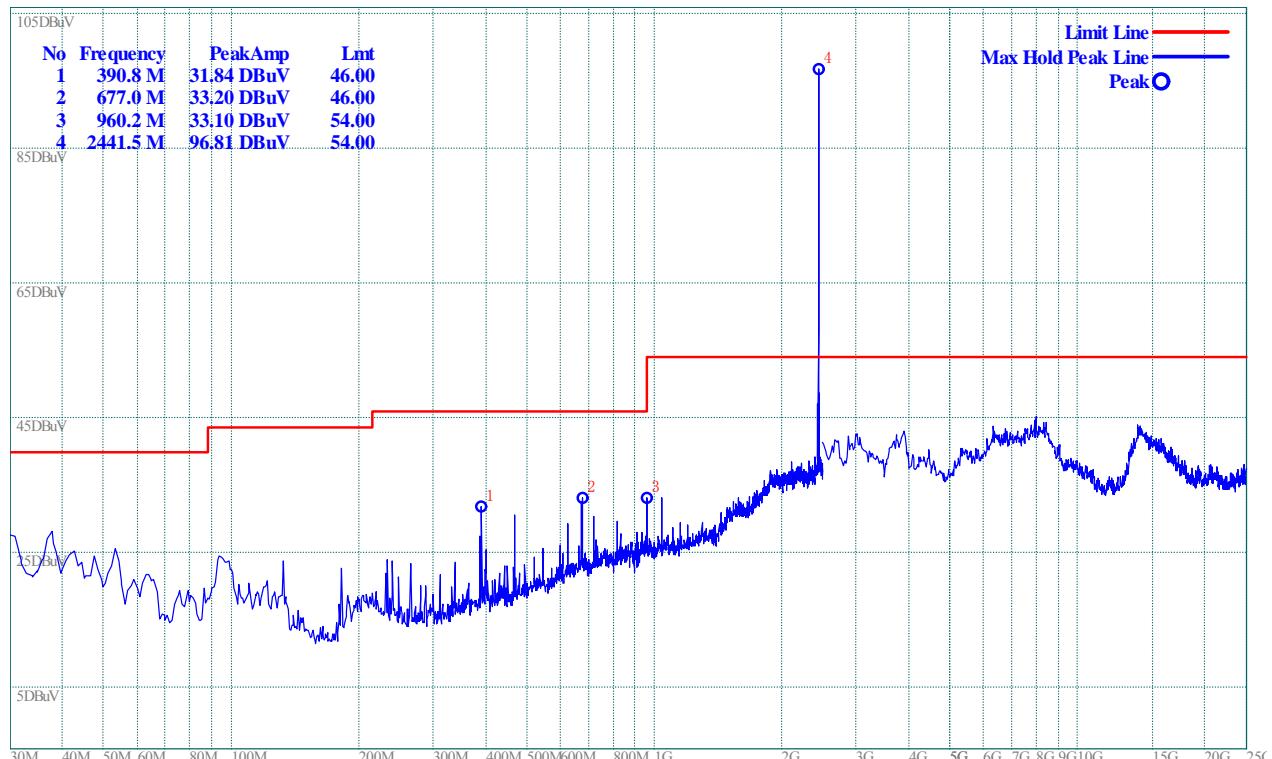


(Plot B.2: Antenna Vertical)

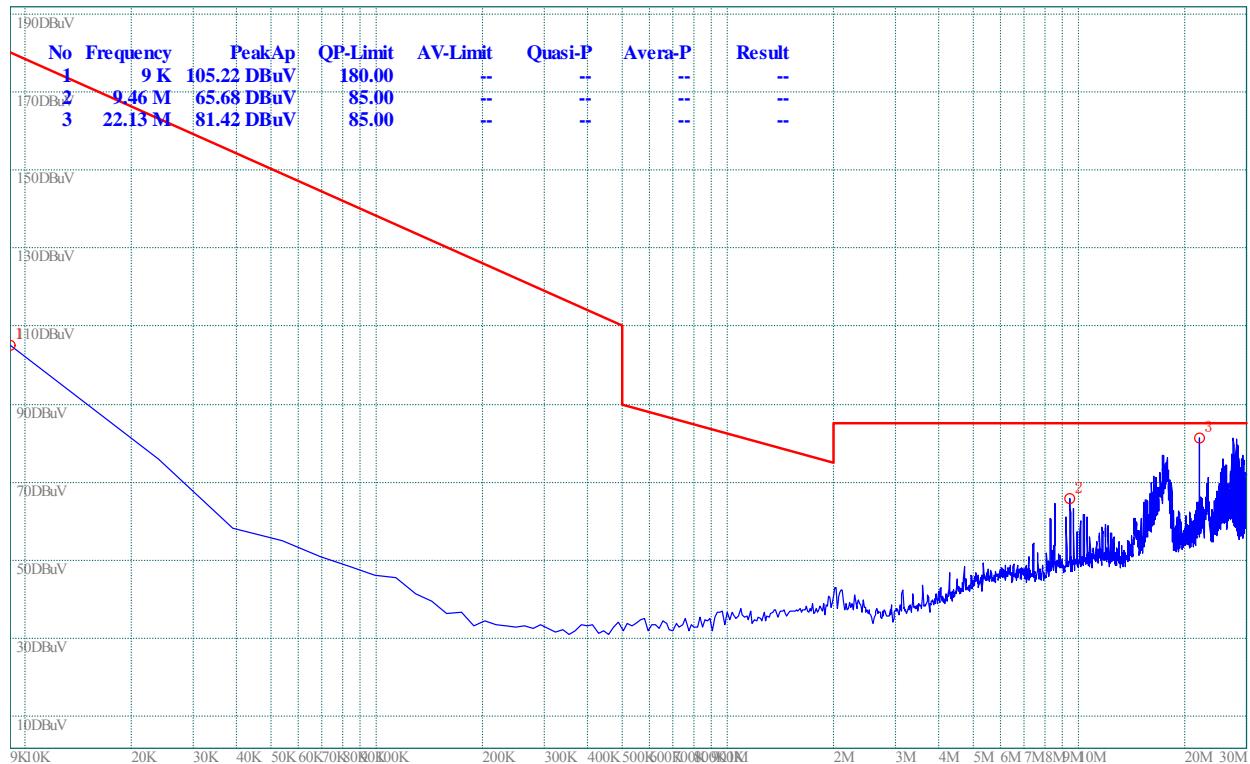Plot for Channel = 78


(Plot C.0: 9kHz to 30MHz)

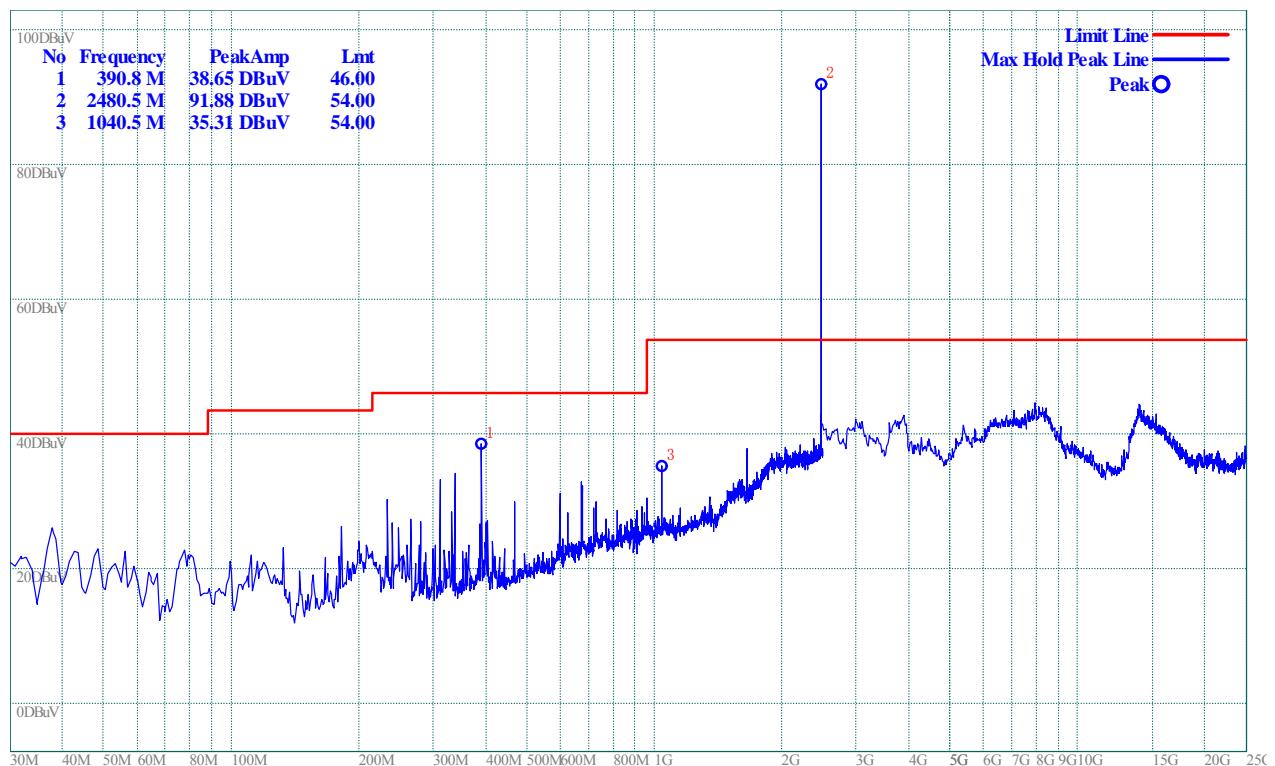

(Plot C.1: Antenna Horizontal)

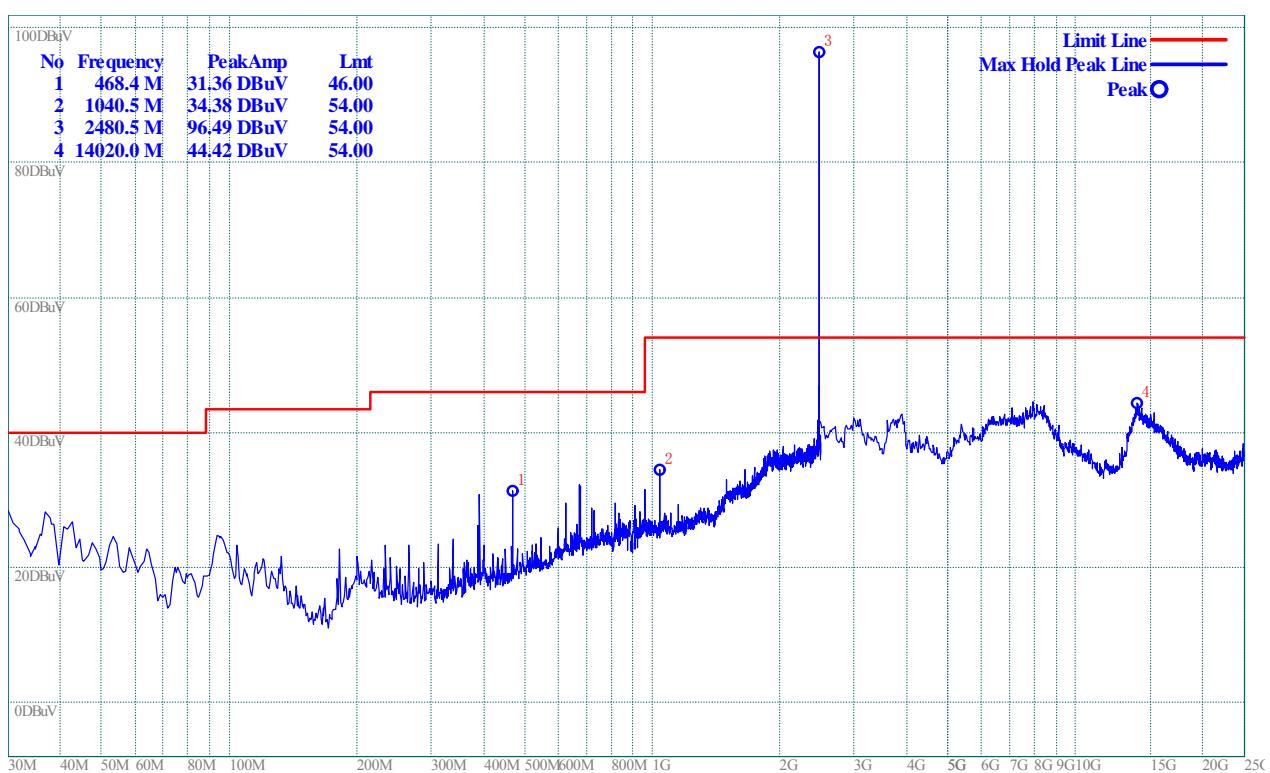

(Plot C.2: Antenna Vertical)

** END OF REPORT **