



TEST REPORT

No. 2011TAR176

for

TCT Mobile Limited

GSM/GPRS/EDGE dual band mobile phone

Model Name: Agate lifestyle

Marketing Name: TCL-8107

FCC ID: RAD196

with

Hardware Version: PIO

Software Version: SW27i

Issued Date: 2011-04-26

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633 Email:welcom@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
4. REFERENCE DOCUMENTS.....	6
4.1. REFERENCE DOCUMENTS FOR TESTING.....	6
5. LABORATORY ENVIRONMENT.....	7
6. SUMMARY OF TEST RESULTS.....	8
7. TEST EQUIPMENTS UTILIZED.....	9
ANNEX A: MEASUREMENT RESULTS.....	10

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: Apr 13,2011
Testing End Date: Apr 20,2011

1.4. Signature




Liu Baodian

(Prepared this test report)



Sun Xiangqian

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 4F, South Building, No.2966, JinKe Road, Zhangjiang High-Tech Park
Shanghai 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: P.R.China
Telephone: 0086 21 61460883
Fax: 0086 2161460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 4F, South Building, No.2966, JinKe Road, Zhangjiang High-Tech Park
Shanghai 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: P.R.China
Telephone: 0086 2161460890
Fax: 0086 2161460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/GPRS/EDGE dual band mobile phone
Model Name	Agate lifestyle
Marketing Name	TCL-8107
FCC ID	RAD196
Frequency	GSM 850MHz; PCS 1900MHz
Antenna	Internal
Power supply	Battery or Charger (AC Adaptor)
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	012742000000441	PIO	SW27i

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Charger	/
AE3	Charger	/
AE4	Headset	/
AE5	Headset	/
AE6	Bluetooth Headset	/
AE7	Charger	/

AE1

Model	CAB3120000C1
Manufacturer	BYD
Capacitance	850mAh
Nominal Voltage	3.7V

AE2

Model	CBA3120AG0C1
Manufacturer	BYD
Length of DC line	120cm

AE3

Model	CBA3120AG0C2
Manufacturer	TENPAO
Length of DC line	120cm

AE4		
Model		CCB3160A10C0
Manufacturer		Juwei
Length of DC line		150cm
AE5		
Model		CCB3160A10C2
Manufacturer		Shunda
Length of DC line		150cm
AE6		
Model		OT-BM82
Manufacturer		TCT Mobile
AE7		
Model		CBA31DDAH0C1
Manufacturer		BYD
Length of DC line		120cm

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2012-03-12
2	Test Receiver	ESCI	100766	R&S	2011-12-06
3	Test Receiver	ESI40	831564/002	R&S	2012-02-12
4	BiLog Antenna	VUL9163	9163-302	Schwarzbeck	2012-02-10
5	Signal Generator	SMB100A	102063	R&S	2012-03-05
6	LISN	ESH2-Z5	829991/012	R&S	2012-04-20
7	Universal Radio Communication Tester	CMU200	100680	R&S	2011-09-05
8	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2012-01-18
9	PC	OPTIPLEX 755	3908243625	DELL	N/A
10	Monitor	E178FPc	CN-OWR979-64 180-7AJ-D2MS	DELL	N/A
11	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
12	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A
13	Mouse	VR-301	6927225500198	XINGYU	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2009, section 8.3.

A.1.2 EUT Operating Mode:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + F_A + G_{\text{PL}}$$

Where

F_A : Receive Antenna Factor

G_{PL} : Cable Loss

P_{Mea} : The measurement result on receiver.

Charging Mode(AE2)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3875.752	51.23	-19.6	33.4	37.43	VERTICAL
3863.727	49.77	-19.6	33.4	35.97	VERTICAL
3541.082	49.66	-19.5	33.4	35.76	HORIZONTAL
3673.347	49.56	-19.6	33.4	35.76	VERTICAL
3589.178	49.51	-19.6	33.4	35.71	VERTICAL
3815.631	49.49	-19.5	33.4	35.59	VERTICAL

Charging Mode(AE3)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3811.623	50.05	-19.5	33.4	36.15	VERTICAL
3681.363	49.91	-19.5	33.4	36.01	VERTICAL
3763.527	49.9	-19.6	33.4	36.1	VERTICAL
3607.214	49.82	-19.6	33.4	36.02	HORIZONTAL
3619.238	49.82	-19.7	33.4	36.12	HORIZONTAL
3505.01	49.79	-19.7	33.4	36.09	VERTICAL

Charging Mode(AE7)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3873.747	51.43	-19.6	33.4	37.63	HORIZONTAL
3537.074	50.84	-19.4	33.4	36.84	VERTICAL
3460.922	50.72	-19.6	31.2	39.12	HORIZONTAL
3623.246	50.7	-19.8	33.4	37.1	VERTICAL
3527.054	50.69	-19.6	33.4	36.89	HORIZONTAL
3513.026	50.63	-19.6	33.4	36.83	HORIZONTAL

USB Mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
2058.116	50.97	-20.2	27.5	43.67	HORIZONTAL
2054.108	50.72	-20.2	27.5	43.42	VERTICAL
2062.124	50.68	-20.2	27.5	43.38	VERTICAL
3593.186	50.38	-19.6	33.4	36.58	VERTICAL
3875.752	50.07	-19.6	33.4	36.27	VERTICAL
3825.651	50	-19.4	33.4	36	VERTICAL

Charging Mode(AE2)

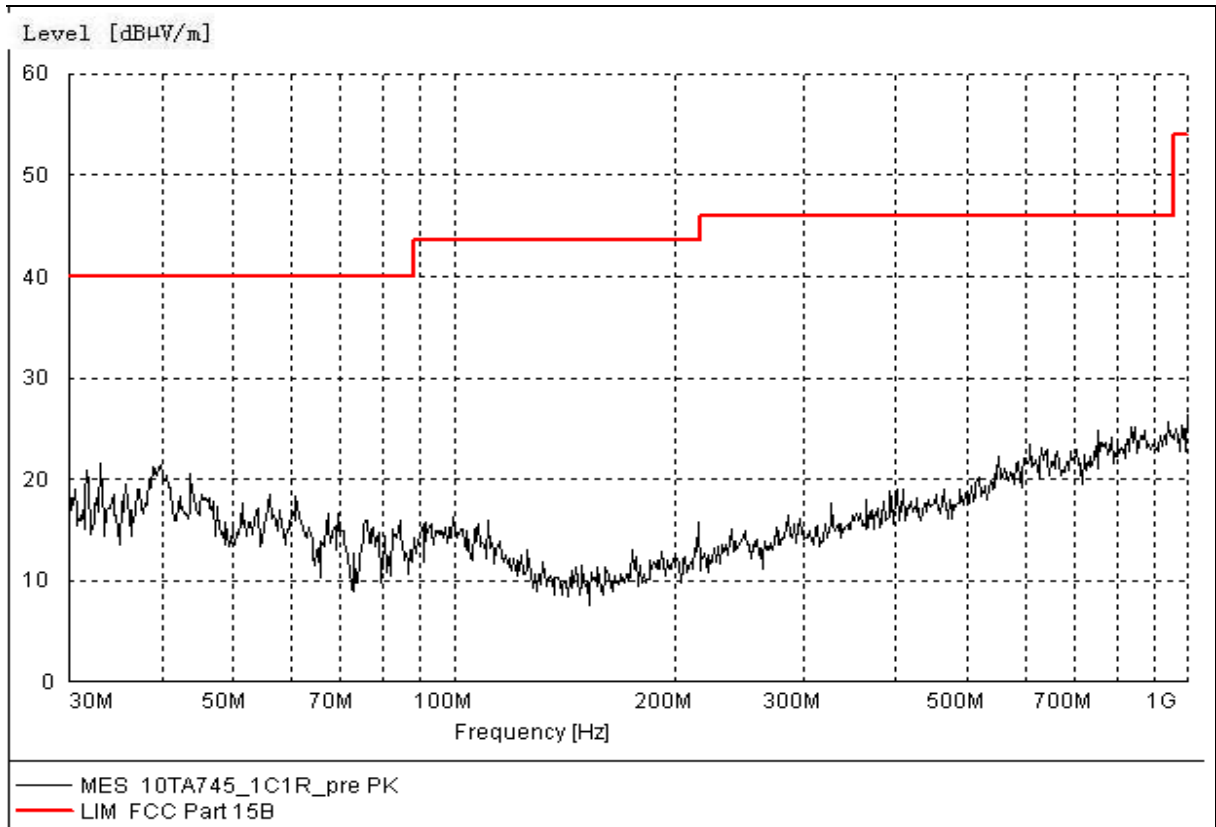


Figure A.1 Radiated Emission from 30MHz to 1GHz

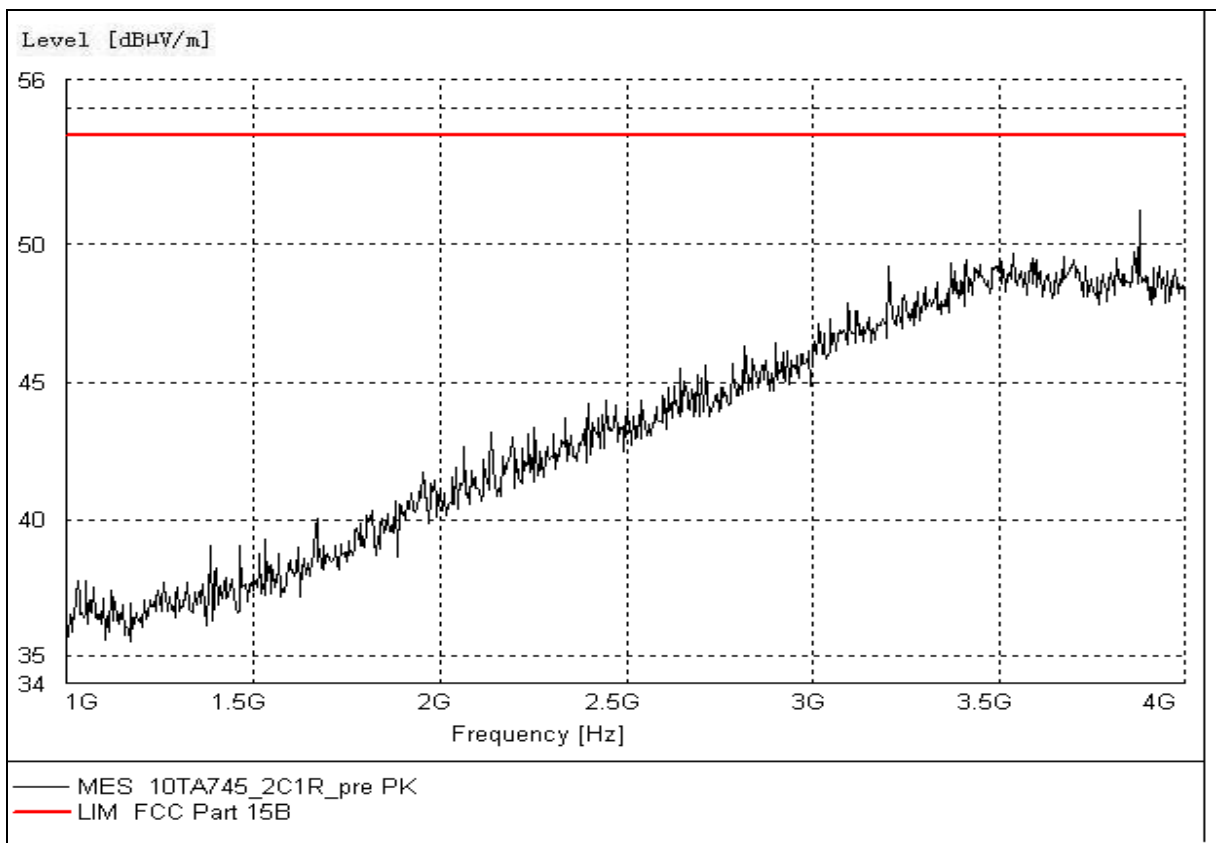


Figure A.2 Radiated Emission from 1GHz to 4GHz

Charging Mode(AE3)

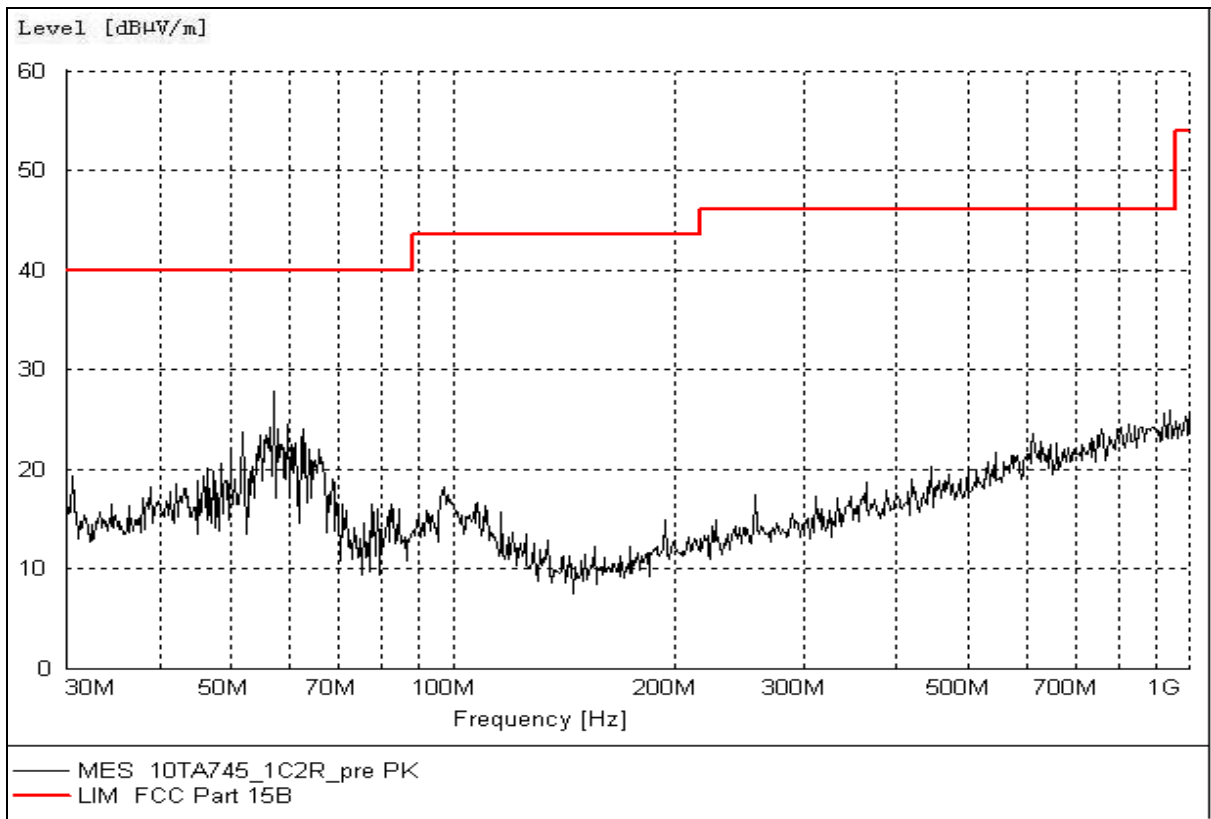


Figure A.3 Radiated Emission from 30MHz to 1GHz

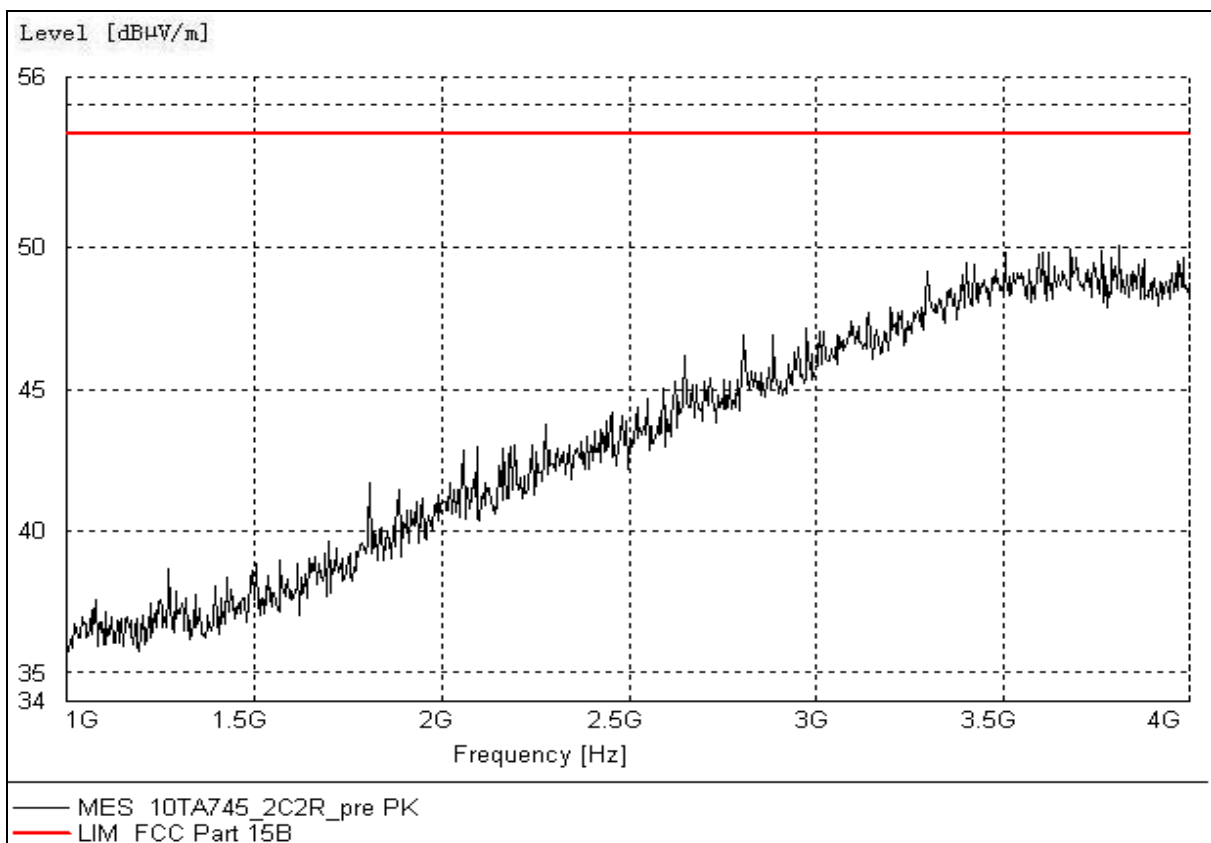


Figure A.4 Radiated Emission from 1GHz to 4GHz

Charging Mode(AE7)

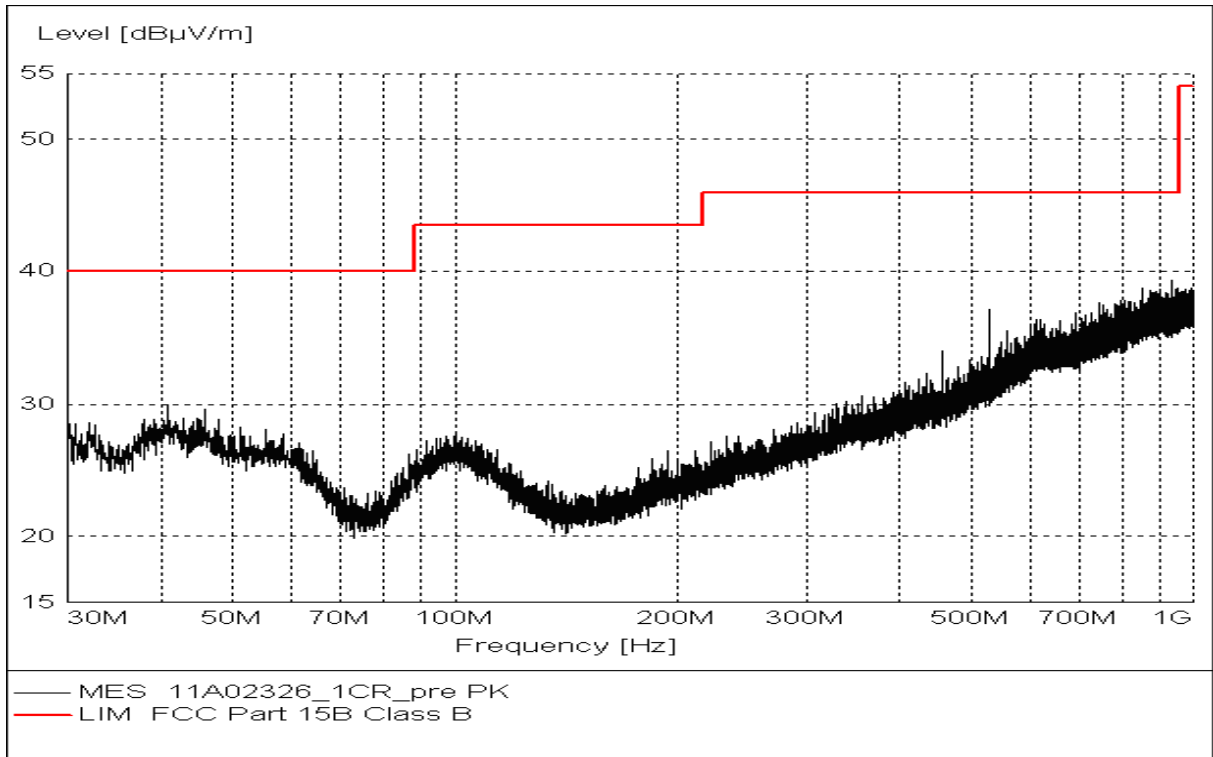


Figure A.5 Radiated Emission from 30MHz to 1GHz

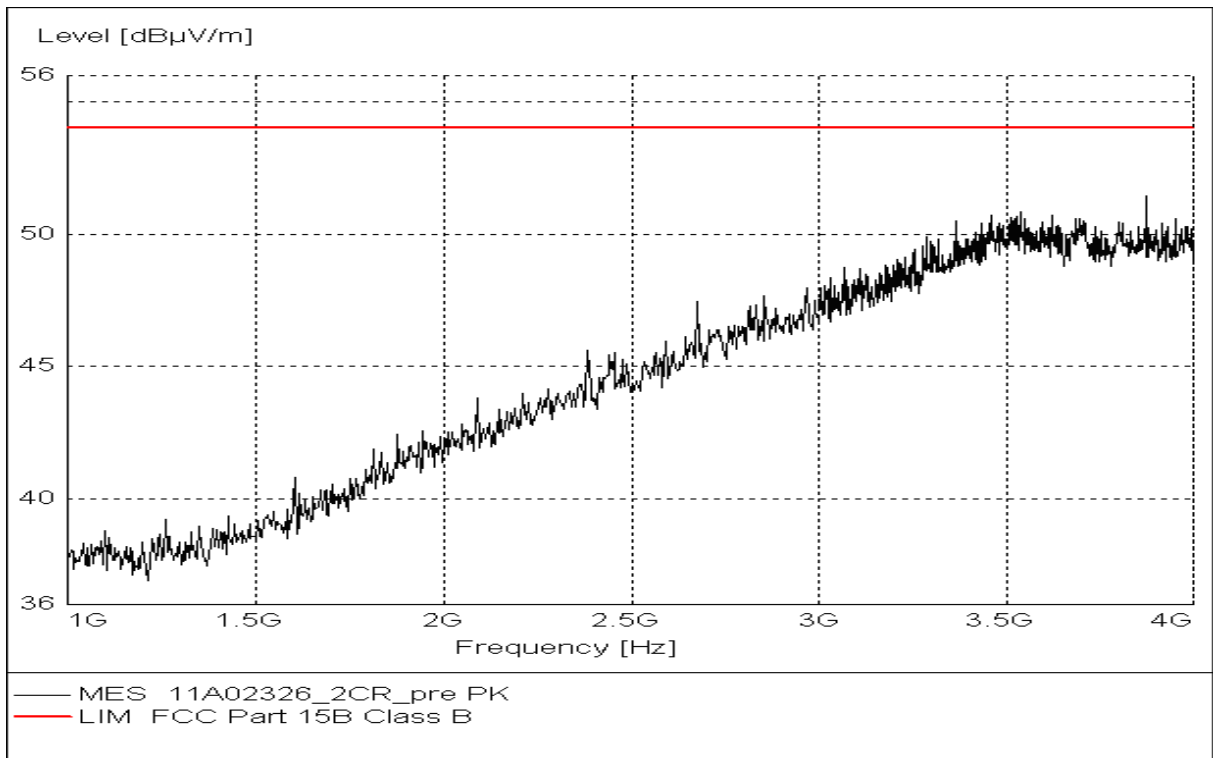


Figure A.6 Radiated Emission from 1GHz to 4GHz

USB Mode

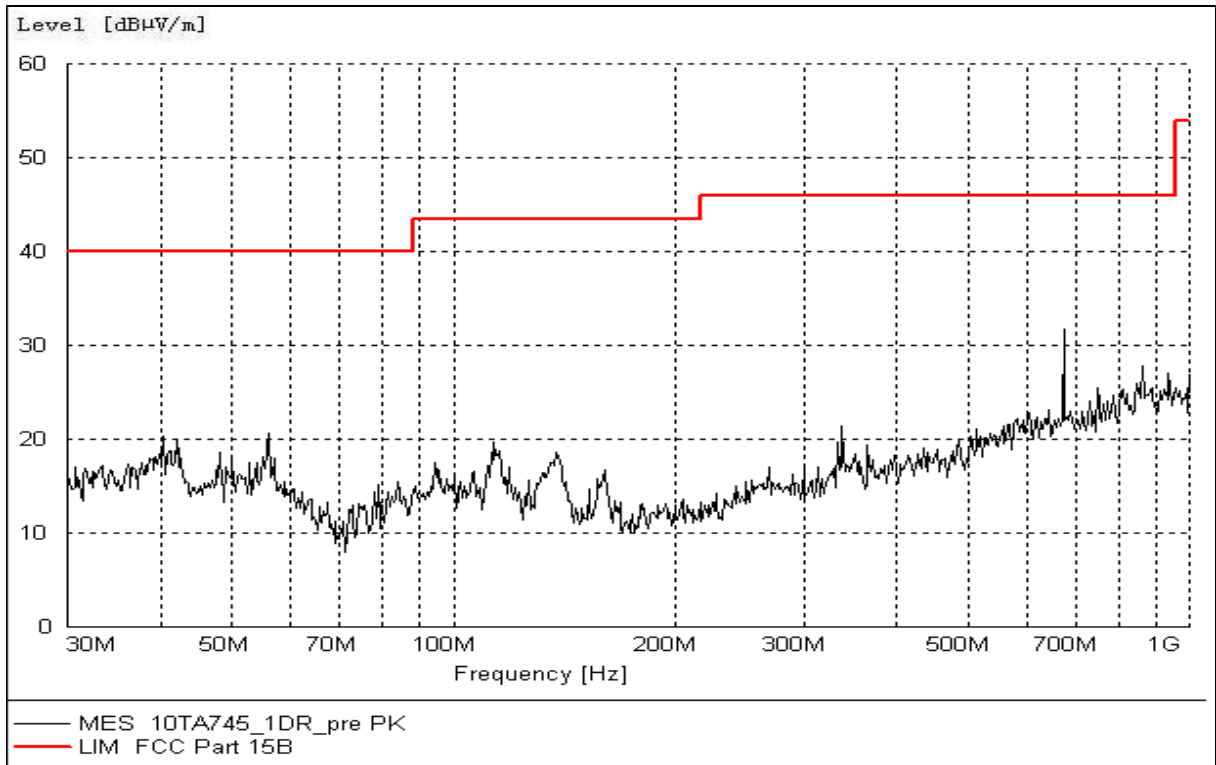


Figure A.7 Radiated Emission from 30MHz to 1GHz

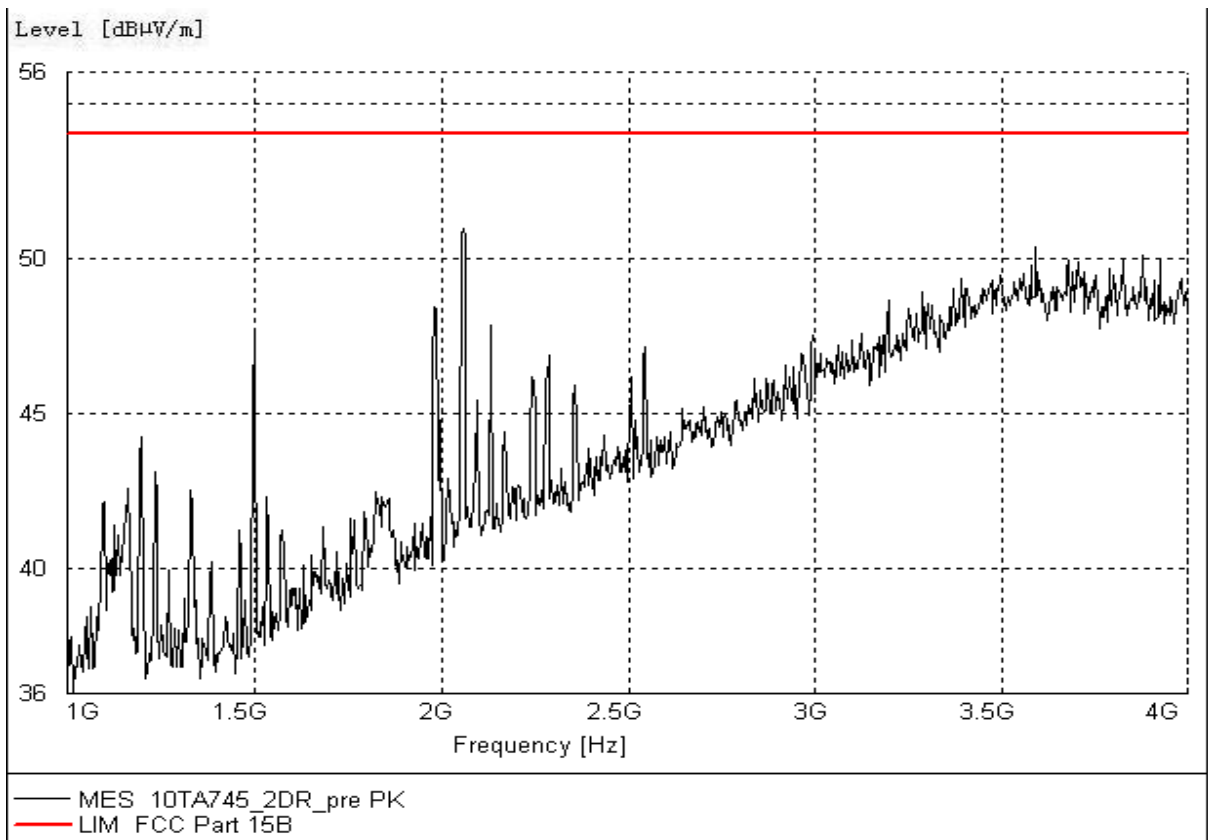


Figure A.8 Radiated Emission from 1GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2009, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
110	60

A.2.4 Measurement Results
Charging Mode (AE2)

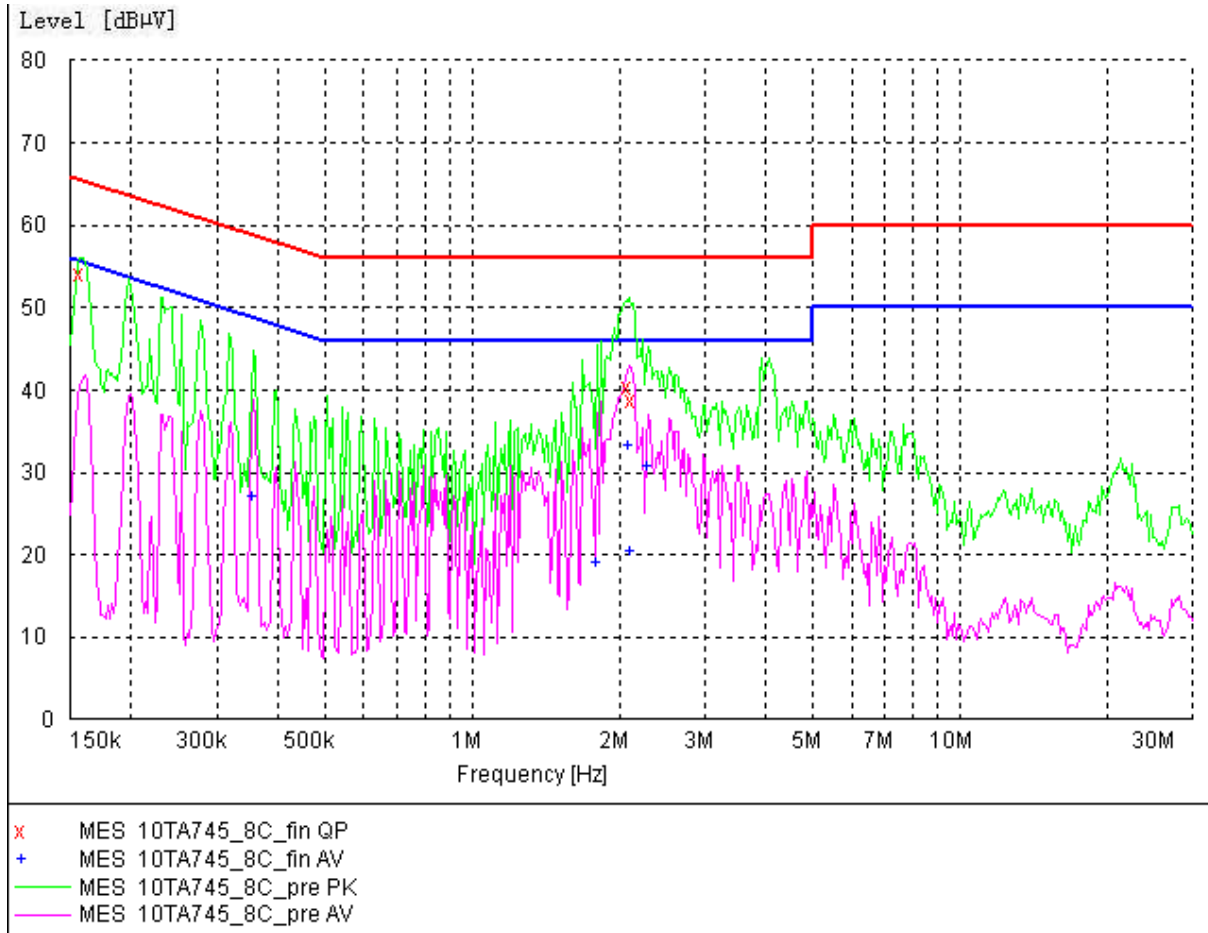


Figure A.9 Conducted Emission

MEASUREMENT RESULT: "10TA745_8C_fin QP"


Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB	dB	
0.159228	54.10	10.1	66	11.4	L1	FLO
2.102020	40.40	10.1	56	15.6	L1	GND
2.144271	38.80	10.1	56	17.2	N	FLO

MEASUREMENT RESULT: "10TA745_8C_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB	dB	
0.356493	27.10	10.1	49	21.7	L1	FLO
1.804823	19.10	10.1	46	26.9	L1	FLO
2.102020	33.20	10.1	46	12.8	L1	GND
2.123040	20.30	10.1	46	25.7	L1	FLO
2.298948	30.70	10.1	46	15.3	N	FLO

Charging Mode (AE3)

Level [dB μ V]

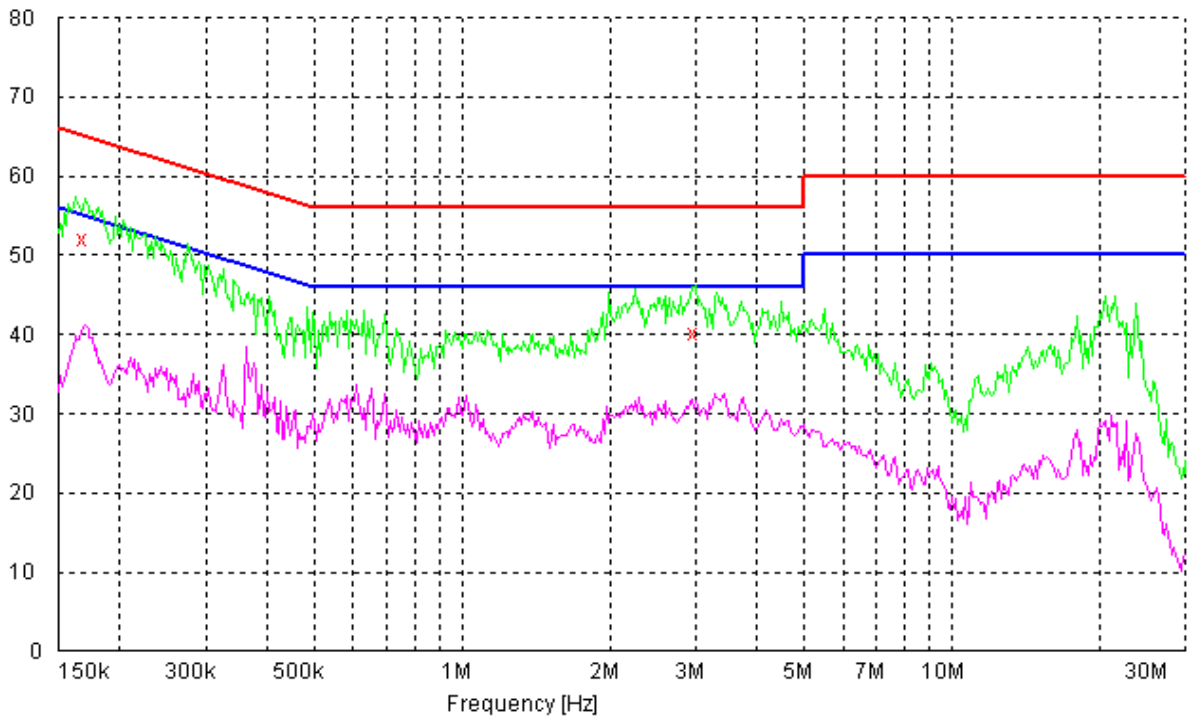

- x MES 10TA745_28C_fin QP
- MES 10TA745_28C_pre PK
- MES 10TA745_28C_pre AV
- LIM EN 55022 V QP Voltage QP Limit

Figure A.10 Conducted Emission

MEASUREMENT RESULT: "10TA745_28C_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dB μ V	dB	dB μ V	dB		
0.170714	52.00	10.1	65	13.0	N	FLO
3.007505	40.20	10.1	56	15.8	N	FLO

Charging Mode (AE7)

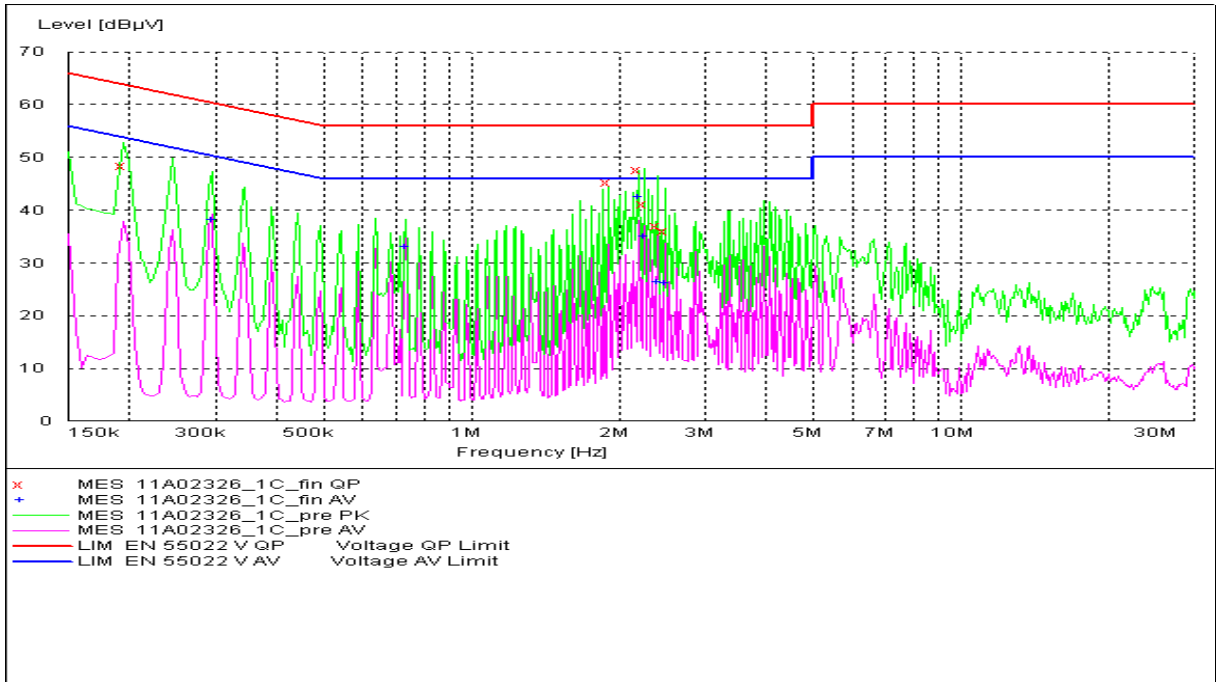


Figure A.11 Conducted Emission

MEASUREMENT RESULT: "11A02326_1C_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.195000	48.40	10.2	64	15.4	L1	GND
1.905054	45.20	10.2	56	10.8	N	GND
2.198856	47.50	10.2	56	8.5	N	GND
2.252052	41.20	10.2	56	14.8	N	GND
2.400284	36.90	10.2	56	19.1	N	GND
2.497844	35.90	10.2	56	20.1	N	GND

MEASUREMENT RESULT: "11A02326_1C_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.295000	38.20	10.2	50	12.2	L1	GND
0.735000	33.10	10.2	46	12.9	L1	GND
2.198856	42.40	10.2	46	3.6	N	GND
2.252052	35.00	10.2	46	11.0	N	GND
2.400284	26.30	10.2	46	19.7	N	GND
2.497844	26.10	10.2	46	19.9	N	GND

USB Mode

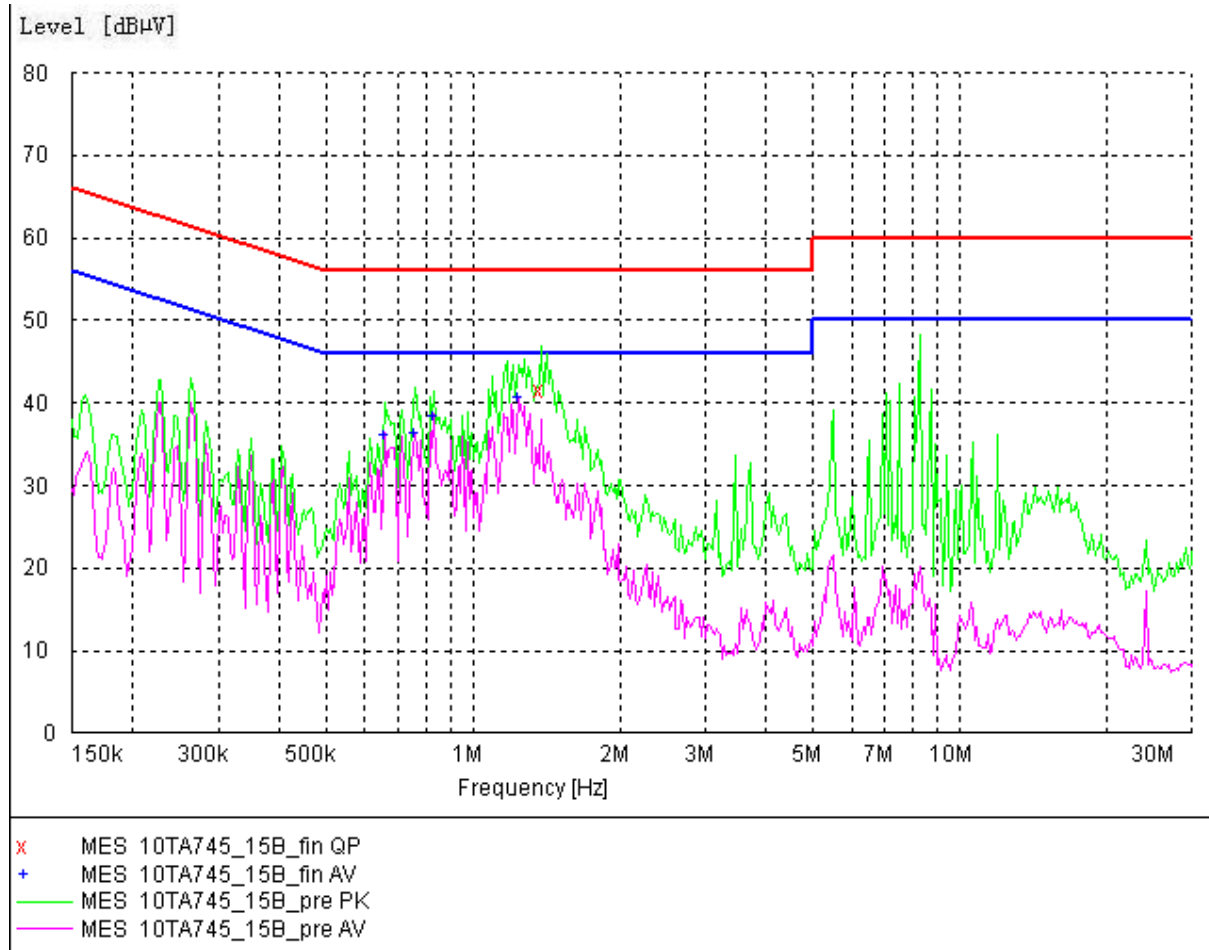


Figure A.12 Conducted Emission

MEASUREMENT RESULT: "10TA745_15B_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
1.379614	41.50	10.1	56	14.5	L1	FLO

MEASUREMENT RESULT: "10TA745_15B_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.660657	36.10	10.1	46	9.9	L1	FLO
0.759408	36.20	10.1	46	9.8	L1	FLO
0.830553	38.30	10.1	46	7.7	L1	GND
1.248947	40.70	10.1	46	5.3	L1	FLO

END OF REPORT