



# TEST REPORT

No. 2011TAR434

for

**TCT Mobile Limited**

**CDMA2000 dual band mobile phone**

**Model Name: Venus**

**Marketing Name: one touch 909B**

**FCC ID : RAD210**

with

**Hardware Version: PIO**

**Software Version: vF23**

**Issued Date: 2011-08-12**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629A-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633 , Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>3</b>
<b>1.1. TESTING LOCATION.....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT.....</b>	<b>3</b>
<b>1.3. PROJECT DATA.....</b>	<b>3</b>
<b>1.4. SIGNATURE.....</b>	<b>3</b>
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....</b>	<b>5</b>
<b>3.1. ABOUT EUT.....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....</b>	<b>5</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>5</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>6</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>6</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>7</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>9</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>10</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304633


### **1.2. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.3. Project data**

Testing Start Date: Aug 02, 2011  
Testing End Date: Aug 11, 2011


### **1.4. Signature**



---

**Liu Baodian**


**(Prepared this test report)**



---

**Sun Xiangqian**

**(Reviewed this test report)**



---

**Lu Bingsong**

**Deputy Director of the laboratory  
(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: +86-21-61460890  
Fax: +86-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: +86-21-61460890  
Fax: +86-21-61460602

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	CDMA2000 dual band mobile phone
Model Name	one touch 909B
FCC ID	RAD210
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	A100000862D6F1	PIO	vF23

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN
AE1	Travel Adapter	/
AE2	Battery	/
AE3	USB Cable	/

##### AE1

Model	CBA3001AG0C1
Manufacturer	BYD
Length of DC line	USB Connector

##### AE2

Model	CAB31P0000C1
Manufacturer	BYD
Capacitance	1300mAh
Nominal Voltage	3.7V

##### AE3

Model	CDA3122002C1
Manufacturer	/
Length of DC line	100cm

\*AE ID: is used to identify the test sample in the lab internally.

#### **EUT set-ups**

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1+AE2+AE3	--
Set.2	EUT1+ AE2 +AE3	--

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1**(6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Fully-anechoic chamber2**(8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 1Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

## 6. SUMMARY OF TEST RESULTS

<b>Abbreviations used in this clause:</b>	
P	Pass
NA	Not applicable
F	Fail

<b>Clause</b>	<b>List</b>	<b>Clause in FCC rules</b>	<b>Verdict</b>
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P



## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2012-03-12
2	Test Receiver	ESCI	100766	R&S	2011-12-06
3	Test Receiver	ESI40	831564/002	R&S	2012-02-12
4	BiLog Antenna	VUL9163	9163-302	Schwarzbeck	2012-02-10
5	Signal Generator	SMB100A	102063	R&S	2012-03-05
6	LISN	ESH2-Z5	829991/012	R&S	2012-04-20
7	Universal Radio Communication Tester	CMU200	102228	R&S	2012-07-07
8	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2012-01-18
9	PC	OPTIPLEX 755	3908243625	DELL	N/A
10	Monitor	E178FPc	CN-OWR979-64 180-7AJ-D2MS	DELL	N/A
11	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
12	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A
13	Mouse	VR-301	6927225500198	XINGYU	N/A

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

#### **A.1.2 EUT Operating Mode:**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

#### **A.1.3 Measurement Limit**

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

#### **A.1.4 Test Condition**

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + F_A + G_{\text{PL}}$$

Where

$F_A$ : Receive Antenna Factor

$G_{\text{PL}}$ : Cable Loss

$P_{\text{Mea}}$ : The measurement result on receiver.


#### Charging Mode

Frequency(MHz)	Result(dBuV/m)	$G_{\text{PL}}$ (dB)	$F_A$ (dB/m)	$P_{\text{Mea}}$ (dBuV)	Polarity
3599.198	50.82	-19.6	33.4	37.02	VERTICAL
3675.351	50.78	-19.6	33.4	36.98	VERTICAL
3877.756	50.74	-19.6	33.4	36.94	VERTICAL
3693.387	50.73	-19.5	33.4	36.83	VERTICAL
3436.874	50.7	-19.6	31.2	39.1	HORIZONTAL
3527.054	50.7	-19.6	33.4	36.9	VERTICAL


#### USB Mode

Frequency(MHz)	Result(dBuV/m)	$G_{\text{PL}}$ (dB)	$F_A$ (dB/m)	$P_{\text{mea}}$ (dBuV)	Polarity
3434.87	51.22	-19.6	31.2	39.62	HORIZONTAL
3685.371	51.06	-19.5	33.4	37.16	HORIZONTAL
3717.435	51	-19.5	33.4	37.1	VERTICAL
3871.743	51	-19.6	33.4	37.2	VERTICAL
3541.082	50.98	-19.5	33.4	37.08	VERTICAL
3607.214	50.91	-19.6	33.4	37.11	VERTICAL

**Charging Mode**

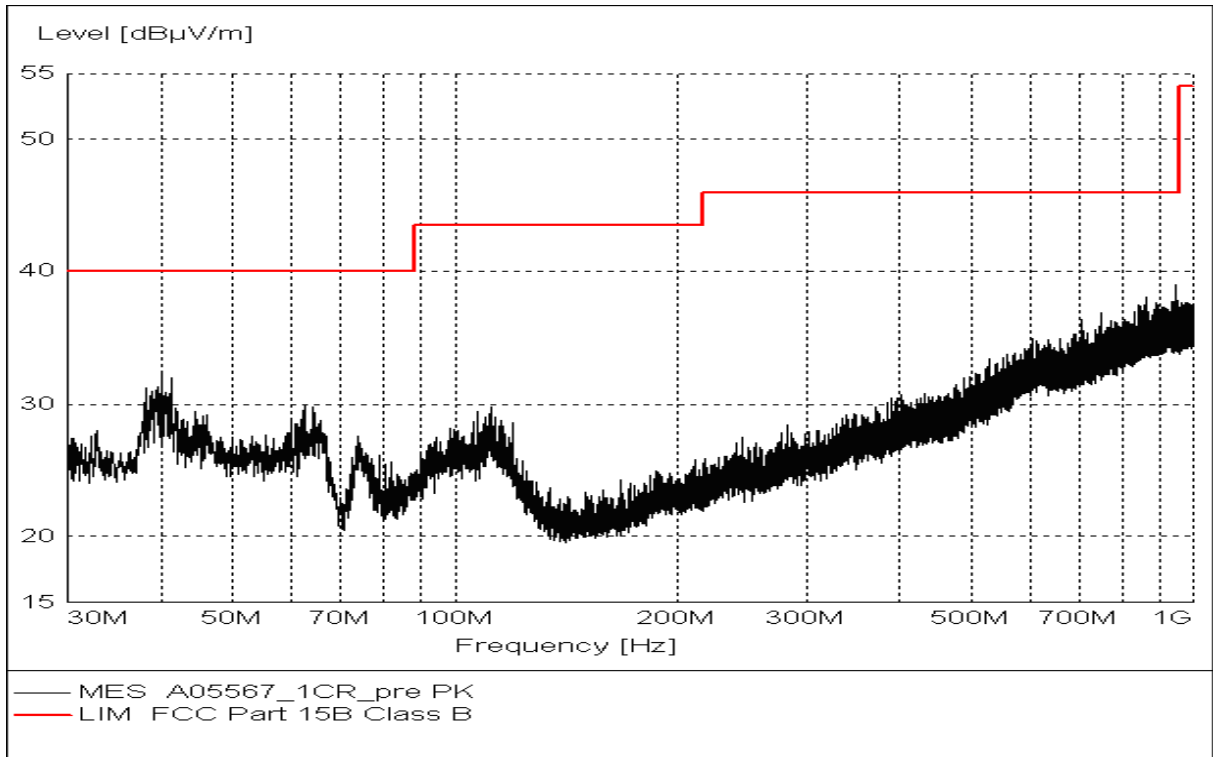

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

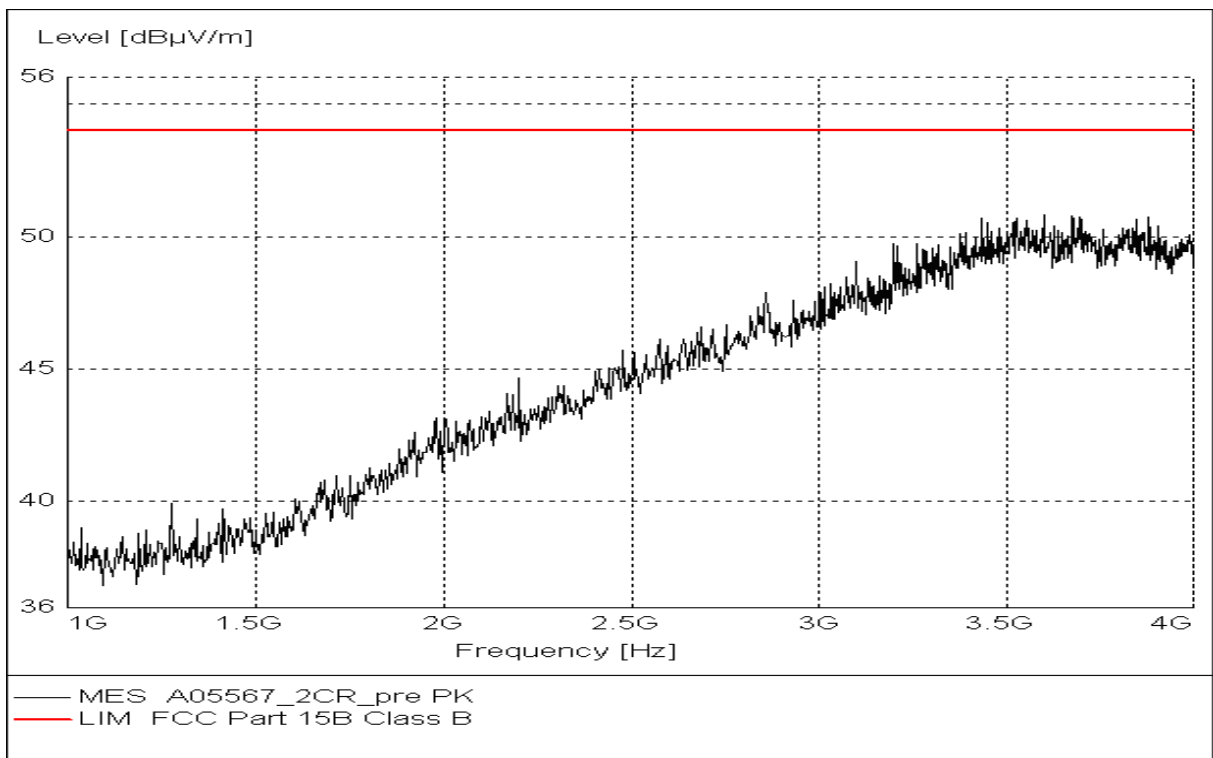

**Figure A.2 Radiated Emission from 1GHz to 4GHz**

USB Mode

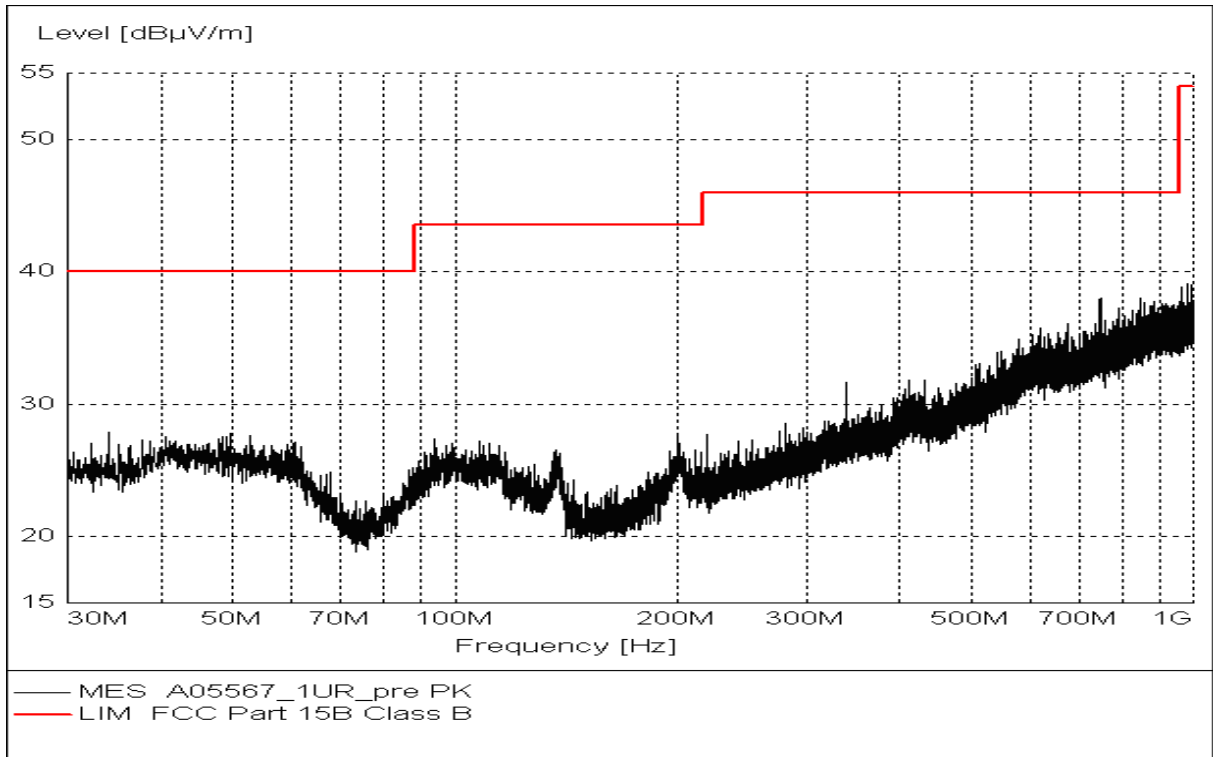


Figure A.3 Radiated Emission from 30MHz to 1GHz

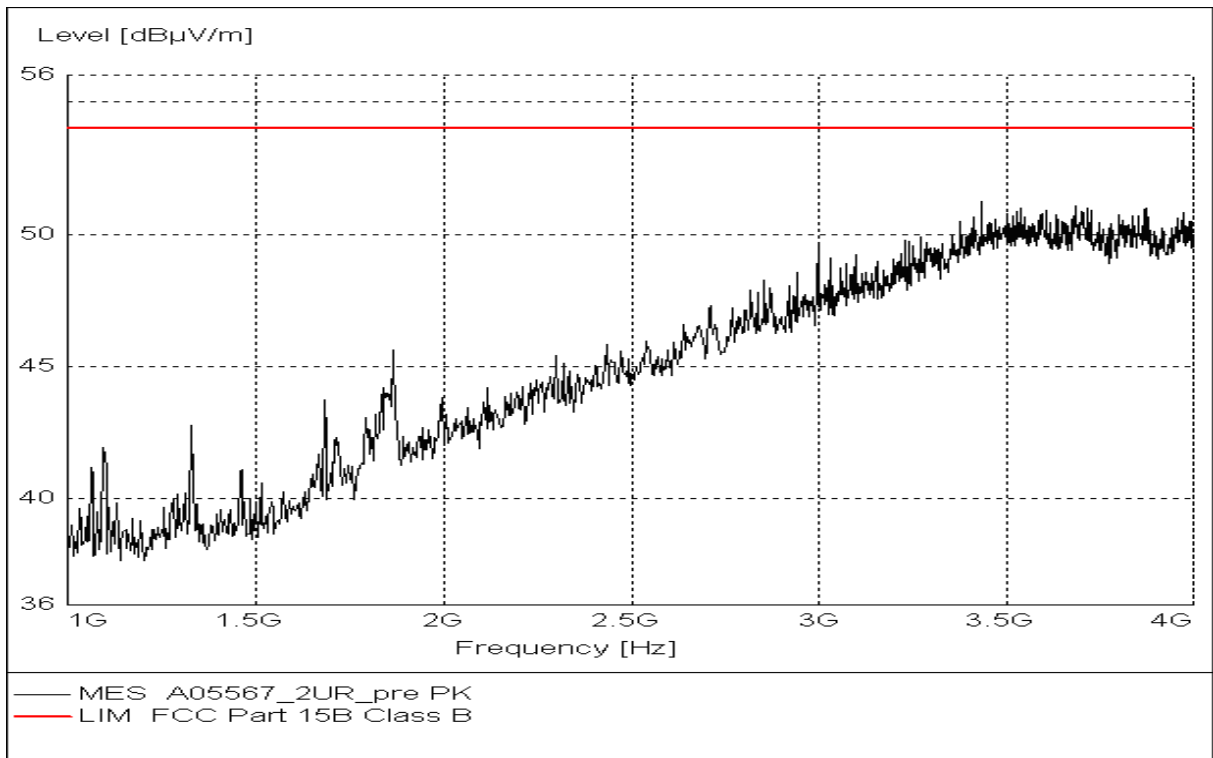


Figure A.4 Radiated Emission from 1GHz to 4GHz

## A.2 Conducted Emission (§15.107(a))

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

### A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

**A.2.4 Measurement Results**  
**Charging Mode**

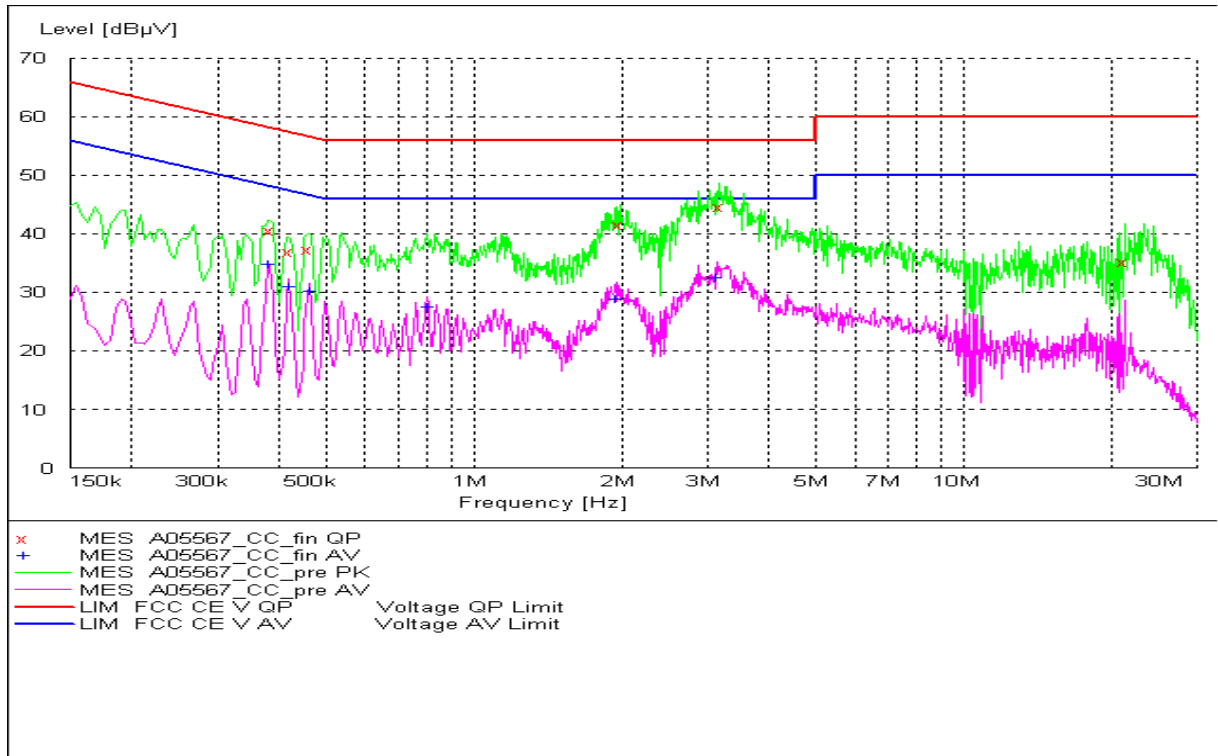

**Figure A.5 Conducted Emission**

**MEASUREMENT RESULT: "A05567\_CC\_fin QP"**

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.384000	40.60	10.1	58	17.6	L1	FLO
0.420000	36.90	10.1	57	20.5	L1	GND
0.456000	37.30	10.1	57	19.4	L1	GND
1.986000	41.60	10.1	56	14.4	L1	FLO
3.164519	44.70	10.1	56	11.3	L1	GND
21.268814	35.20	10.2	60	24.8	L1	FLO

**MEASUREMENT RESULT: "A05567\_CC\_fin AV"**

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.379500	34.80	10.1	48	13.5	L1	FLO
0.420000	31.00	10.1	47	16.5	N	GND
0.460500	30.20	10.1	47	16.5	L1	GND
0.802500	27.50	10.1	46	18.5	L1	FLO
1.950000	28.90	10.1	46	17.1	L1	FLO
3.133109	32.60	10.1	46	13.4	L1	GND

USB Mode

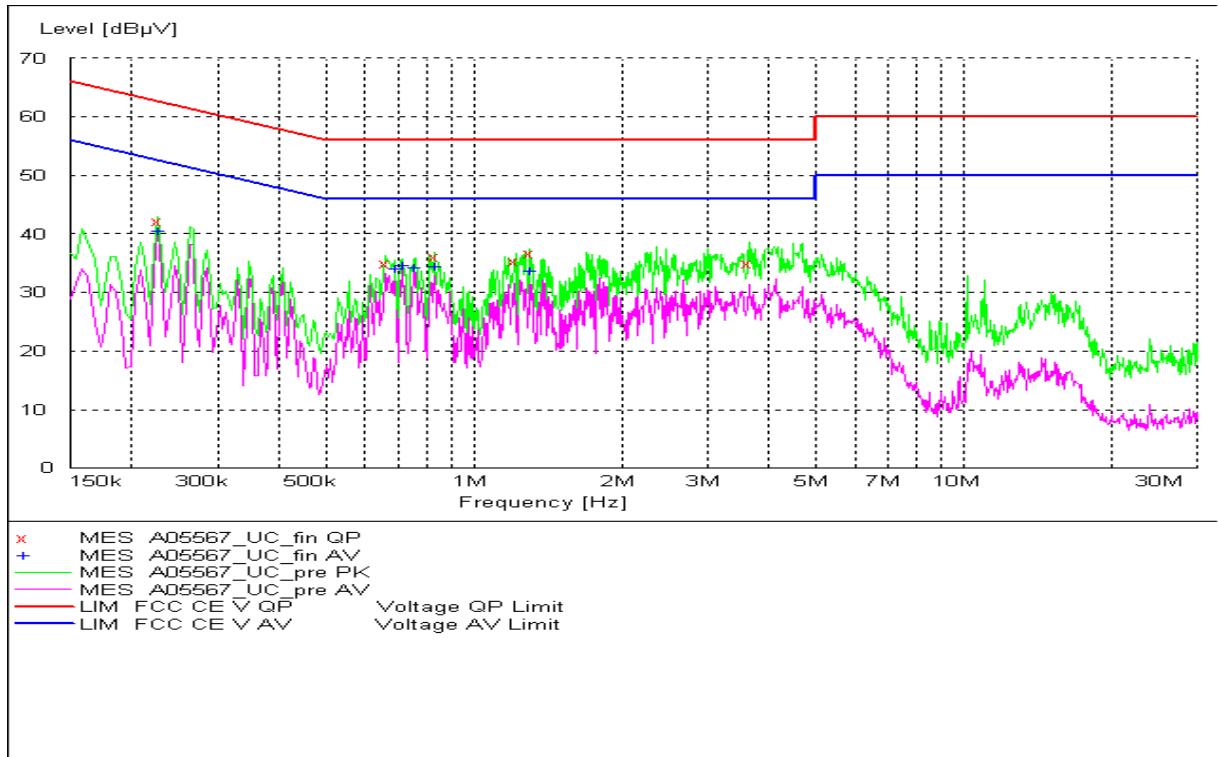


Figure A.5 Conducted Emission

MEASUREMENT RESULT: "A05567\_UC\_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.226500	42.10	10.1	63	20.5	L1	GND
0.658500	35.00	10.1	56	21.0	L1	GND
0.829500	36.10	10.1	56	19.9	L1	GND
1.216500	35.30	10.1	56	20.7	L1	GND
1.302000	36.60	10.1	56	19.4	L1	GND
3.638793	35.00	10.1	56	21.0	N	GND

MEASUREMENT RESULT: "A05567\_UC\_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.226500	40.40	10.1	53	12.2	L1	GND
0.690000	34.00	10.1	46	12.0	L1	GND
0.717000	34.60	10.1	46	11.4	L1	GND
0.753000	34.30	10.1	46	11.7	L1	GND
0.829500	34.40	10.1	46	11.6	L1	GND
1.302000	33.70	10.1	46	12.3	L1	GND

\*\*\*END OF REPORT\*\*\*