



# FCC PART 15C TEST REPORT No.2012WLN0341

for

**TCT Mobile Limited**

**UMTS TriBand / GSM Quadband mobile phone**

**Type: Cocktail S**

**Market Name: one touch 995S**

**With**

**FCC ID: RAD231**

**Hardware Version: PIO4**

**Software Version: 21S**

**Issued Date: 2012-03-23**



**No. DGA-PL-114/01-02**

*DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02*

*FCC 2.948 Listed: No.733176*

*IC O.A.T.S listed: No.6629A-1*

**Note:**The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China, 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

## **CONTENTS**

<b>CONTENTS .....</b>	<b>2</b>
<b>1. TEST LABORATORY.....</b>	<b>5</b>
1.1. TESTING LOCATION .....	5
1.2. TESTING ENVIRONMENT .....	5
1.3. PROJECT DATA .....	5
1.4. SIGNATURE .....	5
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION.....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE).....</b>	<b>7</b>
3.1. ABOUT EUT.....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
3.4. GENERAL DESCRIPTION .....	7
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
6.1. SUMMARY OF TEST RESULTS.....	10
6.2. STATEMENTS.....	10
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
A.1. MEASUREMENT METHOD .....	12
A.2. MAXIMUM PEAK OUTPUT POWER .....	13
A.2.1. MAXIMUM PEAK OUTPUT POWER .....	13
A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED .....	14
A.3. PEAK POWER SPECTRAL DENSITY .....	15
FIG. 1     POWER SPECTRAL DENSITY (802.11B, CH 1).....	16
FIG. 2     POWER SPECTRAL DENSITY (802.11B, CH 6).....	16
FIG. 3     POWER SPECTRAL DENSITY (802.11B, CH 11).....	17
FIG. 4     POWER SPECTRAL DENSITY (802.11G, CH 1) .....	17
FIG. 5     POWER SPECTRAL DENSITY (802.11G, CH 6) .....	18
FIG. 6     POWER SPECTRAL DENSITY (802.11G, CH 11) .....	18
FIG. 7     POWER SPECTRAL DENSITY (802.11N-20MHz, CH 1).....	19
FIG. 8     POWER SPECTRAL DENSITY (802.11N-20MHz, CH 6).....	19
FIG. 9     POWER SPECTRAL DENSITY (802.11N-20MHz, CH 11).....	20

A.4. OCCUPIED 6dB BANDWIDTH .....	21
FIG. 10 OCCUPIED 6dB BANDWIDTH (802.11B, CH 1).....	22
FIG. 11 OCCUPIED 6dB BANDWIDTH (802.11B, CH 6).....	22
FIG. 12 OCCUPIED 6dB BANDWIDTH (802.11B, CH 11).....	23
FIG. 13 OCCUPIED 6dB BANDWIDTH (802.11G, CH 1) .....	23
FIG. 14 OCCUPIED 6dB BANDWIDTH (802.11G, CH 6) .....	24
FIG. 15 OCCUPIED 6dB BANDWIDTH (802.11G, CH 11) .....	24
FIG. 16 OCCUPIED 6dB BANDWIDTH (802.11 N-20MHz,, CH 1).....	25
FIG. 17 OCCUPIED 6dB BANDWIDTH (802.11 N-20MHz,, CH 6).....	25
FIG. 18 OCCUPIED 6dB BANDWIDTH (802.11N-20MHz, CH 11).....	26
A.5. BAND EDGES COMPLIANCE .....	27
FIG. 19 BAND EDGES (802.11B, CH 1) .....	28
FIG. 20 BAND EDGES (802.11B, CH 11).....	28
FIG. 21 BAND EDGES (802.11G, CH 1) .....	29
FIG. 22 BAND EDGES (802.11G, CH 11).....	29
FIG. 23 BAND EDGES (802.11 N-20MHz, CH 1).....	30
FIG. 24 BAND EDGES (802.11 N-20MHz, CH 11).....	30
A.6. TRANSMITTER SPURIOUS EMISSION .....	31
A.6.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	31
FIG. 25 CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY) .....	32
FIG. 26 CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHz-26 GHz) .....	33
FIG. 27 CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY) .....	33
FIG. 28 CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-26 GHz) .....	34
FIG. 29 CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY).....	34
FIG. 30 CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-26 GHz) .....	35
FIG. 31 CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY) .....	35
FIG. 32 CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-26 GHz) .....	36
FIG. 33 CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY) .....	36
FIG. 34 CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-26 GHz) .....	37
FIG. 35 CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY).....	37
FIG. 36 CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-26 GHz) .....	38
FIG. 37 CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, CENTER FREQUENCY) .....	38
FIG. 38 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH1, 30 MHz-26 GHz) .....	39
FIG. 39 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH6, CENTER FREQUENCY)....	39
FIG. 40 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH6, 30 MHz-26 GHz) .....	40
FIG. 41 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH11, CENTER FREQUENCY) ...	40
FIG. 42 CONDUCTED SPURIOUS EMISSION (802.11 N-20MHz, CH11, 30 MHz-26 GHz).....	41
A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED .....	42
FIG. 43 RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH1, 2.38 GHz - 245GHz.....	48
FIG. 44 RADIATED SPURIOUS EMISSION (802.11B, CH1, 30 MHz-1 GHz) .....	48
FIG. 45 RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-4 GHz) .....	49
FIG. 46 RADIATED SPURIOUS EMISSION (802.11B, CH1, 4 GHz-18 GHz) .....	49
FIG. 47 RADIATED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-1 GHz) .....	50
FIG. 48 RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-4 GHz) .....	50

FIG. 49	RADIATED SPURIOUS EMISSION (802.11B, CH6, 4 GHz-18 GHz) .....	51
FIG. 50	RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH11, 2.45 GHz - 2.50GHz.....	51
FIG. 51	RADIATED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-1 GHz) .....	52
FIG. 52	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-4 GHz).....	52
FIG. 53	RADIATED SPURIOUS EMISSION (802.11B, CH11, 4 GHz-18 GHz).....	53
FIG. 54	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH1, 2.38 GHz - 2.45GHz.....	53
FIG. 55	RADIATED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-1 GHz) .....	54
FIG. 56	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-4 GHz) .....	54
FIG. 57	RADIATED SPURIOUS EMISSION (802.11G, CH1, 4 GHz-18 GHz) .....	55
FIG. 58	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-1 GHz) .....	55
FIG. 59	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-4 GHz) .....	56
FIG. 60	RADIATED SPURIOUS EMISSION (802.11G, CH6, 4 GHz-18 GHz) .....	56
FIG. 61	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH11, 2.45 GHz - 2.50GHz.....	57
FIG. 62	RADIATED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-1 GHz) .....	57
FIG. 63	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-4 GHz).....	58
FIG. 64	RADIATED SPURIOUS EMISSION (802.11G, CH11, 4 GHz-18 GHz).....	58
FIG. 65	RADIATED SPURIOUS EMISSION (POWER): 802.11N-20MHz, ch1, 2.38 GHz - 2.45GHz 59	
FIG. 66	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH1, 30 MHz-1 GHz) .....	59
FIG. 67	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH1, 1 GHz-4 GHz).....	60
FIG. 68	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH1, 4 GHz-18 GHz).....	60
FIG. 69	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 30 MHz-1 GHz) .....	61
FIG. 70	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 1 GHz-4 GHz).....	61
FIG. 71	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 4 GHz-18 GHz).....	62
FIG. 72	RADIATED SPURIOUS EMISSION (POWER): 802.11N-20MHz, CH11, 2.45 GHz - 2.50GHz 62	
FIG. 73	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH11, 30 MHz-1 GHz).....	63
FIG. 74	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH11, 1 GHz-4 GHz).....	63
FIG. 75	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH11, 4 GHz-18 GHz).....	64
FIG. 76	RADIATED EMISSION: 18 GHz - 26.5 GHz.....	64
A.7. AC POWERLINE CONDUCTED EMISSION .....		65
FIG. 77	AC POWERLINE CONDUCTED EMISSION-802.11N MODE .....	66
FIG. 78	AC POWERLINE CONDUCTED EMISSION-IDLE MODE .....	67

## 1. TEST LABORATORY

### 1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304793

### 1.2. Testing Environment

Normal Temperature: 15-30°C  
Extreme Temperature: -20/+55°C  
Relative Humidity: 30-60%  
Air Pressure 990hPa-1040hPa

Note: The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

### 1.3. Project data

Testing End Date: 2012-01-17

### 1.4. Signature

Sun Zhenyu  
(Prepared this test report)

Gao Hong  
(Reviewed this test report)

Lu Bingsong  
Deputy Director of the laboratory  
(Approved this test report)

## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 518057  
Country: China  
Contact: Gong Zhizhou  
Email: zhizhou.gong @jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 518057  
Country: China  
Contact: Gong Zhizhou  
Email: zhizhou.gong @jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)**

#### **3.1. About EUT**

Description	UMTS TriBand / GSM Quadband mobile phone
Type	Cocktail S
Market Name	one touch 995S
FCC ID	RAD231
IC	/
With WLAN Function	Yes
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	21.75dBm(OFDM)
Power Supply	3.7V DC by Battery

Note: Photographs of EUT are shown in ANNEX C of this test report.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	PIO4	21S
EUT2	/	PIO4	21S

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	Type	SN
AE1	Battery	CAB31Y0006C1	/
AE2	Travel Adapter	CBA3002AG0C1	/
/	/	/	/

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. General Description**

Equipment Under Test (EUT) is a model of UMTS TriBand / GSM Quadband mobile phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

## **4. REFERENCE DOCUMENTS**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct, 2009 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	March 23, 2005

## **5. LABORATORY ENVIRONMENT**

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing::

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Shielding Room2** (7.30 meters×4.00 meters×3.80 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (a)	/	P
Peak Power Spectral Density	15.247 (d)	/	P
Occupied 6dB Bandwidth	15.247 (d)	/	P
Band Edges Compliance	15.247 (b)	/	P
Transmitter Spurious Emission - Conducted	15.247	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.209, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

The measurement is made according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by TMC
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

TMC has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

This model is a variant product of the model Cocktail A, which market name is one touch 995A; all test cases are not performed, and the test result has been derived from test report of Cocktail A.

#### Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	26°C
Voltage	V nom	3.7V(By battery)

Humidity	H nom	44%
Air Pressure	A nom	1010hPa

## **7. TEST EQUIPMENTS UTILIZED**

### **Conducted test system**

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2012-07-19
2	Spectrum Analyzer	MS2687B	6200819812	Anritsu	2012-09-22
3	Test Receiver	ESS	847151/015	Rohde & Schwarz	2012-10-30
4	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2012-08-12

### **Radiated emission test system**

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESI40	831564/002	Rohde & Schwarz	2012-08-11
2	BiLog Antenna	3142B	9908-1403	EMCO	2012-03-15
3	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2012-12-25

### **Anechoic chamber**


Anechoic chamber by Frankonia German.

## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

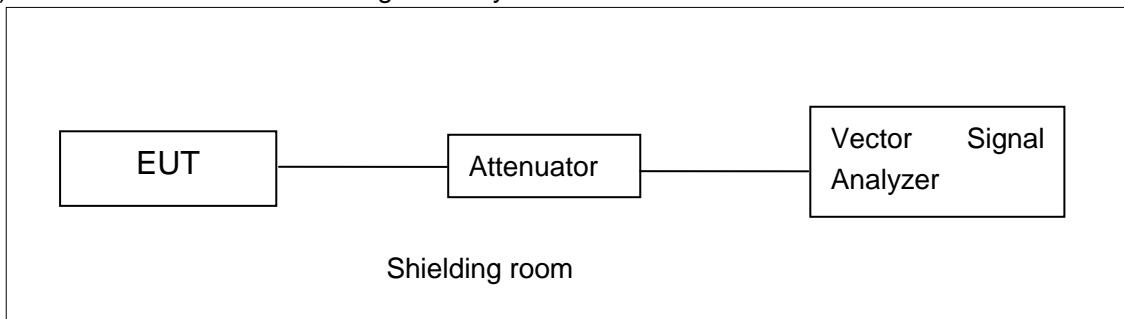


#### A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

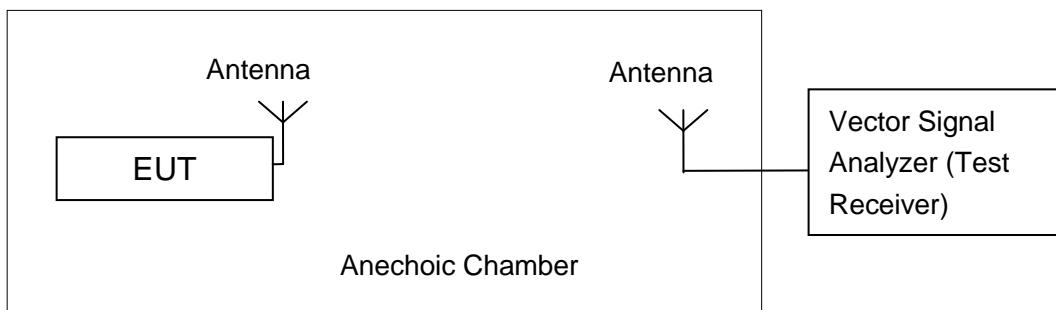

The measurement is made according to ANSI C63.4 and KDB558074

## A.2. Maximum Peak Output Power

### Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

The measurement is made according to ANSI C63.4 and KDB558074, and power output option 1 (RBW=20MHz) in KDB558074 is used for the test. EUT is operating in continuous transmitting mode

### Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

### A.2.1. Maximum Peak Output Power

#### Measurement Results:

##### 802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	16.14	/	/
	2	16.48	/	/
	5.5	17.92	/	/
	11	19.26	19.28	19.31
802.11g	6	21.21	/	/
	9	21.19	/	/
	12	20.92	/	/
	18	20.83	/	/
	24	21.30	21.48	21.75
	36	21.06	/	/
	48	21.23	/	/
	54	21.20	/	/

The data rate 11Mbps and 24Mbps are selected as worse condition, and the following cases are performed with this condition.

##### 802.11n mode

Mode	Data Rate (MCS Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz BW)	MCS0	21.02	/	/
	MCS1	20.82	/	/
	MCS2	20.69	/	/
	MCS3	21.25	21.18	21.35
	MCS4	21.23	/	/
	MCS5	21.11	/	/

	MCS6	21.04	/	/
	MCS7	21.10	/	/
802.11n (40MHz)	MCS0	/	/	/
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate index of MCS3 is selected as worse condition, and the following cases are performed with this condition.

### A.2.2. Maximum Average Output Power-conducted

#### 802.11b/g mode

Mode	Test Result (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	13.21	13.52	13.06
802.11g	12.64	12.89	12.90

#### 802.11n mode

Mode	Test Result (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	12.32	11.80	12.32
802.11n (40MHz)	/	/	/

Conclusion: PASS

### A.3. Peak Power Spectral Density

#### Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

The measurement is made according to ANSI C63.4 and KDB558074

#### Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

#### Measurement Results:

##### 802.11b/g mode



Mode	Channel	Power Spectral Density ( 8 dBm/3 kHz )		Conclusion
802.11b	1	Fig.1	-7.67	P
	6	Fig.2	-7.41	P
	11	Fig.3	-6.23	P
802.11g	1	Fig.4	-9.97	P
	6	Fig.5	-9.72	P
	11	Fig.6	-9.16	P



##### 802.11n mode



Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (20MHz)	1	Fig.7	-10.03	P
	6	Fig.8	-9.65	P
	11	Fig.9	-9.03	P
802.11n (40MHz)	/	/	/	/
	/	/	/	/
	/	/	/	/


Conclusion: PASS

Test graphs as below:

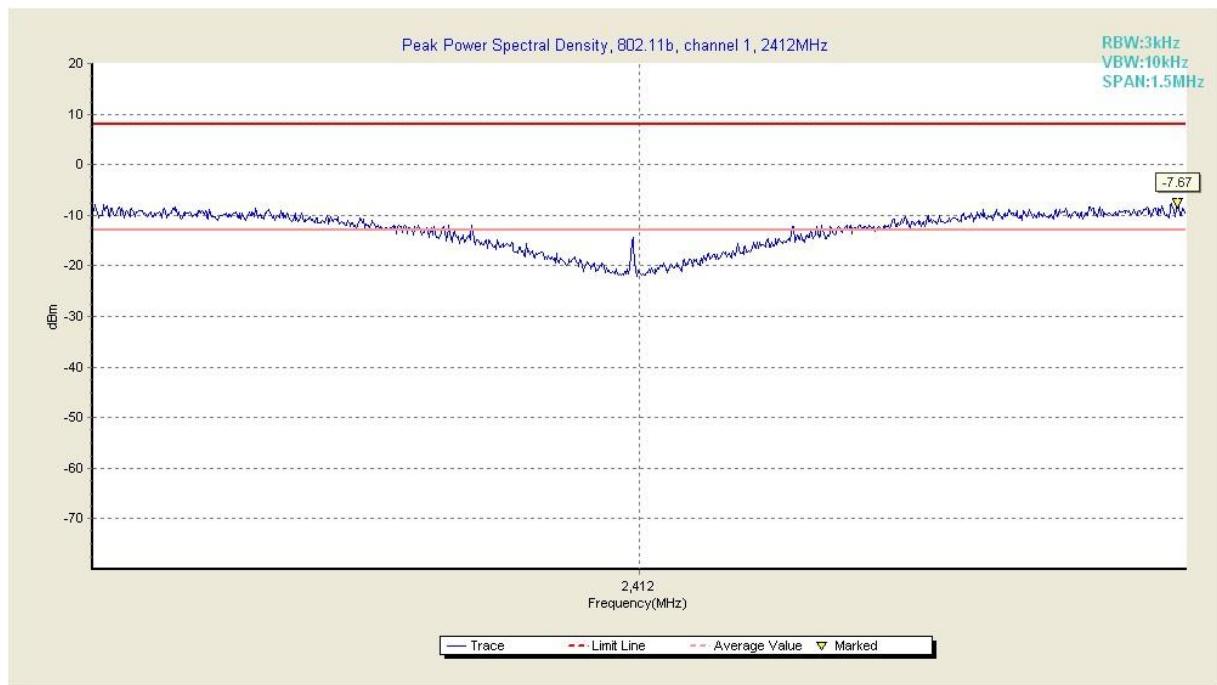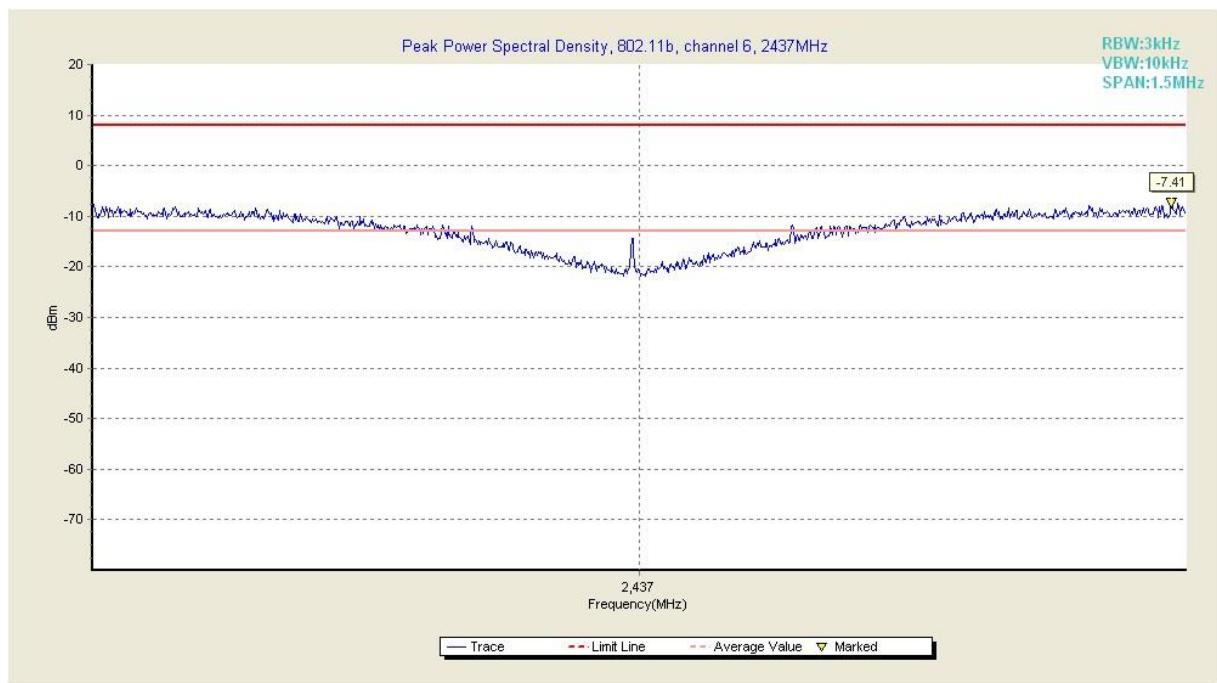
**Fig. 1 Power Spectral Density (802.11b, Ch 1)****Fig. 2 Power Spectral Density (802.11b, Ch 6)**

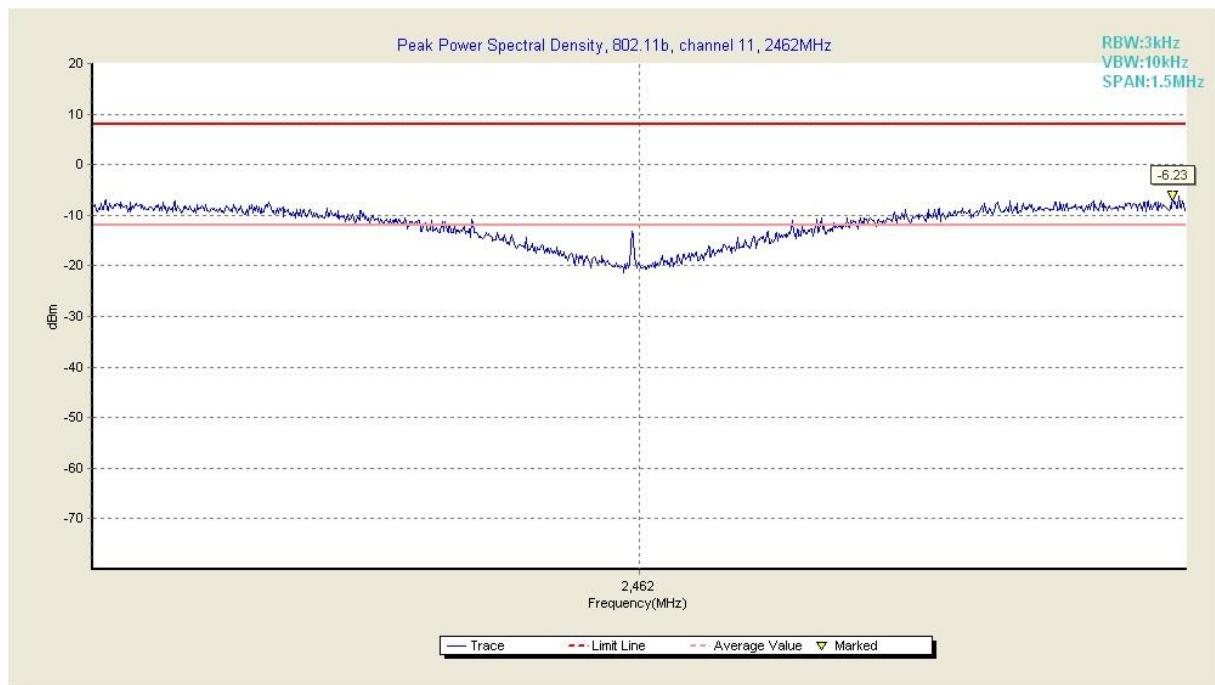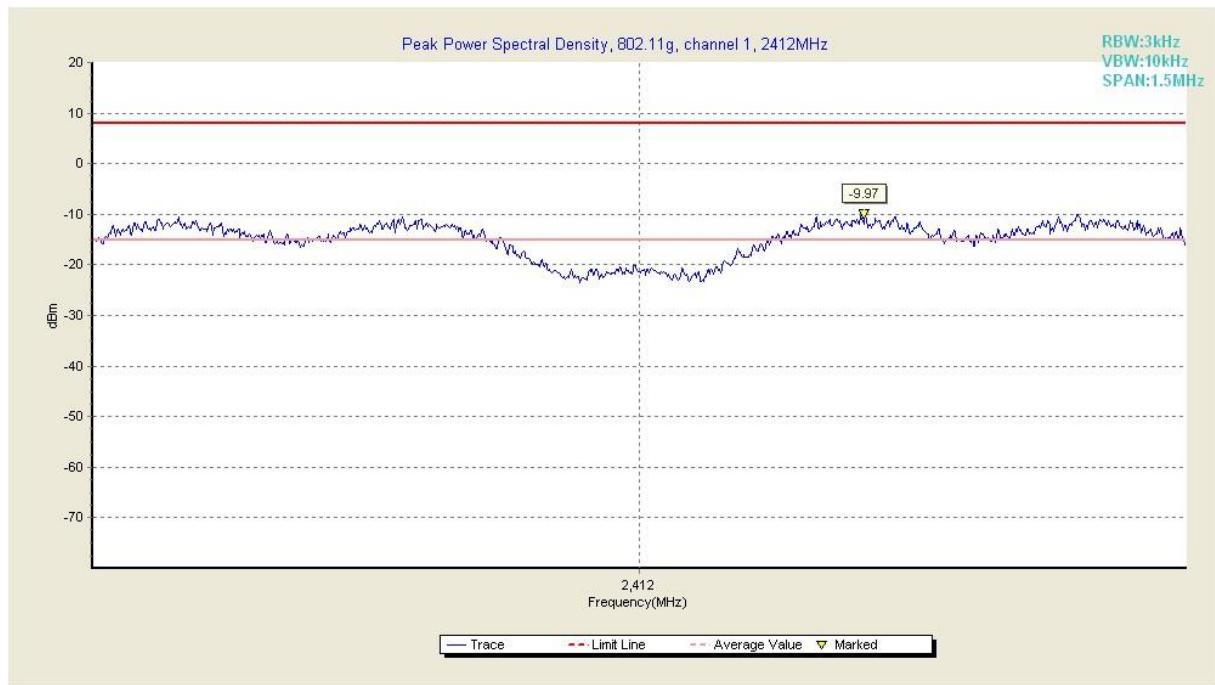**Fig. 3 Power Spectral Density (802.11b, Ch 11)****Fig. 4 Power Spectral Density (802.11g, Ch 1)**

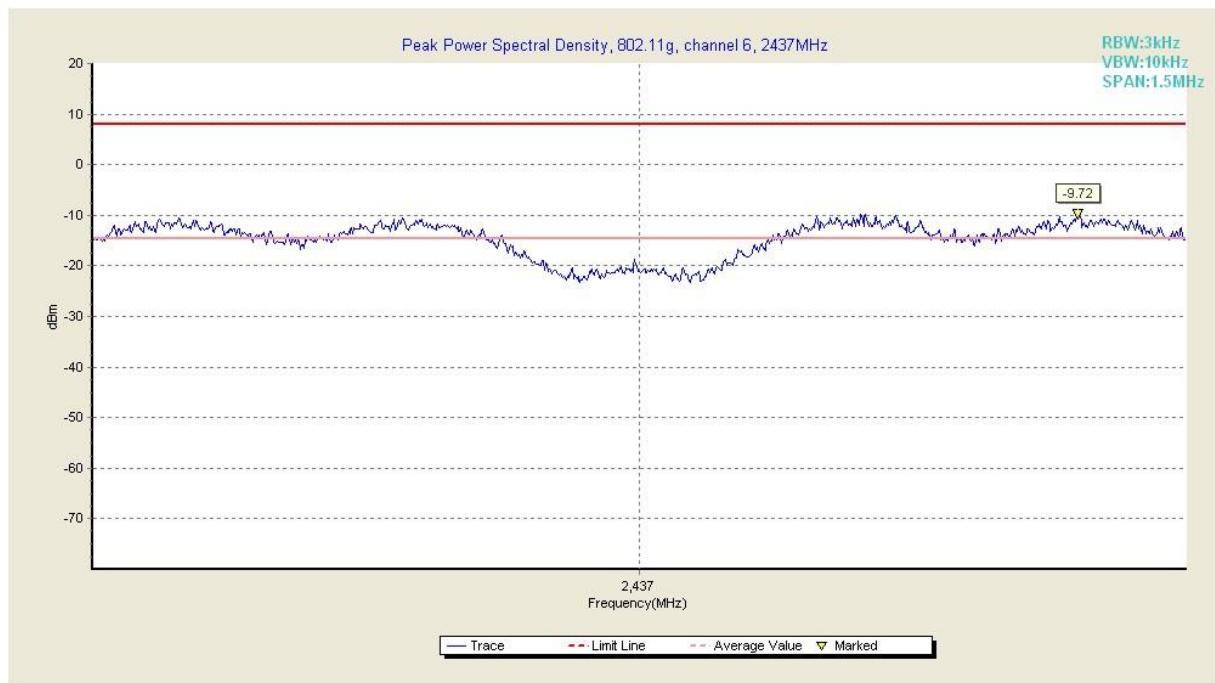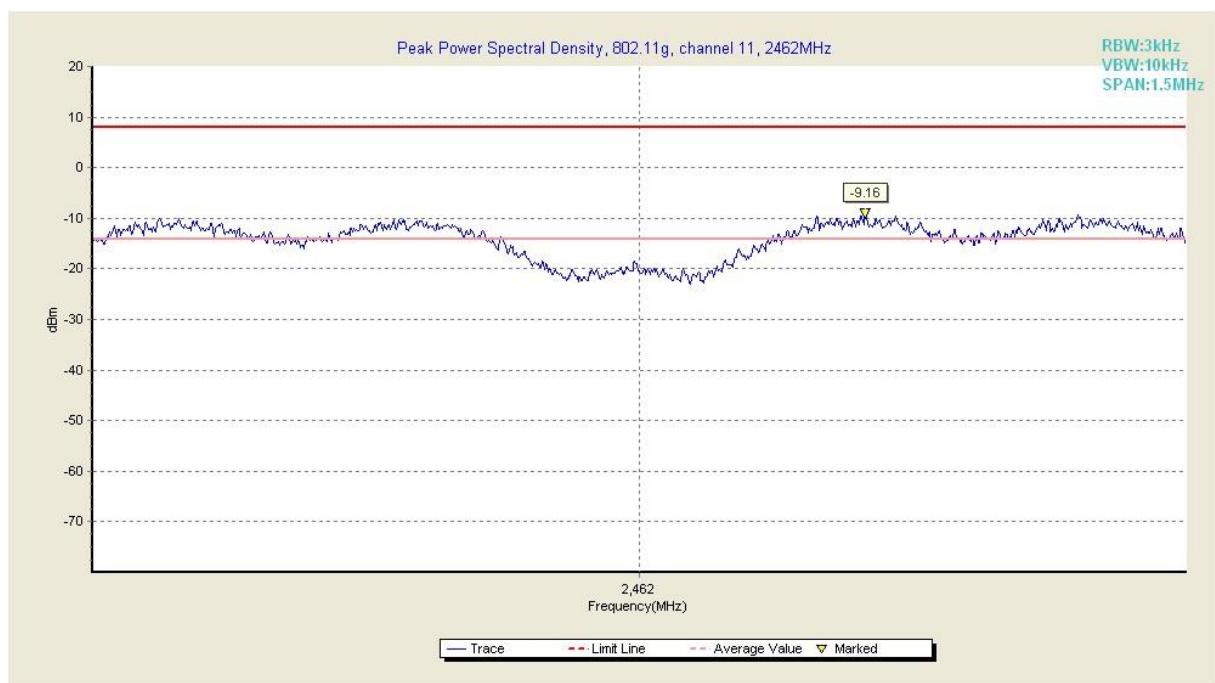
**Fig. 5 Power Spectral Density (802.11g, Ch 6)****Fig. 6 Power Spectral Density (802.11g, Ch 11)**

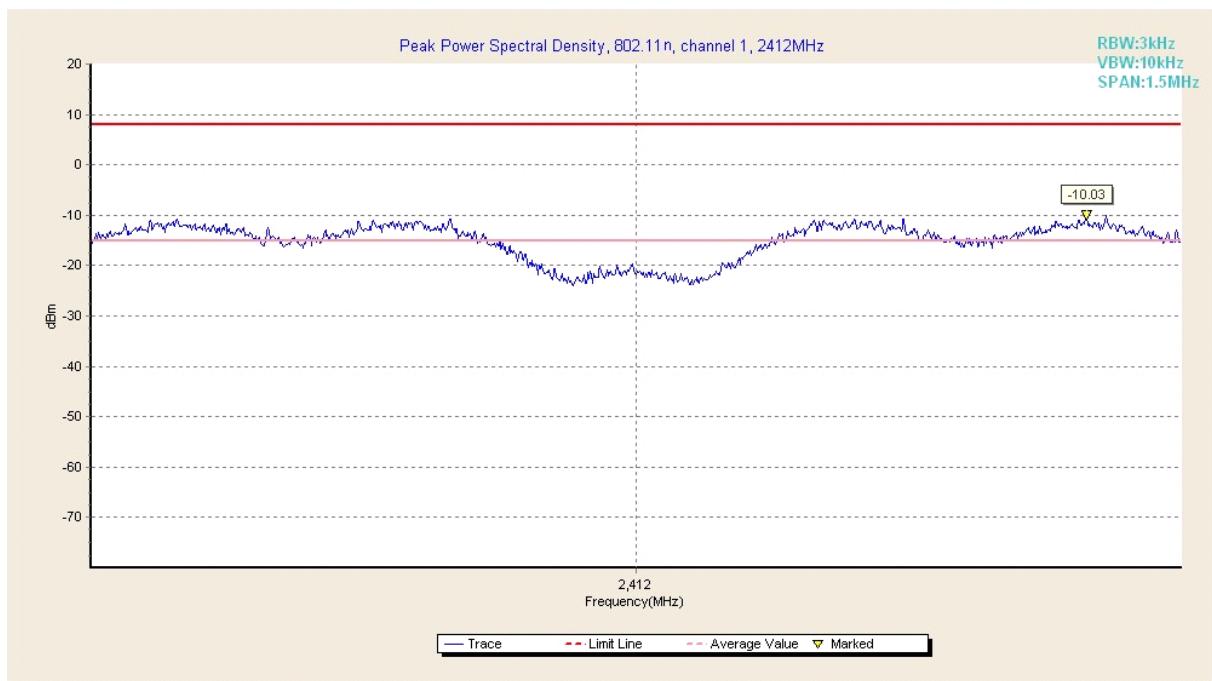

**Fig. 7 Power Spectral Density (802.11n-20MHz, Ch 1)**

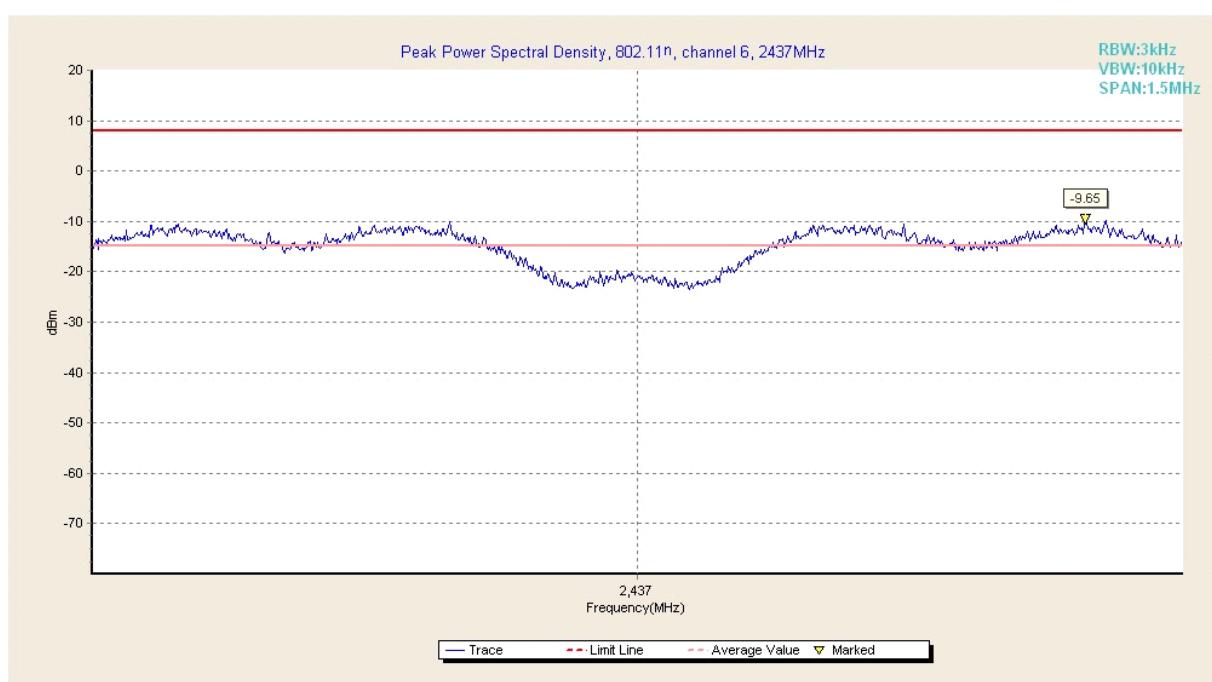

**Fig. 8 Power Spectral Density (802.11n-20MHz, Ch 6)**

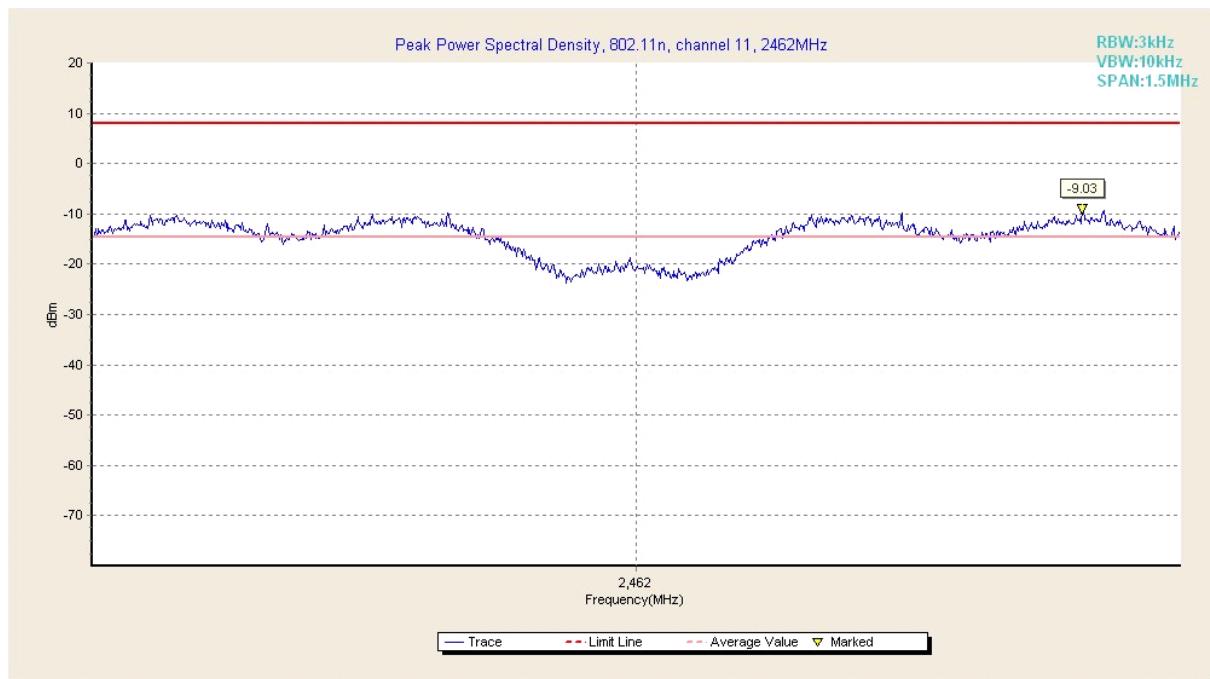

**Fig. 9 Power Spectral Density (802.11n-20MHz, Ch 11)**

#### A.4. Occupied 6dB Bandwidth

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

The measurement is made according to ANSI C63.4 and KDB558074

**Measurement Uncertainty:**

Measurement Uncertainty	60.80Hz
-------------------------	---------

**Measurement Result:****802.11b/g mode**


Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11b	1	Fig.10	9050	P
	6	Fig.11	9100	P
	11	Fig.12	9050	P
802.11g	1	Fig.13	15200	P
	6	Fig.14	15200	P
	11	Fig.15	15200	P

**802.11n mode**


Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11n (20MHz)	1	Fig.16	16950	P
	6	Fig.17	15350	P
	11	Fig.18	15200	P
802.11n (40MHz)	/	/	/	/
	/	/	/	/
	/	/	/	/

**Conclusion: PASS**

**Test graphs as below:**

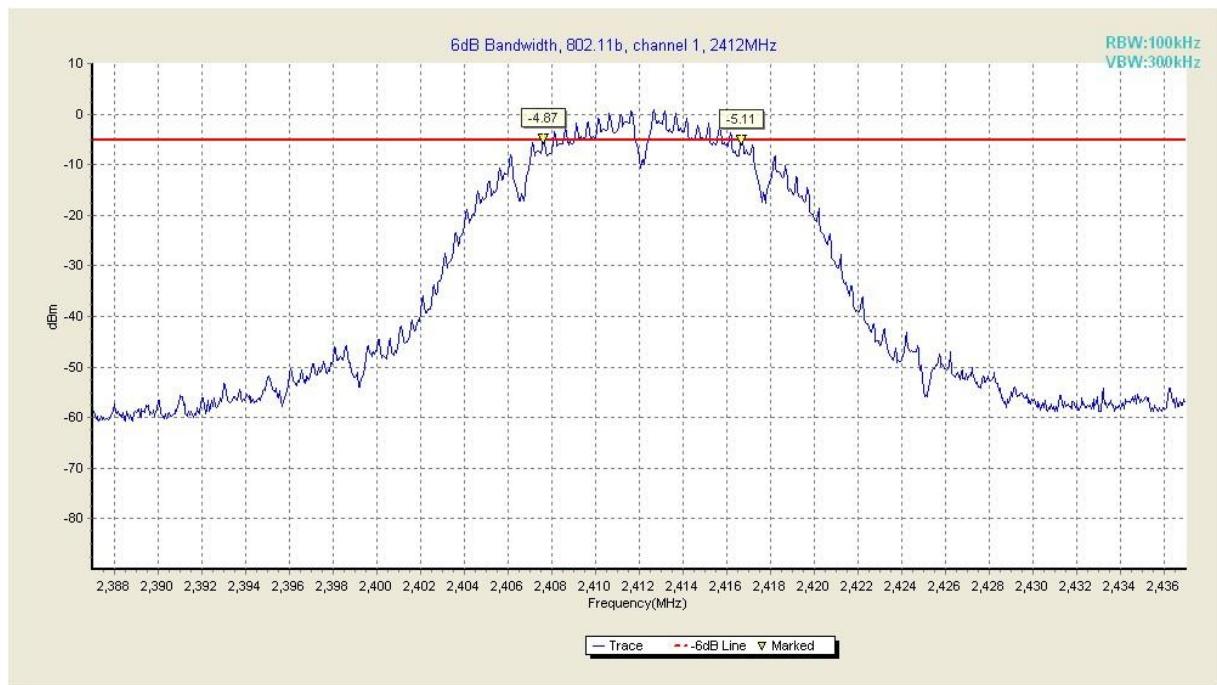


**Fig. 10 Occupied 6dB Bandwidth (802.11b, Ch 1)**

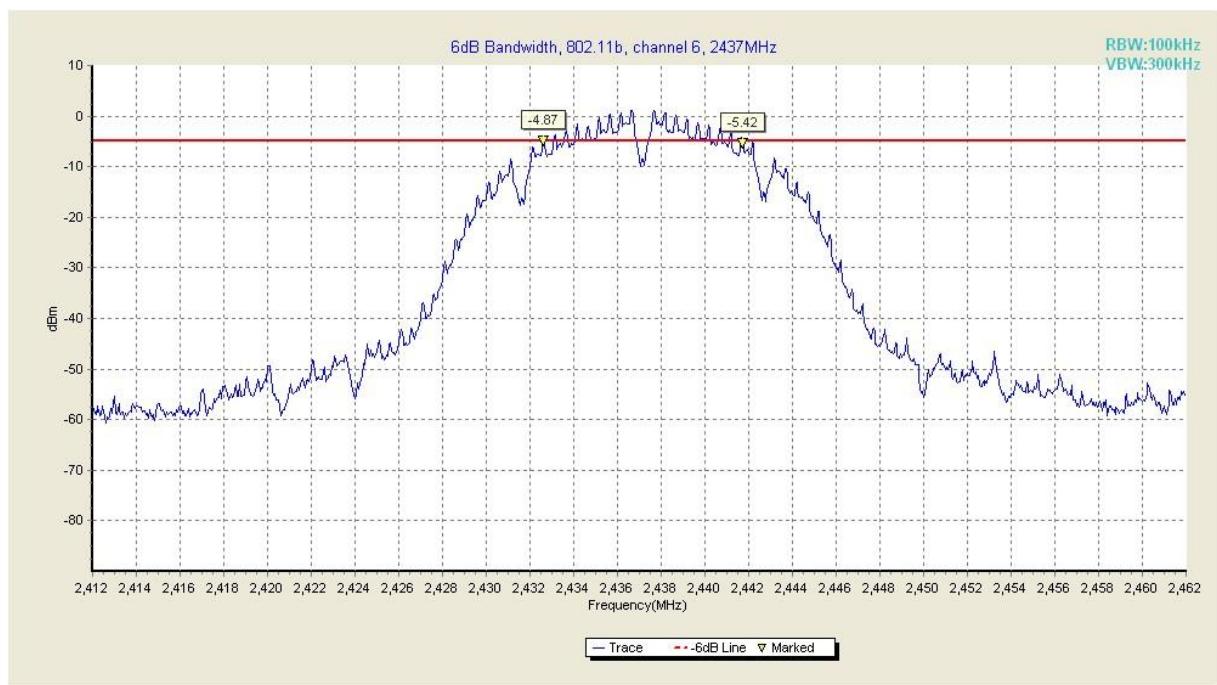


**Fig. 11 Occupied 6dB Bandwidth (802.11b, Ch 6)**




**Fig. 12 Occupied 6dB Bandwidth (802.11b, Ch 11)**

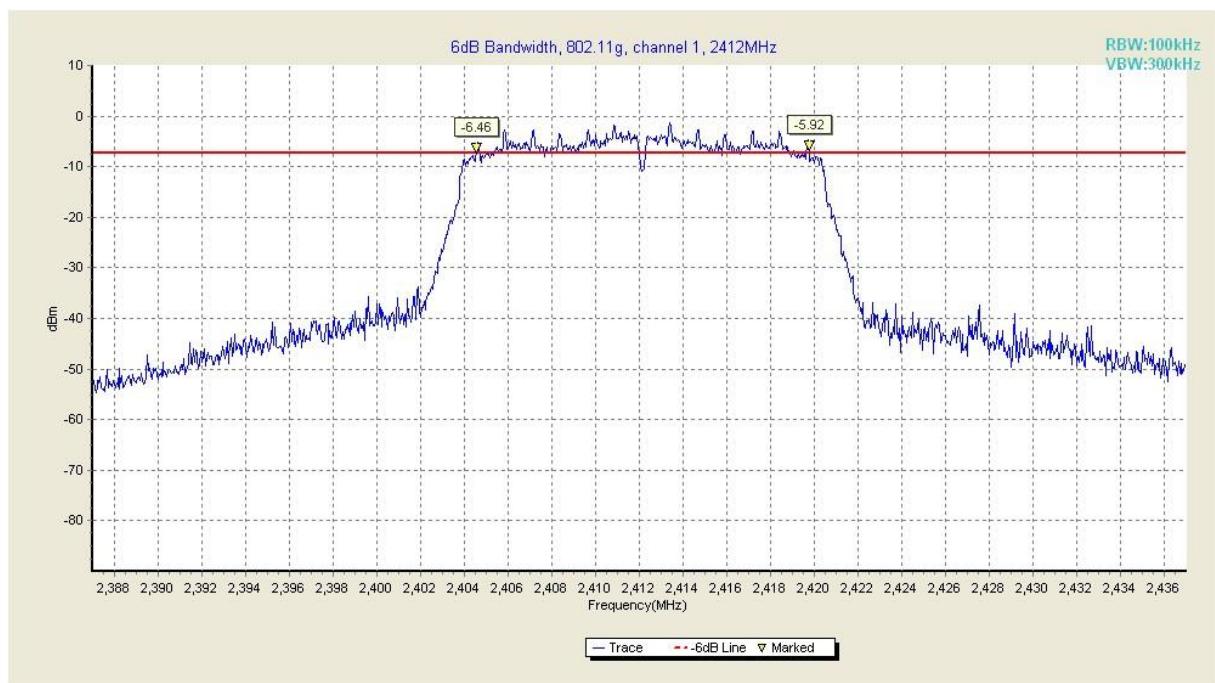


**Fig. 13 Occupied 6dB Bandwidth (802.11g, Ch 1)**

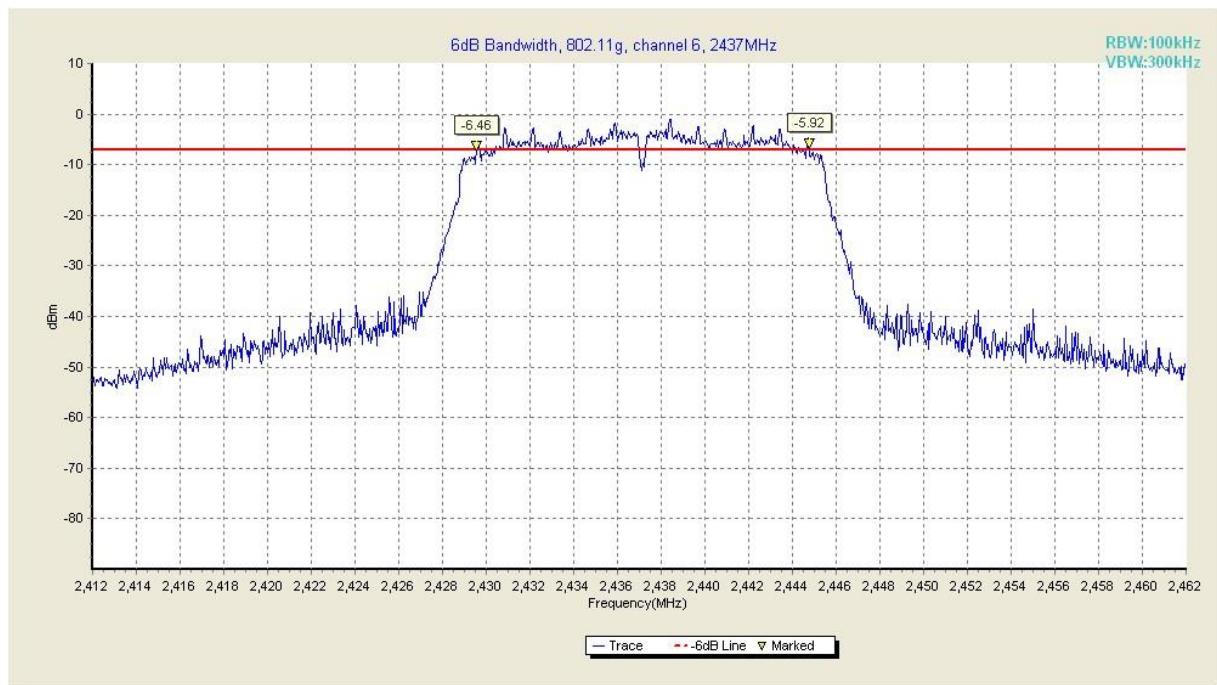


**Fig. 14 Occupied 6dB Bandwidth (802.11g, Ch 6)**

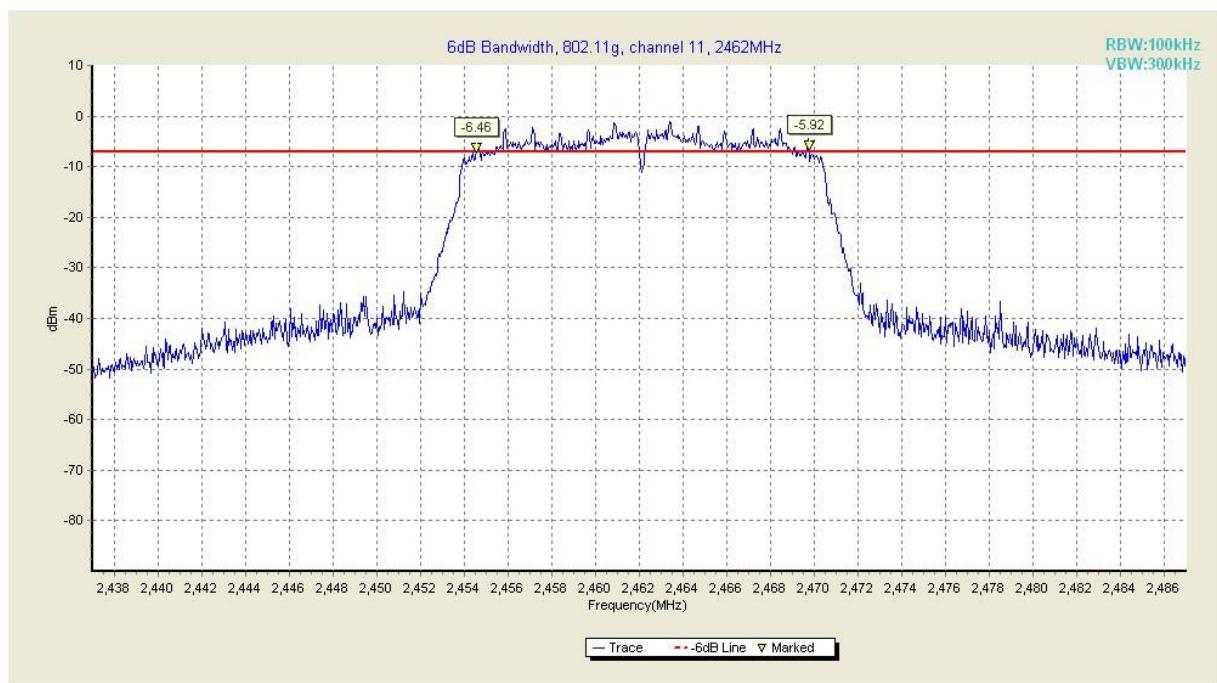


**Fig. 15 Occupied 6dB Bandwidth (802.11g, Ch 11)**

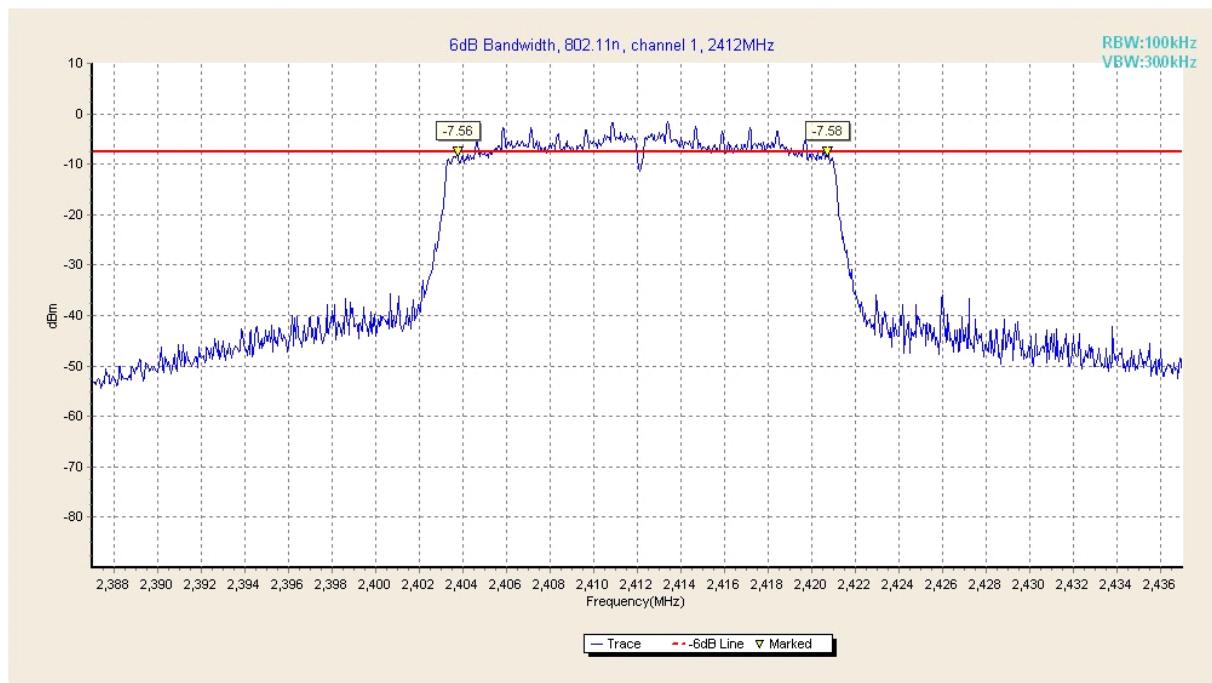

**Fig. 16 Occupied 6dB Bandwidth (802.11 n-20MHz,, Ch 1)**

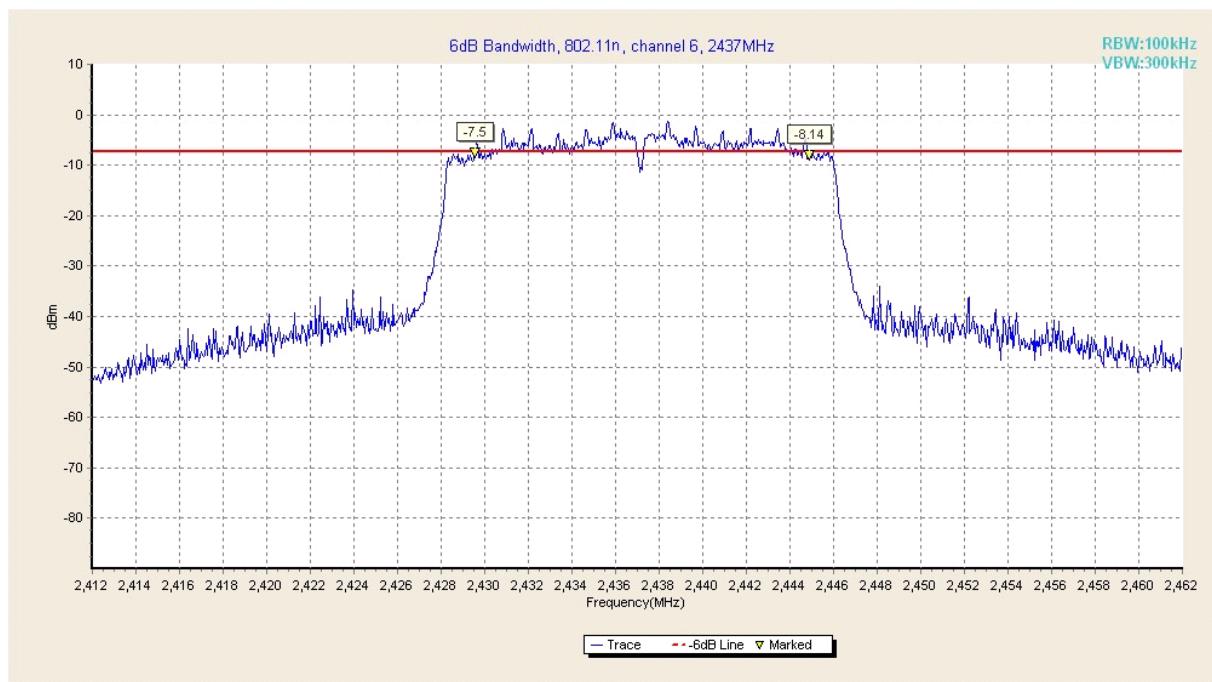

**Fig. 17 Occupied 6dB Bandwidth (802.11 n-20MHz,, Ch 6)**

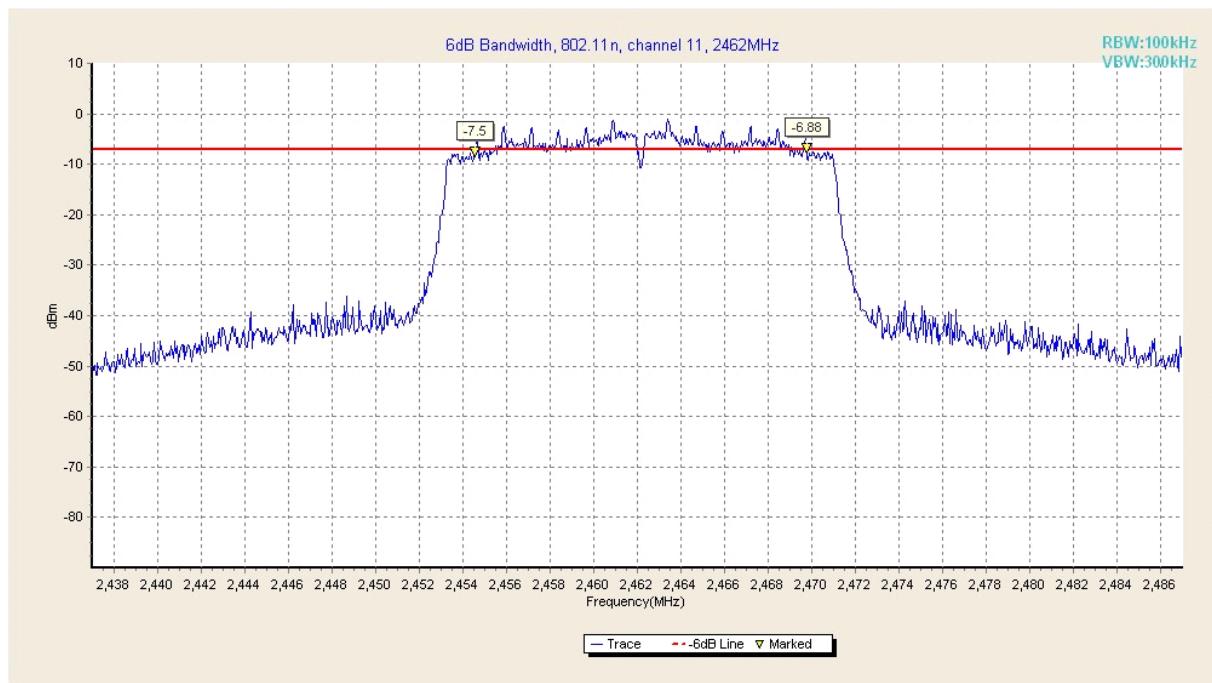

**Fig. 18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 11)**

## A.5. Band Edges Compliance

### Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

The measurement is made according to ANSI C63.4 and KDB558074

### Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

### Measurement Result:

#### 802.11b/g mode



Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.19	P
	11	Fig.20	P
802.11g	1	Fig.21	P
	11	Fig.22	P



#### 802.11n mode


Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.23	P
	11	Fig.24	P
802.11n (40MHz)	/	/	/
	/	/	/

**Conclusion: PASS**


**Test graphs as below:**

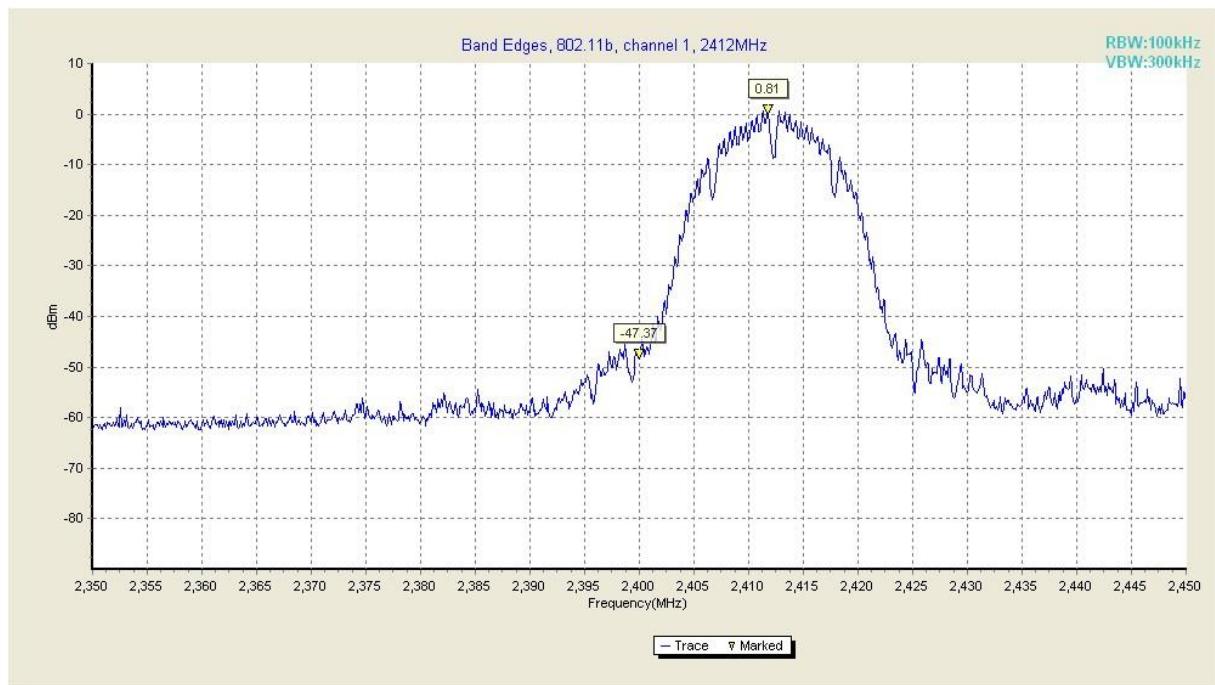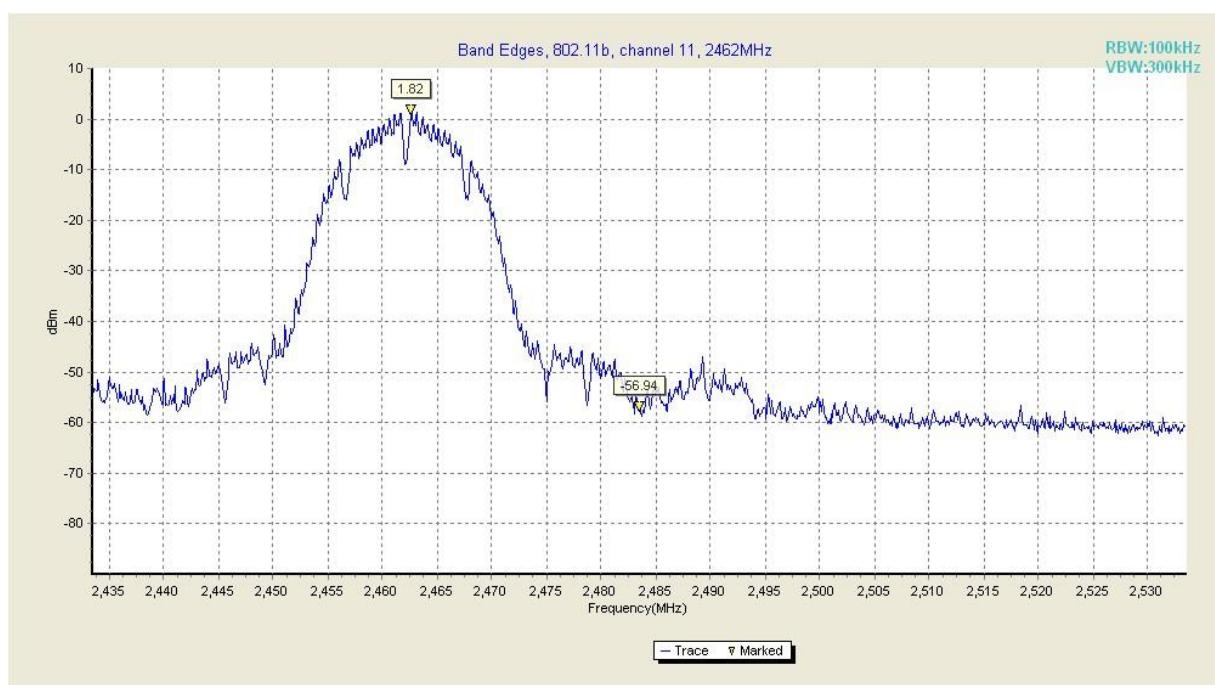**Fig. 19 Band Edges (802.11b, Ch 1)****Fig. 20 Band Edges (802.11b, Ch 11)**

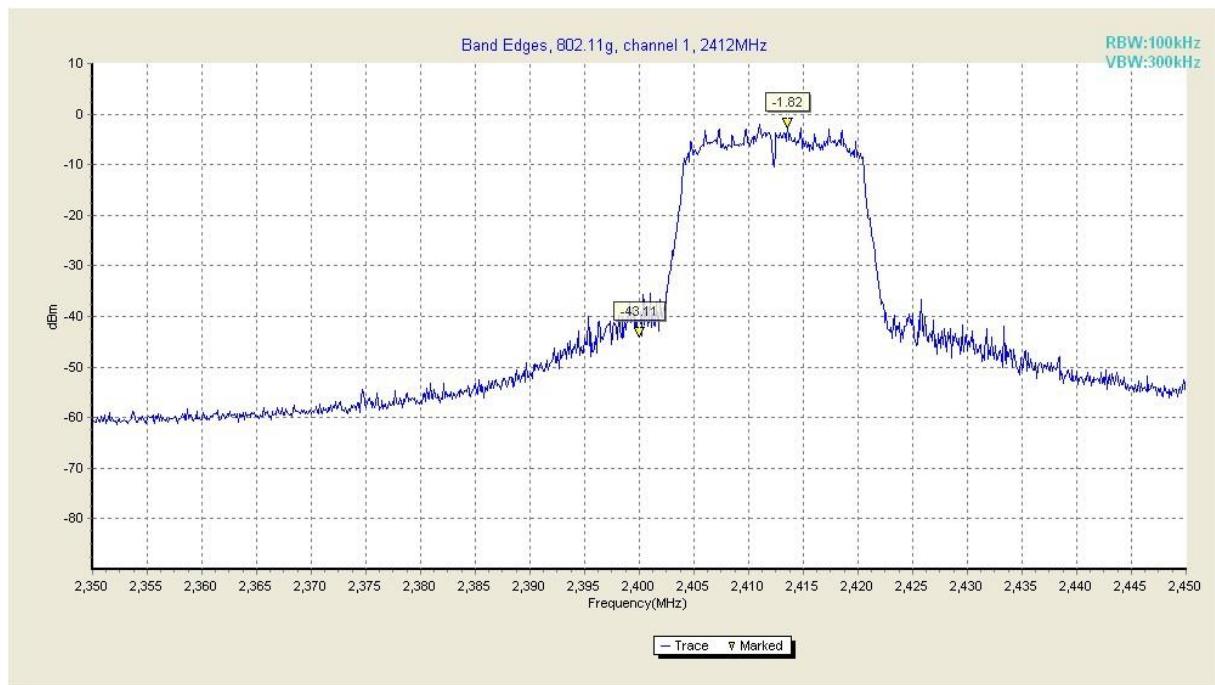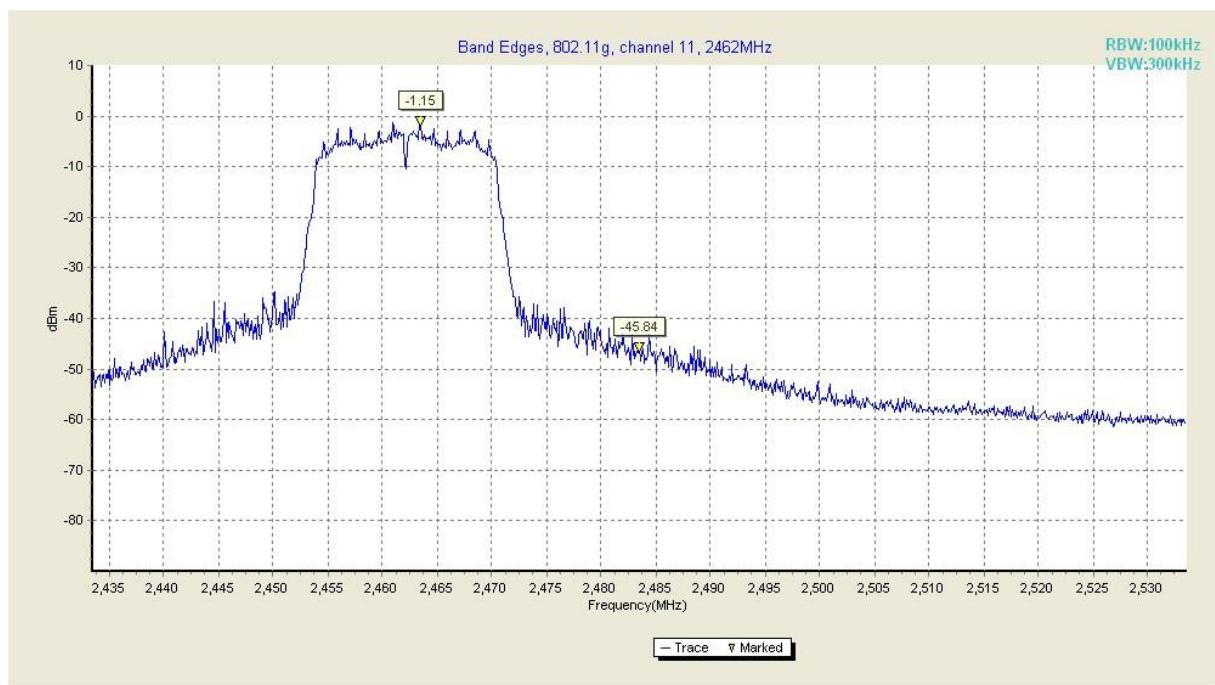**Fig. 21 Band Edges (802.11g, Ch 1)****Fig. 22 Band Edges (802.11g, Ch 11)**

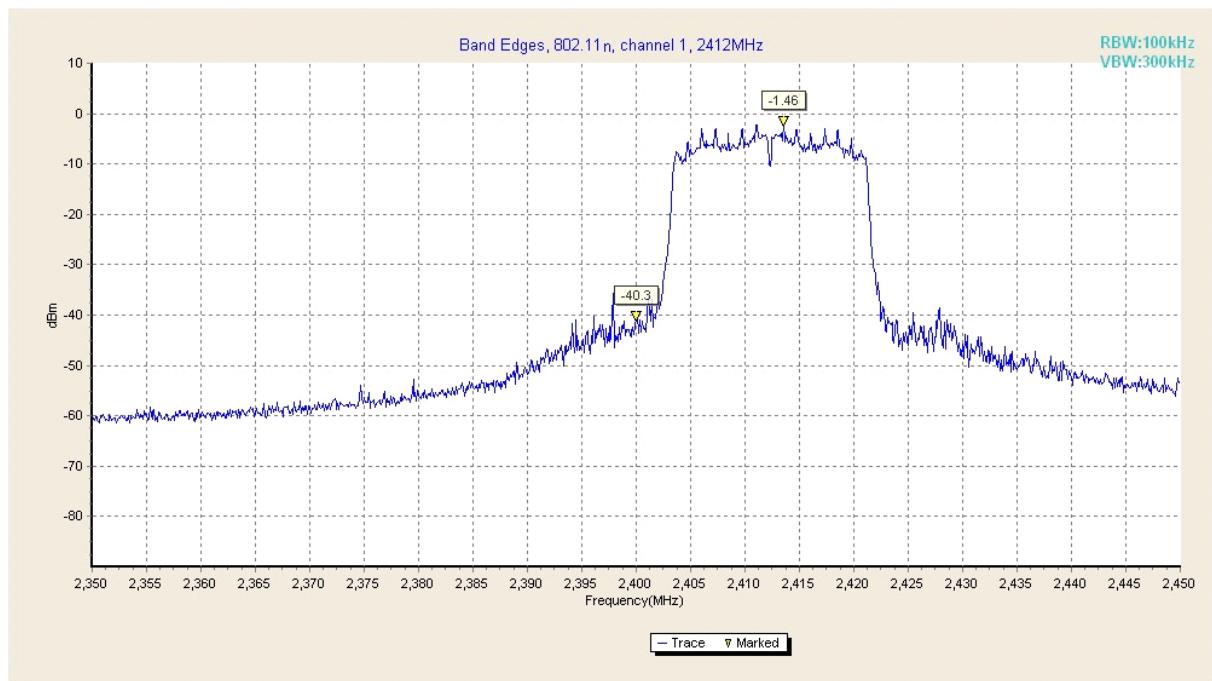

**Fig. 23 Band Edges (802.11 n-20MHz, Ch 1)**

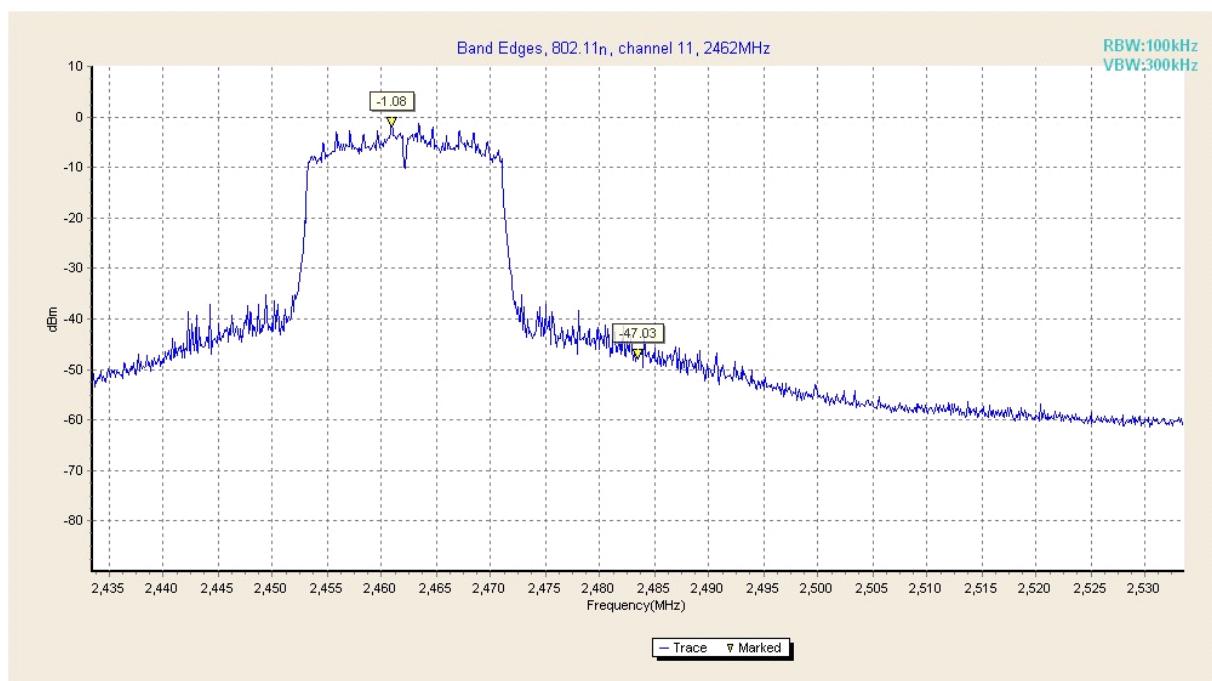

**Fig. 24 Band Edges (802.11 n-20MHz, Ch 11)**

## A.6. Transmitter Spurious Emission

### A.6.1 Transmitter Spurious Emission - Conducted

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.4 and KDB558074

#### Measurement Uncertainty:

Frequency Range	Uncertainty
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

#### Measurement Results:

##### 802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.25	P
		30 MHz-26 GHz	Fig.26	P
	6	2.437 GHz	Fig.27	P
		30 MHz-26 GHz	Fig.28	P
	11	2.462 GHz	Fig.29	P
		30 MHz-26 GHz	Fig.30	P
802.11g	1	2.412 GHz	Fig.31	P
		30 MHz-26 GHz	Fig.32	P
	6	2.437 GHz	Fig.33	P
		30 MHz-26 GHz	Fig.34	P
	11	2.462 GHz	Fig.35	P
		30 MHz-26 GHz	Fig.36	P


##### 802.11n mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (20MHz)	1	2.412 GHz	Fig.37	P
		30 MHz-26 GHz	Fig.38	P
	6	2.437 GHz	Fig.39	P
		30 MHz-26 GHz	Fig.40	P
	11	2.462 GHz	Fig.41	P


		30 MHz-26 GHz	Fig.42	P
802.11n (40MHz)	/	/	/	/
		/	/	/
	/	/	/	/
		/	/	/
	/	/	/	/
		/	/	/

**Conclusion: PASS**


**Test graphs as below:**

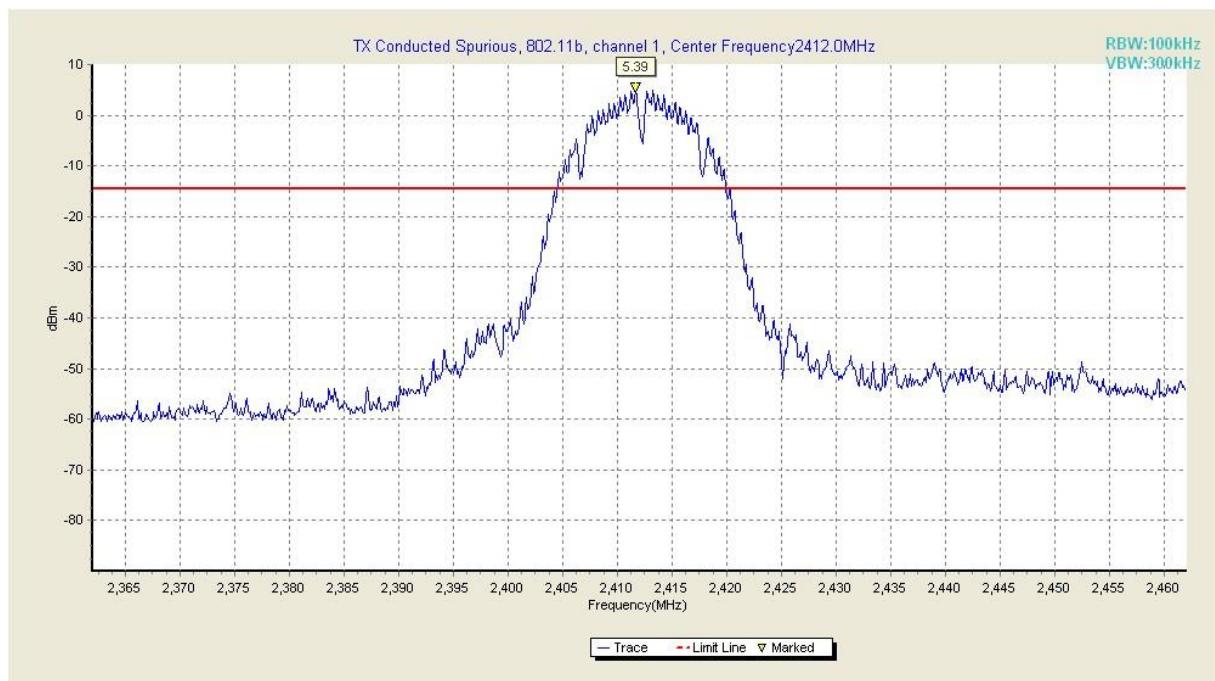


**Fig. 25 Conducted Spurious Emission (802.11b, Ch1, Center Frequency)**

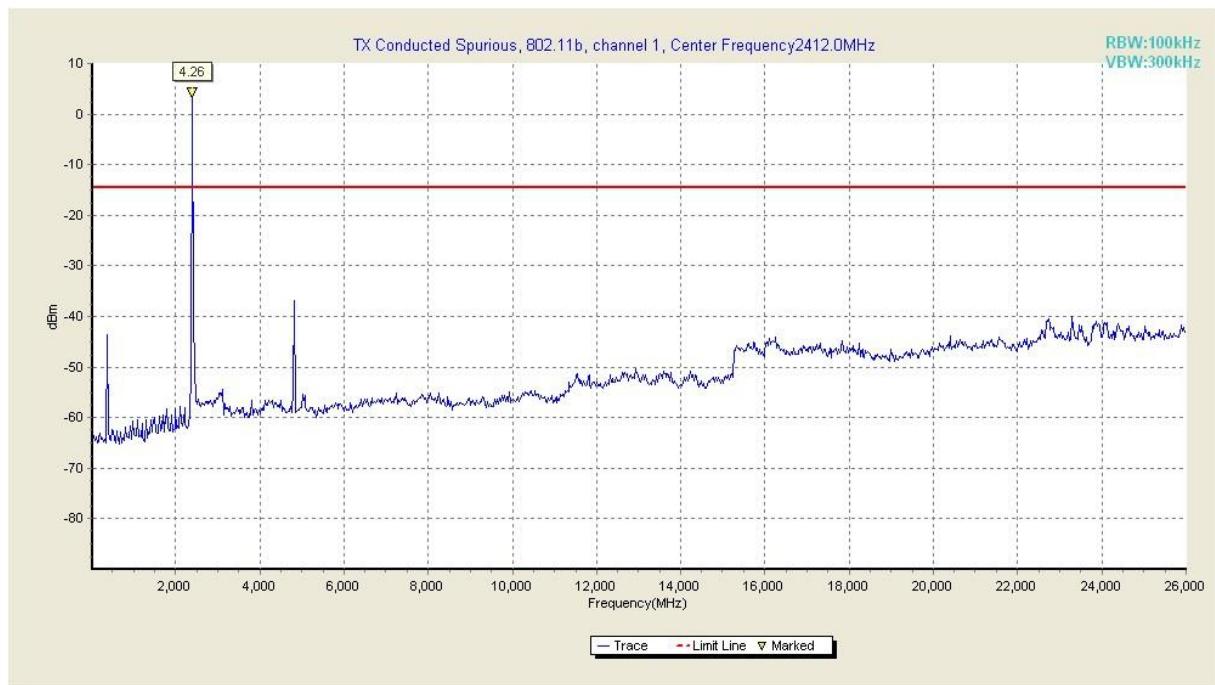


**Fig. 26 Conducted Spurious Emission (802.11b, Ch1, 30 MHz-26 GHz)**

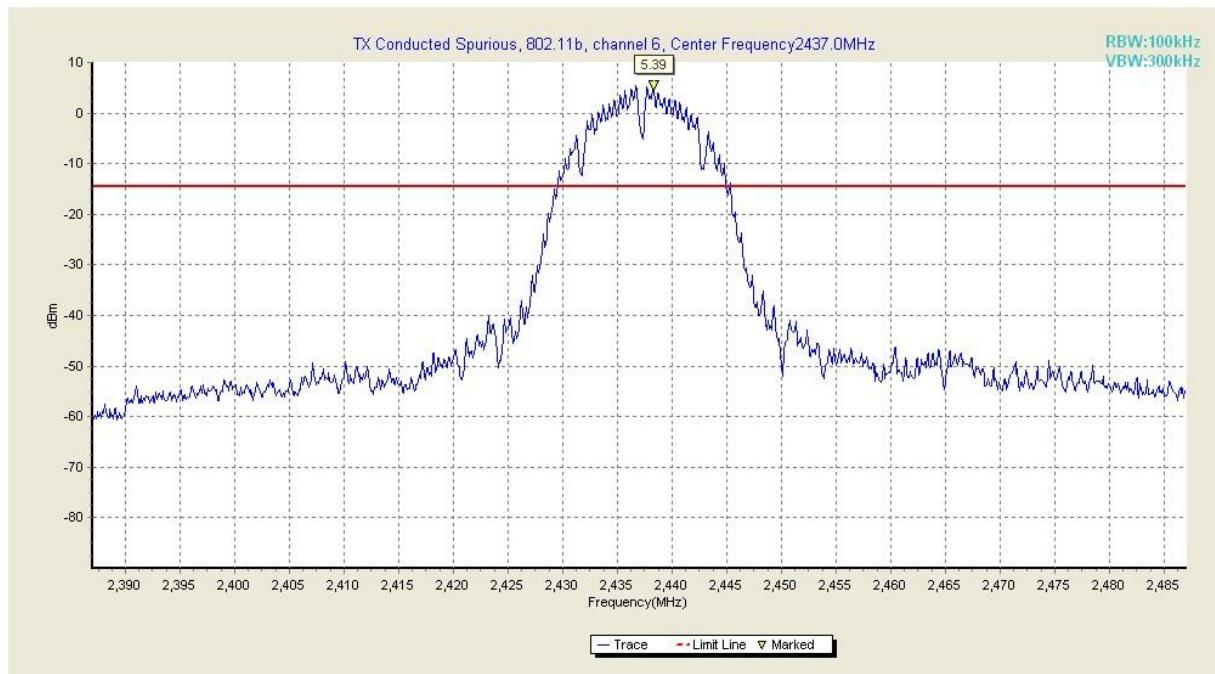


**Fig. 27 Conducted Spurious Emission (802.11b, Ch6, Center Frequency)**

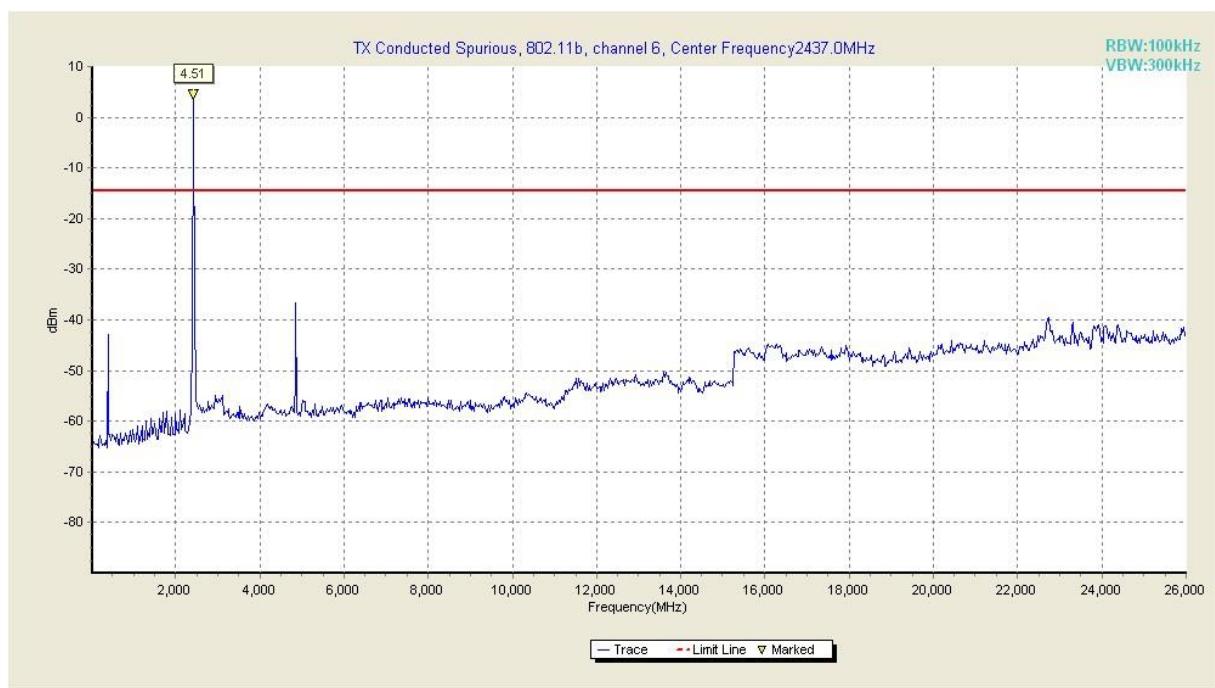


**Fig. 28 Conducted Spurious Emission (802.11b, Ch6, 30 MHz-26 GHz)**

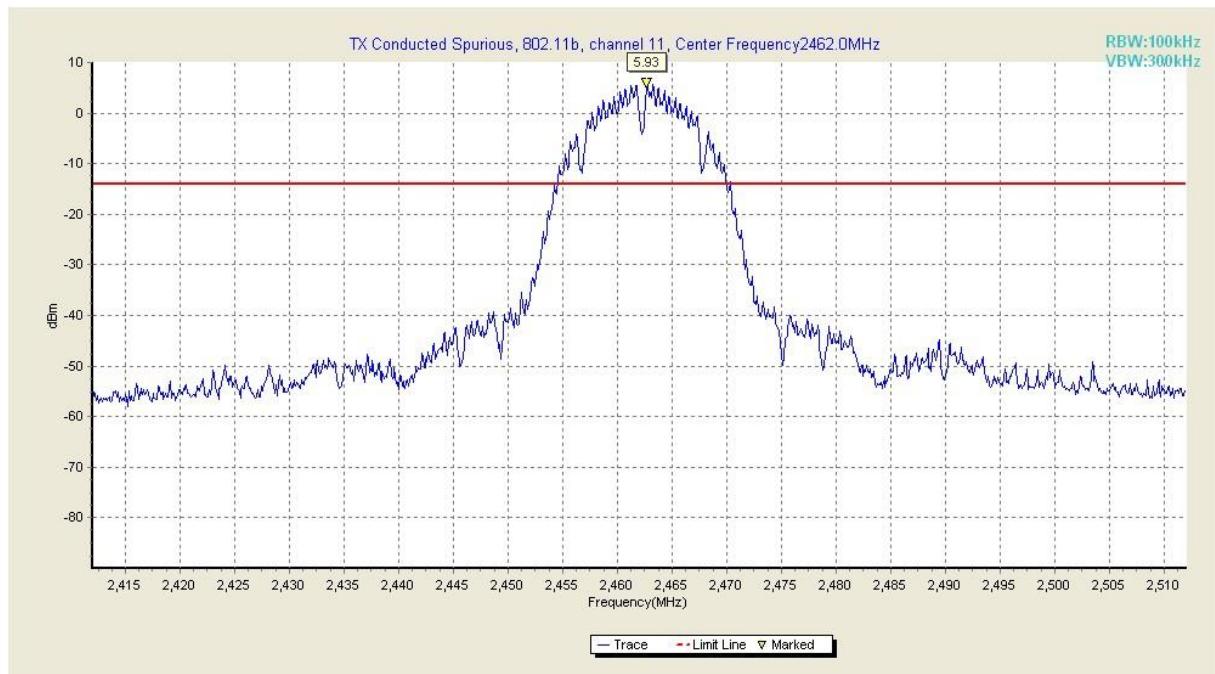



**Fig. 29 Conducted Spurious Emission (802.11b, Ch11, Center Frequency)**

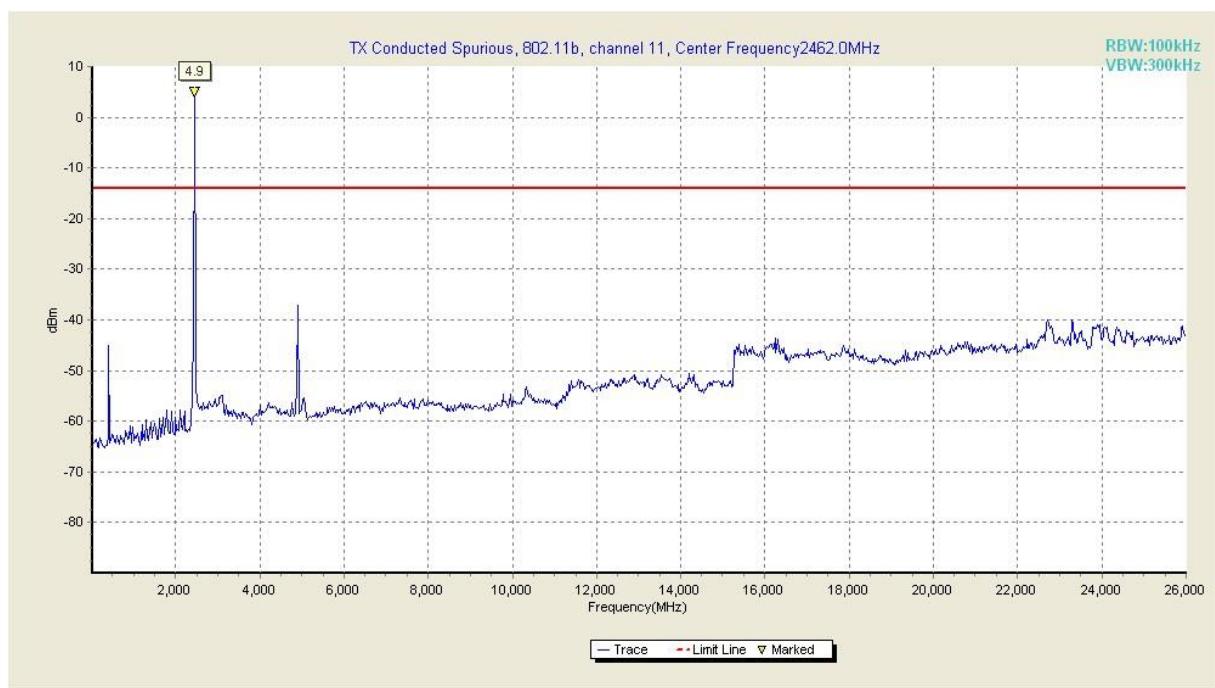


**Fig. 30 Conducted Spurious Emission (802.11b, Ch11, 30 MHz-26 GHz)**

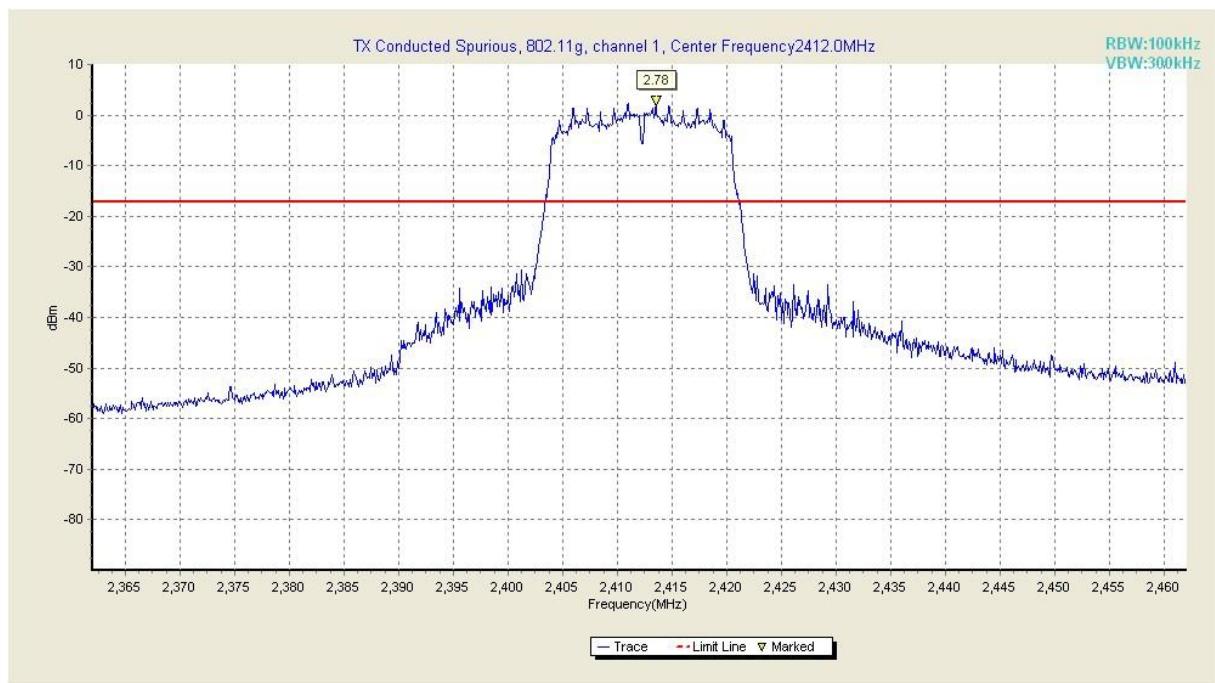


**Fig. 31 Conducted Spurious Emission (802.11g, Ch1, Center Frequency)**

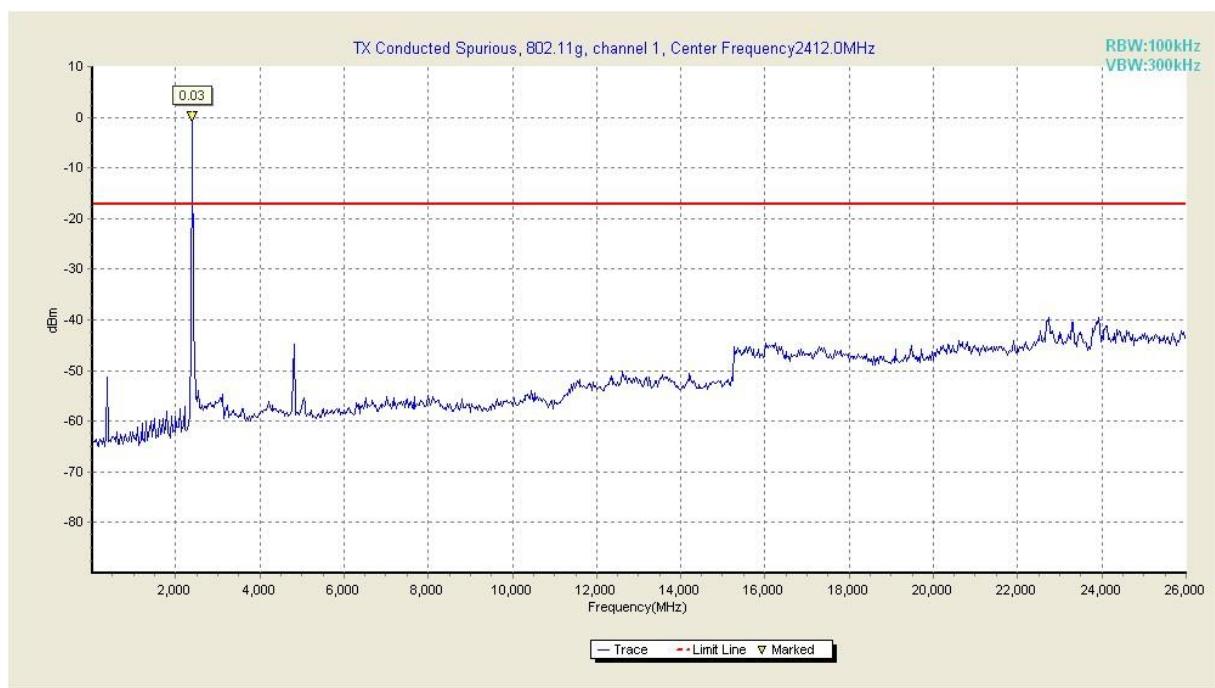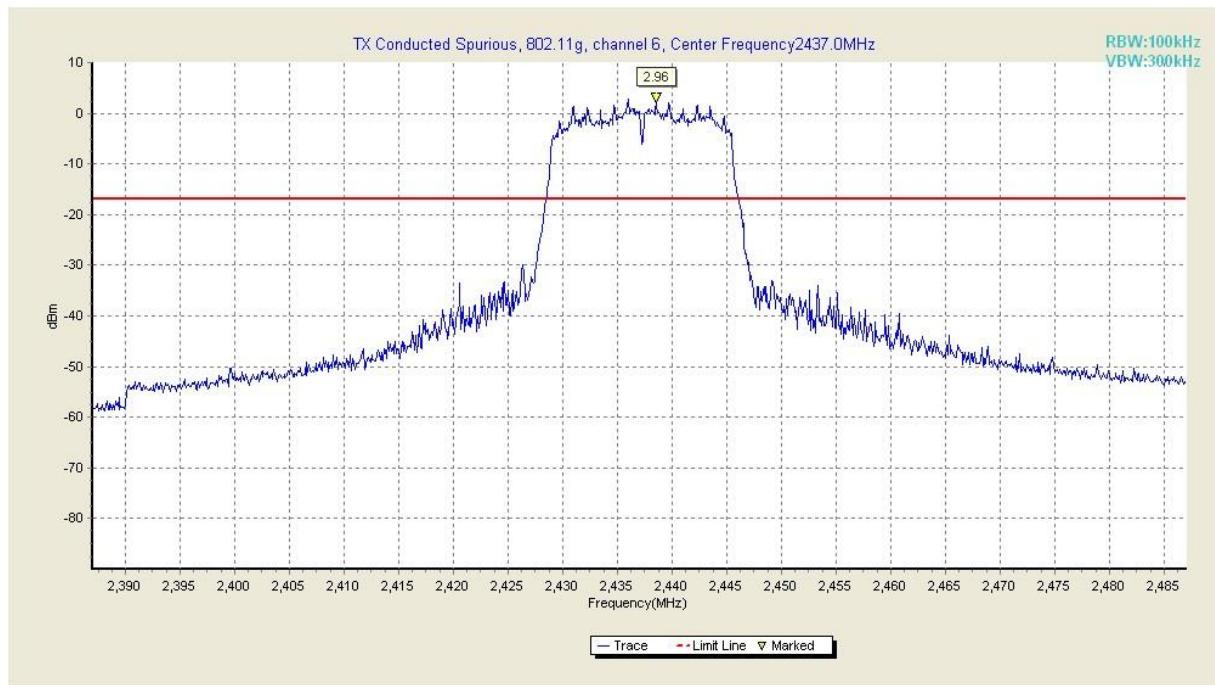**Fig. 32 Conducted Spurious Emission (802.11g, Ch1, 30 MHz-26 GHz)****Fig. 33 Conducted Spurious Emission (802.11g, Ch6, Center Frequency)**

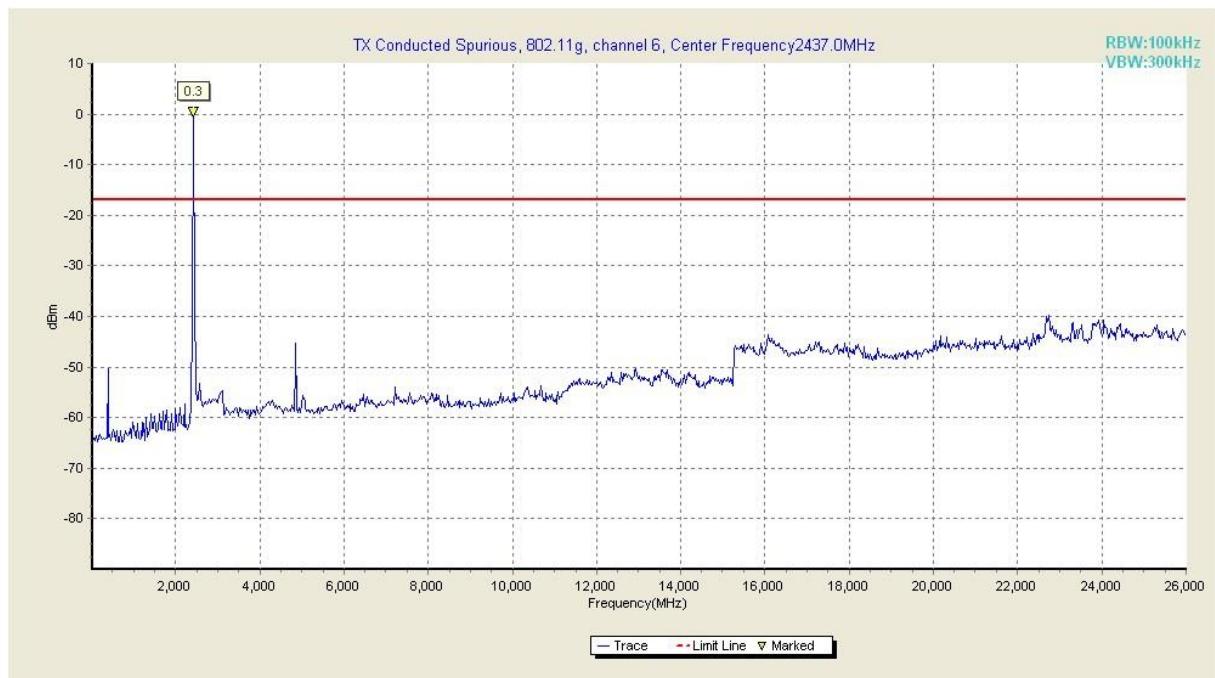


**Fig. 34 Conducted Spurious Emission (802.11g, Ch6, 30 MHz-26 GHz)**

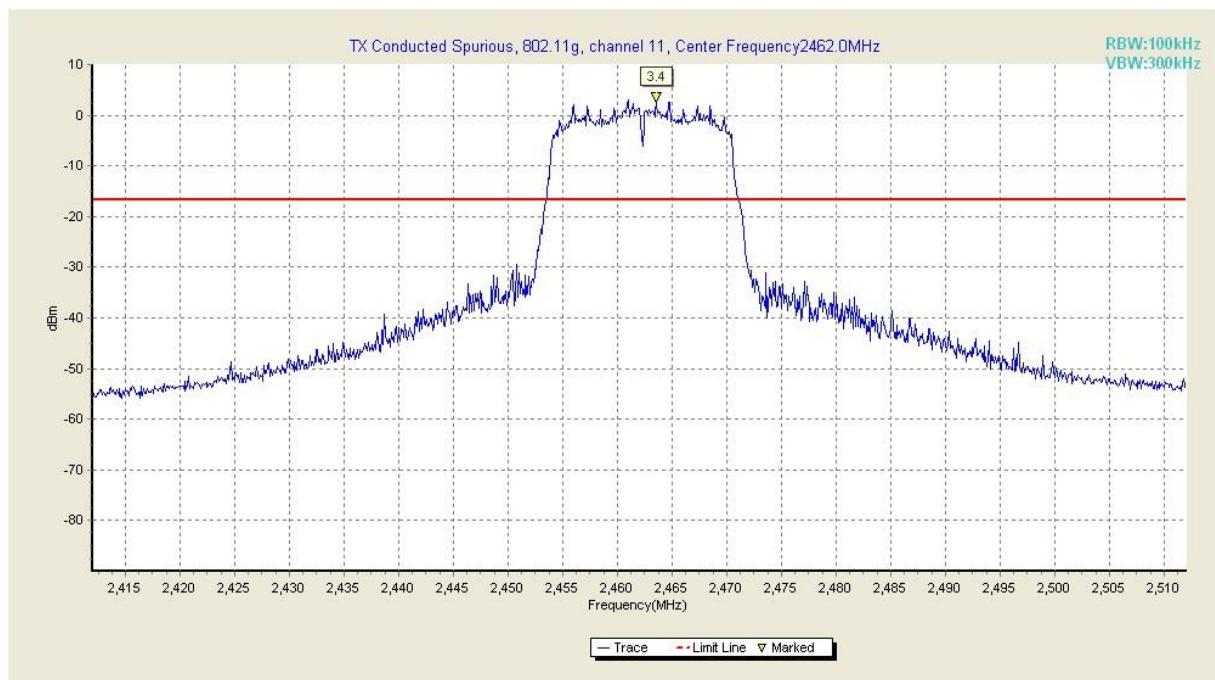


**Fig. 35 Conducted Spurious Emission (802.11g, Ch11, Center Frequency)**




**Fig. 36 Conducted Spurious Emission (802.11g, Ch11, 30 MHz-26 GHz)**

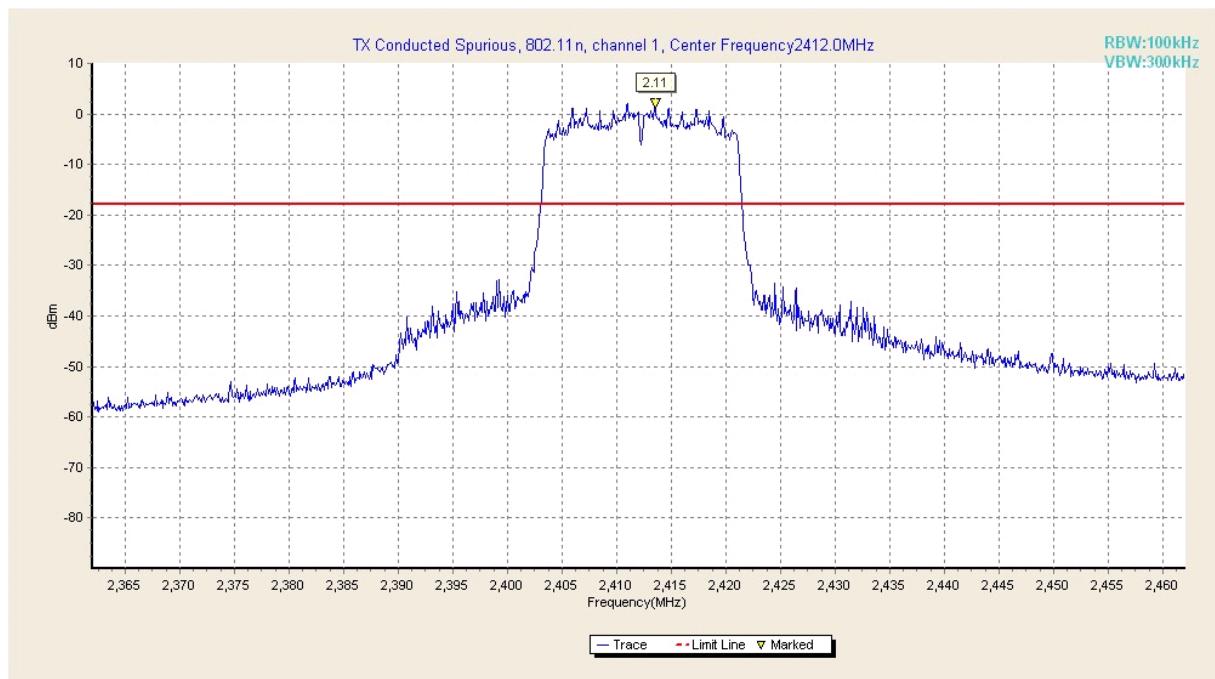


**Fig. 37 Conducted Spurious Emission (802.11n-20MHz, Ch1, Center Frequency)**

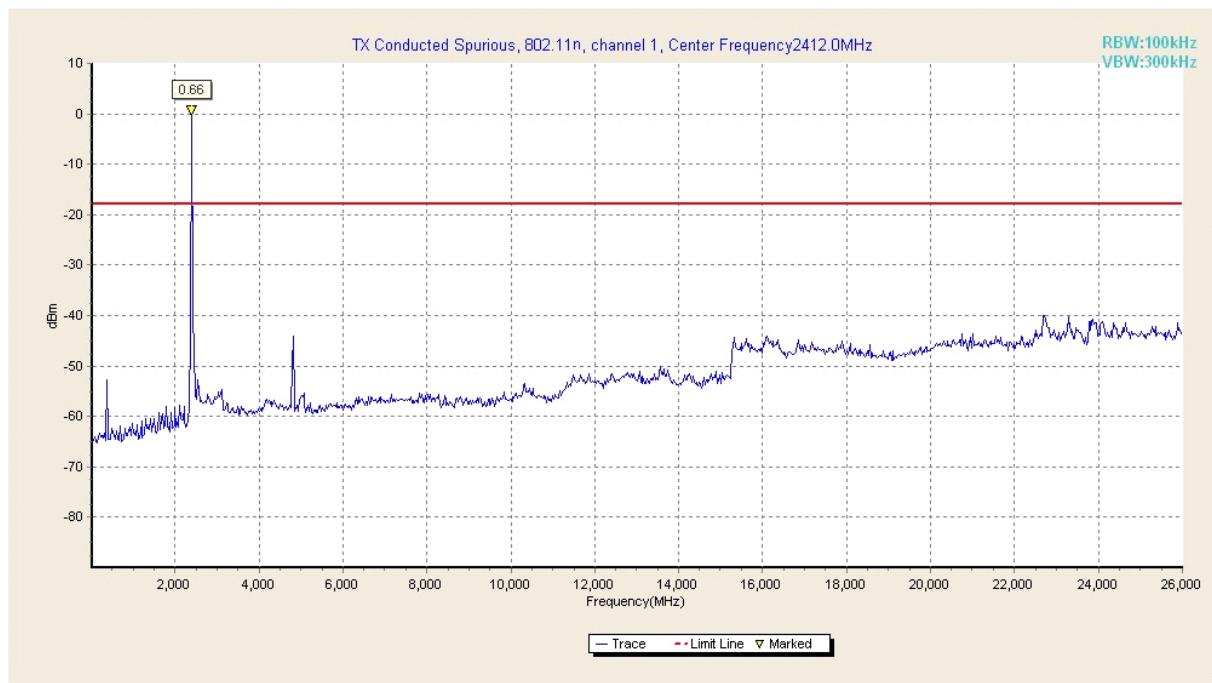


**Fig. 38 Conducted Spurious Emission (802.11 n-20MHz, Ch1, 30 MHz-26 GHz)**

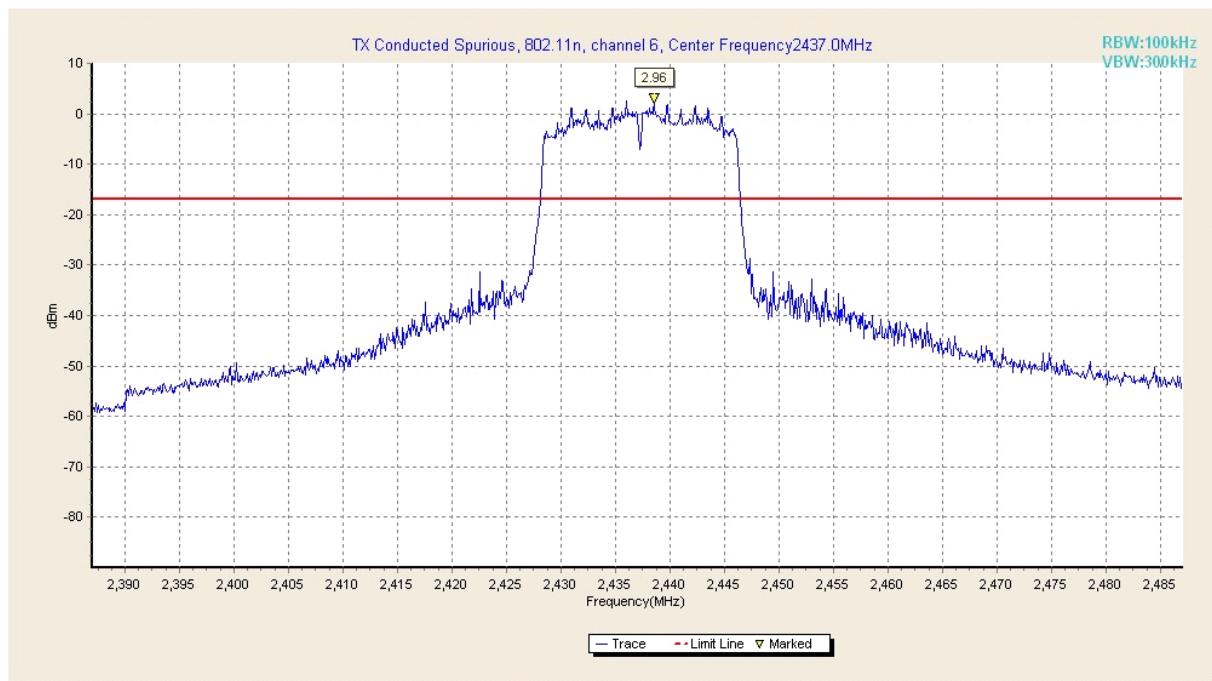


**Fig. 39 Conducted Spurious Emission (802.11 n-20MHz, Ch6, Center Frequency)**

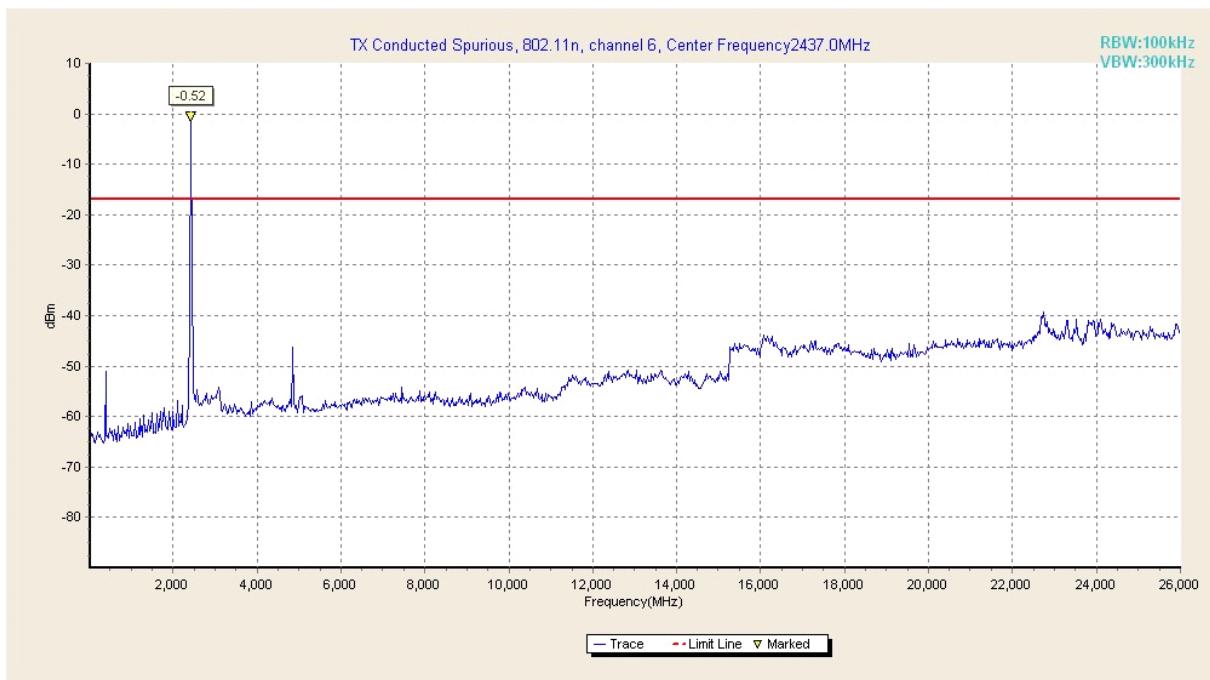

**Fig. 40 Conducted Spurious Emission (802.11 n-20MHz, Ch6, 30 MHz-26 GHz)**

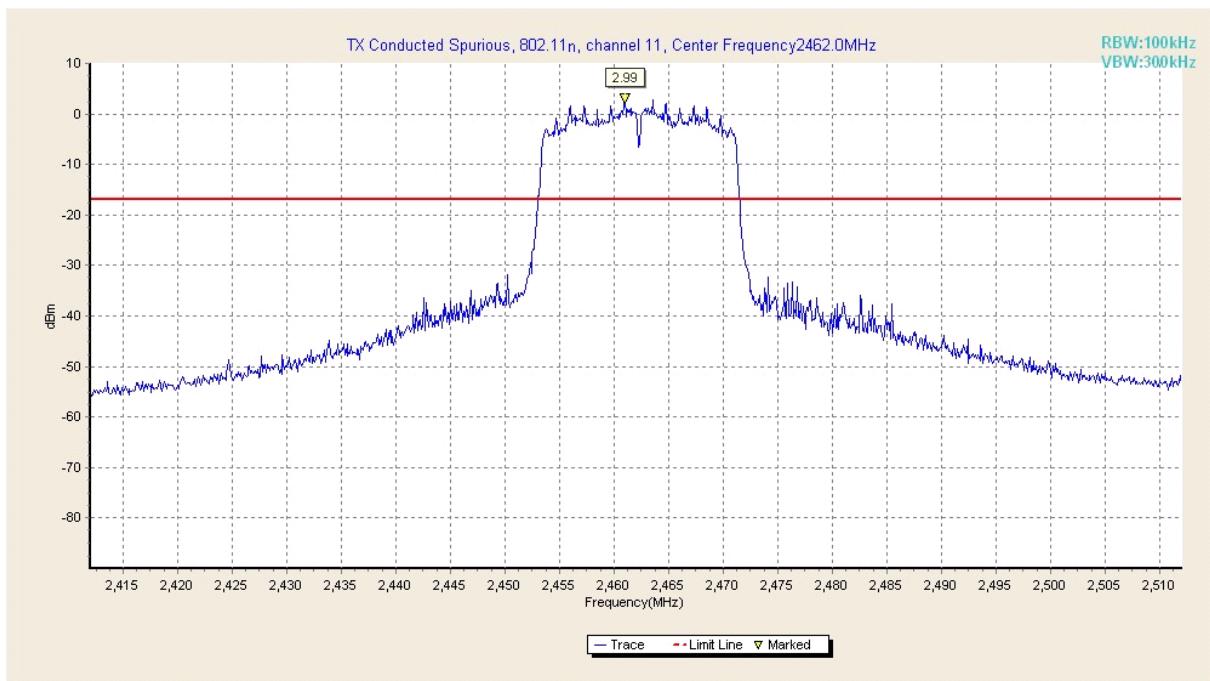

**Fig. 41 Conducted Spurious Emission (802.11 n-20MHz, Ch11, Center Frequency)**

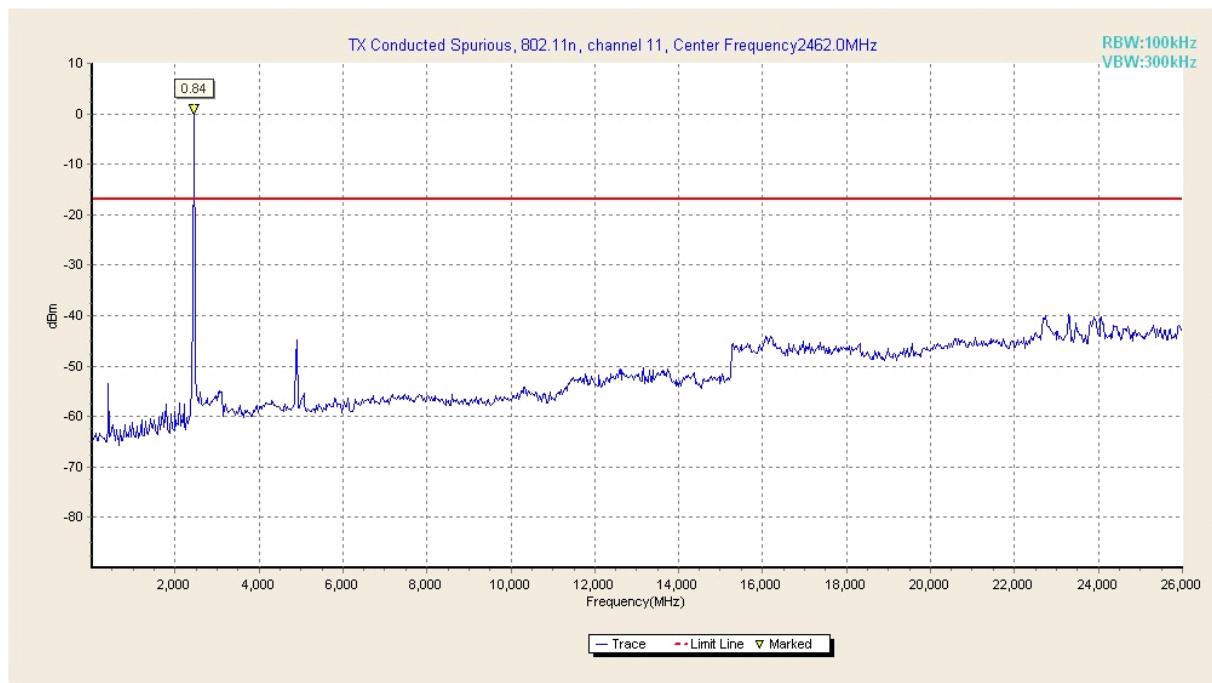

**Fig. 42 Conducted Spurious Emission (802.11 n-20MHz, Ch11, 30 MHz-26 GHz)**

**A.6.2 Transmitter Spurious Emission - Radiated****Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.4 and KDB558074.

**Limit in restricted band:**

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Test Condition**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

**Measurement Results:**
**802.11b/g mode**

<b>Mode</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11b	1	Power	Fig.43	P
		30 MHz ~1 GHz	Fig.44	P
		1 GHz ~ 4 GHz	Fig.45	P
		4 GHz ~ 18 GHz	Fig.46	P
	6	30 MHz ~1 GHz	Fig.47	P
		1 GHz ~ 4 GHz	Fig.48	P
		4 GHz ~ 18 GHz	Fig.49	P
	11	Power	Fig.50	P
		30 MHz ~1 GHz	Fig.51	P
		1 GHz ~ 4 GHz	Fig.52	P
		4 GHz ~ 18 GHz	Fig.53	P
802.11g	1	Power	Fig.54	P
		30 MHz ~1 GHz	Fig.55	P
		1 GHz ~ 4 GHz	Fig.56	P
		4 GHz ~ 18 GHz	Fig.57	P
	6	30 MHz ~1 GHz	Fig.58	P
		1 GHz ~ 4 GHz	Fig.59	P
		4 GHz ~ 18 GHz	Fig.60	P
	11	Power	Fig.61	P
		30 MHz ~1 GHz	Fig.62	P
		1 GHz ~ 4 GHz	Fig.63	P
		4 GHz ~ 18 GHz	Fig.64	P

**802.11n mode**

<b>Mode</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11n (20MHz)	1	Power	Fig.65	P
		30 MHz ~1 GHz	Fig.66	P
		1 GHz ~ 4 GHz	Fig.67	P
		4 GHz ~ 18 GHz	Fig.68	P
	6	30 MHz ~1 GHz	Fig.69	P
		1 GHz ~ 4 GHz	Fig.70	P
		4 GHz ~ 18 GHz	Fig.71	P
	11	Power	Fig.72	P
		30 MHz ~1 GHz	Fig.73	P
		1 GHz ~ 4 GHz	Fig.74	P
		4 GHz ~ 18 GHz	Fig.75	P
802.11n (40MHz)	/	Power	/	/
		/	/	/
		/	/	/

		/	/	/
/	Power	/	/	/
		/	/	/
		/	/	/
		/	/	/
/	All channels	18 GHz~ 26.5 GHz	Fig.76	P

**Conclusion: PASS**

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

**802.11b**

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2414.83	78.19	-18.7	27.5	69.39	VERTICAL
2410.822	76.91	-18.7	27.5	68.11	VERTICAL
2418.838	71.76	-18.7	27.5	62.96	HORIZONTAL
2406.814	69.74	-18.7	27.5	60.94	VERTICAL
2422.846	52.52	-18.8	27.5	43.82	VERTICAL
2402.806	49.6	-18.7	27.5	40.8	HORIZONTAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2438.878	80.61	-18.9	27.5	72.01	VERTICAL
2434.87	78.43	-18.9	27.5	69.83	HORIZONTAL
2442.886	75.68	-18.9	27.5	67.08	HORIZONTAL
2430.862	67.59	-18.9	27.5	58.99	VERTICAL
2446.894	60.74	-18.9	27.5	52.14	VERTICAL
2426.854	42.94	-18.8	27.5	34.24	HORIZONTAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2462.926	79.73	-18.6	27.5	70.83	VERTICAL
2458.918	76.39	-18.7	27.5	67.59	VERTICAL
2466.934	76.05	-18.6	27.5	67.15	HORIZONTAL
2454.91	63.43	-18.7	27.5	54.63	VERTICAL
2470.942	63.39	-18.4	27.5	54.29	HORIZONTAL
3701.403	41.27	-19.1	33.4	26.97	VERTICAL

**802.11g**

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2418.838	75.22	-18.7	27.5	66.42	VERTICAL
2414.83	75.13	-18.7	27.5	66.33	HORIZONTAL
2410.822	73.72	-18.7	27.5	64.92	VERTICAL
2406.814	73.41	-18.7	27.5	64.61	VERTICAL
2422.846	60.99	-18.8	27.5	52.29	VERTICAL
2402.806	57.63	-18.7	27.5	48.83	HORIZONTAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2438.878	77.38	-18.9	27.5	68.78	HORIZONTAL
2442.886	76.55	-18.9	27.5	67.95	VERTICAL
2434.87	76.39	-18.9	27.5	67.79	VERTICAL
2430.862	73.61	-18.9	27.5	65.01	HORIZONTAL
2446.894	68.69	-18.9	27.5	60.09	HORIZONTAL
2426.854	46.63	-18.8	27.5	37.93	VERTICAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2462.926	76.26	-18.6	27.5	67.36	VERTICAL
2458.918	75.96	-18.7	27.5	67.16	VERTICAL
2466.934	74.58	-18.6	27.5	65.68	HORIZONTAL
2470.942	70.04	-18.4	27.5	60.94	VERTICAL
2454.91	70	-18.7	27.5	61.2	HORIZONTAL
3699.399	41.28	-19.2	33.4	27.08	HORIZONTAL

**802.11n-20MHz**

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2418.838	74.81	-18.7	27.5	66.01	HORIZONTAL
2414.83	74.71	-18.7	27.5	65.91	VERTICAL
2410.822	73.36	-18.7	27.5	64.56	HORIZONTAL
2406.814	73.12	-18.7	27.5	64.32	VERTICAL
2422.846	64.42	-18.8	27.5	55.72	VERTICAL
2402.806	61.56	-18.7	27.5	52.76	HORIZONTAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2438.878	76.66	-18.9	27.5	68.06	HORIZONTAL
2442.886	75.97	-18.9	27.5	67.37	VERTICAL
2434.87	75.64	-18.9	27.5	67.04	VERTICAL
2430.862	74.15	-18.9	27.5	65.55	HORIZONTAL
2446.894	70.45	-18.9	27.5	61.85	HORIZONTAL
2426.854	52.92	-18.8	27.5	44.22	VERTICAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2462.926	75.56	-18.6	27.5	66.66	VERTICAL
2458.918	75.06	-18.7	27.5	66.26	VERTICAL
2466.934	73.97	-18.6	27.5	65.07	HORIZONTAL
2454.91	71.27	-18.7	27.5	62.47	VERTICAL
2470.942	70.82	-18.4	27.5	61.72	HORIZONTAL
2474.95	44.92	-18.4	27.5	35.82	VERTICAL

Test graphs as below:

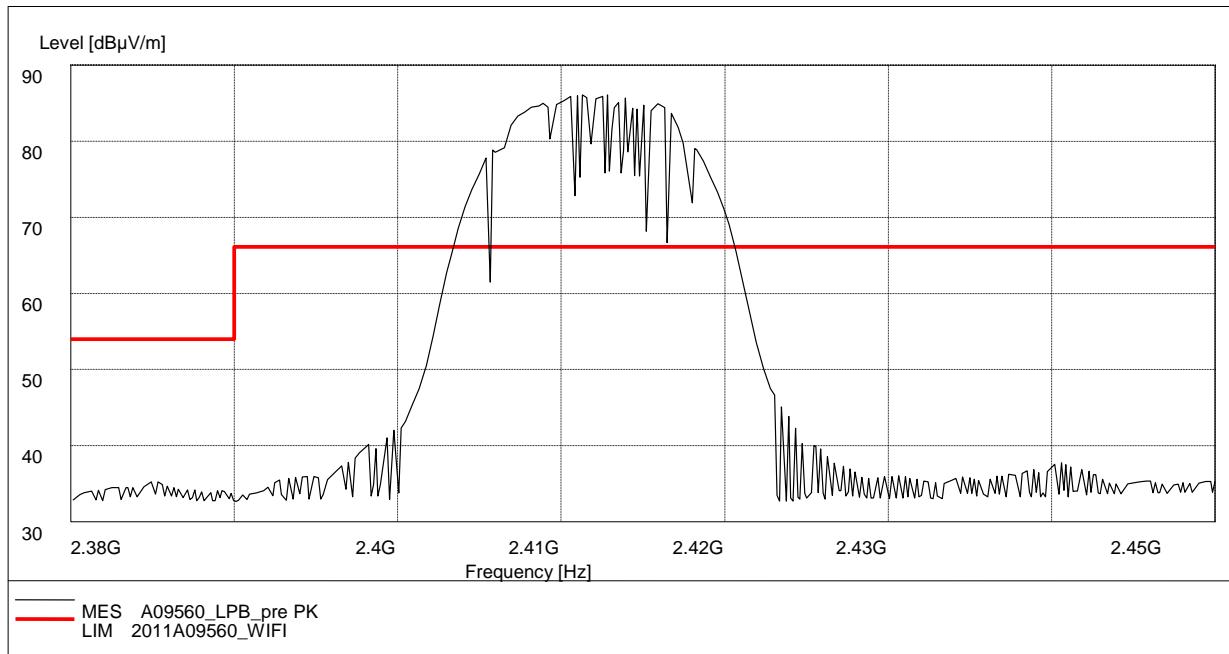


Fig. 43 Radiated Spurious Emission (Power): 802.11b, ch1, 2.38 GHz - 245GHz



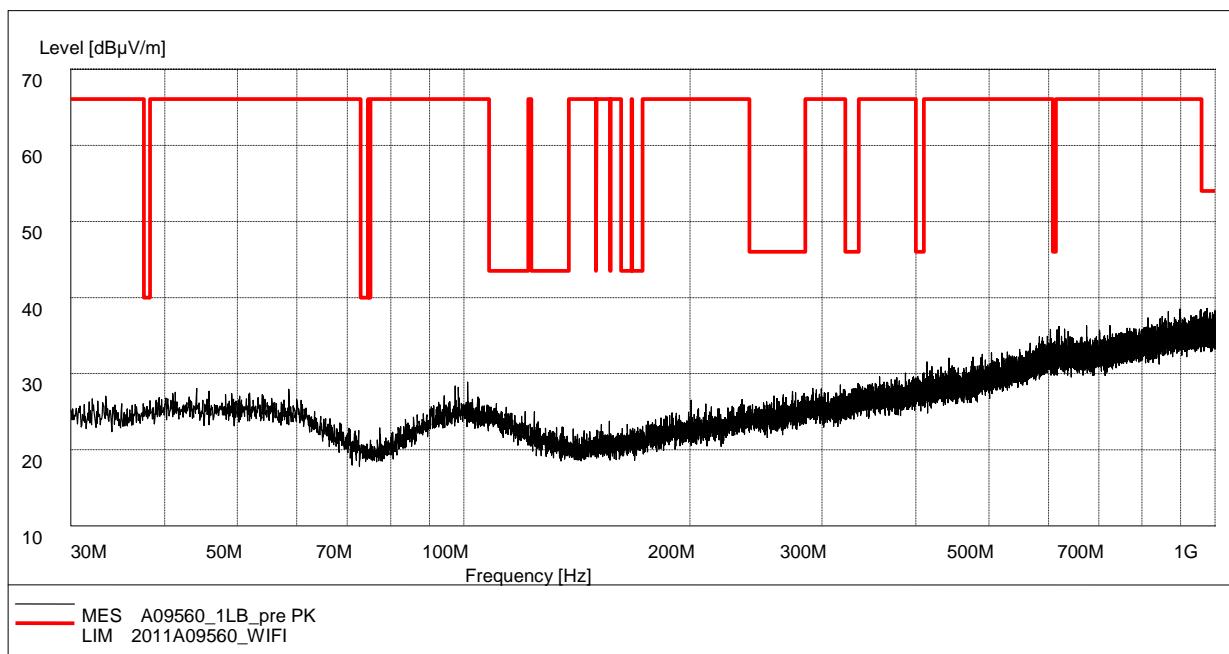




Fig. 44 Radiated Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)

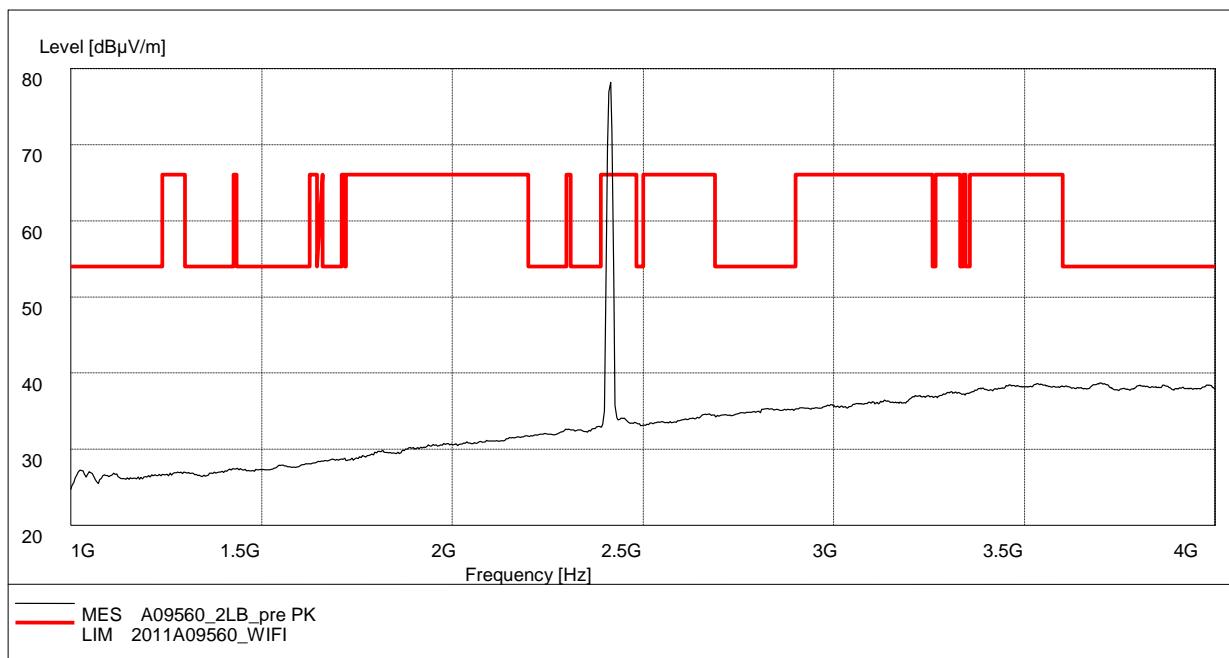


**Fig. 45 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-4 GHz)**

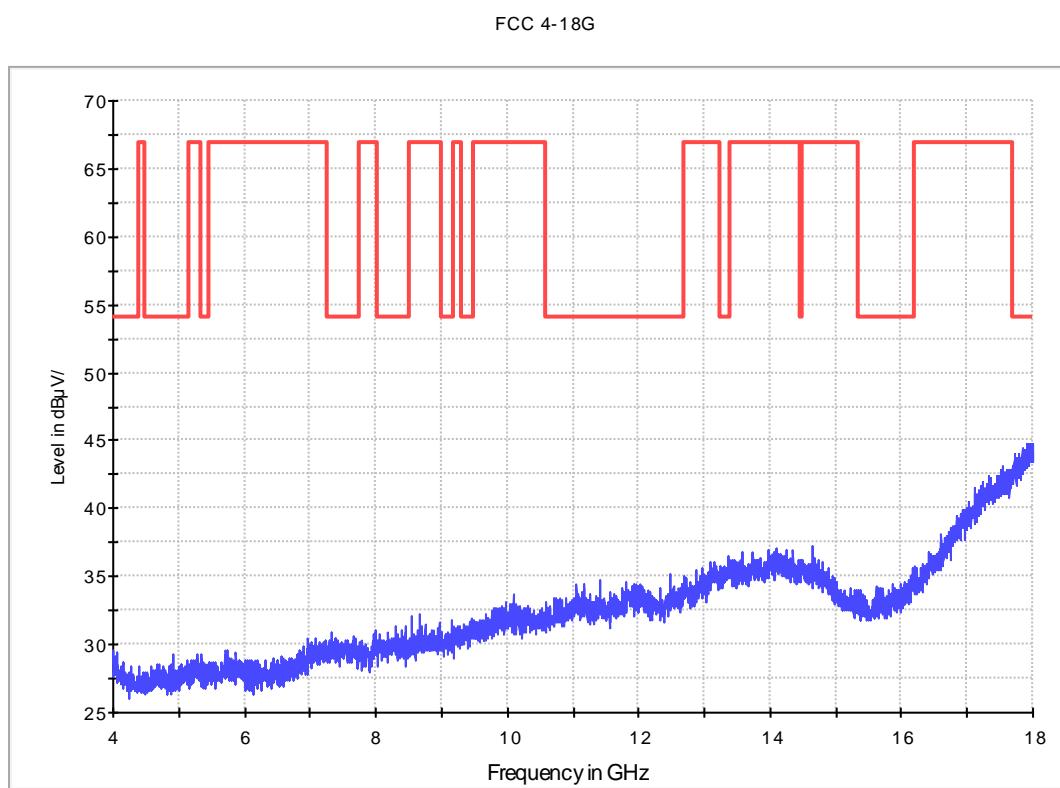


**Fig. 46 Radiated Spurious Emission (802.11b, Ch1, 4 GHz-18 GHz)**

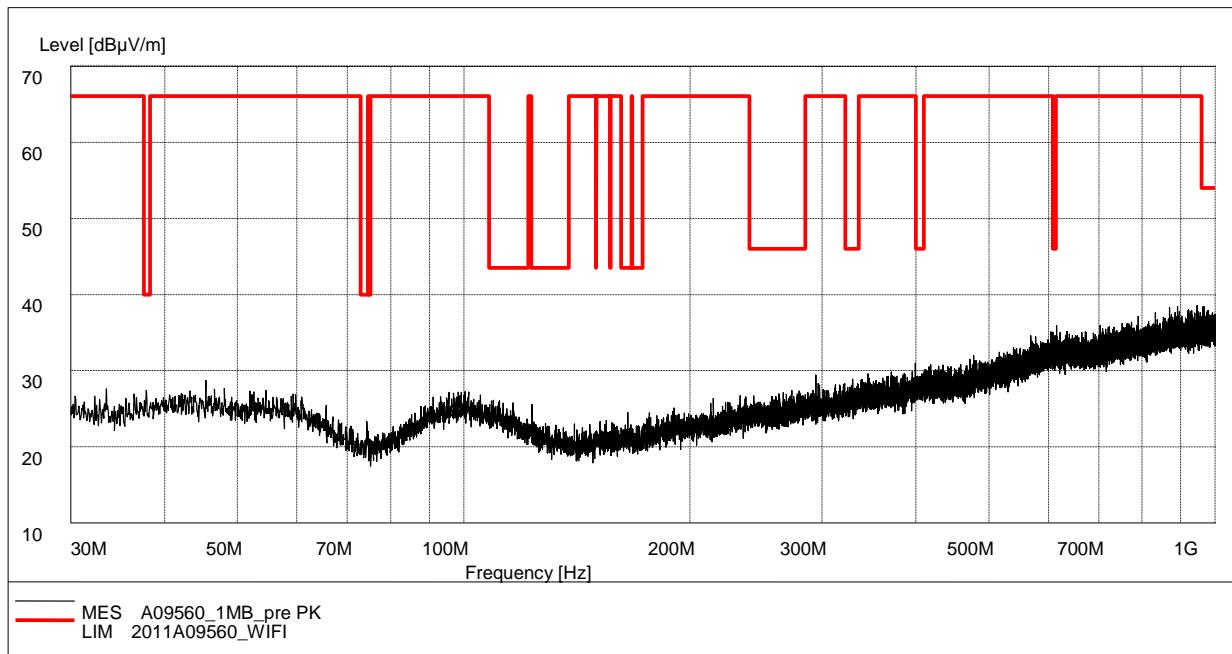
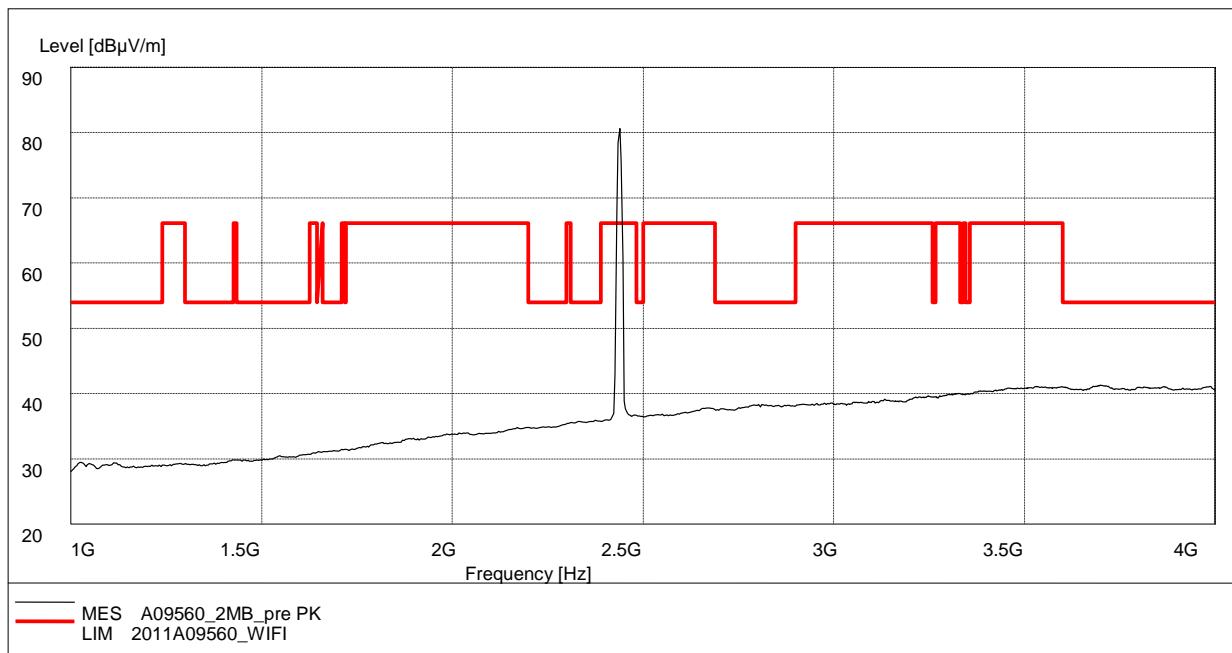

**Fig. 47 Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)**

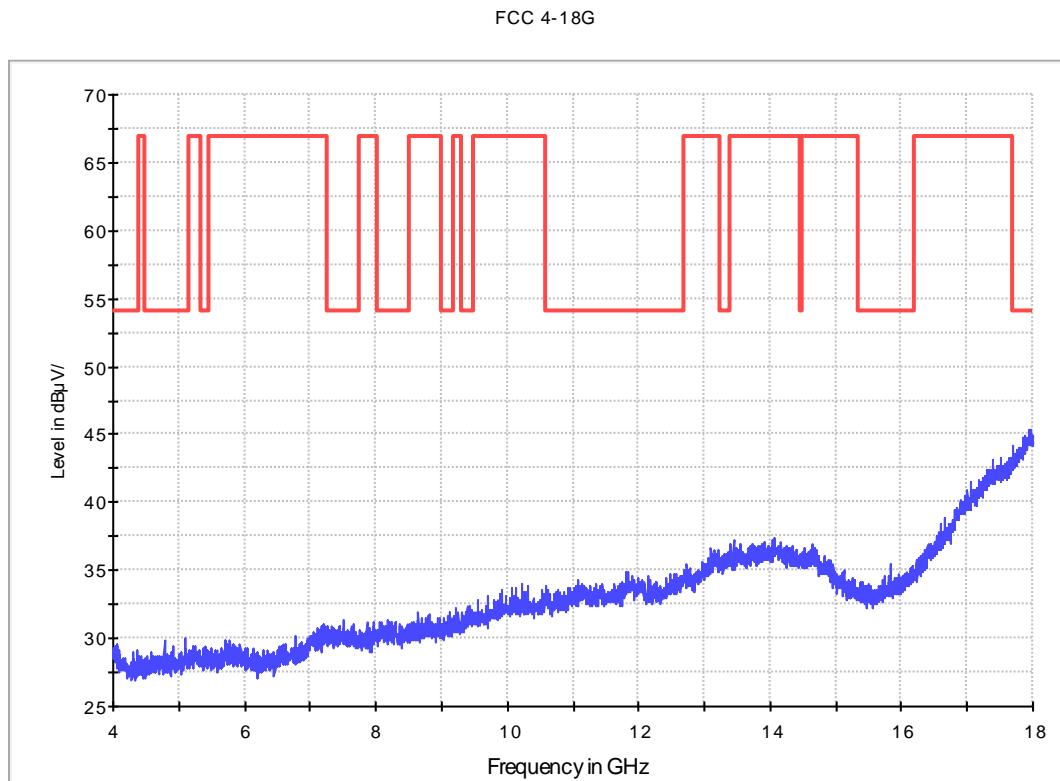**Fig. 48 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-4 GHz)**


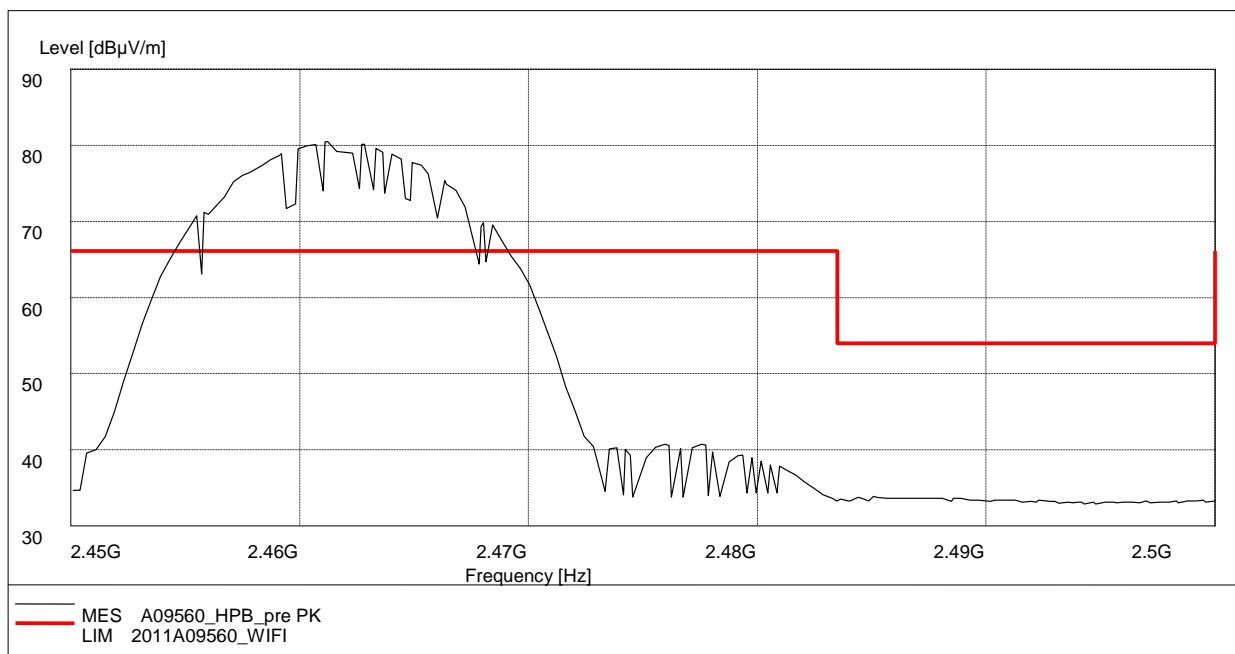




**Fig. 49 Radiated Spurious Emission (802.11b, Ch6, 4 GHz-18 GHz)**

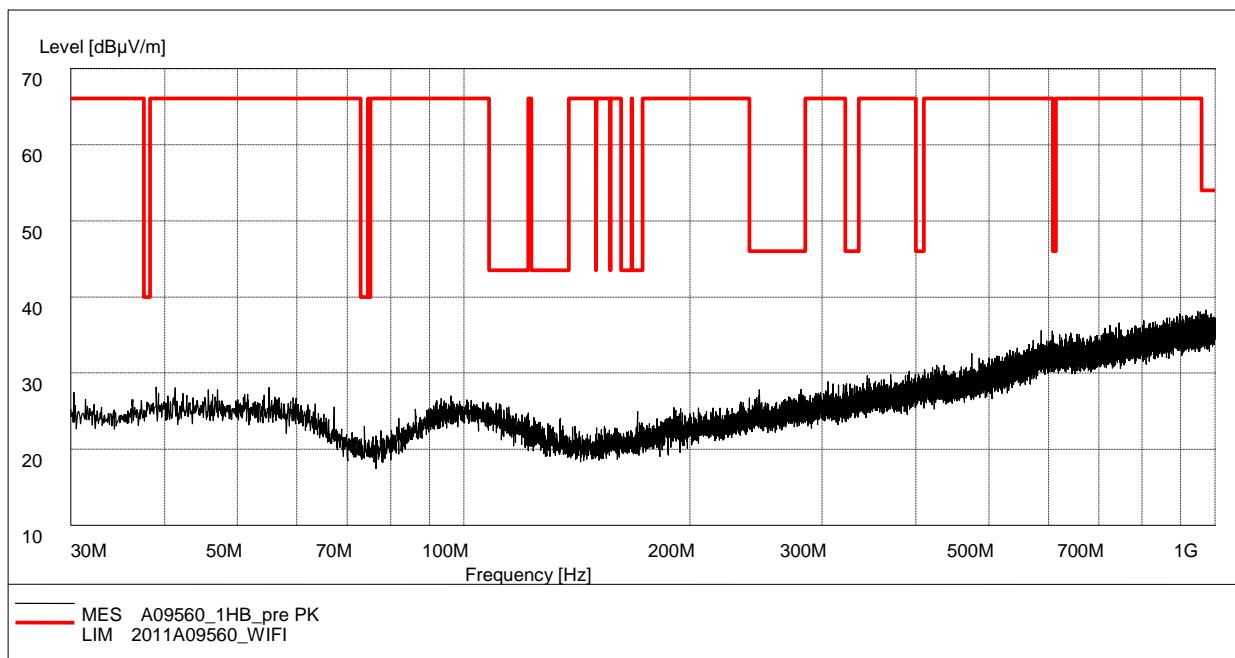
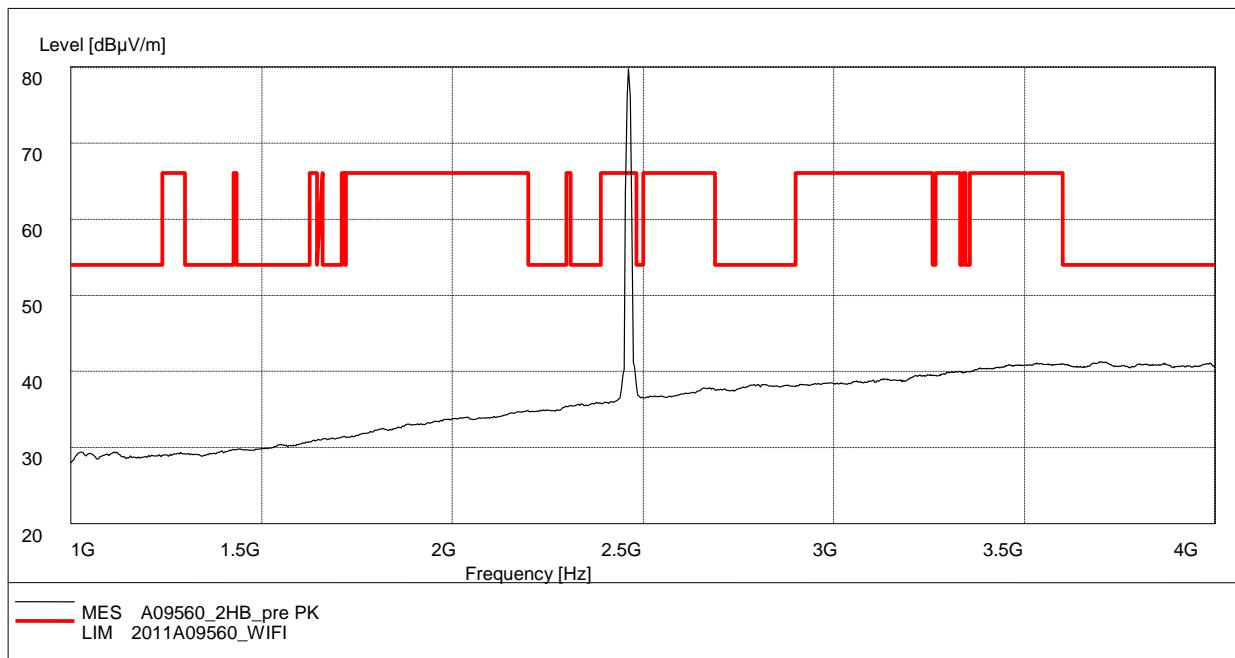



**Fig. 50 Radiated Spurious Emission (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz**


**Fig. 51 Radiated Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)**

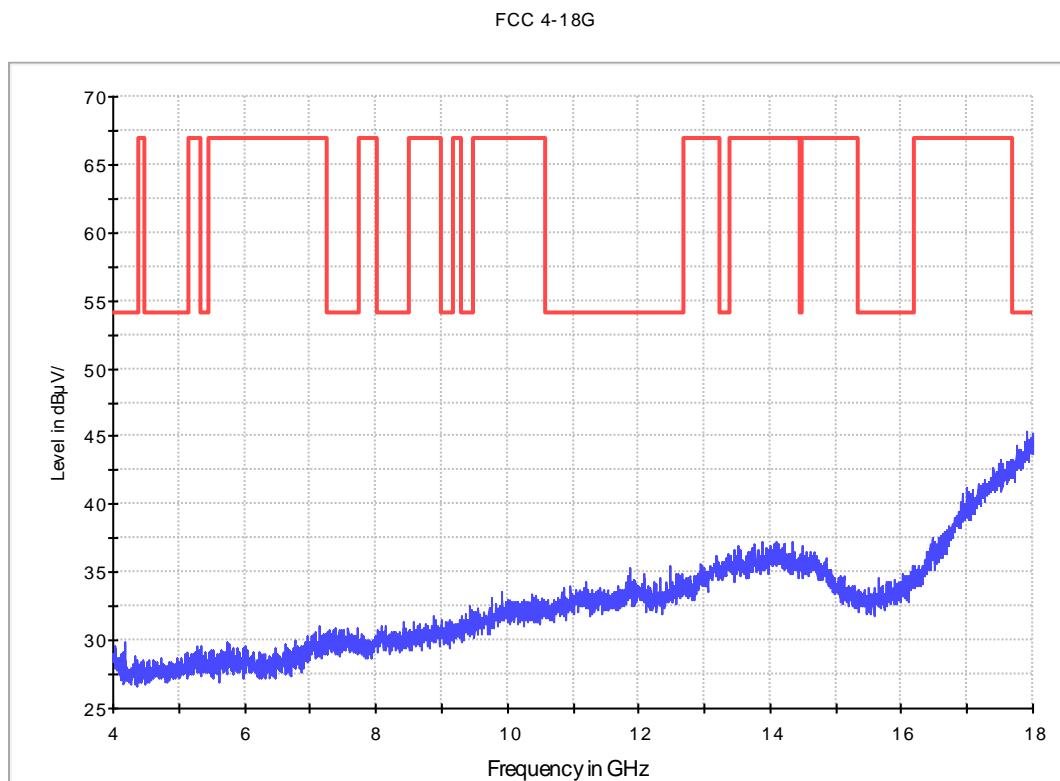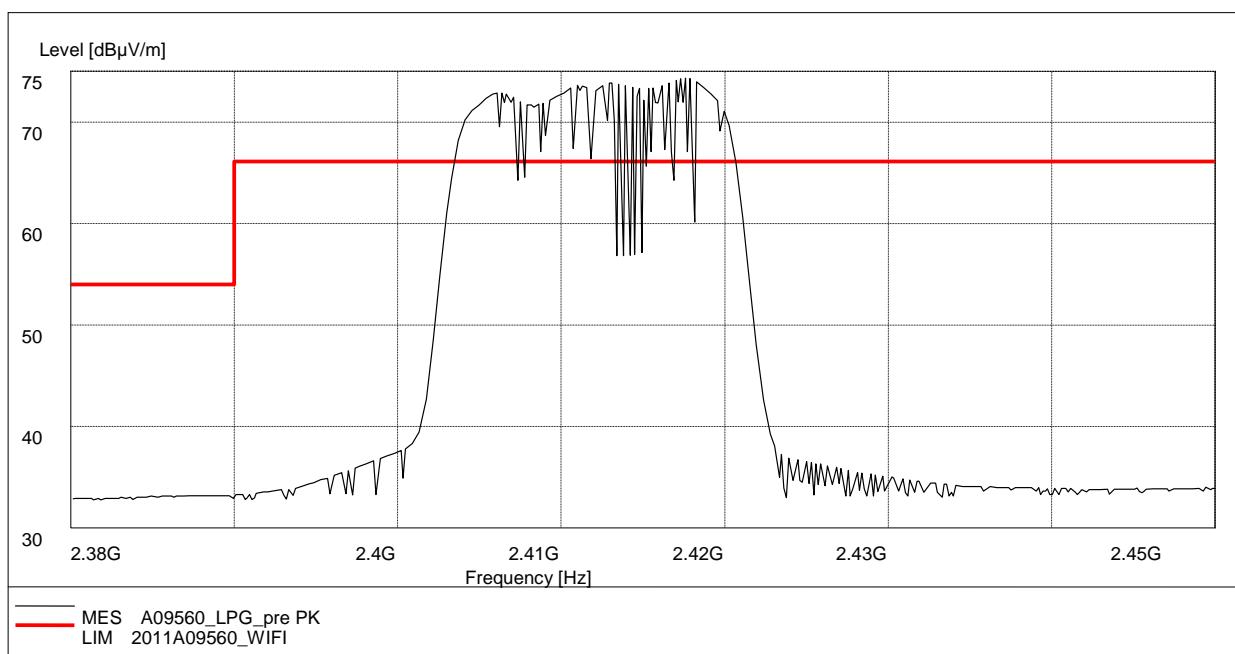**Fig. 52 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-4 GHz)**

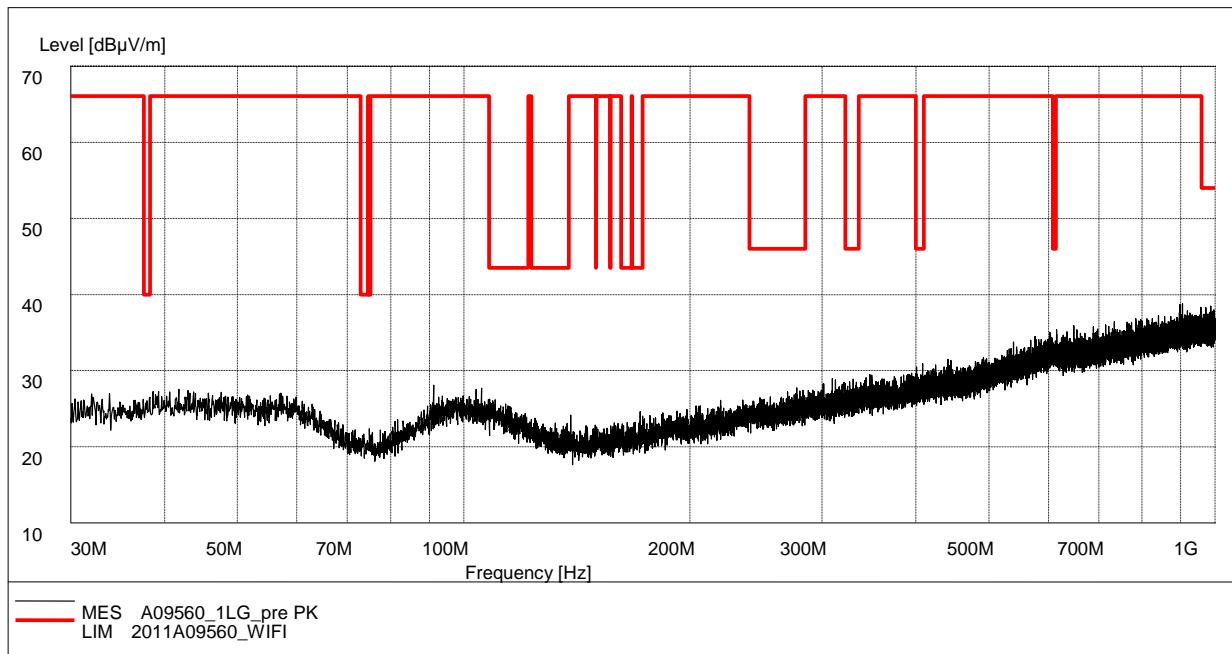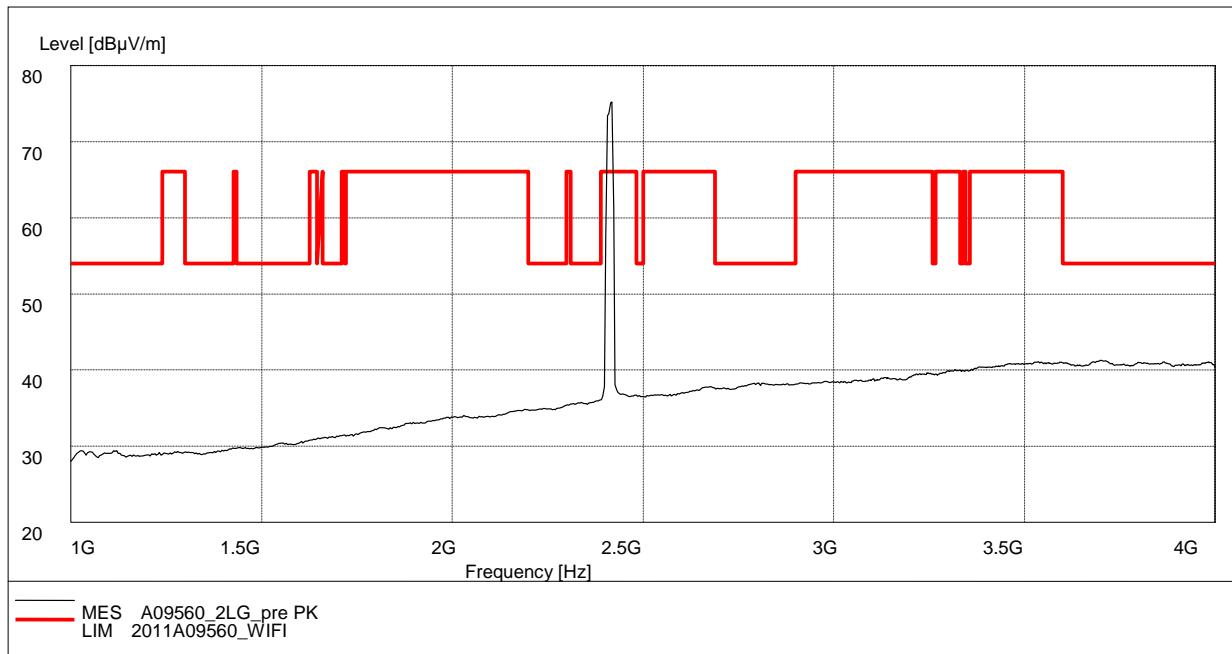
**Fig. 53 Radiated Spurious Emission (802.11b, Ch11, 4 GHz-18 GHz)****Fig. 54 Radiated Spurious Emission (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz**

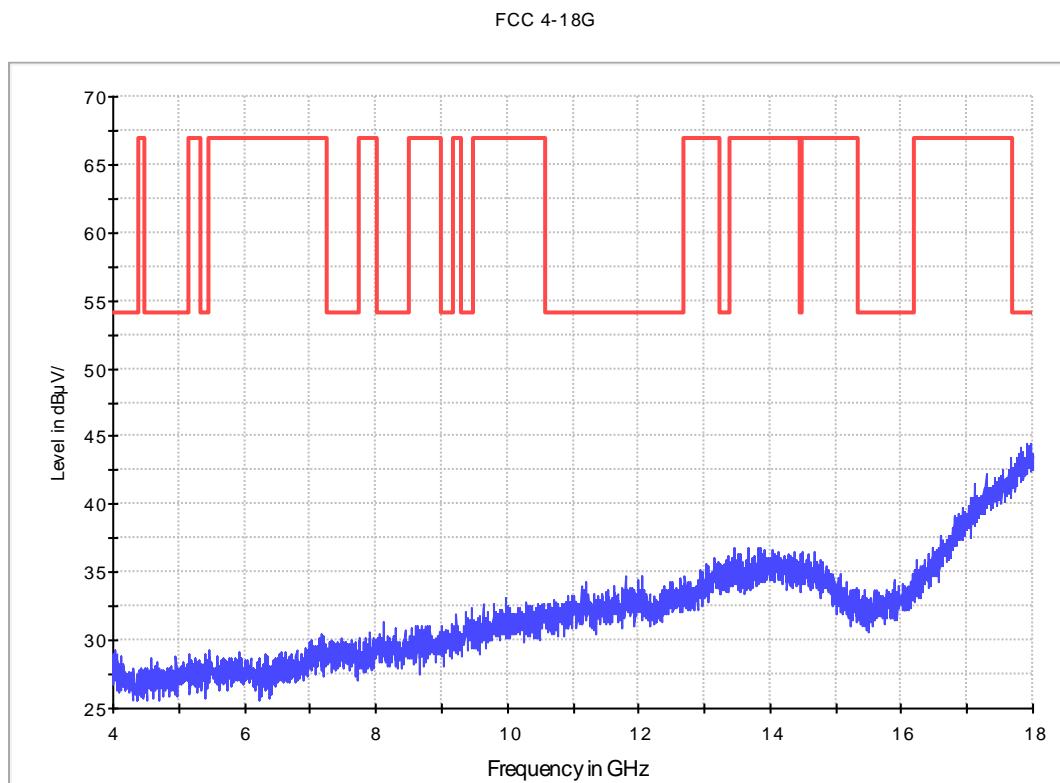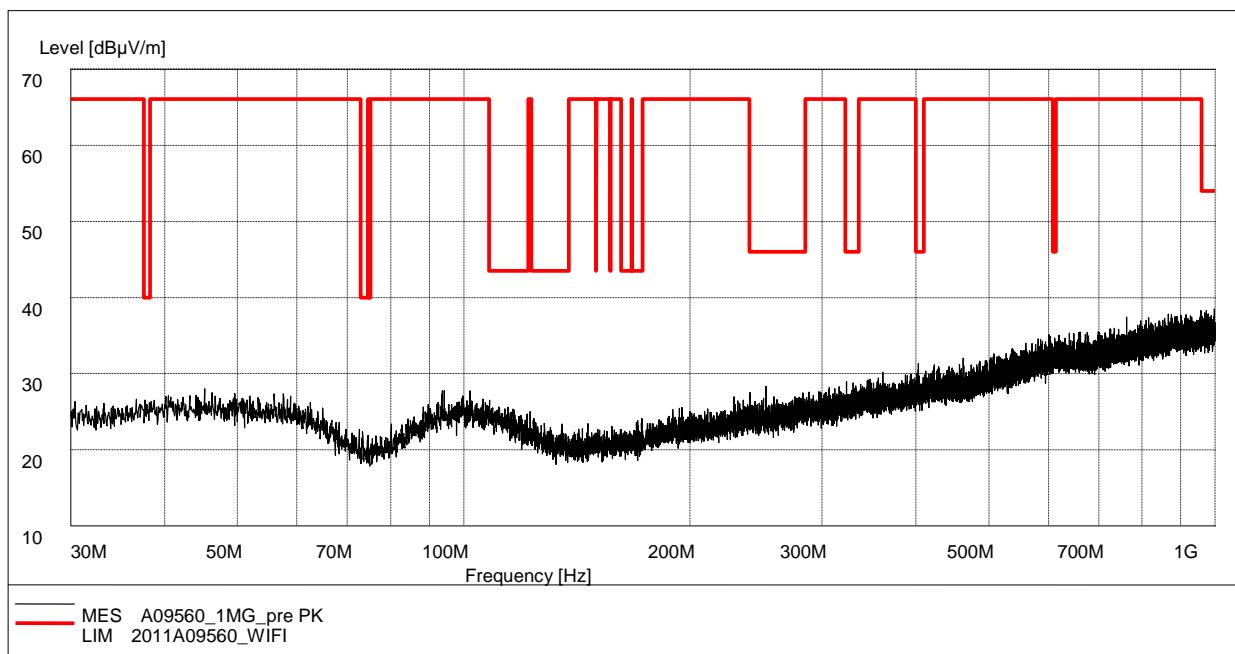
**Fig. 55 Radiated Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)**

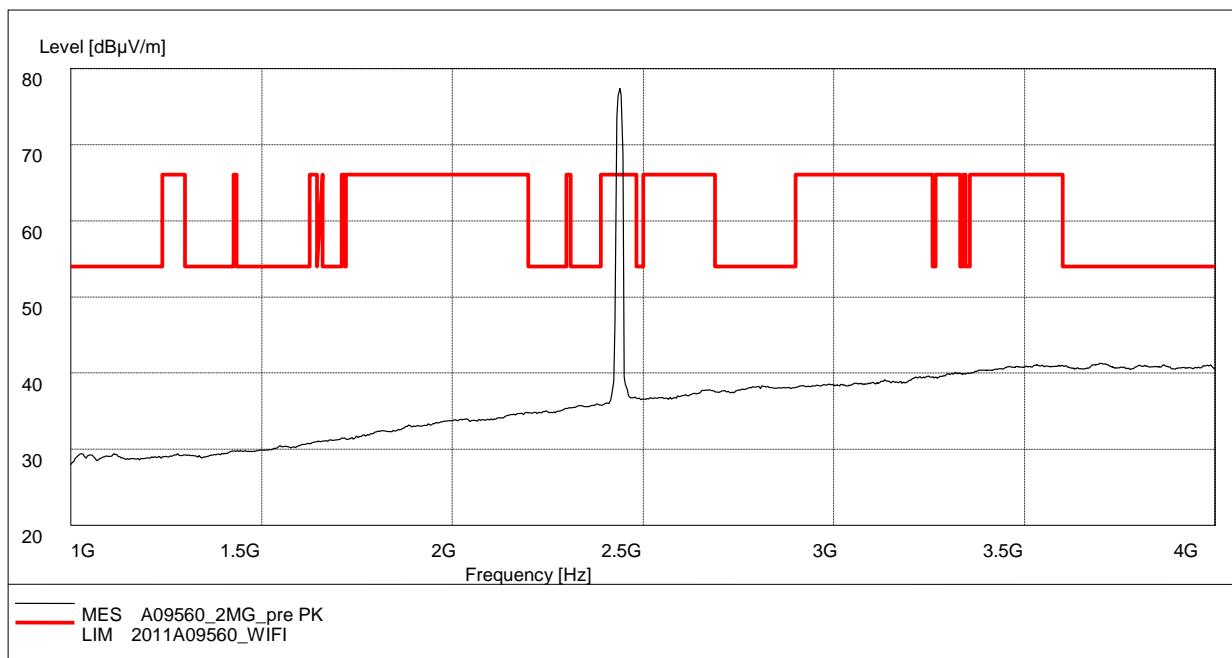**Fig. 56 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-4 GHz)**


**Fig. 57 Radiated Spurious Emission (802.11g, Ch1, 4 GHz-18 GHz)****Fig. 58 Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)**

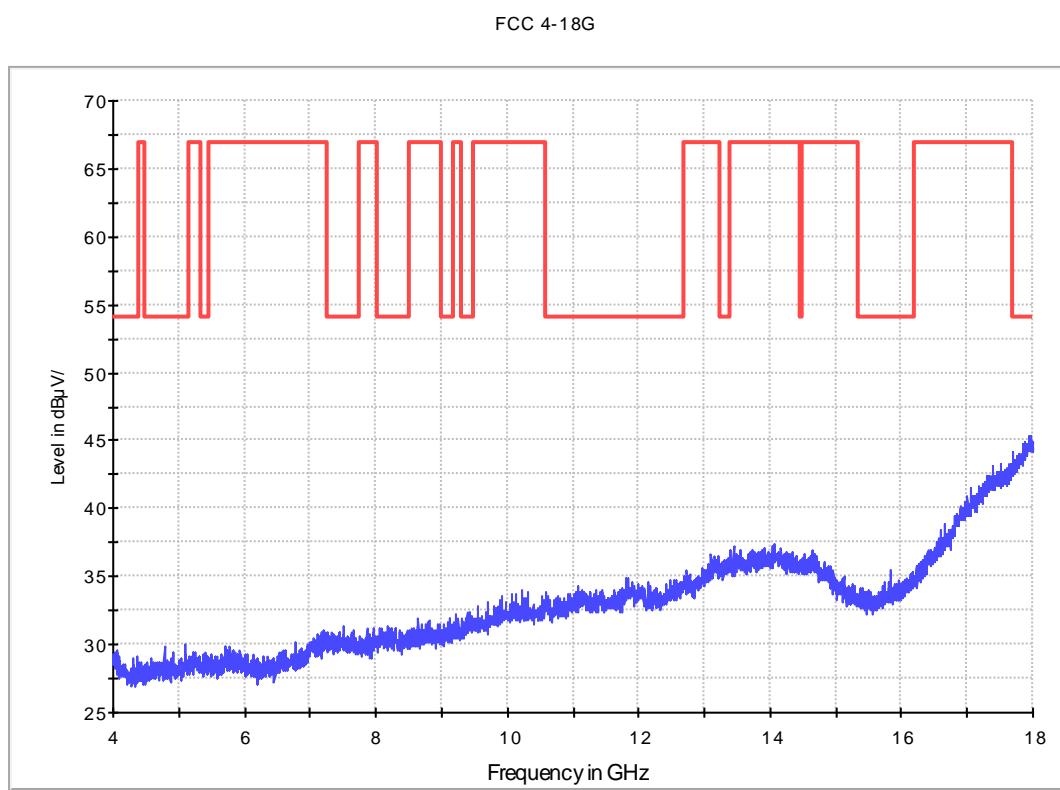


**Fig. 59 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-4 GHz)**





**Fig. 60 Radiated Spurious Emission (802.11g, Ch6, 4 GHz-18 GHz)**


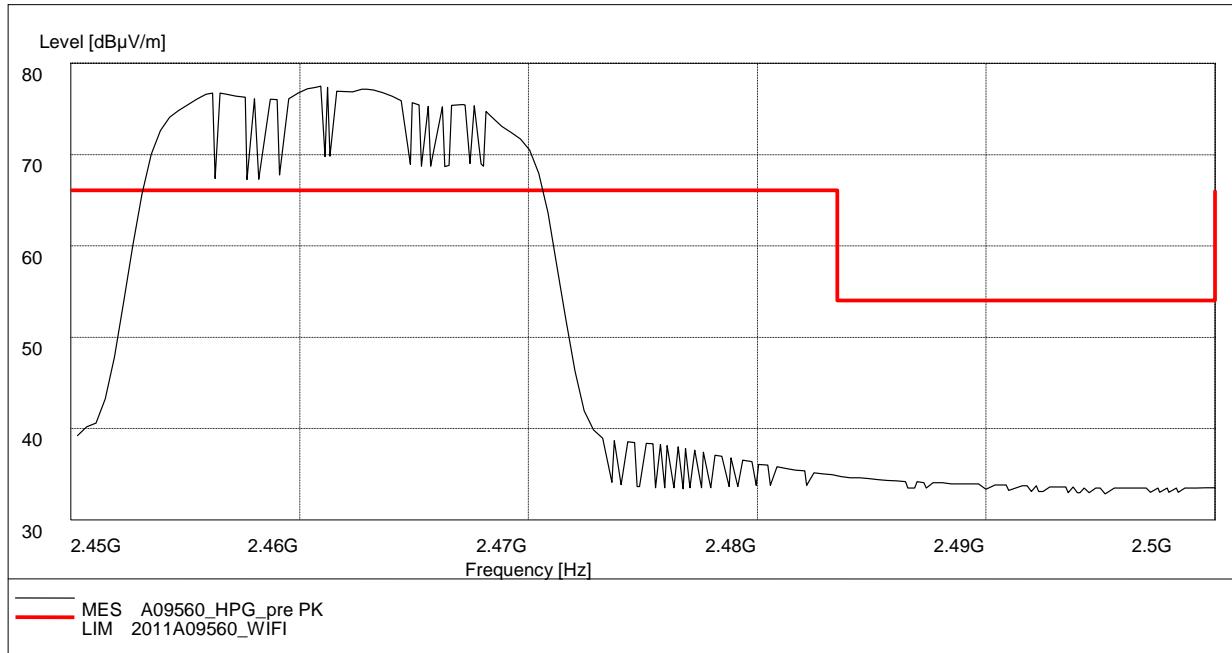




**Fig. 61 Radiated Spurious Emission (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz**


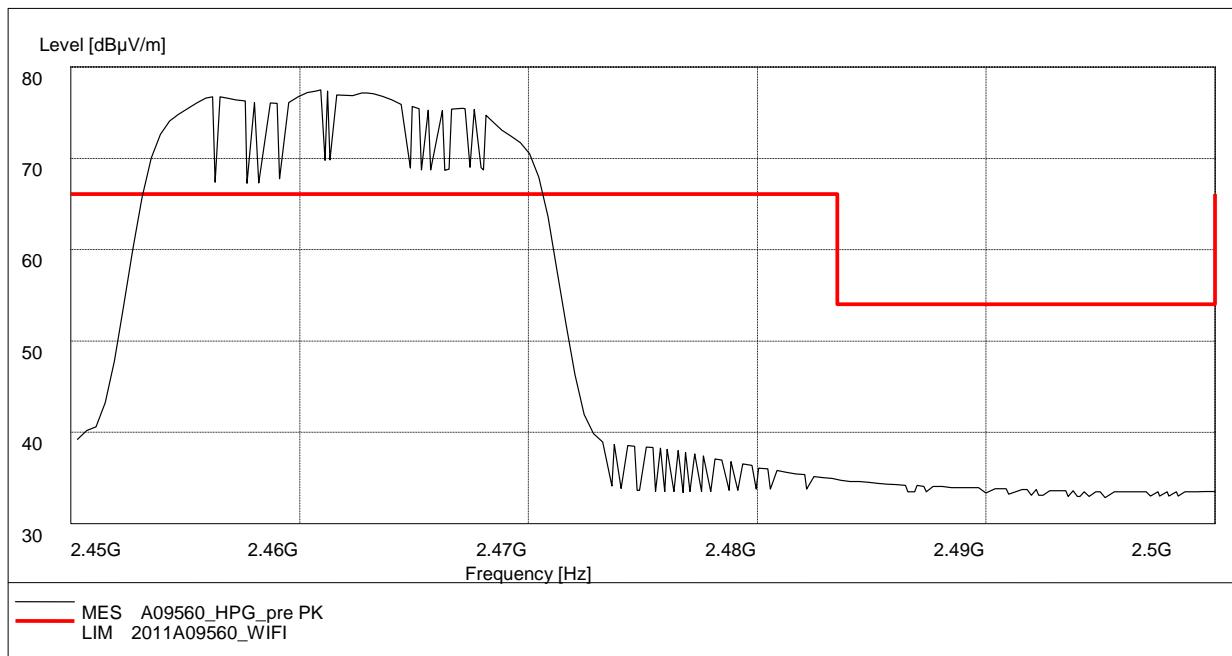



**Fig. 62 Radiated Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)**

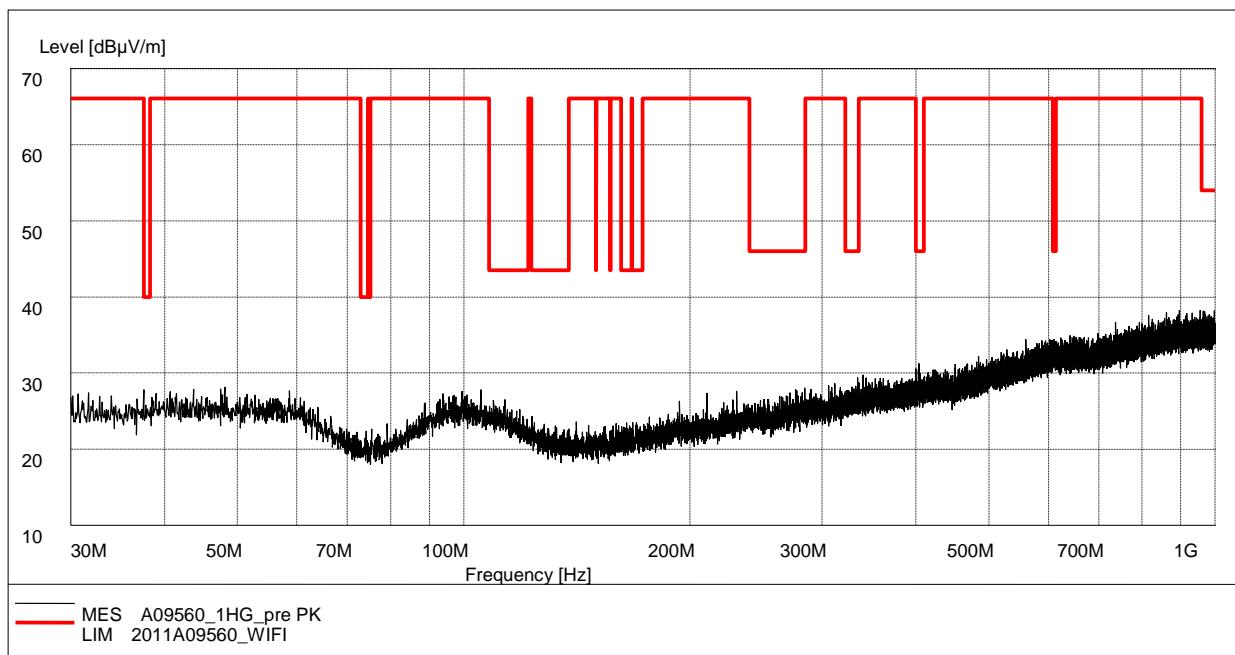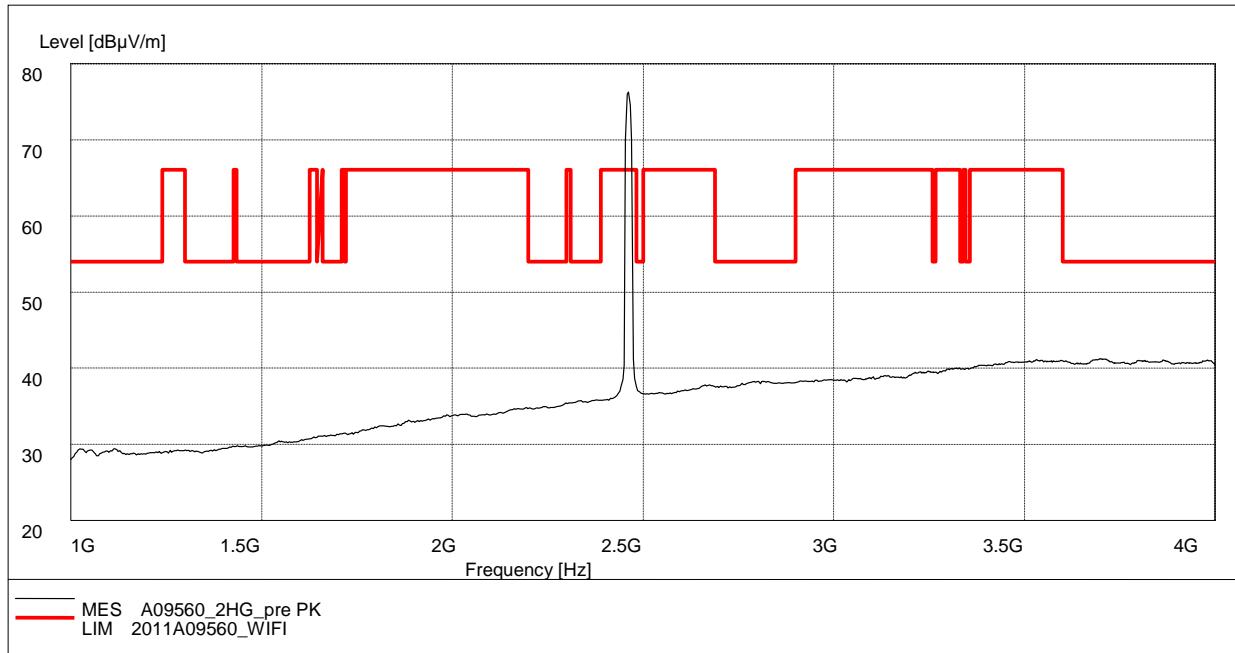**Fig. 63 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-4 GHz)****Fig. 64 Radiated Spurious Emission (802.11g, Ch11, 4 GHz-18 GHz)**

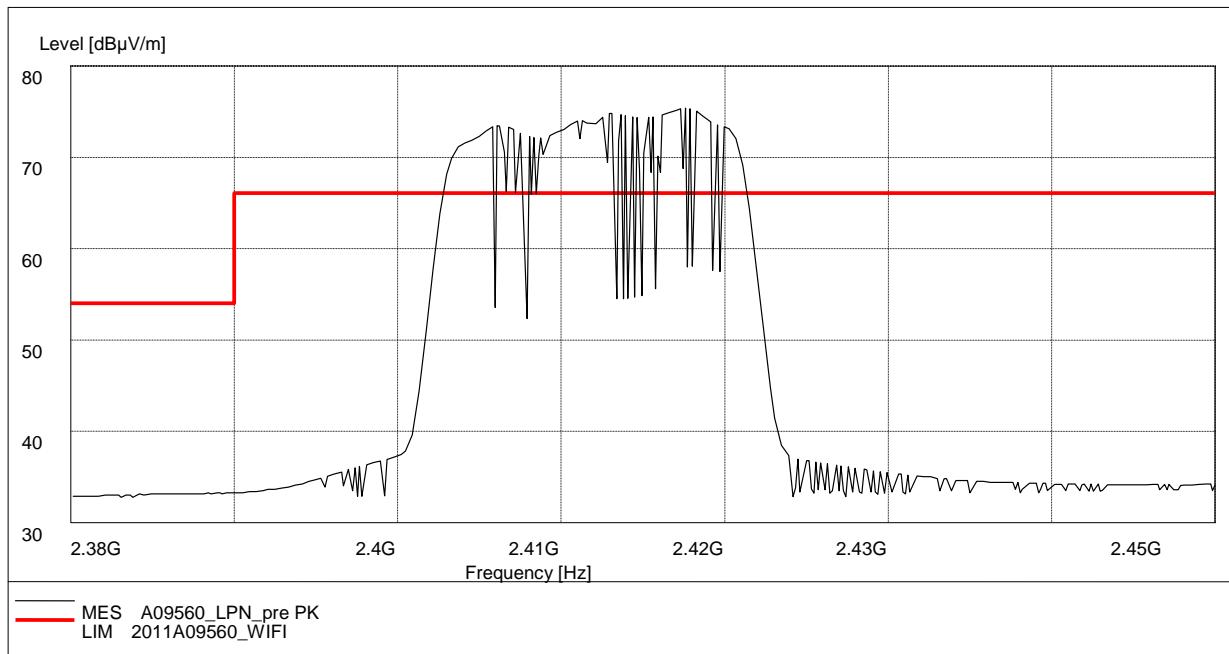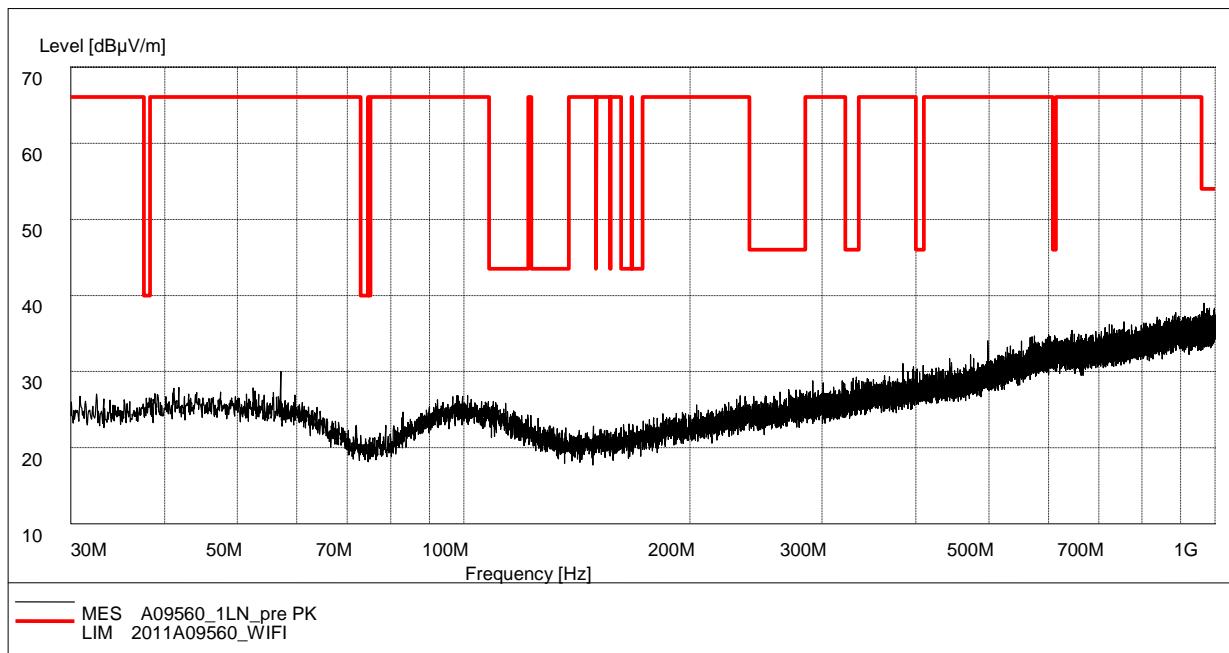

**Fig. 65 Radiated Spurious Emission (Power): 802.11n-20MHz, ch1, 2.38 GHz - 2.45GHz**

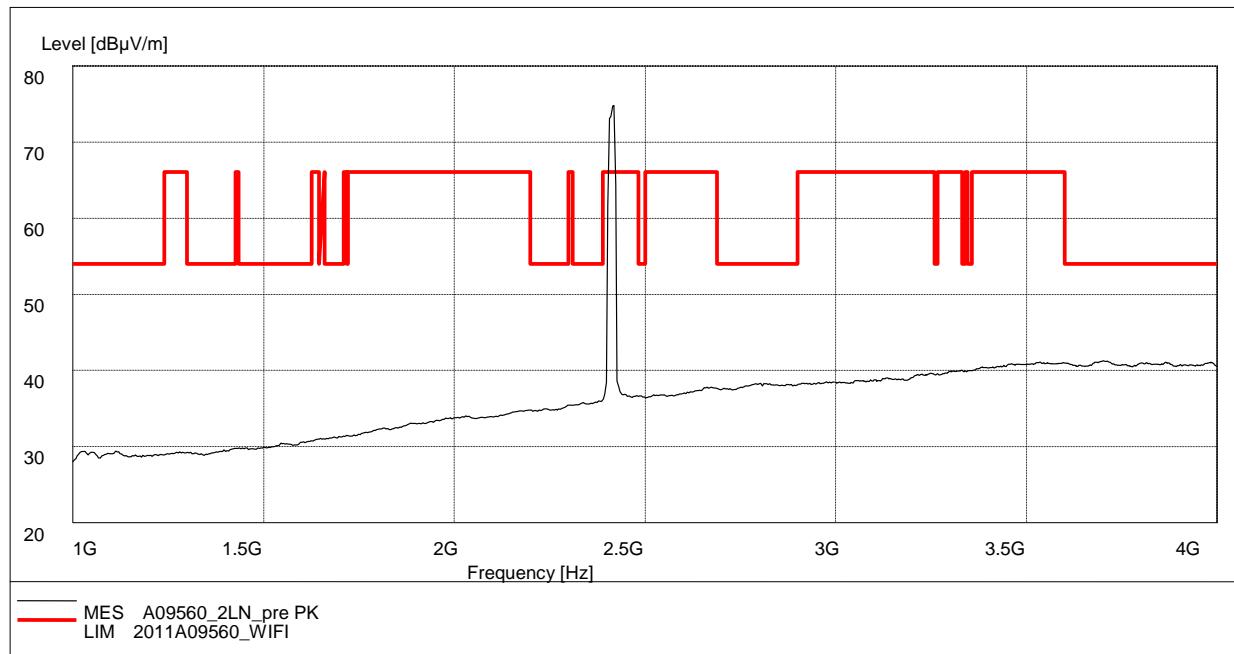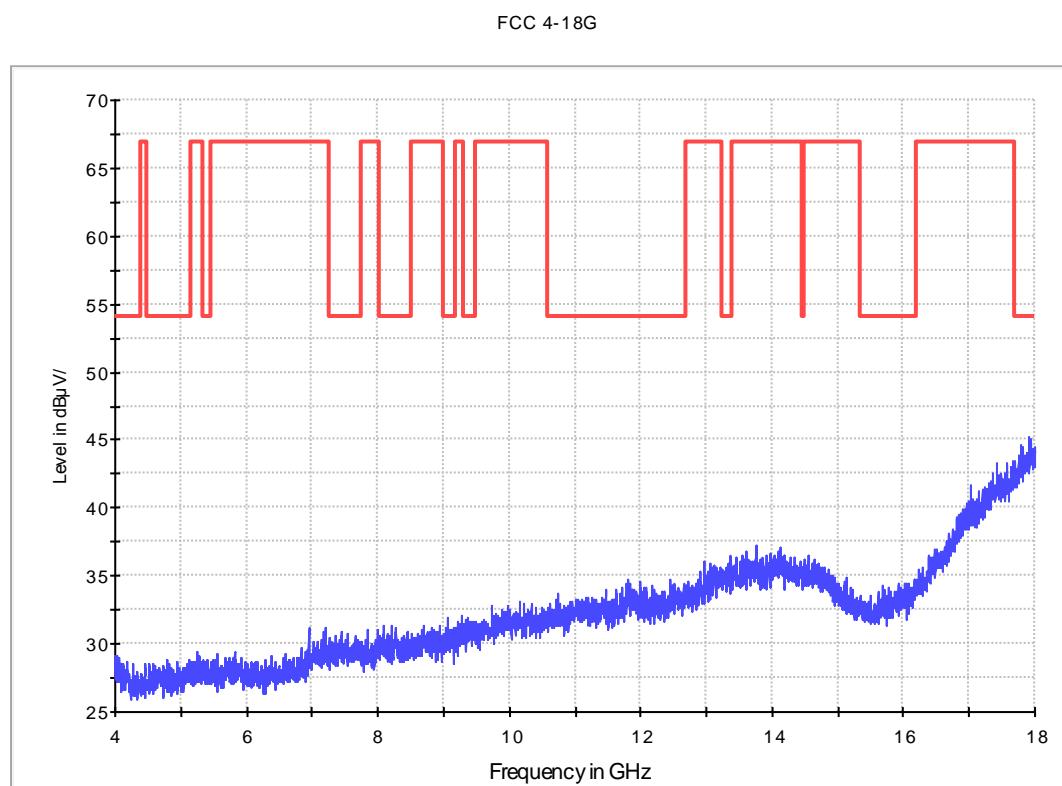**Fig. 66 Radiated Spurious Emission (802.11n-20MHz, Ch1, 30 MHz-1 GHz)**

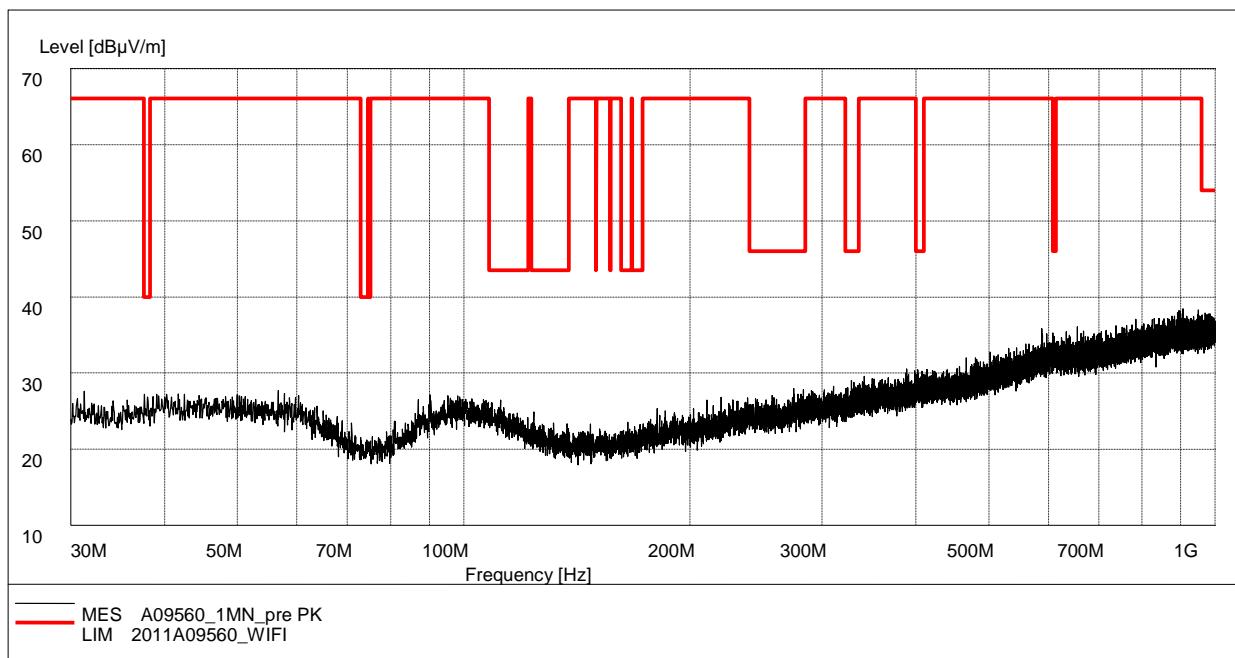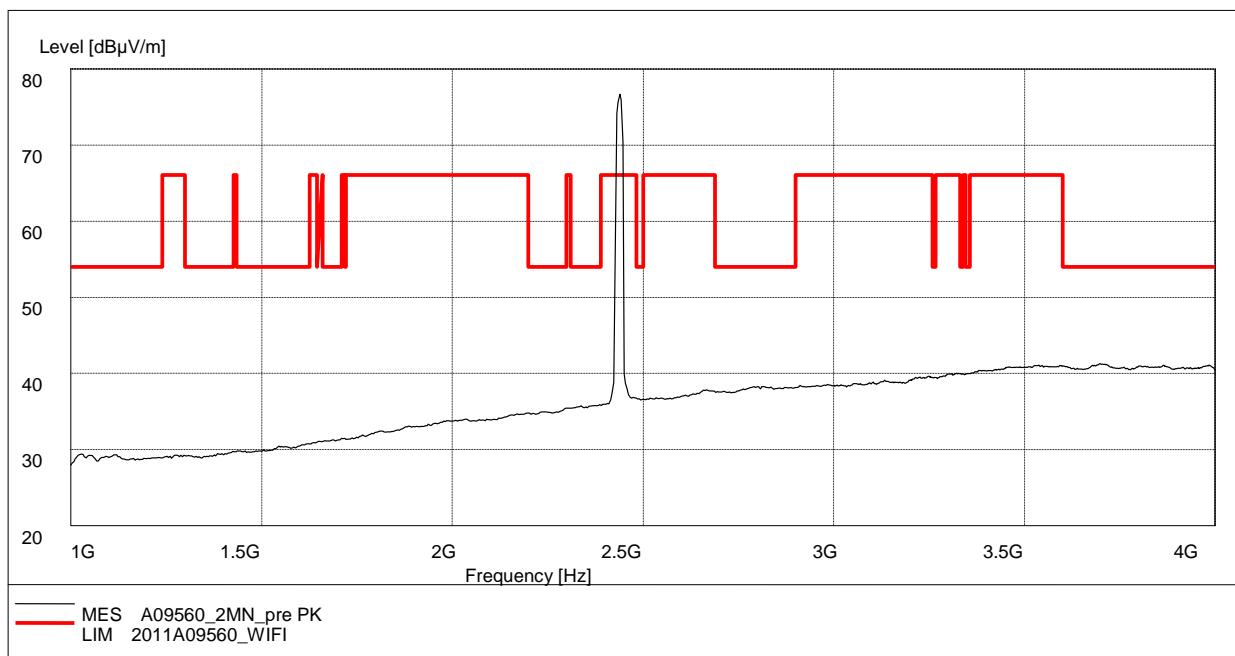**Fig. 67 Radiated Spurious Emission (802.11n-20MHz, Ch1, 1 GHz-4 GHz)****Fig. 68 Radiated Spurious Emission (802.11n-20MHz, Ch1, 4 GHz-18 GHz)**


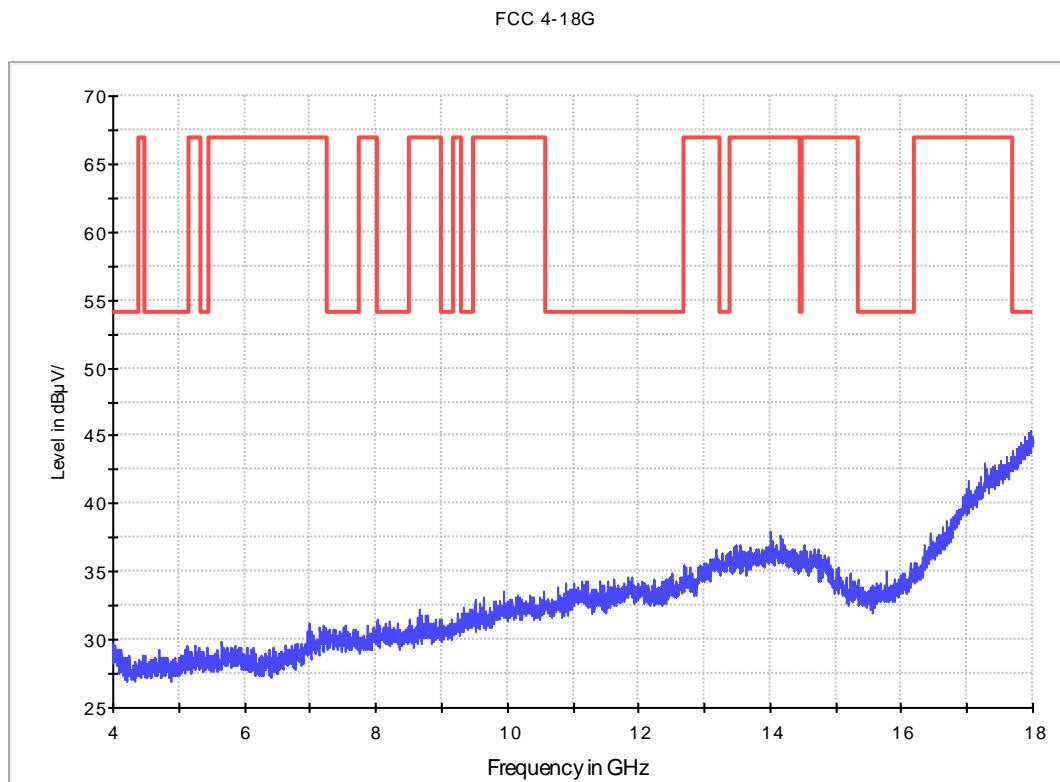

**Fig. 69 Radiated Spurious Emission (802.11n-20MHz, Ch6, 30 MHz-1 GHz)**

**Fig. 70 Radiated Spurious Emission (802.11n-20MHz, Ch6, 1 GHz-4 GHz)**

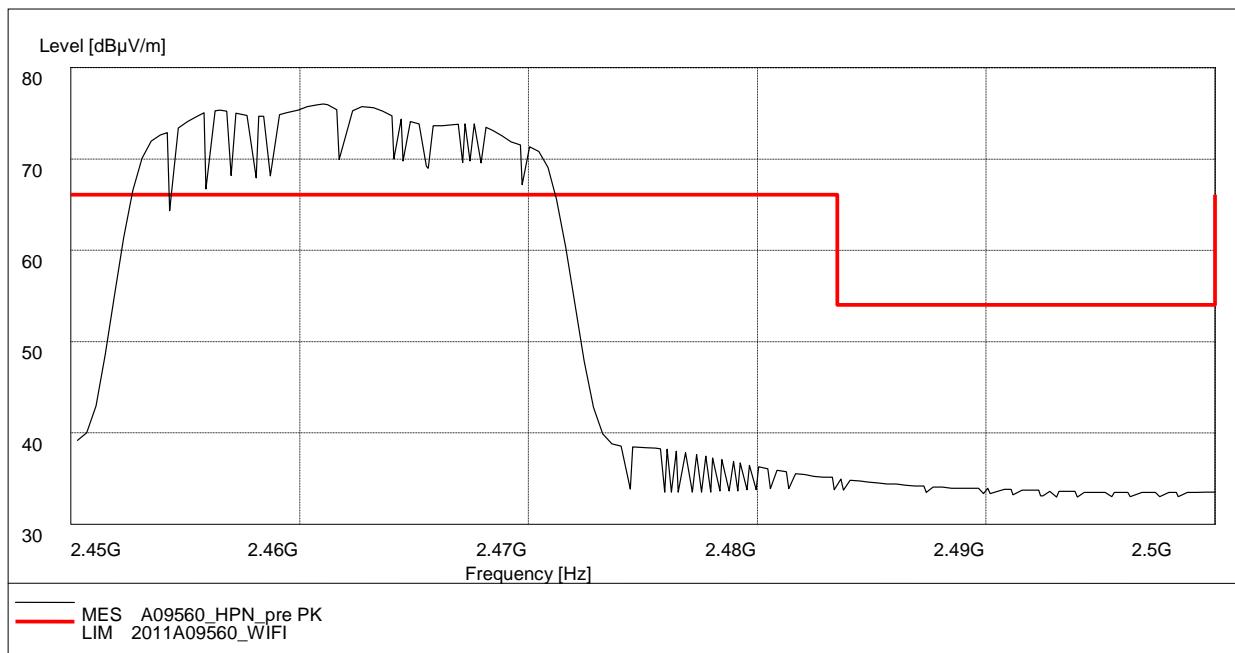


**Fig. 71 Radiated Spurious Emission (802.11n-20MHz, Ch6, 4 GHz-18 GHz)**

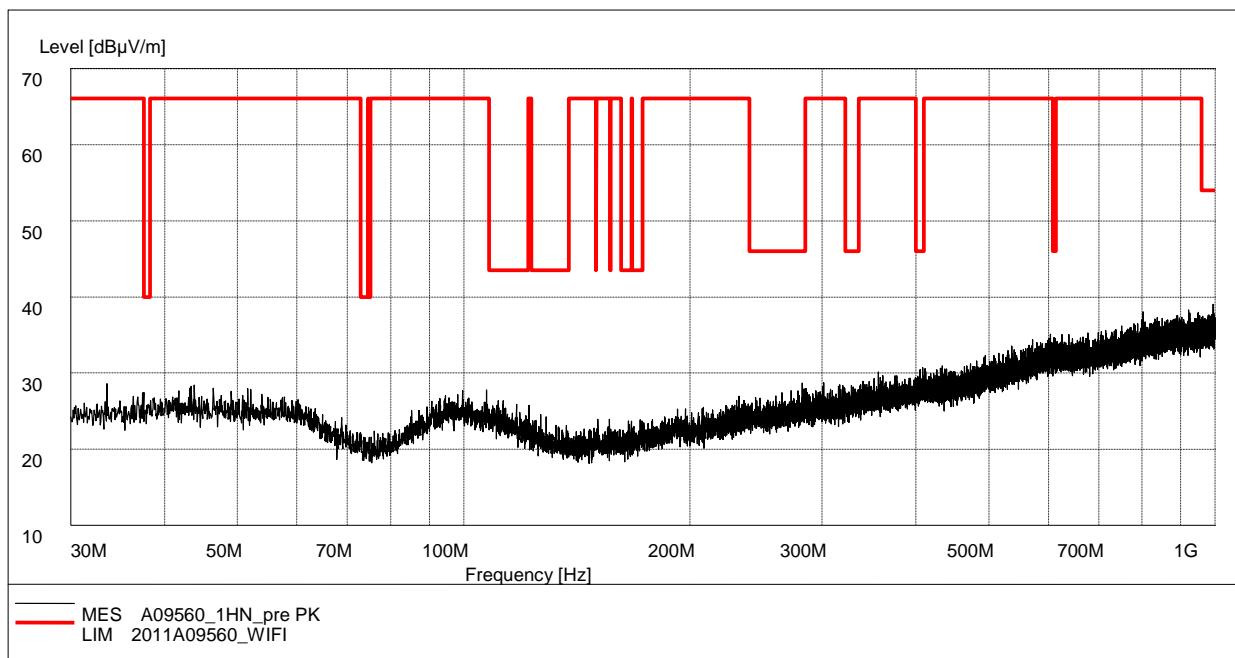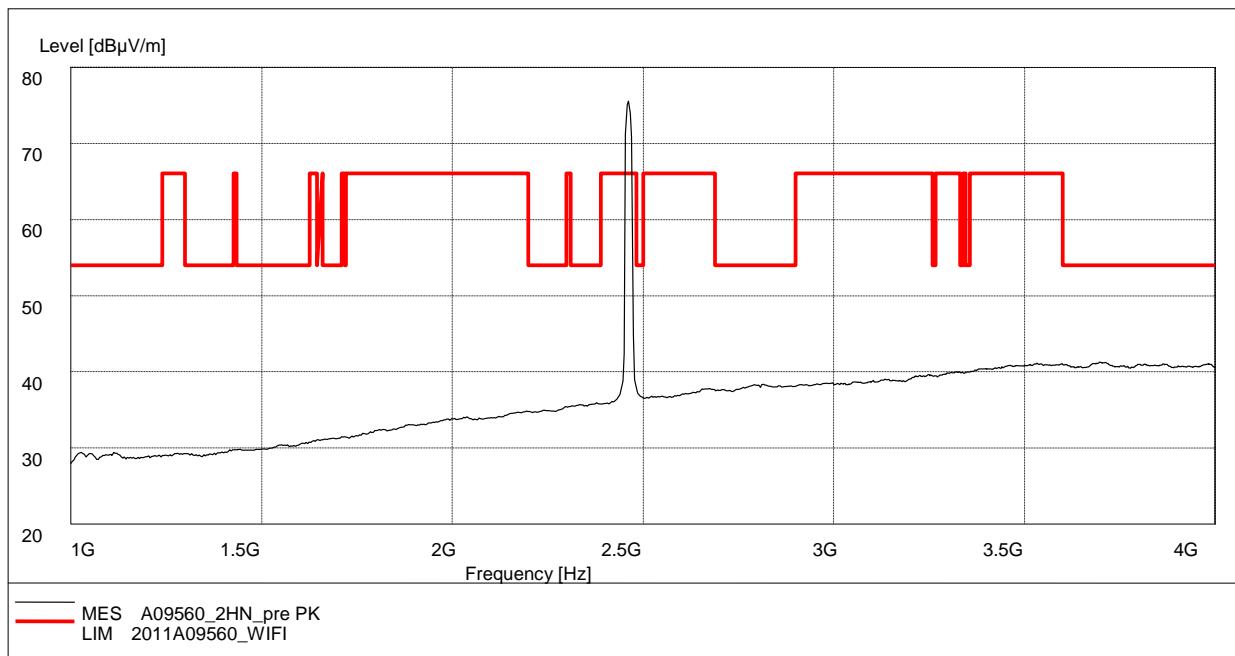


**Fig. 72 Radiated Spurious Emission (Power): 802.11n-20MHz, ch11, 2.45 GHz - 2.50GHz**


**Fig. 73 Radiated Spurious Emission (802.11n-20MHz, Ch11, 30 MHz-1 GHz)**

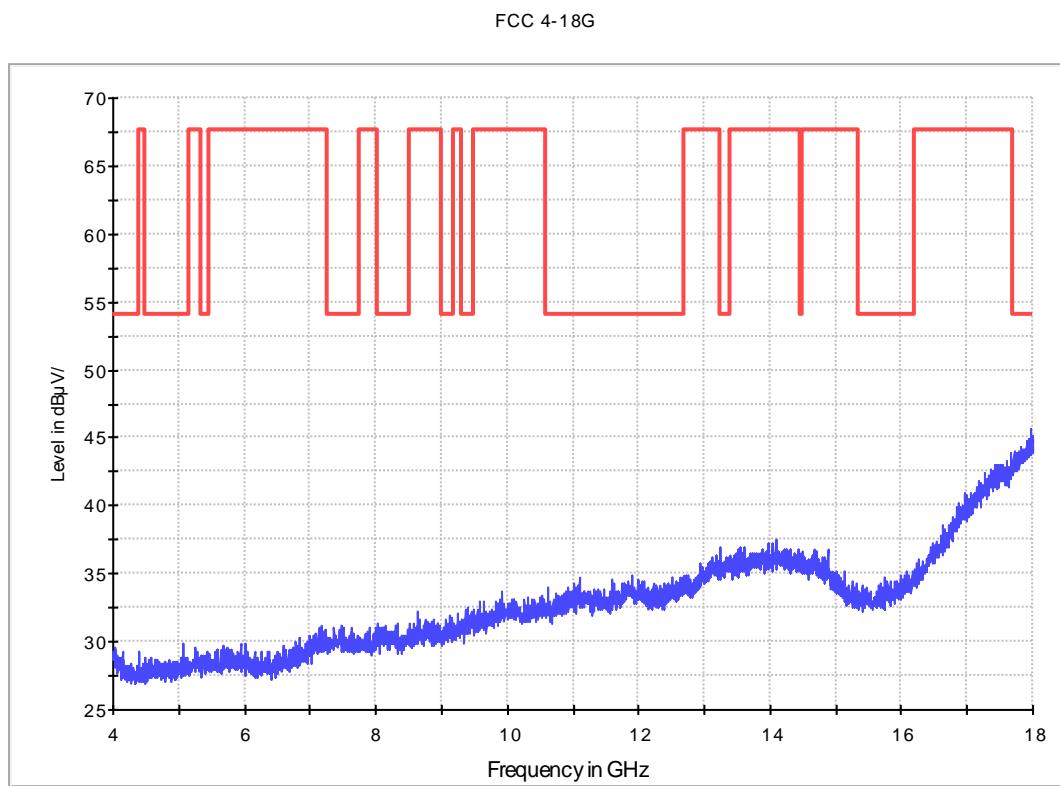**Fig. 74 Radiated Spurious Emission (802.11n-20MHz, Ch11, 1 GHz-4 GHz)**

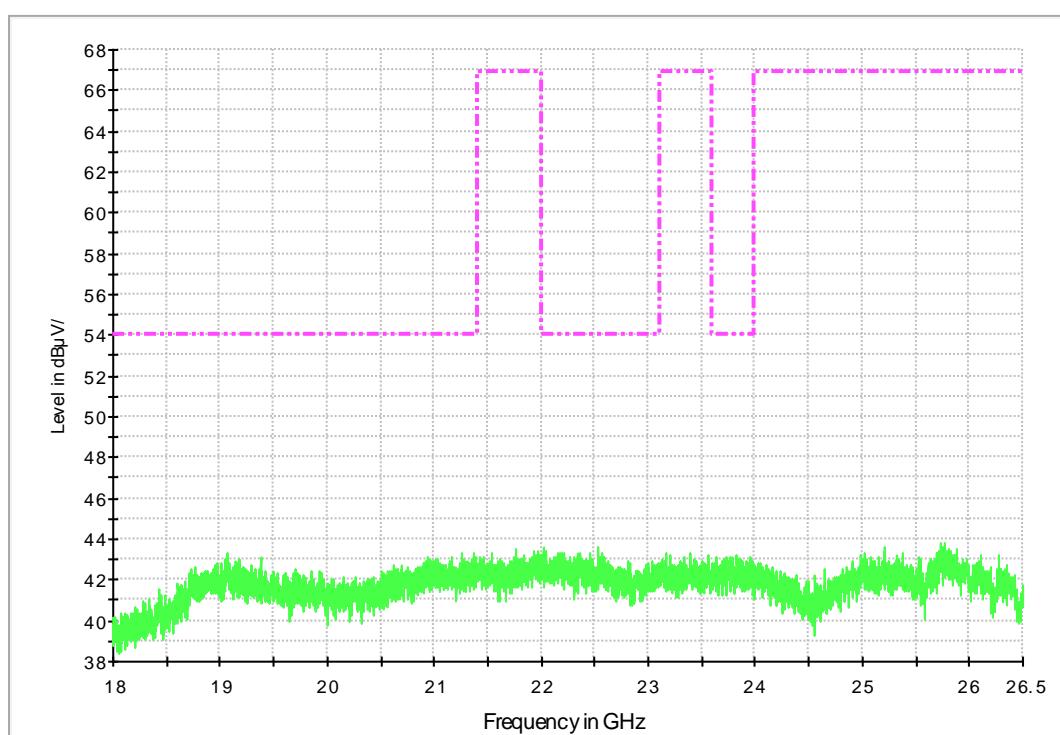

**Fig. 75 Radiated Spurious Emission (802.11n-20MHz, Ch11, 4 GHz-18 GHz)**



**Fig. 76 Radiated emission: 18 GHz - 26.5 GHz**

## A.7. AC Powerline Conducted Emission

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion	
		With charger			
		11n mode	Idle mode		
0.15 to 0.5	66 to 56				
0.5 to 5	56	Fig. 77	Fig.78	P	
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)


Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion	
		With charger			
		11n mode	Idle mode		
0.15 to 0.5	56 to 46				
0.5 to 5	46	Fig.77	Fig.78	P	
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.4 and KDB558074

**Conclusion: PASS**

**Test graphs as below:**

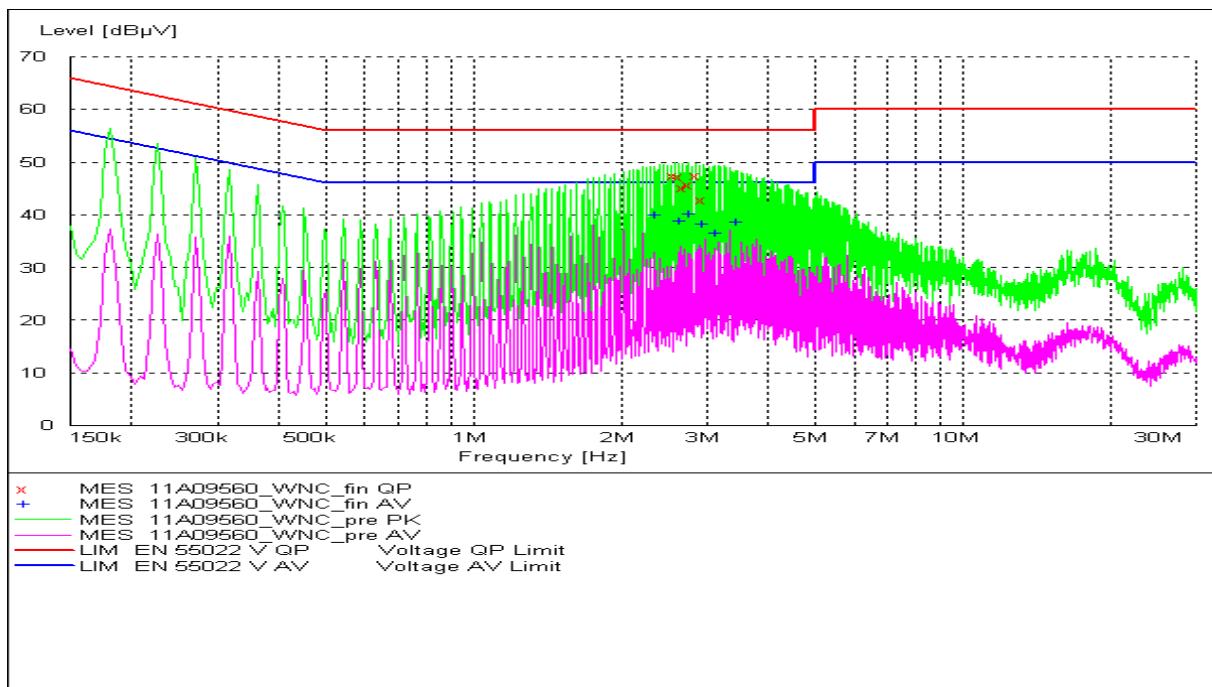


**Fig. 77 AC Powerline Conducted Emission-802.11n mode**

MEASUREMENT RESULT: "11A09560\_WNC\_fin QP"

Frequency (MHz)	Level (dB $\mu$ V)	Transd (dB)	Limit (dB $\mu$ V)	Margin (dB)	Line	PE
2.572545	47.6	10.1	56	8.4	L1	GND
2.619223	47.3	10.1	56	8.7	L1	GND
2.666747	45.2	10.1	56	10.8	L1	GND
2.753375	45.8	10.1	56	10.2	N	GND
2.842818	47.4	10.1	56	8.6	L1	GND
2.935165	42.9	10.1	56	13.1	N	GND

MEASUREMENT RESULT: " 11A09560\_WNC\_fin AV"

Frequency (MHz)	Level (dB $\mu$ V)	Transd (dB)	Limit (dB $\mu$ V)	Margin (dB)	Line	PE
2.346647	40.1	10.1	46	5.9	L1	GND
2.619223	38.9	10.1	46	7.1	L1	GND
2.753375	40.2	10.1	46	5.8	L1	GND
2.935165	38.4	10.1	46	7.6	L1	GND
3.116479	36.7	10.1	46	9.3	L1	GND
3.430163	38.7	10.1	46	7.3	L1	GND

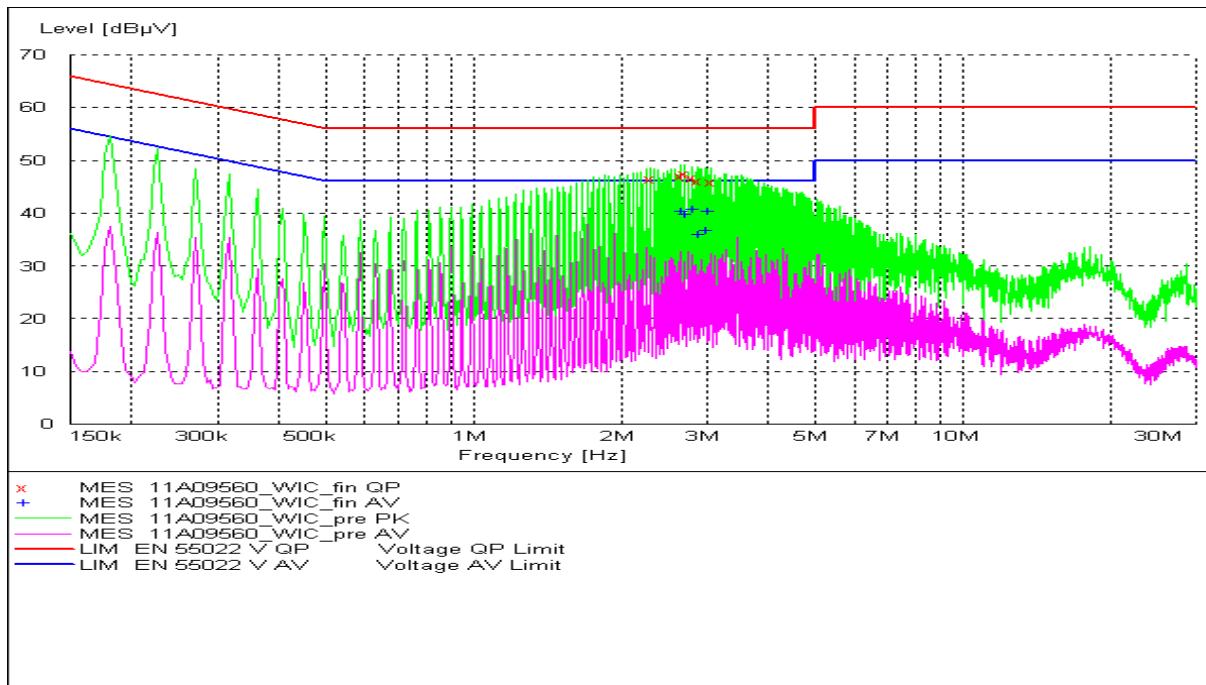
**Fig. 78 AC Powerline Conducted Emission-Idle mode**

MEASUREMENT RESULT: "11A09560\_WIC\_fin QP"

Frequency (MHz)	Level (dB $\mu$ V)	Transd (dB)	Limit (dB $\mu$ V)	Margin (dB)	Line	PE
2.295635	46.5	10.1	56	9.5	N	GND
2.656112	47.2	10.1	56	8.8	L1	GND
2.704307	47.4	10.1	56	8.6	L1	GND
2.792155	46.7	10.1	56	9.3	N	GND
2.882857	46.1	10.1	56	9.9	N	GND
3.060939	46	10.1	56	10	N	GND

MEASUREMENT RESULT: "11A09560\_WIC\_fin AV"

Frequency (MHz)	Level (dB $\mu$ V)	Transd (dB)	Limit (dB $\mu$ V)	Margin (dB)	Line	PE
2.656112	40.4	10.1	46	5.6	L1	GND
2.704307	39.8	10.1	46	6.2	L1	GND
2.792155	40.7	10.1	46	5.3	L1	GND
2.882857	36.1	10.1	46	9.9	N	GND
2.976505	36.8	10.1	46	9.2	L1	GND
3.018427	40.4	10.1	46	5.6	L1	GND

\*\*\* END OF REPORT BODY \*\*\*