



TEST REPORT

No. 2012TAR132

for

TCT Mobile Limited

HSUPA/HSDPA/UMTS triband / GSM quadband mobile phone

Model Name: Mojitolite A

Marketing Name: ONE TOUCH 991A

FCC ID : RAD254

with

Hardware Version: PIO02

Software Version: vF1I_US

Issued Date: 2012-04-21

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633 , Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT	7
6. SUMMARY OF TEST RESULTS	8
7. TEST EQUIPMENTS UTILIZED	9
ANNEX A: MEASUREMENT RESULTS.....	10

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: Mar 03, 2012
Testing End Date: Apr 10, 2012

1.4. Signature



Liu Baodian

(Prepared this test report)



Sun Xiangqian

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: +86-21-61460890
Fax: +86-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: +86-21-61460890
Fax: +86-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSUPA/HSDPA/UMTS triband / GSM quadband mobile phone
Model Name	ONE TOUCH 991A
FCC ID	RAD254
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	013111000020339	PIO02	vF1I_US

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Travel Adapter	/
AE2	Travel Adapter	/
AE3	Travel Adapter	/
AE4	Battery	/
AE5	Battery	/
AE6	USB Cable	/
AE7	USB Cable	/
AE8	USB Cable	/
AE9	USB Cable	/
AE10	Travel Adapter	/

AE1

Model	CBA3002AG0C1
Manufacturer	BYD
Length of DC line	122cm

AE2

Model	CBA3001AG0C1
Manufacturer	BYD
Length of DC line	With 10cm USB Connector

AE3

Model	CBA3001AG0C2
Manufacturer	Tenpao
Length of DC line	With 10cm USB Connector

AE4

Model	CAB32A0000C2
Manufacturer	SCUD
Capacitance	1500mAh
Nominal Voltage	3.7V

AE5	
Model	CAB32A0000C1
Manufacturer	BYD
Capacitance	1500mAh
Nominal Voltage	3.7V
AE6	
Model	CDA3122002C1
Manufacturer	Juwei
Length of DC line	100cm
AE7	
Model	CDA3122002C2
Manufacturer	Shenhua
Length of DC line	100cm
AE8	
Model	CDA3122005C1
Manufacturer	Juwei
Length of DC line	100cm
AE9	
Model	CDA3122005C2
Manufacturer	Shenhua
Length of DC line	100cm
AE10	
Model	CBA3000AG0C1
Manufacturer	TENPAO
Length of DC line	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+AE1+AE4/AE5	Charging
Set.2	EUT1+AE2+AE4/AE5+AE6	Charging
Set.3	EUT1+AE3+AE4/AE5+AE6	Charging
Set.4	EUT1+AE4/AE5+AE6	USB
Set.5	EUT1+AE3+AE4/AE5+AE6	Charging

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2013-03-28
2	Test Receiver	ESCI	100766	R&S	2013-04-09
3	Test Receiver	ESI40	831564/002	R&S	2013-02-12
4	BiLog Antenna	VUL9163	9163-302	Schwarzbeck	2013-02-10
5	Signal Generator	SMB100A	102063	R&S	2013-03-05
6	LISN	ESH2-Z5	829991/012	R&S	2012-04-17
7	Universal Radio Communication Tester	CMU200	102228	R&S	2012-09-05
8	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2012-12-16
9	PC	OPTIPLEX 755	3908243625	DELL	N/A
10	Monitor	E178FPc	CN-OWR979-64 180-7AJ-D2MS	DELL	N/A
11	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
12	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A
13	Mouse	VR-301	6927225500198	XINGYU	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

A.1.2 EUT Operating Mode:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + F_A + G_{\text{PL}}$$

Where

F_A : Receive Antenna Factor

G_{PL} : Cable Loss

P_{Mea} : The measurement result on receiver.

Charging Mode(set.1)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3699.399	39.59	-19.5	33.4	25.69	HORIZONTAL
3701.403	39.58	-19.4	33.4	25.58	HORIZONTAL
3703.407	39.56	-19.4	33.4	25.56	VERTICAL
3697.395	39.55	-19.5	33.4	25.65	VERTICAL
3537.074	39.53	-19.4	33.4	25.53	VERTICAL
3695.391	39.53	-19.5	33.4	25.63	VERTICAL

Charging Mode(set.2)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3701.403	39.73	-19.4	33.4	25.73	VERTICAL
3699.399	39.65	-19.5	33.4	25.75	VERTICAL
3703.407	39.62	-19.4	33.4	25.62	VERTICAL
3697.395	39.61	-19.5	33.4	25.71	VERTICAL
3705.411	39.57	-19.4	33.4	25.57	VERTICAL
3529.058	39.56	-19.6	33.4	25.76	VERTICAL

Charging Mode(set.3)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3701.403	39.76	-19.4	33.4	25.76	VERTICAL
3703.407	39.73	-19.4	33.4	25.73	VERTICAL
3533.066	39.72	-19.4	33.4	25.72	VERTICAL
3693.387	39.72	-19.5	33.4	25.82	VERTICAL
3699.399	39.71	-19.5	33.4	25.81	VERTICAL
3697.395	39.69	-19.5	33.4	25.79	HORIZONTAL

Charging Mode(set.5)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3699.399	39.17	-19.5	33.4	25.27	VERTICAL
3703.407	39.14	-19.4	33.4	25.14	HORIZONTAL
3697.395	39.13	-19.5	33.4	25.23	VERTICAL
3701.403	39.13	-19.4	33.4	25.13	VERTICAL
3695.391	39.08	-19.5	33.4	25.18	VERTICAL
3693.387	39.06	-19.5	33.4	25.16	HORIZONTAL

USB Mode

Frequency(MHz)	Result(dBuV/m)	G _{PL} (dB)	F _A (dB/m)	P _{mea} (dBuV)	Polarity
3701.403	40.07	-19.4	33.4	26.07	VERTICAL
3699.399	40.05	-19.5	33.4	26.15	VERTICAL
3697.395	40	-19.5	33.4	26.1	VERTICAL
3703.407	39.99	-19.4	33.4	25.99	VERTICAL
3535.07	39.93	-19.4	33.4	25.93	VERTICAL
3695.391	39.93	-19.5	33.4	26.03	VERTICAL

Charging Mode

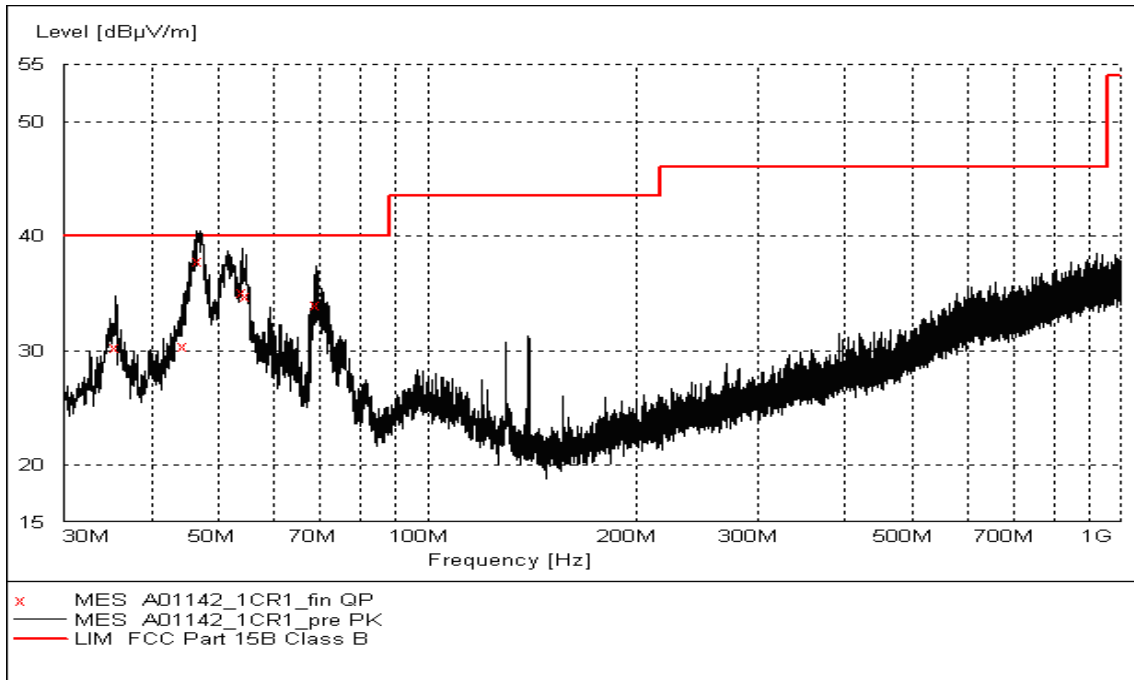


Figure A.1 Radiated Emission from 30MHz to 1GHz (set.1)

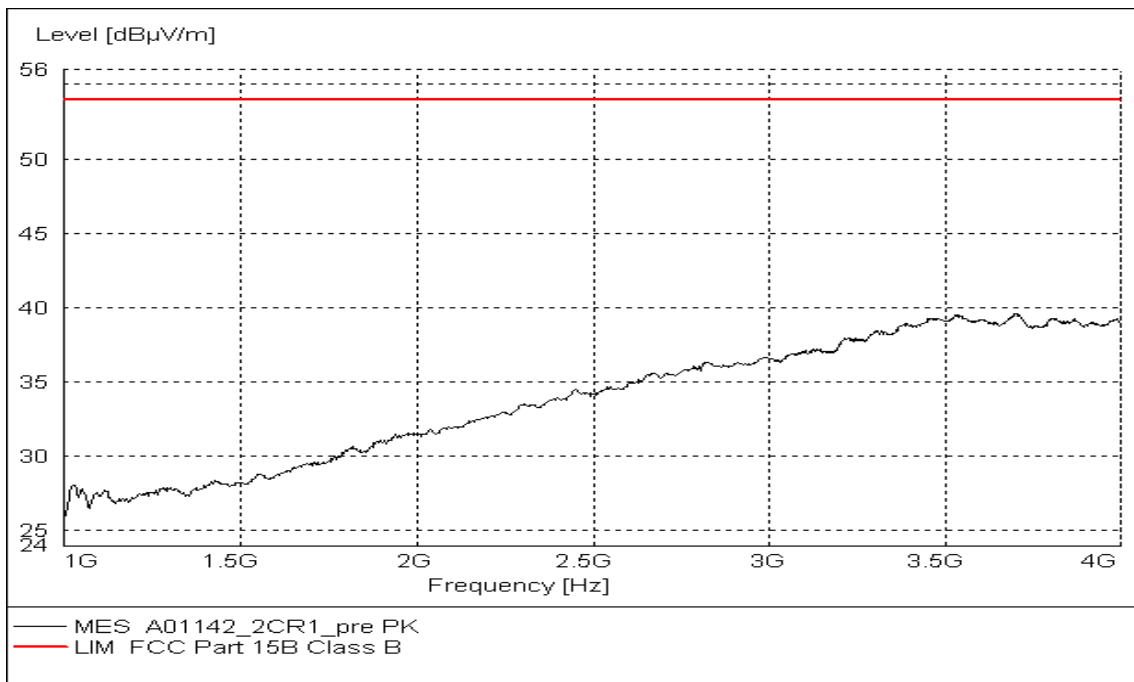


Figure A.2 Radiated Emission from 1GHz to 4GHz(set.1)

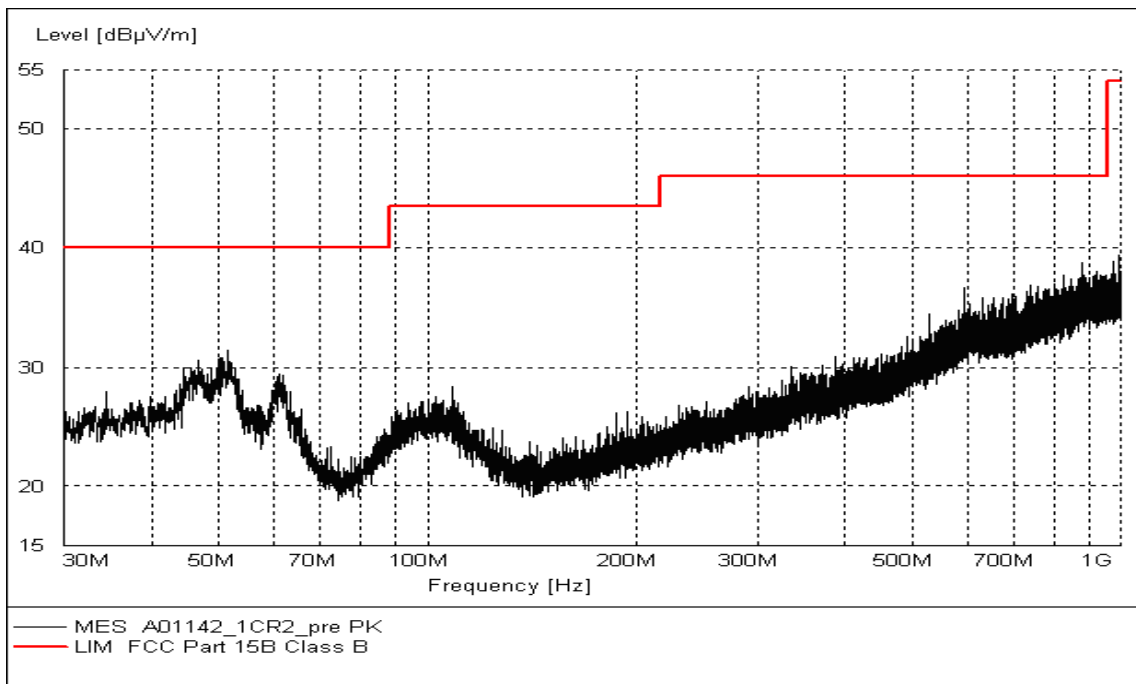


Figure A.3 Radiated Emission from 30MHz to 1GHz (set.2)

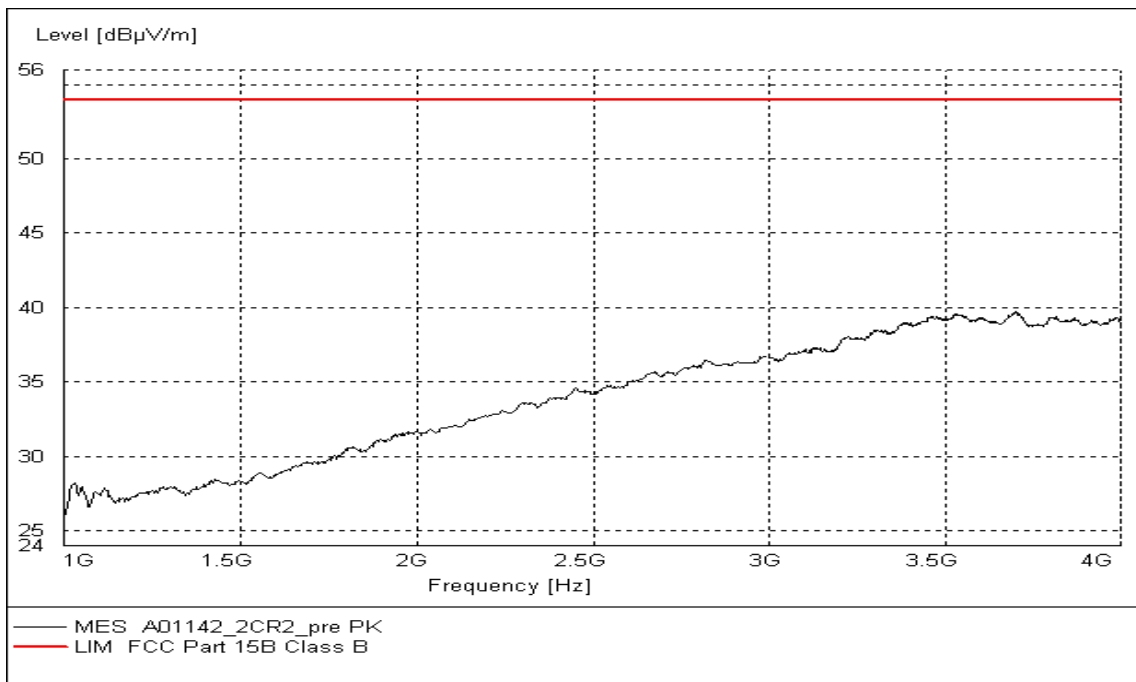


Figure A.4 Radiated Emission from 1GHz to 4GHz(set.2)

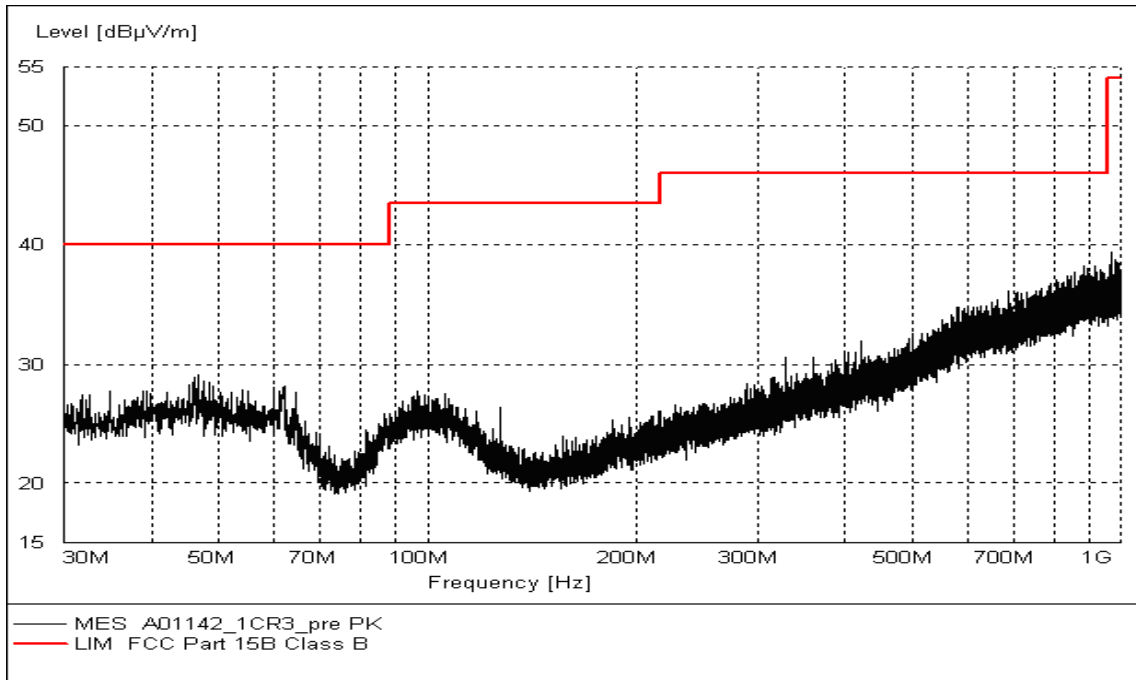


Figure A.5 Radiated Emission from 30MHz to 1GHz (set.3)

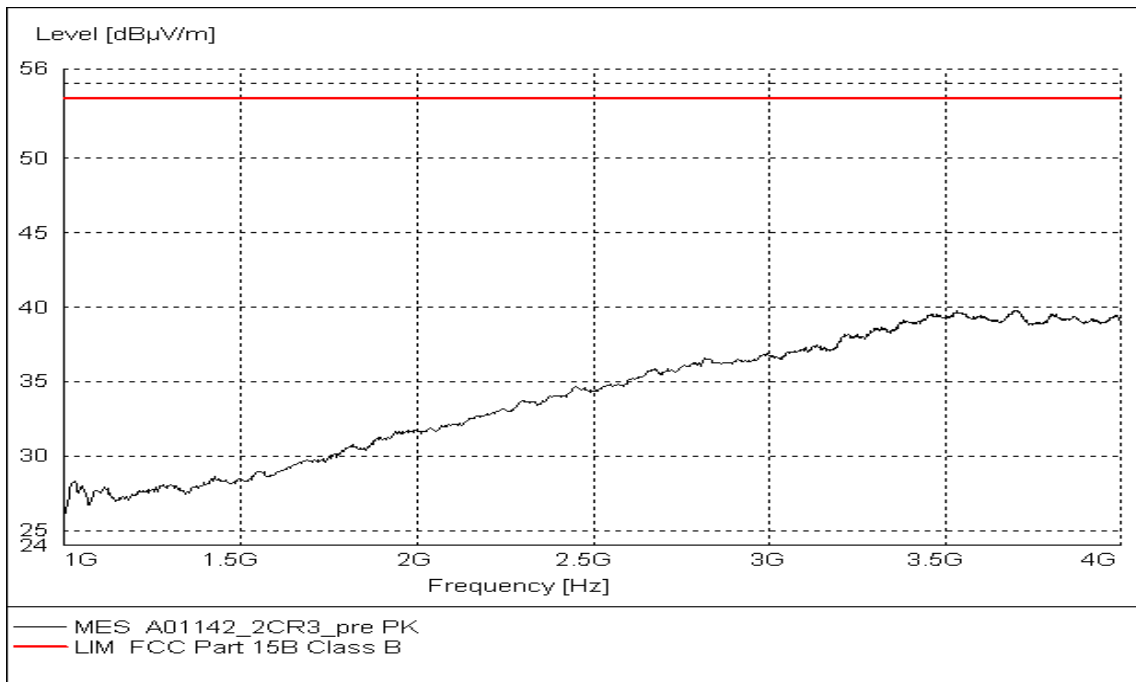


Figure A.6 Radiated Emission from 1GHz to 4GHz(set.3)

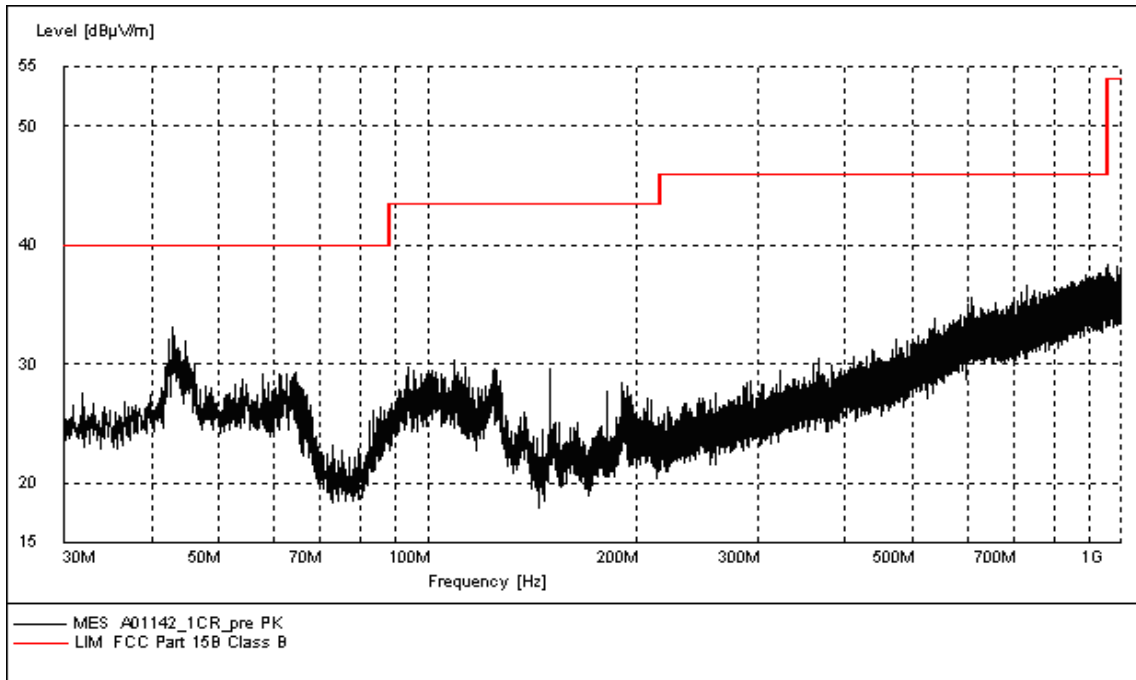


Figure A.7 Radiated Emission from 30MHz to 1GHz (set.5)

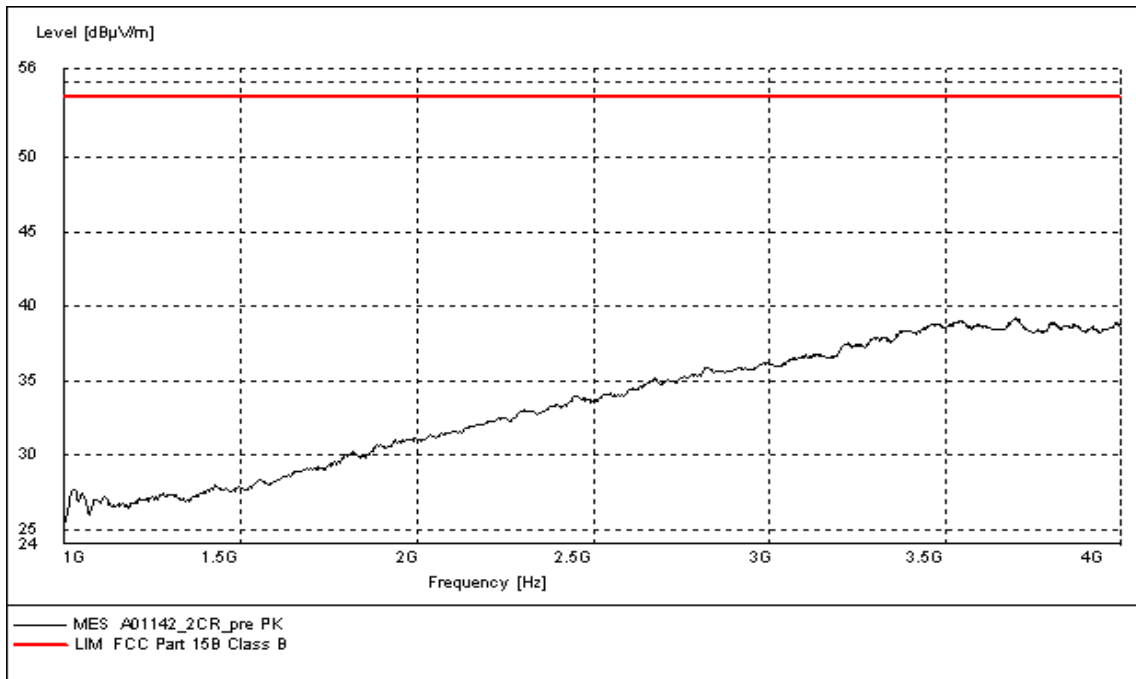


Figure A.8 Radiated Emission from 1GHz to 4GHz(set.5)

USB Mode

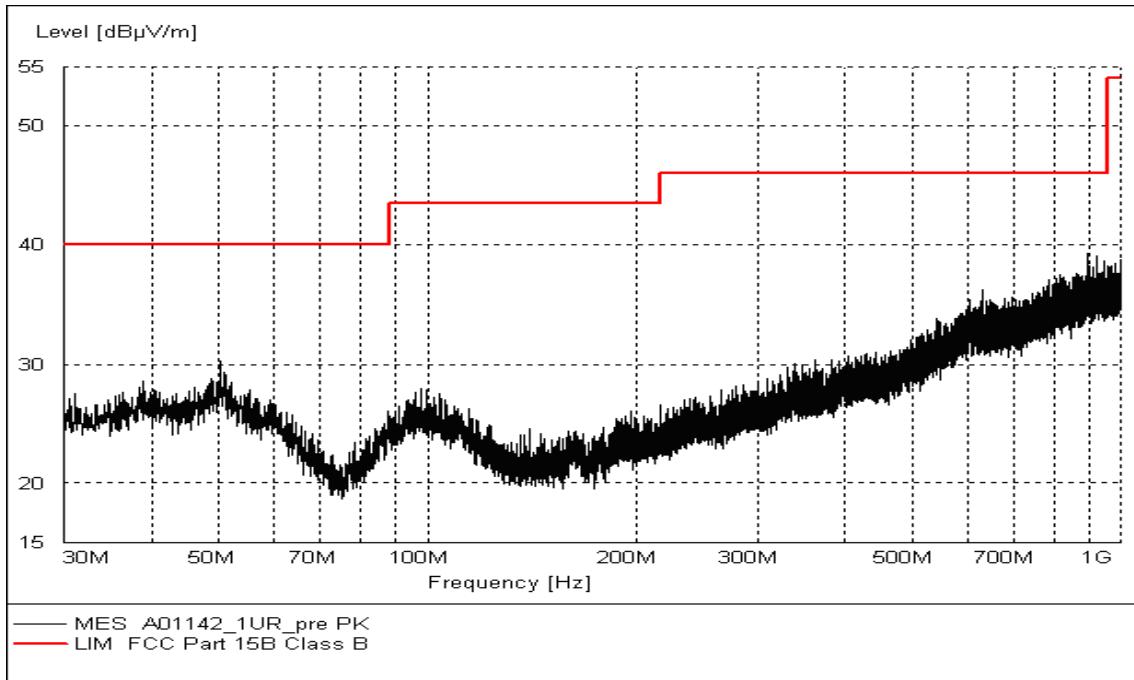


Figure A.9 Radiated Emission from 30MHz to 1GHz

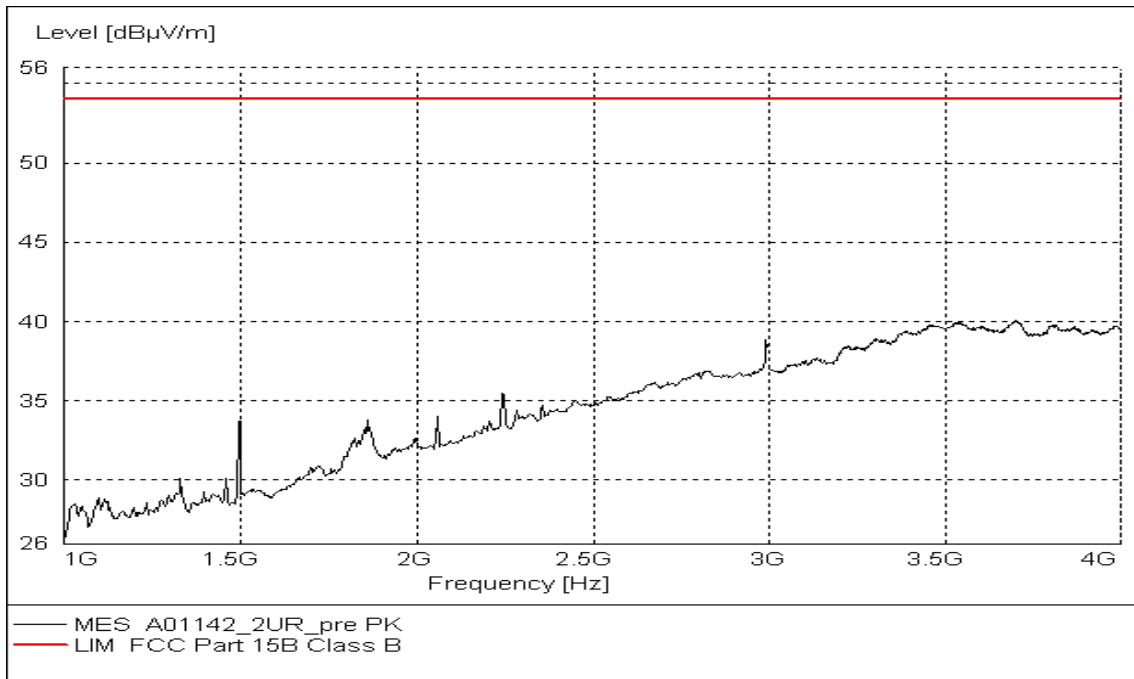


Figure A.10 Radiated Emission from 1GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

A.2.4 Measurement Results Charging Mode

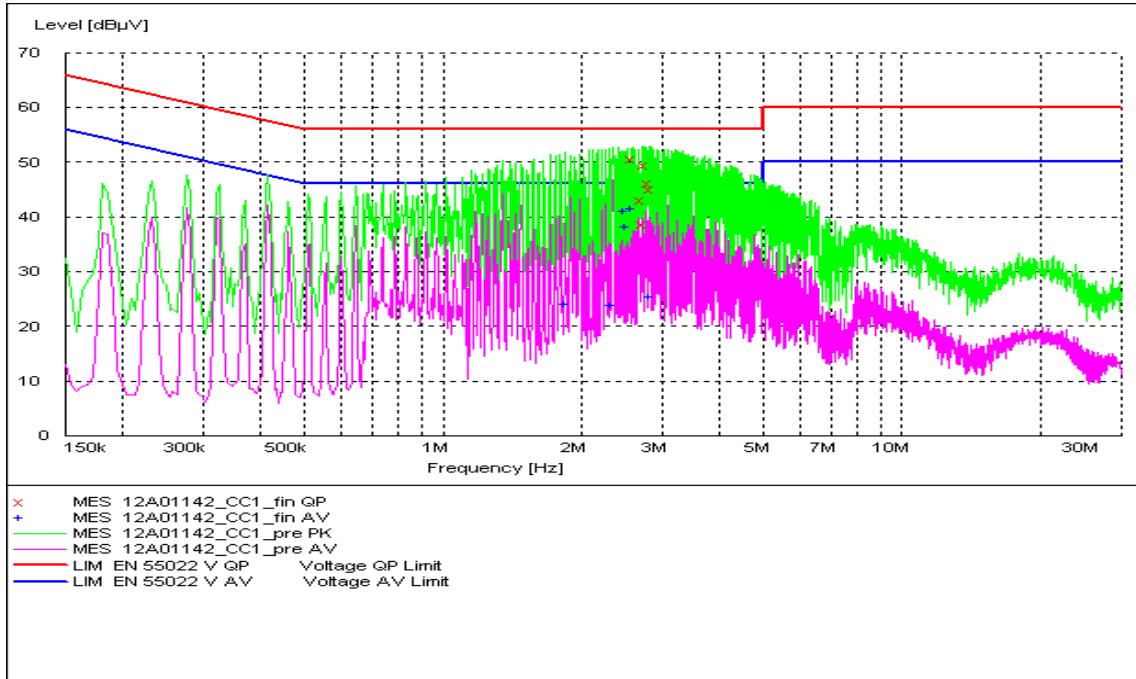


Figure A.11 Conducted Emission(set.1)

MEASUREMENT RESULT: "12A01142_CC1_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
2.582845	50.50	10.1	56	5.5	L1	GND
2.704307	43.20	10.1	56	12.8	N	GND
2.742395	38.80	10.1	56	17.2	N	GND
2.764400	49.50	10.1	56	6.5	N	GND
2.814559	46.30	10.1	56	9.7	L1	GND
2.842818	45.00	10.1	56	11.0	L1	GND

MEASUREMENT RESULT: "12A01142_CC1_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
1.851000	24.20	10.1	46	21.8	L1	GND
2.337288	23.80	10.1	46	22.2	L1	GND
2.491606	41.10	10.1	46	4.9	L1	GND
2.536815	38.30	10.1	46	7.7	N	GND
2.582845	41.60	10.1	46	4.4	L1	GND
2.842818	25.50	10.1	46	20.5	N	GND

Charging Mode

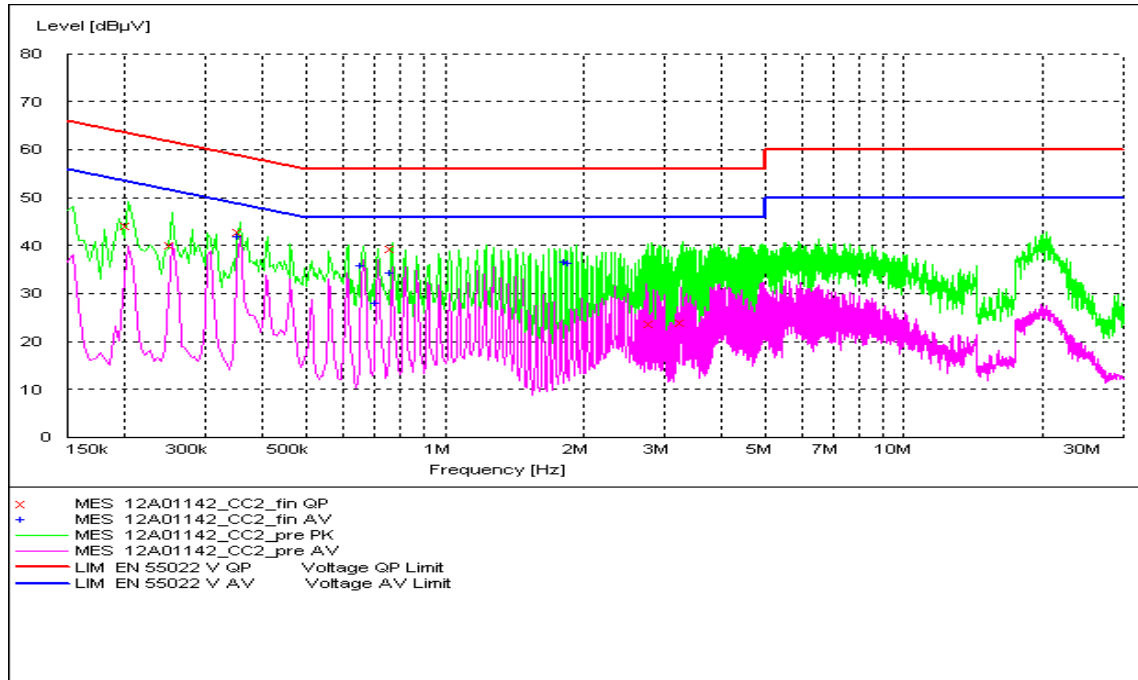


Figure A.12 Conducted Emission(set.2)

MEASUREMENT RESULT: "12-A01142_CC2_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.204000	44.30	10.1	63	19.1	L1	GND
0.253500	40.20	10.1	62	21.4	N	GND
0.357000	43.00	10.1	59	15.8	N	GND
0.766500	39.30	10.1	56	16.7	N	GND
2.814559	23.80	10.1	56	32.2	N	GND
3.289218	24.10	10.1	56	31.9	L1	GND

MEASUREMENT RESULT: "12A01142_CC2_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.357000	41.90	10.1	49	6.9	L1	GND
0.663000	36.00	10.1	46	10.0	N	GND
0.717000	28.10	10.1	46	17.9	N	GND
0.766500	34.40	10.1	46	11.6	N	GND
1.837500	36.60	10.1	46	9.4	N	GND
1.887000	36.40	10.1	46	9.6	L1	GND

Charging Mode

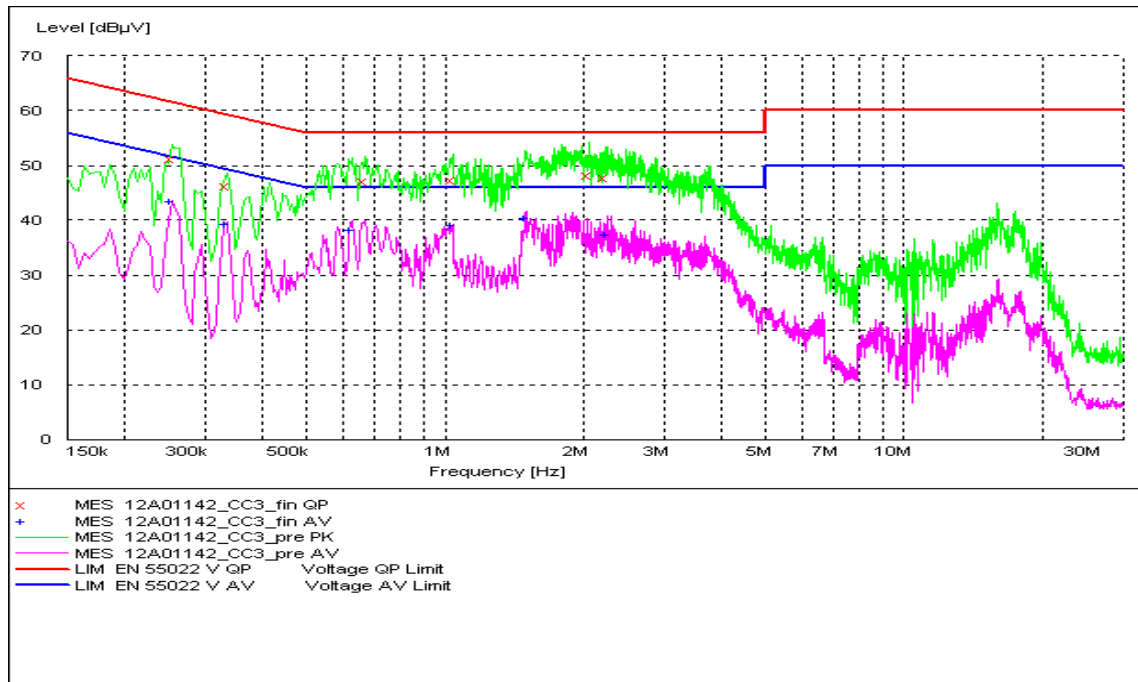


Figure A.13 Conducted Emission(set.3)

MEASUREMENT RESULT: "12A01142_CC3_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.253500	51.20	10.1	62	10.5	L1	GND
0.334500	46.20	10.1	59	13.1	L1	GND
0.667500	47.20	10.1	56	8.8	L1	GND
1.041000	47.40	10.1	56	8.6	L1	GND
2.060847	48.10	10.1	56	7.9	L1	GND
2.241249	47.70	10.1	56	8.3	L1	GND

MEASUREMENT RESULT: "12A01142_CC3_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.253500	43.40	10.1	52	8.3	L1	GND
0.334500	39.40	10.1	49	10.0	L1	GND
0.627000	38.30	10.1	46	7.7	L1	GND
1.041000	39.00	10.1	46	7.0	L1	GND
1.500000	40.40	10.1	46	5.6	L1	GND
2.259233	37.30	10.1	46	8.7	L1	GND

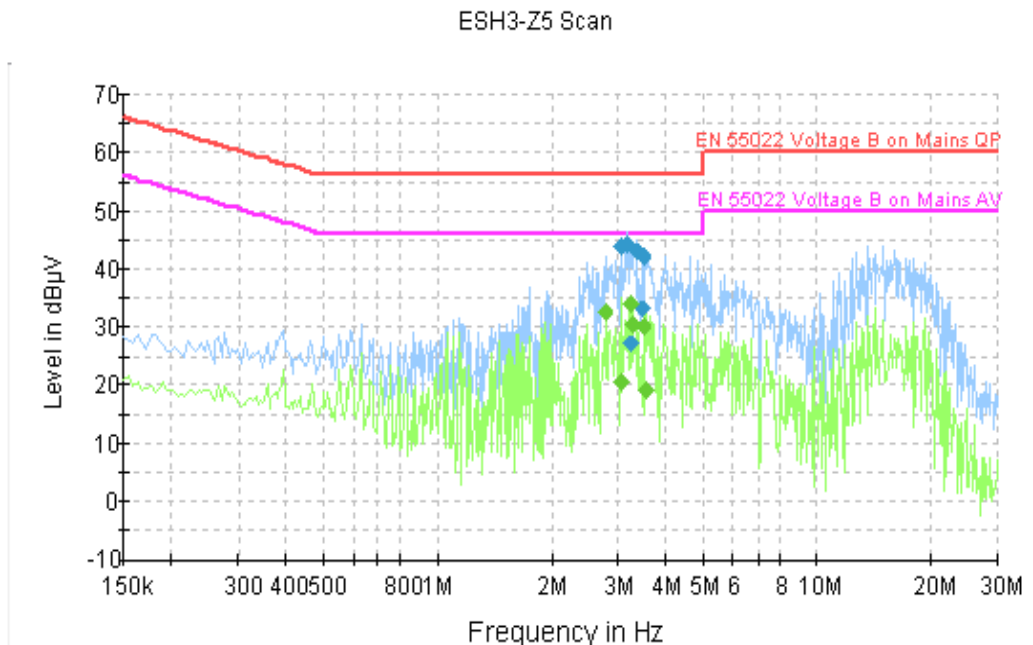


Figure A.14 Conducted Emission(set.5)

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
3.086579	43.9	GND	L1	9.8	12.1	56.0
3.164519	44.1	GND	L1	9.8	11.9	56.0
3.244427	27.1	GND	L1	9.8	28.9	56.0
3.359700	43.0	GND	L1	9.8	13.0	56.0
3.479068	33.1	GND	L1	9.8	22.9	56.0
3.513945	42.1	GND	L1	9.8	13.9	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.765821	32.6	GND	L1	9.8	13.4	46.0
3.086579	20.5	GND	L1	9.8	25.5	46.0
3.244427	33.9	GND	L1	9.8	12.1	46.0
3.276952	30.5	GND	L1	9.8	15.5	46.0
3.513945	30.0	GND	L1	9.8	16.0	46.0
3.549173	19.3	GND	N	9.8	26.7	46.0

USB Mode

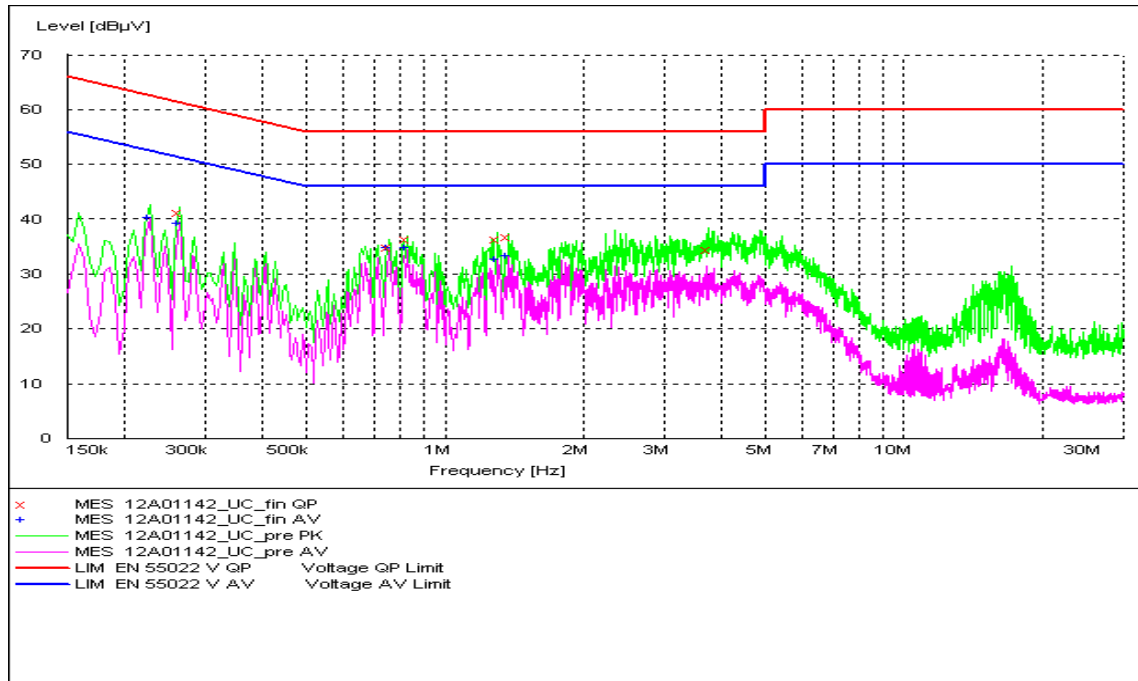


Figure A.15 Conducted Emission

MEASUREMENT RESULT: "12A01142_UC_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.262500	41.20	10.1	61	20.2	N	GND
0.753000	34.80	10.1	56	21.2	N	GND
0.829500	36.30	10.1	56	19.7	N	GND
1.297500	36.30	10.1	56	19.7	N	GND
1.374000	36.80	10.1	56	19.2	N	GND
3.752859	34.30	10.2	56	21.7	N	GND

MEASUREMENT RESULT: "12A01142_UC_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.226500	40.30	10.1	53	12.3	N	GND
0.262500	39.40	10.1	51	11.9	N	GND
0.753000	34.80	10.1	46	11.2	N	GND
0.829500	34.90	10.1	46	11.1	N	GND
1.297500	32.70	10.1	46	13.3	N	GND
1.374000	33.40	10.1	46	12.6	N	GND

*****END OF REPORT*****